

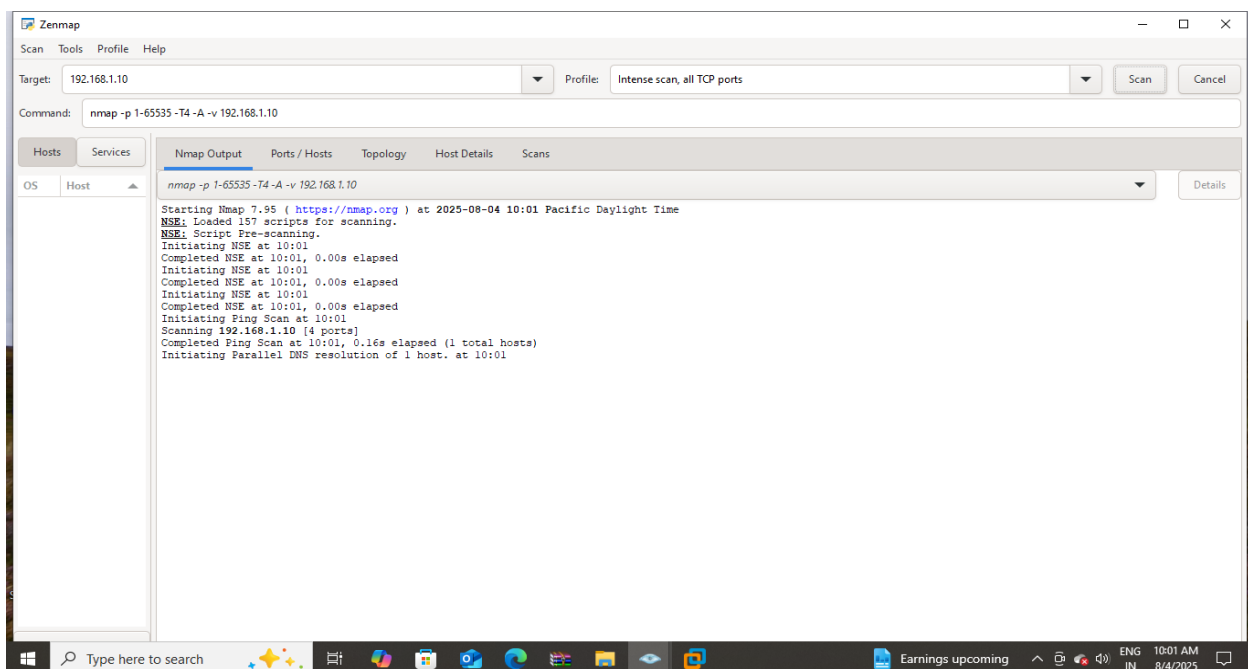



Name: Sneha Basugade

Nmap Scan:

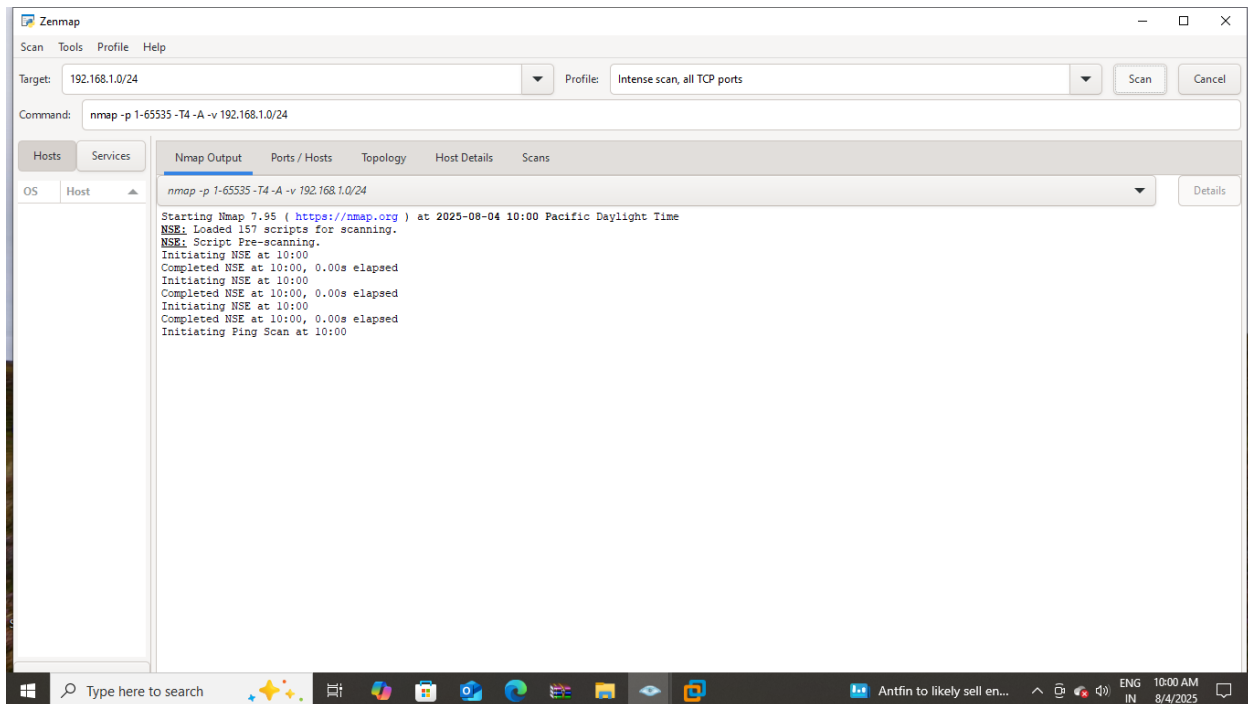

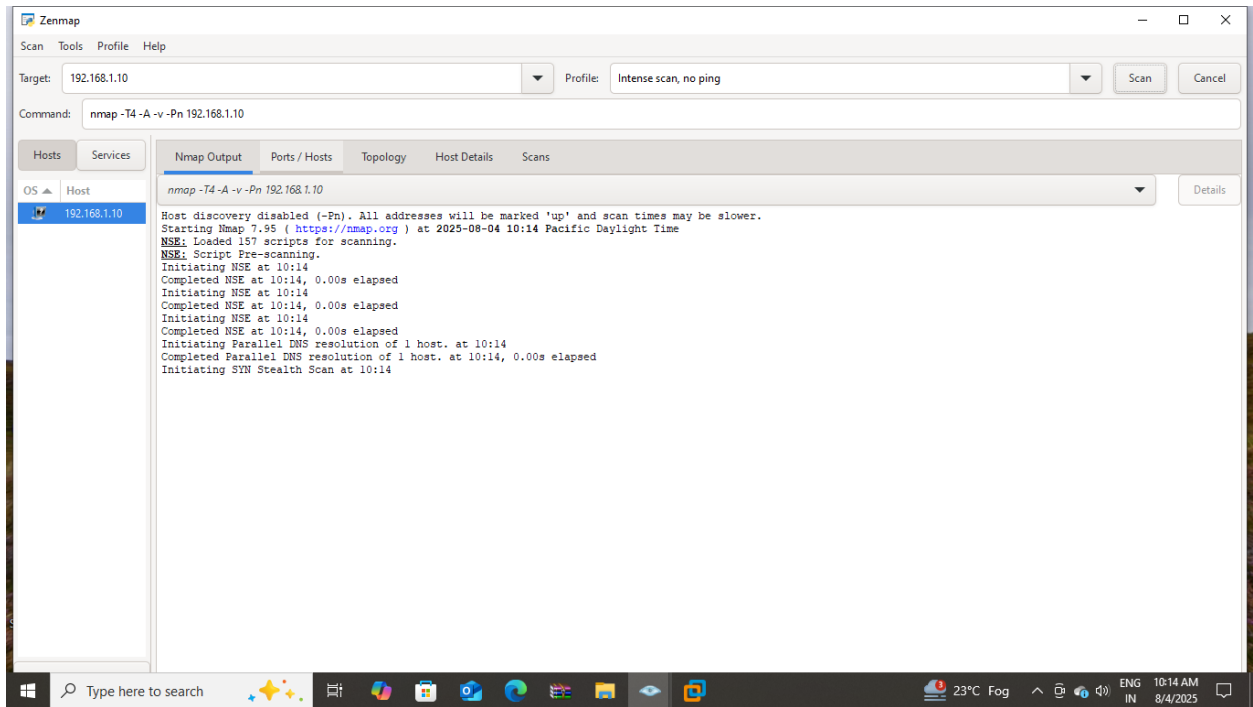

Step 3: Host Detection and Ports Scans

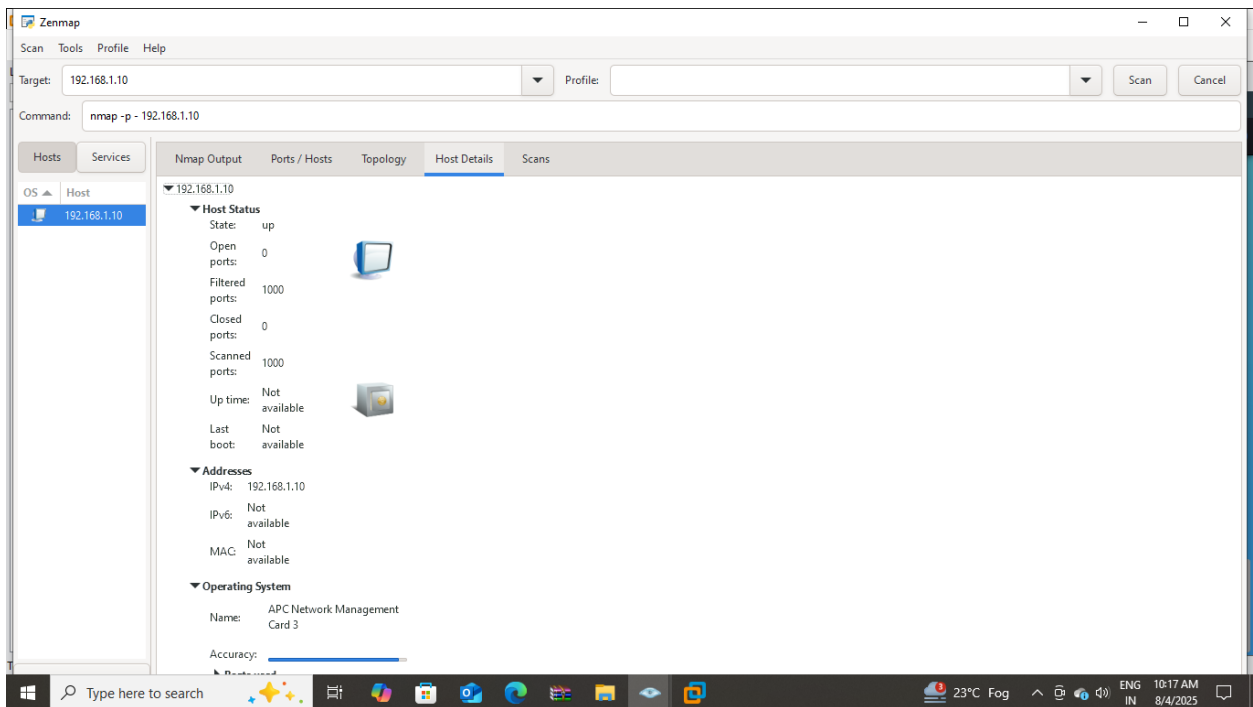

Step 4: Packets capturing with Wireshark

The image shows the Wireshark network protocol analyzer interface. The top menu bar includes File, Edit, View, Go, Capture, Analyze, Statistics, Telephony, Wireless, Tools, and Help. Below the menu is a toolbar with various icons for file operations, capture, and analysis. The main window is divided into three panes:

- Packet List Pane:** Displays a list of captured packets. The selected packet is 27048, which is a TCP Reset (RST) packet from 192.168.1.41 to 192.168.43.227. The packet details show it is a SYN packet with Seq=1, Ack=1, Win=1024, and Len=0.
- Packet Details Pane:** Shows the structure of the selected packet. It is an Ethernet II frame with a source MAC of ChiconyElect_8c:db:1d and a destination MAC of b6:f2:8a:49:92:f5. The frame contains an Internet Protocol Version 4 header and a Transmission Control Protocol header.
- Packet Bytes Pane:** Displays the raw bytes of the packet in hexadecimal and ASCII. The packet is 58 bytes long.

The bottom status bar shows the capture file name (wireshark_Wi-FiTVAB3.pcapng), the number of packets (27061), and the current time (10:24 AM on 8/4/2025).