Plaquette Manual

Release 0.6.3

Sofian Audry

CONTENTS

| 1 | Essei | ntials | 3 |
|---|-------|---|-----------------|
| | 1.1 | Why Plaquette? | |
| | | 1.1.1 The Need for a New Standard | |
| | | 1.1.2 Meet Plaquette | |
| | 1.2 | Features | |
| | | 1.2.1 Object-oriented | |
| | | | |
| | | 1.2.3 Signal-centric | |
| | | 1.2.4 Signal Filtering | |
| | | 1.2.5 Real-time | |
| | | 1.2.6 Arduino Compatible | |
| | 1.3 | Reference | |
| | | | |
| | | | |
| | | 1.3.3 Timing | |
| | | 1.3.4 Filters | |
| | | 1.3.5 Functions | |
| | | 1.3.6 Structure | |
| | | 1.3.7 Extra | |
| | | | |
| 2 | Guid | | 11 |
| | 2.1 | • | |
| | | | |
| | | | |
| | | 2.1.3 Step 3 : Experiment! | |
| | | 2.1.4 Learning More | |
| | 2.2 | | |
| | | | |
| | | | |
| | | | 20 |
| | | 2.2.4 Using Units as Their Own Values | |
| | | | |
| | | 2.2.6 Dealing with Noisy Signals: Debouncin | g and Smoothing |
| | | 2.2.7 Mapping Values to Different Ranges | 23 |
| | | 2.2.8 Making Decisions with Conditions | 23 |
| | | 2.2.9 Modes for Inputs and Outputs | |
| | | 2.2.10 Conclusion | 26 |
| | 2.3 | | 26 |
| | | • | r |
| | | 2.3.2 Types of Waves | 27 |
| | | | |

| | 2.3.3 | Wave Properties | 28 |
|------|-----------|--|----|
| | 2.3.4 | Wave Addition | 30 |
| | 2.3.5 | Modulation | 31 |
| | 2.3.6 | Adding Noise with randomFloat() | 31 |
| | 2.3.7 | Timing Functions | 33 |
| | 2.3.8 | Phase Shifting with shiftBy() | 33 |
| | 2.3.9 | Conclusion | 34 |
| 2.4 | | g with Time | 34 |
| 2.4 | 2.4.1 | Measuring Absolute Time with seconds() | 34 |
| | 2.4.2 | Timing Units | 35 |
| | 2.4.3 | Keeping Track of Time with Chronometer | 35 |
| | 2.4.3 | | 36 |
| | | Delayed Switching with Alarm | |
| | 2.4.5 | Triggering Periodic Events with Metronome | 37 |
| | 2.4.6 | Creating Smooth Transitions with Ramp | 38 |
| | 2.4.7 | Combining Timing Units | 42 |
| | 2.4.8 | Conclusion | 43 |
| 2.5 | _ | izing Signals | 43 |
| | 2.5.1 | Direct Input-to-Output | 43 |
| | 2.5.2 | Getting the Full Range of a Signal | 45 |
| | 2.5.3 | Reacting to Signal Changes | 46 |
| | 2.5.4 | Adapting to Changing Conditions | 46 |
| | 2.5.5 | Normalizing Signals to Spot Extreme Values | 46 |
| | 2.5.6 | Detecting Peaks | 48 |
| | 2.5.7 | Conclusion | 49 |
| 2.6 | Managi | ng Events | 49 |
| | 2.6.1 | Supported Events | 50 |
| | 2.6.2 | Reacting to an Event | 50 |
| | 2.6.3 | Managing Multiple Events | 51 |
| | 2.6.4 | Coordinating Parallel Events with Metronomes | 51 |
| | 2.6.5 | Creating On-the-fly Callbacks | 52 |
| | 2.6.6 | Conclusion | 53 |
| 2.7 | | ed Usage | 53 |
| 2.1 | 2.7.1 | | 53 |
| | | Smoothing Arbitrary Signals | |
| | 2.7.2 | Vanilla Coding Style | 53 |
| | 2.7.3 | Using Plaquette as an External Library | 54 |
| Refe | rongo | | 55 |
| | Base U | nite. | 55 |
| 3.1 | 3.1.1 | | 55 |
| | | AnalogIn | |
| | 3.1.2 | AnalogOut | 56 |
| | 3.1.3 | DigitalIn | 58 |
| 2.2 | 3.1.4 | DigitalOut | 60 |
| 3.2 | | ors | 62 |
| | 3.2.1 | SineWave | 62 |
| | 3.2.2 | SquareWave | 65 |
| | 3.2.3 | TriangleWave | 68 |
| 3.3 | Timing | | 71 |
| | 3.3.1 | Alarm | 71 |
| | 3.3.2 | Chronometer | 73 |
| | 3.3.3 | Metronome | 75 |
| | 3.3.4 | Ramp | 76 |
| 3.4 | Filters . | 1 | 80 |
| | 3.4.1 | MinMaxScaler | 80 |
| | 3.4.2 | Normalizer | 83 |
| | | | |

3

| In | dex | | | 111 |
|----|-------|----------|---------------|-------------------|
| | 4.1 | | | 109 |
| 4 | Relat | ed Info | | 109 109 |
| | | 3.7.5 | StreamOut | 107 |
| | | 3.7.4 | StreamIn | 106 |
| | | 3.7.3 | | 105 |
| | | 3.7.2 | | 103 |
| | | 3.7.1 | Easings | 102 |
| | 3.7 | Extra . | | 102 |
| | | 3.6.5 | >> (pipe) | 101 |
| | | 3.6.4 | . (dot) | 101 |
| | | 3.6.3 | [] (arrays) | 100 |
| | | 3.6.2 | step() | 99 |
| | | 3.6.1 | begin() | 98 |
| | 3.6 | Structur | e | 98 |
| | | 3.5.6 | wrap() | 97 |
| | | 3.5.5 | seconds() | 96 |
| | | 3.5.4 | randomFloat() | 95 |
| | | 3.5.3 | mapToO1() | 94 |
| | | 3.5.2 | mapFrom01() | 93 |
| | | 3.5.1 | mapFloat() | 92 |
| | 3.5 | Function | ns | 92 |
| | | 3.4.4 | Smoother | 90 |
| | | 3.4.3 | PeakDetector | 86 |


Plaquette is an object-oriented, user-friendly, signal-centric programming framework for **creative physical computing**. It promotes **expressiveness** over technical details while remaining fully compatible with Arduino, thus allowing **both beginner and advanced** creative practitioners to design meaningful physical computing systems in an intuitive fashion.

Plaquette allows you to:

- React to multiple sensors and actuators in real-time without interruption.
- Automatically calibrate sensors to generate stable interactions in changing environments.
- Design complex interactive behaviors by seamlessly combining powerful effects.

Quick links:

| Discover the features | Get started |
|-----------------------|---------------------|
| Watch video tutorials | Filter your signals |
| GitHub repository | PDF manual |

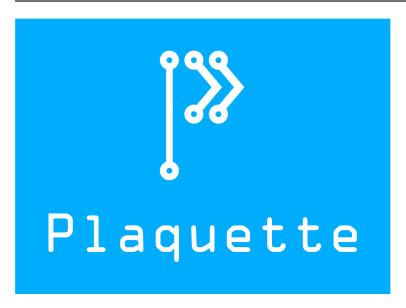


CONTENTS 1

2 CONTENTS

ESSENTIALS

1.1 Why Plaquette?

Plaquette is a groundbreaking creative coding framework designed to empower creative practitioners by simplifying the way they work with real-time signals in tangible computing applications. By bridging the gap between low-level electronics and high-level creative expression, Plaquette enables creators to focus on what matters most: bringing their visions to life.

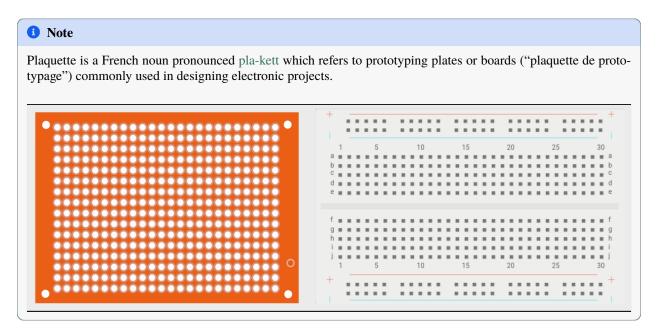

1.1.1 The Need for a New Standard

Media artists, interactive designers, digital luthiers, and electronic musicians constantly engage with real-time signals. However, when working with tangible computing systems such as embedded sensors, robotics, connected objects, and electronic music instruments, available tools such as Arduino are often very low-level and lack expressivity. Creative practitioners thus struggle to implement their vision directly using such platforms.

Consider the following case of learning how to work with a simple light sensor (eg. photoresistor) connected to an Arduino board on analog pin 0. The code reads as follows:

```
int value = analogRead(A0);
```

The value that is read is a raw 10-bit value returned by the Arduino board's Analog to Digital Converter (ADC), an integer between 0 and 1023. But how is this value intuitively useful for an artist who wants to use this value creatively?

For example, what if one wants to react to a flash of light? Well, one solution would be to look at the value and compare it to a threshold:

```
if (value > 716) {
    ...
}
```

There are two problems with this approach.

Firstly, while it might work under certain lighting conditions, it will likely stop working if these conditions change, forcing us to make adjustments to the threshold value by hand.

Secondly, and perhaps more importantly, this piece of code does not really *express* what we are after. As creative practitioners, we don't care whether the light signal is above 716 or 456 or whatnot: what we really want to know to detect a flash of light is whether the light signal is *significantly high compared to ambient light*.

What this example shows is that the way we are teaching and learning about sensor data is inefficient for creative applications. In other words: **raw digital data lacks expressiveness**.

Continuing with our example, consider how one would take the input value and directly reroute it to an analog (PWM) output on pin 9:

```
analogWrite(9, value / 4);
```

Why do we need to perform that division by 4? That's because while the ADC gives us 10-bit values (1024 possibilities), the PWM only supports 8 bits (256 possibilities) forcing us to divide the incoming value by 4 (2 bits). But again, why is this detail important to know for an artist, designer, or musician? And what exactly does it have to do with our expressive intention?

1.1.2 Meet Plaquette

As a way to address these issues, Plaquette offers a general-purpose, standard interface for simple, real-time signal processing tailored for media artists.

Plaquette's key objectives are:

- 1. **Empowering creators to focus on the creative aspects of their work**, rather than getting lost in irrelevant numerical details, which supports a smoother learning process.
- 2. **Providing accessible tools for creative practitioners** that capture high-level concepts such as "normalizing" and "detecting peaks", without requiring deep technical knowledge of complex techniques like Fast Fourier Transforms or Chebyshev filtering.
- 3. **Facilitating teamwork and interoperability** by promoting an intuitive, cross-platform approach to real-time signals, such as by keeping all signals consistently scaled between 0 and 1 for easier integration across different applications.

Plaquette achieves these goals by embracing the following core principles:

- Ease of use: Offering a carefully selected set of functionalities that address the most common challenges faced by creators—keeping things simple while solving 95% of typical use cases.
- **Real-time performance:** Enabling smooth, uninterrupted interactions to ensure responsiveness in dynamic environments.
- **Signal-oriented approach:** Focusing on meaningful signal manipulation rather than dealing with arbitrary numerical values such as 255, 1024, 716, or 42.
- **Robustness:** Adapting to changes in the sensory context without breaking down, ensuring reliability in unpredictable and evolving environments such as art installations, live performances, and public art.

• **Interoperability and extensibility:** Leveraging an object-oriented architecture that seamlessly integrates with the Arduino ecosystem, ensuring compatibility and future scalability.

1.2 Features

Plaquette is an *object-oriented*, user-friendly, signal-centric framework that facilitates signal filtering in real-time. It is fully compatible with Arduino.

1.2.1 Object-oriented

Plaquette is designed using input, output, and filtering units that are easily interchangeable in a plug-and-play fashion. Units are created using expressive code.

For example, the code DigitalOut led creates a new digital output object that can be used to control an LED.

| Arduino | Plaquette | | | |
|--|---------------------------------|--|--|--|
| Create digital output to control an LED: | | | | |
| <pre>pinMode(12, OUTPUT);</pre> | <pre>DigitalOut led(12);</pre> | | | |
| Create digital input push-button: | | | | |
| <pre>pinMode(2, INPUT);</pre> | <pre>DigitalIn button(2);</pre> | | | |

1.2.2 User-friendly

Plaquette allows users to quickly design interactive systems using an expressive language that abstracts low-level functions. This allows both beginners and experts to create truly expressive code. For example, switching our LED object on or off can be achieved by calling: led.on(). Find out more about Plaquette's base units by following *this link*.

| Arduino | Plaquette |
|--|-------------------------------|
| Turn LED on: | |
| <pre>digitalWrite(12, HIGH);</pre> | <pre>led.on();</pre> |
| Check if button is pushed: | |
| <pre>if (digitalRead(2) == HIGH)</pre> | <pre>if (button.isOn())</pre> |

1.2.3 Signal-centric

Plaquette helps designers manipulate real-time signals from inputs to outputs. In Plaquette, signals are represented either as true/false conditions (in the case of digital binary signals such as those coming from a button or switch), or as floating-point numbers in the [0, 1] range (ie. 0% to 100%) (in the case of analog signals such as those emitted by a light sensor, microphone, or potentiometer.) Because of this, there is no more need for users to perform counterintuitive conversions on integer values.

| Arduino | Plaquette | | |
|---|-------------------------|--|--|
| Check if button is released: | | | |
| <pre>if (digitalRead(2) !=</pre> | HIGH) if (!button) | | |
| Check if sensor value is higher than 70%: | | | |
| <pre>if (analogRead(A0) >=</pre> | 716) if (sensor >= 0.7) | | |

1.2. Features 5

1.2.4 Signal Filtering

Plaquette provides simple yet powerful data filtering tools for debouncing, smoothing, and normalizing data. Removing noise in input signals can be as simple as calling a function such as debounce() or smooth(). Rather than guessing the right threshold for triggering an event based on input sensor input, one can use auto-normalizing *filters* such as *MinMaxScaler* and *Normalizer*.

Signals in Plaquette can easily flow between units, in a similar fashion to modern data-flow software such as Max, Pure Data, and TouchDesigner. While this can be achieved using function calls, Plaquette provides a special **piping operator** (>>) which allows data to be sent from one unit to another.

```
Arduino Plaquette

Set LED to ON when button is pressed:
digitalWrite(12, digitalRead(2)/4); button >> led;
Set LED to ON when input sensor is high:
digitalWrite(12, (analogRead(A0) >= 716 ? HIGH : LOW)); (sensor >= 0.7) >> led;
```

Read Regularizing Signals to see how you can take full advantage of Plaquette's signal filtering features.

1.2.5 Real-time

Plaquette avoids blocking processes such as Arduino's (in)famous delay() by providing a set of *timing units* as well as time-based *signal generators*. As such, the processing loop is never interrupted, allowing interactive and generative processes to flow smoothly.

Plaquette forbids the use of blocking functions such as Arduino's delay() and delayMicroseconds(). Rather, it invites programmers to adopt a frame-by-frame approach to coding similar to Processing.

Compare the following attempt to make an LED blink when pressing a button in Arduino, versus Plaquette's real-time approach:

```
Arduino
                                              Plaquette
int buttonPin = 2;
                                              DigitalIn button(2);
int ledPin = 12;
                                              DigitalOut led(12);
void setup() {
                                              // Square wave 1 second period.
  pinMode(buttonPin, OUTPUT);
                                              SquareWave oscillator(1.0);
  pinMode(ledPin, OUTPUT);
}
                                              void begin() {}
void loop() {
                                              void step() {
  // Button is checked once per second.
                                                // Button is checked at all time.
 if (digitalRead(buttonPin) == HIGH) {
                                                if (button)
    digitalWrite(ledPin, HIGH);
                                                  oscillator >> led;
    delay(500); // do nothing for 500ms
                                              }
    digitalWrite(ledPin, LOW);
    delay(500); // do nothing for 500ms
 }
}
```

1.2.6 Arduino Compatible

Plaquette is installed as an Arduino library and provides a replacement for the core Arduino functionalities while remaining fully compatible with Arduino code. Seasoned Arduino users should consult the *Advanced Usage* section for some tips on how to integrate Plaquette into their existing code.

The following example uses Arduino's constrain() function and Serial object to control a blinking LED that slows down with each button push. keeping the oscillation period within a certain range.

```
#include <Plaquette.h>
DigitalIn button(2);
DigitalOut led(LED_BUILTIN);
SquareWave oscillator(1.0);
int countButtonPushes = 0;
void begin() {}
void step() {
  if (Serial.read() == 'R') {
     countButtonPushes = 0;
   }
  if (button.rose()) { // true when value rises (ie. button is pushed)
     countButtonPushes++;
     oscillator.period( constrain(countButtonPushes, 2, 10) );
  }
  oscillator >> led;
}
```

Danger

Plaquette needs the main processing loop to run continuously without interruption to work correctly. Users should thus **avoid using blocking processes** such as Arduino's delay() and delayMicroseconds() and functions in their code when using Plaquette.

Warning

Many of the core Arduino functions work with integer types such as int or long rather than floating-point types such as float. Plaquette provides alternative *functions* which should be used instead.

In particular, please use:

- *mapFloat()* instead of map()
- randomFloat() instead of random()
- seconds() instead of millis()

1.2. Features 7

A Warning

Plaquette is still at an experimental stage of development. If you have any issues or questions, please contact the developers, or file a bug in our issue tracker.

1.3 Reference

1.3.1 Base Units

- AnalogIn Reads analog input values between 0 and 1. Typically used for sensors that output a range of values, such as potentiometers or light sensors.
- AnalogOut Writes analog output values between 0 and 1. Useful for controlling devices like dimmable LEDs or motor controllers.
- *DigitalIn* Reads digital input values as boolean true/false. Commonly used with buttons, switches, or other on/off signals.
- DigitalOut Writes digital output values as boolean true/false. Often used to control relays, LEDs, or other binary devices.

1.3.2 Generators

- Sine Wave Generates a smooth, periodic sine wave signal. Commonly used for oscillatory motion or smooth transitions.
- *SquareWave* Generates a periodic square wave signal, alternating between high and low states. Ideal for toggling signals like blinking LEDs.
- *TriangleWave* Produces a periodic triangle wave signal with a linear rise and fall. Useful for generating smoother oscillatory patterns than square waves.

1.3.3 Timing

- Alarm Triggers an event after a specified time duration. Can be used to schedule delays or time-based actions.
- Chronometer Measures elapsed time since the start or reset. Useful for timing events or profiling system performance.
- Metronome Produces a periodic tick at specified intervals. Often used in rhythmic applications such as sound or light pulses.
- *Ramp* Generates a linear ramp signal over time. Commonly used for smooth parameter transitions like fading lights or scaling values.

1.3.4 Filters

- *MinMaxScaler* Scales signals to fit within a specified minimum and maximum range. Essential for normalizing input signals from diverse sources.
- Normalizer Adjusts signals to have a zero mean and unit variance. Useful in signal processing pipelines where
 consistent scaling is required.
- PeakDetector Detects peaks (local maxima) in input signals, allowing for event-based processing such as edge detection.
- *Smoother* Reduces noise and fluctuations in input signals using smoothing algorithms like exponential moving averages.

1.3.5 Functions

- mapFloat() Maps a float value from one range to another. Useful for adapting input ranges to the desired output domain.
- mapFrom01() Maps a float value from the normalized [0,1] range to a custom range, such as [-10, 10].
- mapTo01() Maps a float value from a custom range to the normalized [0,1] range, simplifying calculations for normalized operations.
- randomFloat() Generates a random float between 0 and 1, ideal for simulations or procedural generation.
- seconds() Returns the current time in seconds since the program started, enabling precise time tracking.
- wrap() Wraps a value within a specified range, making it cyclic. Commonly used for angles or periodic parameters.

1.3.6 Structure

- begin() Initializes the system, similar to Arduino's setup() function. Sets up necessary configurations and prepares units for operation.
- *step()* Repeatedly called during the program's execution, akin to Arduino's *loop()* function. Drives the execution of the main logic.
- [] (arrays) Allows the creation of arrays of Plaquette units for batch operations. Facilitates efficient processing of multiple units simultaneously.
- . (dot) Provides access to an object's methods and data, enabling intuitive object-oriented programming with Plaquette units.
- >> (pipe) Sends data across units from left to right, creating a streamlined and intuitive flow of information between connected units.

1.3.7 Extra

- *Easings* Provides easing functions for smooth and natural transitions between values. Commonly used in animations and motion design.
- ContinuousServoOut Controls a continuous rotation servo motor by setting its speed and direction. Ideal for robotics or mechanical motion control.
- ServoOut Controls a standard servo motor by setting its angle. Useful for applications like robotic arms or pan-tilt systems.
- StreamIn Streams input data continuously, allowing real-time signal processing from external devices.
- StreamOut Streams output data continuously, enabling real-time control of external actuators or visualizations.

1.3. Reference 9

CHAPTER


TWO

GUIDE

2.1 Getting started

This short introduction will guide you through the first steps of using Plaquette.

We also recommend watching our introductory video tutorial series.

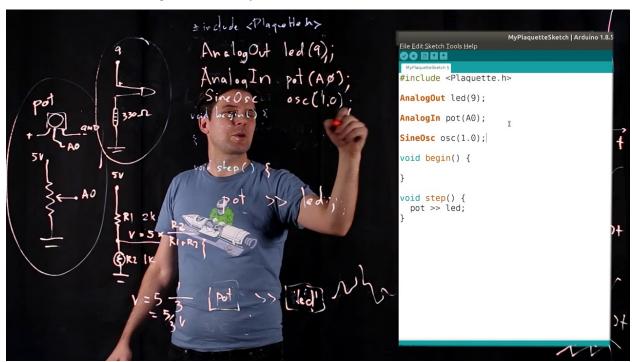

2.1.1 Step 1: Install Plaquette

If you do not have Arduino installed on your machine you need to download and install the Arduino IDE for your platform.

Once Arduino is installed, please install Plaquette as an Arduino library following these instructions.

2.1.2 Step 2: Your first Plaquette program

We will begin by creating a simple program that will make the built-in LED on your microcontroller blink.

Create a new sketch

Create a new empty sketch by selecting **File > New**.

IMPORTANT: New Arduino sketches are initialized with some "slug" starting code. Make sure to erase the content of the sketch before beginning. You can use **Edit > Select All** and then click **Del** or **Backspace**.

Include library

Include the Plaquette library by typing:

```
#include <Plaquette.h>
```

Create an output unit

Now, we will create a new unit that will allow us to control the built-in LED:

```
DigitalOut myLed(13);
```

In this statement, DigitalOut is the **type** of unit that we are creating. There also exists other types of units, which will be described later. DigitalOut is a type of software unit that can represent one of the many hardware pins for digital output on the Arduino board. One way to think about this is that the DigitalOut is a "virtual" version of the Arduino pin. These can be set to one of two states: ("on/off", "high/low", "1/0").

The word myLed is a name for the object we are creating.

Finally, 13 is a **parameter** of the object myLed that specifies the hardware *pin* that it corresponds to on the board. In English, the statement would thus read as: "Create a unit named myLed of type DigitalOut on pin 13."



Most Arduino boards have a pin connected to an on-board LED in series with a resistor and on most boards, this LED is connected to digital pin 13. The constant LED_BUILTIN is the number of the pin to which the on-board LED is connected.

Create an input unit

We will now create another unit that will generate a signal which will be sent to the LED to make it blink. To this effect, we will use the SquareWave unit type which generates a square wave oscillating between "on/high/one" and "off/low/zero" at a regular period of 2.0 seconds:

```
SquareWave myWave(2.0);
```

Create the begin() function

Each Plaquette sketch necessitates the declaration of two functions: begin() and step().

Function begin() is called only once at the beginning of the sketch (just like the setup() function in Arduino). For our first program, we do not need to perform any special configuration at startup so we will leave the begin() function empty:

```
void begin() {}
```

Create the step() function

The step() function is called repetitively and indefinitely during the course of the program (like the loop() function in Arduino).

Here, we will send the signal generated by the myWave input unit to the myLed output unit. We will do this by using Plaquette's special >> operator:

```
void step() {
  myWave >> myLed;
}
```

In plain English, the statement myWave >> myLed reads as: "Take the value generated by myWave and put it in myLed."

Upload sketch

Upload your sketch to the Arduino board. You should see the LED on the board **blinking once every two seconds at a regular pace**.

Et voilà!

Full code

```
#include <Plaquette.h>
DigitalOut myLed(13);
SquareWave myWave(2.0);

void begin() {}

void step() {
  myWave >> myLed;
}
```

2.1.3 Step 3: Experiment!

So far so good. Let's see if we can push this a bit further.

Change initial parameters of a unit


The SquareWave unit type provides two parameters when it is created that allows you to configure the oscillator's behavior.

```
SquareWave myWave(period, width);
```

- period can be any positive number representing the period of oscillation (in seconds)
- width can be any number between 0.0 (0%) and 1.0 (100%), and represents the proportion of the period during which the signal is "high" (ie. "on duty") (default: 0.5)

1 Note

We call this step the construction or instantiation of the object myWave.

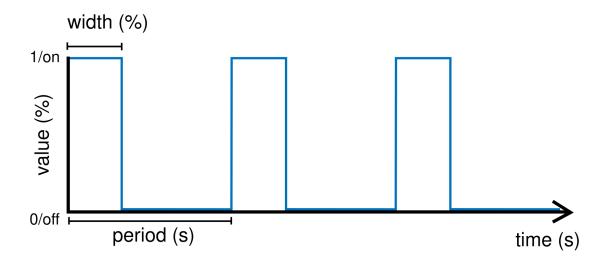

Try changing the first parameter (period) in the square oscillator unit to change the period of oscillation.


- SquareWave myWave(1.0); for a period of one second
- SquareWave myWave(2.5); for a period of 2.5 seconds
- SquareWave myWave(10.0); for a period of 10 seconds
- SquareWave myWave(0.5); for a period of half a second (500 milliseconds)

Important

Don't forget to re-upload the sketch after each change.

Now try adding a second parameter (width) to control the oscillator's width. For a fixed period, try changing the duty cycle to different percentages between 0.0 and 1.0.

- SquareWave myWave(2.0, 0.5); for a width of 50% (default)
- SquareWave myWave(2.0, 0.25); for a width of 25%
- SquareWave myWave(2.0, 0.75); for a width of 75%
- SquareWave myWave(2.0, 0.9); for a width of 90%

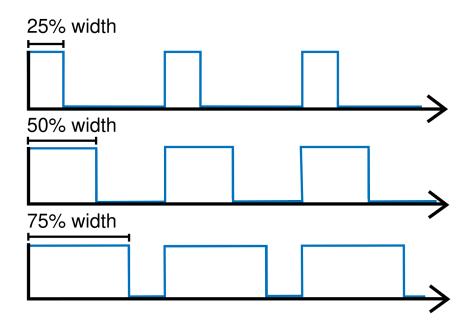

Change parameters of a unit during runtime

What if we wanted to change the parameters of the oscillator during runtime rather than just at the beginning? The SquareWave unit type allows real-time modification of its parameters by calling one of its functions using the . (dot) operator.

For example, to change the period, simply call the following inside the step() function:


```
void step() {
  myWave.period(newPeriod);
  myWave >> myLed;
}
```

Of course, to accomplish our goal, we need a way to *change* the value newPeriod during runtime. We can accomplish this in many different ways, but let's try something simple: we will use another wave to *modulate* our wave's period.

For this, we will be using another kind of source called a SineWave and will use its outputs to change the period of myWave.

```
SineWave myModulator(20.0);
```

This wave will oscillate smoothly from 0 to 1 every 20 seconds.

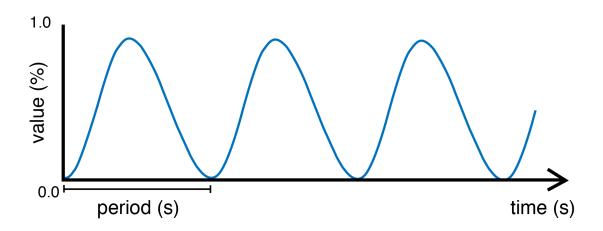

```
void step() {
  myWave.period(myModulator);
  myWave >> myLed;
}
```

Upload the sketch and you should see the LED blinking as before, with the difference that the blinking speed will now change from blinking very fast (in fact, infinitely fast, with a period of zero seconds!) to very slow (period of 20 seconds).

🗘 Tip

If you want to visualize the values of both waves on your computer, you can print them on the serial port one after the other, separated by a space. Add the following code to your step() function:

```
print(myWave);
print(" ");
println(myModulator);
```

Then, launch the Arduino Serial Plotter by selecting in in **Tools > Serial Plotter**.

Now try modulating the width of myWave instead of its period:

```
myWave.width(myModulator);
```

Use a button

Now let's try to do some very simple interactivity by using a simple switch or button. For this we will be using the internal pull-up resistor available on Arduino boards for a very simple circuit. One leg of the button should be connected to ground (GND) while the other should be connected to digital pin 2.

🗘 Tip

If you do not have a button or switch, you can just use two electric wires: one connected to ground (GND) and the other one to digital pin 2. When you want to press the button, simply touch the wires together to close the circuit.

Declare the button unit with the other units at the top of your sketch:

```
DigitalIn myButton(2, INTERNAL_PULLUP);
```

You will notice that the type of this unit (*DigitalIn*) resembles that of our LED-controlling unit (*DigitalOut*). This is because both units have something in common: they have only two states: either on or off, high or low, true or false, one or zero, hence the adjective Digital. However, while the LED is considered an output or actuator (Out) our button is rather an input or sensor (In).

1 Note

If you are curious, you might also want to know that there is an *AnalogIn* and an *AnalogOut* types which support sensors and actuators that work with continuous values between 0 and 1 (0% to 100%).

Now, let's use this button as a way to control whether the LED blinks or not. For this, we will need to use the value of the button as part of a **condition** for an if...else statement.

```
void step() {
  if (myButton)
    myWave >> myLed;
  else
    0 >> myLed;
}
```

Full code

```
#include <Plaquette.h>
DigitalOut myLed(13);
SquareWave myWave(2.0);
SineWave myModulator(20.0);
DigitalIn myButton(2, INTERNAL_PULLUP);

void begin() {}

void step() {
   myWave.period(myModulator);

   if (myButton)
        myWave >> myLed;
   else
      0 >> myLed;
}
```

2.1.4 Learning More

Built-in Examples

You will find more examples here or directly from the Arduino software in File > Examples > Plaquette including:

- · Using analog inputs such as a photocells or potentiometers
- · Using analog outputs
- · Serial input and output
- Using wave generators
- · Time management
- Ramps
- Basic filtering (smoothing, re-scaling)
- · Peak detection
- Event-driven programming
- Controlling servomotors

The Plaquette Reference

The online reference can be accessed *here* or directly from the sidebar of the Plaquette website. It provides detailed technical documentation for every available unit and function in Plaquette. This reference serves as a go-to resource for understanding the specifics of each component, including their parameters, methods, and behavior.

Here are the key sections of the reference:

- Base Units: Introduces foundational units like DigitalIn, DigitalOut, AnalogIn, and AnalogOut. These are the building blocks for interfacing with hardware pins.
- Generators: Covers the signal generators SquareWave, TriangleWave, and SineWave. These are used to create various oscillating or periodic signals.
- *Timing*: Focuses on units related to time management, like *Metronome* for periodic events, *Alarm* for duration-based functionality, and *Ramp* for smooth transitions.
- Filters: Discusses tools for smoothing, scaling, or normalizing signals, as well as detecting peaks.
- Functions: Explains helper functions for tasks like value mapping, signal transformations, and conversions.
- *Structure*: Describes core structural functions and operators.
- Extra: Contains miscellaneous units and features.

What's Next?

With the basics covered, you are now ready to dive deeper into Plaquette's capabilities. Explore the rest of the guide to learn about specific features and advanced techniques:

- *Inputs and Outputs*: Learn how to use Plaquette to handle a variety of inputs and outputs, including analog, digital, and specialized sensors or actuators.
- Generating Waves: Understand the different types of wave generators available and how they can be used for oscillatory or periodic behavior.
- Working with Time: Delve into Plaquette's timing management units to handle scheduling and time-based logic in your projects.
- Regularizing Signals: Discover methods for automatically scaling and normalizing signals amd respond to peaks.

2.2 Inputs and Outputs

When working with Plaquette, **inputs** and **outputs** allow you to interact with the physical world. Whether you are reading a sensor's value or controlling an actuator, Plaquette makes this process intuitive and efficient. This section introduces the basic concepts of digital and analog inputs and outputs, presents Plaquette's unique syntax for efficient and expressive code, explains how to clean noisy data, shows how to make decisions based on input values, and describes the different configuration modes of input and output units.

Let's explore these ideas step by step.

2.2.1 Digital vs Analog

Before diving into code, let's first clarify the difference between **digital** and **analog** signals.

- **Digital** signals represent binary states: ON or OFF, HIGH or LOW, 1 or 0. Examples of digital inputs include buttons and presence sensors, while digital outputs might control LEDs or relays.
- Analog signals represent a continuous range of values. Think of a dimmer switch (potentiometer) or a light sensor that measures brightness levels. Analog outputs control devices such as LEDs with variable brightness and DC motors where the speed can vary.

A Warning

On many microcontrollers, analog outputs are generated using **Pulse Width Modulation (PWM)** rather than a true **Digital-to-Analog Converter (DAC)**. PWM rapidly switches the output pin between HIGH and LOW, creating the illusion of a continuous analog voltage when averaged over time. While this works for controlling brightness in LEDs or speed in motors, it may not be suitable for applications requiring a steady, smooth signal.

For more information, visit the official Arduino documentation on Pulse Width Modulation.

2.2.2 Digital Inputs and Outputs

Let's look at the basics of digital signals by working with LEDs and buttons.

Digital Outputs

A *DigitalOut* unit controls devices that can be turned ON or OFF, such as LEDs or relays. Here's an example of how to control an LED:

```
#include <Plaquette.h>

DigitalOut led(13); // LED connected to pin 13

void begin() {
  led.on(); // Turn the LED on initially
}

void step() {
  if (seconds() > 10.0)
    led.off(); // Turn the LED off after 10 seconds
}
```

Digital Inputs

A *DigitalIn* unit reads binary states from devices like buttons or switches. The easiest way to connect a button or switch is to use the **internal pull-up** resistor on Arduino boards. One leg of the button should be connected to ground (GND) while the other should be connected to a digital pin.

2.2.3 Analog Outputs and Inputs

Next, we will explore analog signals, which allow for finer control and more detailed readings.

Analog Outputs

An *AnalogOut* unit controls devices like LEDs or motors with continuous values. Here's an example of dimming an LED. The cathode (short leg) of the LED should be connected to ground, while the anode (long leg) should be connected to a 300Ω resistor, which in turn should be connected to an analog / PWM pin (eg. pin 9).

```
#include <Plaquette.h>
AnalogOut led(9); // LED connected to pin 9

void begin() {
  led.put(0); // Set LED brightness to 0%
}

void step() {
  led.put( seconds() / 10 ); // Will reach 100% after 10 seconds
}
```

Analog Inputs

An Analog In unit reads continuous values from sensors, such as potentiometers, light, or temperature sensors.

Let's use a potentiometer to control an LED's brightness. For this circuit, the center pin of the potentiometer should be connected to analog input pin (A0), the left pin to ground (GND) and the right pin to +5V (Vcc).

```
#include <Plaquette.h>
AnalogIn dimmer(A0); // Potentiometer on analog pin A0
AnalogOut led(9); // LED on pin 9

(continues on next page)
```

```
void begin() {}

void step() {
  led.put(dimmer.get()); // Map the potentiometer value directly to LED brightness
}
```

2.2.4 Using Units as Their Own Values

Plaquette offers an elegant shortcut: you don't need to explicitly call isOn() or get() for digital or analog inputs. Instead, you can use the input or output unit itself as its value. This makes your code cleaner and easier to read.

Here's the same LED and button example, rewritten with this feature:

```
#include <Plaquette.h>

DigitalIn button(2, INTERNAL_PULLUP);
DigitalOut led(13);

void begin() {}

void step() {
  if (button) { // No need for button.isOn(), just use button as its own value led.on();
  } else {
    led.off();
  }
}
```

For analog inputs, this works similarly. Instead of calling dimmer.get(), you can use the dimmer object directly:

```
#include <Plaquette.h>
AnalogIn dimmer(A0);
AnalogOut led(9);

void begin() {}

void step() {
  led.put(dimmer); // No need for dimmer.get(), just use dimmer
}
```

These simplifications make your code more expressive and emphasize the logic over the syntax.

2.2.5 The Piping Operator (>>)

In Plaquette, the >> operator allows you to directly send or "pipe" the value of one unit to another. This makes it incredibly simple to map inputs to outputs without extra variables or function calls.

Let's revisit the potentiometer and LED example using the piping operator:

```
AnalogOut led(9);

void begin() {}

void step() {
   dimmer >> led; // Directly pipe the potentiometer value to the LED
}
```

This operator improves code readability and emphasizes the relationship between inputs and outputs.

2.2.6 Dealing with Noisy Signals: Debouncing and Smoothing

In real-world applications, signals can be messy. Buttons can produce electrical noise when pressed, and analog sensors might give fluctuating readings. Plaquette provides tools to handle these issues: **debouncing** for digital signals and **smoothing** for analog ones.

Debouncing

Debouncing ensures that a button press is recorded cleanly, ignoring any noise. Here's how to debounce a button:

Smoothing

For analog signals, smoothing helps stabilize noisy data.

Here's how you can smooth a light sensor (photoresistor). For this circuit, you will need to create a simple voltage divider circuit. Connect the photoresistor between the ground (GND) and the analog input pin (A0). Then connect a fixed resistor with value matching your photoresistor between analog input pin and +5V (Vcc). For example, for a 1k Ω - 10k Ω photoresistor you could use a fixed resistor of about 5.5k Ω).

```
#include <Plaquette.h>
AnalogIn lightSensor(A0);
AnalogOut led(9);

void begin() {
  lightSensor.smooth(); // Apply default smoothing
}

(continues on next page)
```

```
void step() {
  lightSensor >> led;
}
```

You can adjust the level of smoothing and deboucing by indicating a parameter representing the time window (in seconds) over which the value is averaged. Experiment with different smoothing values to see the result:

- lightSensor.smooth(): Default smoothing window (100ms)
- lightSensor.smooth(1.0): Smooth over one second
- lightSensor.smooth(10.0): Smooth over 10 seconds
- lightSensor.smooth(0.01): Smooth over 10ms

2.2.7 Mapping Values to Different Ranges

Sometimes, the output of a sensor doesn't match the range needed for an actuator. Plaquette provides a simple **mapping function** mapTo(low, high) which maps the analog input value to a specified range which is very useful for scaling sensor readings.

Example: Controlling the blinking frequency of an LED based on the value of a light sensor.

```
#include <Plaquette.h>
AnalogIn lightSensor(A0);
DigitalOut led(13);
SquareWave wave(1.0);

void begin() {}

void step() {
    // Map sensor value to frequency in range 1-10 Hz
    wave.frequency( lightSensor.mapTo(1, 10) );
    // Control LED with wave.
    wave >> led;
}
```

2.2.8 Making Decisions with Conditions

Interactive systems often need to respond to changes in input. Plaquette provides convenient methods like rose(), fell(), and changed() for detecting transitions in digital signals.

Digital Conditions

Here's an example of toggling an LED when a button is pressed:

```
#include <Plaquette.h>
DigitalIn button(2, INTERNAL_PULLUP);
DigitalOut led(13);

void begin() {}

void step() {
```

(continues on next page)

Analog Conditions

Analog conditions are useful when you want to trigger actions based on a threshold. For instance, turning on an LED when the light level drops below 30% (0.3):

```
#include <Plaquette.h>
AnalogIn lightSensor(A0);
DigitalOut led(13);

void begin() {}

void step() {
  if (lightSensor < 0.3) {
    led.on(); // Turn on LED in low light
  } else {
    led.off(); // Turn off LED in bright light
  }
}</pre>
```

2.2.9 Modes for Inputs and Outputs

All input and output units in Plaquette support different modes, which allow you to adapt to various circuit configurations. You may already be familiar with the INTERNAL_PULLUP mode from *DigitalIn*, which provides a simple way to connect a button input. Let's explore how modes affect *DigitalIn*, *AnalogIn*, *DigitalOut*, and *AnalogOut* units.

Understanding these modes helps you design stable and efficient circuits, whether you're reading inputs or driving outputs. Choose the mode that best fits your hardware setup and application requirements.

DigitalIn Modes: DIRECT, INVERTED, and INTERNAL PULLUP

The *DigitalIn* unit supports three primary modes:

• **DIRECT** (default): The unit is ON when the input pin is HIGH (e.g., 5V). This mode is used for buttons with pull-down resistors, which keep the pin LOW (OFF) when the button is not pressed and allow it to go HIGH (ON) when the button is pressed. Pull-down resistors typically have values around $10k\ \Omega$.

Example: Button connected between pin 2 and 5V with a pull-down resistor to ground:

```
DigitalIn button(2, DIRECT);
DigitalOut led(13);

void step() {
  if (button) {
    led.on();
  } else {
    led.off();
  }
}
```

• **INVERTED**: The unit is ON when the input pin is LOW (e.g., GND). This is useful for buttons with pull-up resistors, which keep the pin HIGH when the button is not pressed and allow it to go LOW when the button is pressed. The INTERNAL_PULLUP mode activates an internal pull-up resistor, simplifying the circuit.

Example: Button connected between pin 2 and ground with a pull-down resistor to +5V (Vcc):

```
DigitalIn button(2, INVERTED);
```

• INTERNAL_PULLUP: As in mode INVERTED the unit is ON when the input pin is LOW (e.g., GND). Makes use of the internal pull-up resistor on the board, therefore removing the need to add a pull-up resistor.

Example: Button connected between pin 2 and ground (no need for an extra pull-up resistor):

```
DigitalIn button(2, INTERNAL_PULLUP);
```

AnalogIn Modes: DIRECT and INVERTED

The Analog In unit also supports DIRECT and INVERTED modes, which determine how the sensor's voltage is interpreted:

• **DIRECT** (default): Reads the raw analog value, normalized to a range of [0.0, 1.0]. This mode is suitable for sensors like photoresistors, where increasing light decreases resistance, resulting in higher voltage and a higher normalized value.

Example: Using a photoresistor in direct mode:

```
AnalogIn lightSensor(A0, DIRECT);
AnalogOut led(9);

void begin() {}

void step() {
  lightSensor >> led;
}
```

• **INVERTED**: Flips the normalized value, so high input voltage results in a low output value and vice versa. This is useful when you want the sensor to behave oppositely without changing your logic.

Example: Inverted photoresistor reading:

```
AnalogIn lightSensor(A0, INVERTED);
```

DigitalOut and AnalogOut Modes: SOURCE and SINK

The *DigitalOut* and *AnalogOut* units control the flow of current and can operate in two modes:

• **SOURCE** (default): The pin provides current when ON, suitable for devices like LEDs connected between the pin and ground.

Example: LED in source mode. Connect the LED anode (long leg) to pin 9 and the cathode (short leg) to ground, with a 330 Ω in series.

```
AnalogOut led(9, SOURCE);
SineWave wave(1.0);

void begin() {}

void step() {
```

(continues on next page)

```
wave >> led;
}
```

• SINK: The pin sinks current when ON, suitable for LEDs connected between a positive voltage and the pin.

Example: LED in sink mode. Connect the LED anode to +5V (Vcc) and the cathode to pin 9, with a 330 Ω resistor in series.

```
AnalogOut led(9, SINK);
```

2.2.10 Conclusion

Understanding inputs and outputs is crucial for building interactive projects. With Plaquette's simplified syntax, tools for handling noisy signals, and powerful mapping and conditional features, you can quickly create dynamic and engaging systems. Next, we'll explore how to use Plaquette's timing and signal generation features to add even more complexity and creativity to your projects.

2.3 Generating Waves

In this section, we will explore waves (also called oscillators), essential tools for creating dynamic and expressive media. Oscillators generate repeating waveforms, which can control various outputs such as LEDs or motors. We will also learn how to visualize signals and shape different kinds of waveforms. We will then introduce combining different waves together, either by adding them or through modulation. Finally, we will look at how to use randomness to generate noisy waveforms that feel more natural.



To follow along with the examples, set up a simple circuit:

- A **potentiometer** connected to **A0** to control proprties dynamically.
- A **button** connected to pin 2 with an internal pull-up resistor to trigger actions.
- An **LED** connected to pin 9 (PWM capable) through a 330 Ω resistor.

2.3.1 Visualizing Waves with the Serial Plotter

In this section, we will use **serial communication** to send data from our Arduino board to our PC so as to visualize the waves in real time. The print() and println() functions allow you to send data to the serial, which is invaluable for debugging and visualizing data. They will provide a way to graphically observe how wave properties like amplitude, phase, or frequency affect the output.

Single Signal

To visualize the data, open the Serial Plotter in the Arduino IDE. The Serial Plotter can graphically display waveforms by interpreting each printed value as a separate line on the graph, making it an invaluable tool to visualize signals such as sensor values and waveforms.

Example: Print the value of the potentiometer:

```
#include <Plaquette.h>
AnalogIn pot(A0); // The potentiometer

(continues on next page)
```

```
void begin() {}

void step() {
  println(pot); // Print the potentiometer value and ends the line
}
```

Multiple Signals

For multiple waveforms, print their values separated by spaces in a single line, followed by a newline using println().

Example: Print the value of the potentiometer and a sine wave:

```
#include <Plaquette.h>
AnalogIn pot(A0);  // Potentiometer input
SineWave wave(2.0);  // Sine wave with period of 2 seconds

void begin() {}

void step() {
  print(wave);  // Print wave value
  print(" ");  // Print white space
  println(pot);  // Print the potentiometer value and ends the line
}
```

2.3.2 Types of Waves

Plaquette provides 3 types of waves:

- *SquareWave*: Alternates between two levels with sharp transitions. Useful for creating rhythmic on-off patterns such as blinking LEDs or simple tone generators for buzzers. Possesses some properties of digital units.
- *TriangleWave*: Smoothly transitions between two levels in a linear fashion. By varying the width of the wave, you can create a **sawtooth wave** (width = 0) or an **inverted sawtooth wave** (width = 1). This is ideal for simulating ramping motions or gradual changes in brightness.
- *SineWave*: Produces a sinusoidal waveform for smoother modulation. Commonly used for creating natural, flowing transitions, such as smooth dimming or speed control.

You can visualize these waves on the Serial Plotter by streaming their values.

Example: Display different waves for comparison:

```
#include <Plaquette.h>

// Three wave types.
SquareWave square(1.0);
TriangleWave triangle(1.0);
SineWave sine(1.0);

void begin() {}

void step() {
    // Print all wave values separated by spaces
```

(continues on next page)

```
print(square); print(" ");
print(triangle); print(" ");
println(sine);
}
```

2.3.3 Wave Properties

Oscillators are defined by their **phase**, **period**, **frequency**, **amplitude**, and **width**. Let us explore these properties and their corresponding functions:

- **phase**(): Sets the initial point in the wave cycle (in range [0, 1]).
- **period**(): Sets the duration of one cycle in seconds.
- **frequency**(): Inverse of period; sets the cycles per second (Hz).
- **bpm**(): Alternative way to set the frequency using beats per minute (BPM).
- amplitude(): Sets the peak level of the wave (as % of max) (in range [0, 1]);
- width(): Controls the balance between the rising and falling portions of the wave cycle (in range [0, 1]). For each wave type, this property has a specific effect:
 - For *SquareWave*, it adjusts the duty cycle (the ratio of ON to OFF time).
 - For TriangleWave, it determines whether the wave skews towards a sawtooth (width = 0) or inverted sawtooth (width = 1).
 - For Sine Wave, it shifts the inflection points of the wave, altering its symmetry.

Initializing Properties

There properties can be initialized in the begin() to build a specific waveform.

Example: Assign some properties of a wave at program startup:

```
#include <Plaquette.h>

TriangleWave wave;

void begin() {
   wave.frequency(2); // 2 Hz
   wave.width(0.9); // width 90%
   wave.phase(0.1); // dephased by 10% of period
   wave.amplitude(0.5); // 50% amplitude
}

void step() {
   println(wave); // Print wave value
}
```

Changing Properties During Runtime

Properties can also be changed in real-time in the step() function to create interactive or evolutive effects.

Example: Control the width of the waves using the potentiometer:

```
#include <Plaquette.h>
AnalogIn pot(A0); // Potentiometer input

SquareWave square(1.0);
TriangleWave triangle(1.0);
SineWave sine(1.0);

void begin() {}

void step() {
    // Assign new width value.
    square.width(pot);
    triangle.width(pot);
    sine.width(pot);
    // Print all wave values separated by spaces
    print(square); print(" ");
    print(triangle); print(" ");
    println(sine);
}
```

Example: Control the period of the waves using the potentiometer. Necessitates remapping potentiometer value to appropriate ranges.

```
#include <Plaquette.h>
AnalogIn pot(A0); // Potentiometer input
SquareWave square(1.0);
TriangleWave triangle(1.0);
SineWave sine(1.0);
void begin() {}
void step() {
  // Read new period value.
  float newPeriod = pot.mapTo(0.5, 5); // Map to 0.5-5 seconds period
 // Assign new period value.
  square.period(newPeriod);
  triangle.period(newPeriod);
  sine.period(newPeriod);
  // Print all wave values separated by spaces
  print(square); print(" ");
  print(triangle); print(" ");
  println(sine);
```

Try using the potentiometer to control different wave properties and visualize the result using the Serial Plotter.

Accessors and Mutators

All properties in wave units have two variants:

- A mutator variant allowing to change the value of the property. Example: wave.period(3.0);.
- An **accessor** read-only variant that returns the current value of the property. Example: float x = wave. period();

```
    Ţip
```

This naming convention is a standard in Plaquette and you will find it in other units as well.

Example: Increase the wave's period by one second each time the button is pressed:

```
#include <Plaquette.h>
DigitalIn button(2, INTERNAL_PULLUP); // Button input

TriangleWave wave(1.0); // Wave with initial 1 second period

void begin() {}

void step() {
   if (button.rose()) {
     wave.period( wave.period() + 1 ); // Set period to current period plus one }
   println(wave); // Print wave value
}
```

2.3.4 Wave Addition

Adding waves together allows for the creation of complex and dynamic waveforms. By superimposing multiple signals, you can simulate natural phenomena, generate rhythmic patterns, or create rich textures for artistic applications. In Plaquette, wave addition is as simple as computing the average value of different waves.

One compelling example of wave addition is simulating a **heartbeat**. A heartbeat typically has two peaks: a stronger primary beat followed by a softer secondary beat. This can be achieved by adding two waves with different amplitudes and timings.

Example: Heartbeat simulation. This example uses two *SineWave* units: one for the primary beat one for the secondary beat. The bpm() function sets the frequency of the waves in beats per minute.

```
#include <Plaquette.h>
SineWave primary;  // Main heartbeat wave
SineWave secondary;  // Secondary beat
AnalogOut led(9);  // LED for visualizing the heartbeat

void begin() {
   primary.bpm(80);  // Set primary beat to 80 beats per minute
   secondary.bpm(2*primary.bpm());  // Set secondary beat to twice primary BPM
   secondary.amplitude(0.8);  // Secondary beat is less strong
}
```

(continues on next page)

```
void step() {
  float heartBeat = (primary + secondary) / 2; // Combine and normalize waves
  led.put(heartBeat); // Drive LED with combined signal
  println(heartBeat); // Stream the combined wave for visualization
}
```

In this simulation, the primary sine wave provides the dominant rhythm, while the secondary sine wave introduces a softer, complementary pulse. The resulting waveform mimics the double-thump pattern of a human heartbeat.

Try experimenting with different wave types, amplitudes, and frequencies to see how the combined waveform changes. Try adding a third wave, making sure you divide the result by 3 intead of 2. Wave addition opens up endless possibilities for creating expressive and engaging outputs.

2.3.5 Modulation

Modulation involves using one oscillator to influence the properties of another, creating rich and dynamic effects. For example, a slower wave (also called a **Low-Frequency Oscillator (LFO)**) can modulate the frequency, phase, period, amplitude, or width of a faster wave.

Example: Modulate the frequency of a sine wave with a triangle wave:

```
#include <Plaquette.h>

TriangleWave modulator(10.0); // LFO (10 seconds period)
SineWave sine; // Main wave
AnalogOut led(9); // LED output

void begin() {}

void step() {
    sine.frequency(modulator.mapTo(1.0, 10.0)); // Modulate frequency between 1 and 10 Hz
    sine >> led; // Drive LED with modulated sine wave
    println(sine); // Stream the modulated wave
}
```

2.3.6 Adding Noise with randomFloat()

While oscillators are incredibly useful for generating regular and predictable waveforms, there are times when you may want to introduce randomness to add a sense of natural variation or lifelike behavior. Plaquette provides the randomFloat() function, which is a powerful tool for generating random values.

A Warning

Avoid using Arduino's random() function as it returns integer numbers instead of floating-point numbers.

The randomFloat() function can be used in several ways:

- randomFloat() generates a random float between 0.0 and 1.0.
- randomFloat(max) generates a random float between 0.0 and max.
- randomFloat(min, max) generates a random float between min and max.

These random values can be used to add noise directly to a signal.

Example: Add noise to a sine wave.

```
#include <Plaquette.h>
SineWave wave(1.0); // Base waveform
AnalogOut led(9); // LED output

void begin() {}

void step() {
  float noise = randomFloat(-0.1, 0.1); // Generate noise value in [-0.1, 0.1]
  float noisyWave = wave + noise; // Compute sine value + noise
  noisyWave >> led; // Drive LED with noisy sine wave
  println(noisyWave); // Stream the noisy sine wave
}
```

These random values can also be used to modify properties such as amplitude, frequency, width, or phase.

Example: Update the wave's period according to a random walk. The potentiometer controls the amount of noise.

Example: Introduce randomness to the frequency of a triangle wave. Frequency updated on each push of the button.

```
#include <Plaquette.h>

DigitalIn button(2, INTERNAL_PULLUP); // Button input
TriangleWave wave; // Wave with default properties
AnalogOut led(9); // LED output

void begin() {
  button.debounce(); // Debounce button
  wave.frequency(5.0); // Start at 5 Hz
}

void step() {
  if (button.rose()) {
    wave.frequency(randomFloat(4.0, 6.0)); // Random frequency between 4 and 6 Hz
  }
  println(wave); // Stream the wave for visualization
}
```

Randomness can also be combined with modulation to create highly dynamic and expressive behaviors. Experiment with adding random noise to various properties and observe the effects using the Serial Plotter. Try to simulate a natural phenomena like a flickering flame or a lightning bolt.

2.3.7 Timing Functions

Oscillators offer various timing functions to control their behavior:

- start(): Starts/restarts the oscillator.
- stop(): Stops it and resets it.
- pause(): Pauses the wave at its current point.
- **resume**(): Resumes from the paused point.
- togglePause(): Toggles between paused and running states.
- **isRunning**(): Returns whether the oscillator is active.
- setTime(): Sets the current phase of the oscillator based on absolute time (in seconds).

Example: Use the button to start and stop the wave:

```
#include <Plaquette.h>

DigitalIn button(2, INTERNAL_PULLUP); // Button input
SineWave sine; // Wave with default properties
AnalogOut led(9); // LED output

void begin() {
    sine.frequency(2.0); // Initialize frequency to 2 Hz
}

void step() {
    if (button.rose()) {
        sine.togglePause(); // Pause or resume the wave
    }
    sine >> led; // Drive LED with sine wave
    println(sine); // Stream the wave for visualization
}
```

2.3.8 Phase Shifting with shiftBy()

The shiftBy() function allows you to offset the phase of an oscillator relative to its current position and returns the value of the dephased wave. This is useful for creating complex, synchronized patterns.

Example: Shift the phase of a sine wave:

```
#include <Plaquette.h>
SineWave wave(5.0); // Sine wave with 5 seconds period

void begin() {}

void step() {
    // Print shifted values separated by white spaces.
    print(wave); print(" "); // 0% shift

    (continues on next page)
```

```
print(wave.shiftBy(0.25)); print(" "); // 25% shift
print(wave.shiftBy(0.5)); print(" "); // 50% shift
println(wave.shiftBy(0.75)); // 75% shift
}
```

2.3.9 Conclusion

Oscillators are powerful tools for creating dynamic, expressive systems. By combining their waveforms, timing functions, and phase-shifting capabilities, you can achieve intricate and synchronized behaviors. Modulation and randomness add another layer of complexity, enabling you to create engaging and responsive media systems. Explore these features in Plaquette and see how waves can bring your projects to life.

2.4 Working with Time

In interactive systems, **timing** plays a crucial role in controlling the flow of events. Whether you're creating delays, triggering events, or generating periodic signals, Plaquette provides powerful tools to manage time effectively. In this section, we will explore timing functions and units, such as seconds, *Chronometer*, *Alarm*, *Metronome*, and *Ramp*.

Timing is the backbone of interactive systems. By understanding and leveraging the timing tools Plaquette provides, you can create precise, dynamic, and creative projects that respond in real-time to various inputs and conditions.

1 Note

To follow along with the examples, set up a simple circuit:

- A **potentiometer** connected to **A0** to control proprties dynamically.
- A **button** connected to pin 2 with an internal pull-up resistor to trigger actions.
- An **LED** connected to pin 9 (PWM capable) through a 330 Ω resistor.

It is strongly advised to use the Serial Plotter to visualize the ramps.

2.4.1 Measuring Absolute Time with seconds()

The most fundamental timing functionality in Plaquette is the seconds() function. It simply returns the elapsed time in seconds *since the program started running*. This is very useful for measuring durations or triggering time-based events.

A Warning

The value returned by seconds() is an approximation and should not be used as a substitute for a real-time clock in applications requiring high precision.

Example: Turn LED off after 3 seconds, then on again after 10 seconds.

```
#include <Plaquette.h>
DigitalOut led(LED_BUILTIN);

void begin() {
  led.on();
  (continues on next page)
```

```
void step() {
  if (seconds() >= 3) { // After 3 seconds: turn LED off
    led.off();
  } else if (seconds() >= 10) { // After 10 seconds: turn LED on
    led.on();
  }
}
```

While seconds() provides a simple and effective way to measure time, it is a global function that cannot differentiate between multiple events: it simply tells you the time since the program was started. Like time itself, it always increases and never resets. For more precise control and event-specific timing, we will need to use more specialized timing functionalities.

2.4.2 Timing Units

Plaquette offers a core set of specialized units to simplify common timing tasks:

- Chronometer: Measures elapsed time between events
- Alarm: Activates after a specific duration
- Metronome: Generates periodic pulses
- *Ramp*: Creates a smooth transition

Danger

Timing units deal with time and events without interrupting the main processing loop. Users should avoid blocking processes such as delay() and delayMicroseconds() and when using Plaquette.

Let us dive into these units and see what each one of them has to offer.

2.4.3 Keeping Track of Time with Chronometer

While seconds() can only give you the time since the start of the program, the *Chronometer* unit allows you to measure the time elapsed since it was started, like a real-life chronometer. It is your basic building block for creating responsive systems where timing matters.

Chronometers are particularly useful for scenarios where the duration of an action determines its outcome. For instance, measuring how long a button is pressed can enable a system to interpret short and long presses differently.

Example: Changes LED intensity depending on how long button was pressed.

```
#include <Plaquette.h>

DigitalIn button(2, INTERNAL_PULLUP); // Button input
AnalogOut led(9); // LED output
Chronometer chrono; // Chronometer measuring button press duration

void begin() {
  button.debounce(); // Debounce button
  led.off();
```

(continues on next page)

```
void step() {
   if (button.rose()) {
      chrono.start(); // Start the timer when button is pressed
   }
   else if (button.fell()) {
      // Converts chronometer time to LED intensity over a range of 10 seconds
      float ledValue = mapToO1(chrono, 0, 10); // Maps from 0-10 seconds to [0, 1] range
      ledValue >> led;
      chrono.stop(); // Stops/resets the timer when button is released
   }
   println(chrono); // Prints value of chrono for visualization.
}
```

The *Chronometer* is great for tracking durations and reacting to them, but sometimes you want an easy way to know whether you waited for a certain amount of time.

2.4.4 Delayed Switching with Alarm

Like a real-world alarm the *Alarm* unit starts "buzzing" after a predefined time. It is a **digital unit** initialized with a certain duration. It outputs 0/false until it reaches its timeout; then, it starts ringing and outputs 1/true until it is stopped or restarted.

Once triggered, it can be reset by calling its start() function. This makes it ideal for implementing delayed responses or timed sequences.

Alarms can help manage actions that require specific timing, such as turning off a light after a certain duration or triggering an animation. Their flexibility makes them a powerful tool in time- based designs.

Example: Starts blinking an LED when we reach the alarm's timeout. Pushing the button restarts the alarm, increasing its duration by 50% each time.

```
#include <Plaquette.h>
DigitalOut led(LED_BUILTIN); // LED on built-in pin
DigitalIn button(2, INTERNAL_PULLUP); // Button input

SquareWave blink(0.5); // Wave to blink LED when alarm is buzzing

Alarm alarm(2.0); // Alarm with 2s duration

void begin() {
   button.debounce(); // Debounce button
}

void step() {
   // Button: restart.
   if (button.rose()) { // Button pressed event
    led.off(); // Turn off LED
    alarm.duration( alarm.duration() * 1.5 ); // Increase duration by 50%.
    alarm.start(); // Start alarm
```

(continues on next page)

```
// Alarm buzzing: blink LED.
if (alarm) {    // Check if alarm is buzzing
    blink >> led; // Blink LED
}

println(alarm.progress()); // % progress of the alarm (for visualization)
}
```

2.4.5 Triggering Periodic Events with Metronome

While the *Alarm* unit is great for dealing with one-time events, there are many cases where events need to be triggered periodically. For such use cases, Plaquette provides the *Metronome* unit which sends a periodic pulse or "bang". In other words, it acts like an *Alarm* that gets restarted as soon as it starts buzzing. It also bears some resemblance with *wave units*.

Periodic actions are at the core of interactive systems, whether you are blinking an LED or synchronizing motor movements. The *Metronome* provides a straightforward way to create these kinds of repetitions.

Example: Blink an LED using a Metronome:

```
#include <Plaquette.h>

DigitalOut led(LED_BUILTIN); // LED on built-in pin
Metronome metro(1.0); // Metronome with period of 1 second

void begin() {}

void step() {
   if (metro) { // The unit will be true for a single frame every time it triggers led.toggle(); // Toggle LED on each pulse
   }
}
```

Metronome units can be used as a way to trigger different actions in parallel.

Example: Use multiple *Metronome* units to control different actions. One metronome toggles LED visibility, while another slower metronome accelerates blinking speed.

```
#include <Plaquette.h>

DigitalOut led(LED_BUILTIN); // LED on built-in pin
SquareWave blink(1.0); // Wave to blink the LED
Metronome metroToggle(2.0); // Metronome to toggle visibility
Metronome metroAccelerate(10.0); // Metronome to accelerate blink

boolean visible = true; // Flag to keep track of visibility

void begin() {}

void step() {
    // Toggle visibility.
    if (metroToggle) {
```

(continues on next page)

```
visible = !visible; // Invert boolean value
}

// Accelerate blink.
if (metroAccelerate) {
   blink.frequency( blink.frequency() * 2 ); // Double frequency
}

// Activate LED depending on visibility status.
if (visible)
   blink >> led;
else
   led.off();
}
```

Ţip

To switch between modes, you can simply call the duration(value) or speed(value) functions with a target duration or speed (recommended). Alternatively, you can change mode by calling mode(RAMP_DURATION) or mode(RAMP_SPEED), in which case the duration or speed will be computed based on the ramp's current properties (ie. duration/speed, starting, and target values).

2.4.6 Creating Smooth Transitions with Ramp

Ramps are a cornerstone of creative expression. Unlike oscillators, which generate periodic signals, ramps interpolate from one value to another over a specific duration or at a specific speed. The *Ramp* unit in Plaquette provides a flexible and powerful way to animate visual elements such as LEDs or physical components such as motors in a natural manner, allowing the creation of rich, dynamic, evolving experiences.

Ţip

We strongly recommend to use the Serial Plotter to visualize the ramp values in the following examples.

Basic Usage

Like Alarm units, ramps are restarted by calling their start() function. By default, they will ramp between 0 and 1.

Example: Gradually increases an LED brightness over 5 seconds every time a button is pressed.

```
#include <Plaquette.h>

DigitalIn button(2, INTERNAL_PULLUP); // Button input
AnalogOut led(9); // LED output
Ramp ramp(5.0); // Ramp with 5 seconds duration

void begin() {
  button.debounce(); // Debounce button
  ramp.start();
}
```

(continues on next page)

```
void step() {
  if (button.rose()) {
    ramp.start(); // Restart ramp
  }
  ramp >> led; // Use ramp value to control LED brightness
  println(ramp); // Visualize ramp value with the Serial Plotter
}
```

Try changing the behavior of the ramp to rather go from 1 to 0 by calling the fromTo() function and see how that changes the behavior of the ramp:

```
void begin() {
  ramp.fromTo(1.0, 0.0); // Ramp from one to zero
  ramp.start();
}
```

Flexible Ranges

Ramps are not restricted to the range [0, 1]. You can define any starting and ending values, making them useful for various applications such as changing properties of waves, controlling the angle of a servo motor, adjusting the color of a RGB LED, etc.

Example: Gradually increases an LED brightness over 5 seconds every time a button is pressed. The potentiometer sets the maximum LED value to attain.

```
#include <Plaquette.h>

DigitalIn button(2, INTERNAL_PULLUP); // Button input
AnalogIn pot(A0); // Potentiometer input
AnalogOut led(9); // LED output
Ramp ramp(5.0); // Ramp with 5 seconds duration

void begin() {
  button.debounce(); // Debounce button
}

void step() {
  if (button.rose()) {
    ramp.to(pot); // Set ramp goal to value of potentiometer
    ramp.start(); // Restart ramp
  }

ramp >> led; // Use ramp value to control LED brightness
  println(ramp); // Visualize ramp value with the Serial Plotter
}
```

Try adjusting the potentiometer to different positions to see the effect.

Notice how we are using function to() to set the goal of the ramp. The starting value is left unchanged at zero (default value). To change the starting value while preserving the goal value, use function from() instead. See what happens if you change the call ramp.to(pot) to use from() intead:

```
ramp.from(pot); // Set ramp goal to value of potentiometer
```

Dynamic Control with go()

A common scenario in creative applications is to respond to events by changing a value such as the position of a servomotor, the color of a RGB LED, or the volume of a sound. Ramps are often used in these cases to create smooth transitions instead of abrupt changes.

The go() function provides a simple way to launch a ramp towards a new goal, starting from the current value of the ramp.

Example: Control blinking frequency using a button. Each time the button is pushed, a new frequency is chosen randomly and the ramp smoothly goes to the new frequency.


```
#include <Plaquette.h>
DigitalIn button(2, INTERNAL_PULLUP); // Button input
AnalogOut led(9); // LED output
Ramp ramp(5.0);  // Ramp with 5 seconds duration
TriangleWave wave; // Oscillator
void begin() {
 wave.width(1.0); // Sawtooth wave
  wave.bpm(100);
                    // Initial BPM
  button.debounce(); // Debounce button
void step() {
  if (button.rose()) {
   // Set target BPM to random value
   float targetBpm = randomFloat(60, 200);
   ramp.go(targetBpm); // Launch ramp
  }
  wave.bpm(ramp); // Use ramp value to adjust BPM of wave
  wave >> led; // Oscillate LED
  println(ramp); // Visualize ramp value with the Serial Plotter
```

1 Note

Ramps provide multiple ways to call go() depending on the desired behavior, including specifying starting value and duration on the spot. For more details, please consult the *Ramp unit's reference*.

Generating Expressive Effects with Easing Functions

Ramp supports *easing function*, providing many different ways to generate expressive effects. Easing functions add acceleration or deceleration effects to ramp transitions, making them feel more natural and lifelike.

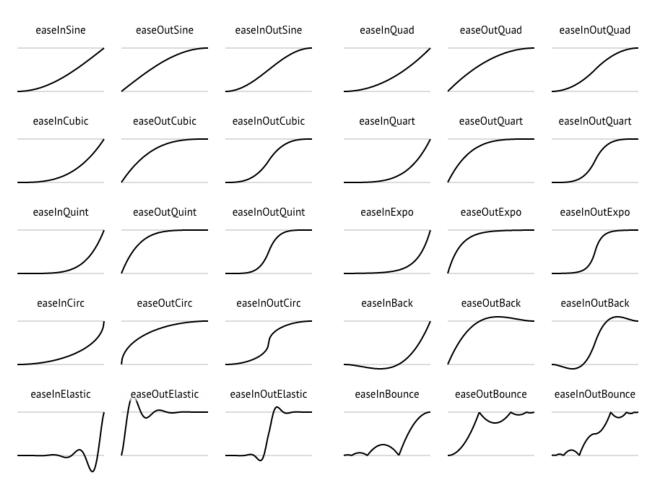

Example: Use easing to create a smooth LED fade repeatedly:

```
#include <Plaquette.h>
AnalogOut led(9); // LED output
Ramp ramp(3.0); // Ramp with 3 seconds duration

void begin() {
   ramp.easing(easeInOutQuad); // Apply an easing function
   ramp.start();
}

void step() {
   if (ramp.isFinished())
     ramp.start(); // Restart the ramp with the easing effect
   }

   ramp >> led; // Use the ramp's value to control the LED brightness
   println(ramp); // Visualize ramp value with the Serial Plotter
}
```

Try experimenting with different easing functions and observe the results on the LED and using the Serial Plotter. Easing can transform mechanical transitions into expressive animations, giving your projects character.

Operational Modes: Duration vs Speed

By default, ramps transition between two values over a definite duration. However, there are many scenarios where this is not the appropriate behavior. For example, one might want to move a servomotor at a specific angular speed: ramping over 10 degrees should take much less time than a 90 degrees transition.

Ramps accomodate these different use cases by providing two modes of operation:

- In duration mode (default) the ramp transitions between values over a fixed number of seconds.
- In **speed mode** the ramp moves at a constant rate, defined in value change per second.

Example: Compare duration and speed modes. Ramp values can be visualized using the Serial Plotter.

```
#include <Plaquette.h>
DigitalIn button(2, INTERNAL_PULLUP); // Button input
Ramp rampDuration; // Ramp operating in duration mode
Ramp rampSpeed: // Ramp operating in speed mode
void begin() {
  rampDuration.duration(5.0); // Duration: 5 seconds
  rampSpeed.speed(5.0); // Rate of change: 5 per second
  button.debounce(); // Debounce button
}
void step() {
  if (button.rose()) {
   // Both ramps go to random target value.
   float targetValue = randomFloat(-20, 20);
   rampDuration.go(targetValue);
   rampSpeed.go(targetValue);
  }
  // Visualize and compare ramps with the Serial Plotter
  print(rampWithDuration);
  print(" ");
  println(rampWithSpeed);
```

2.4.7 Combining Timing Units

Plaquette allows you to combine timing units for more complex behaviors. For instance, you can use a *Metronome* to repeatedly trigger a *Ramp* or synchronize multiple timing units.

Example: Use a Metronome to trigger a Ramp at regular intervals:

```
#include <Plaquette.h>

Metronome metro(10.0); // Trigger every 10 seconds
Ramp ramp(3.0); // Ramp with 3 seconds duration
AnalogOut led(9); // LED output

void begin() {}

void step() {
```

(continues on next page)

```
if (metro) {
    ramp.start(); // Start the ramp each time the metronome triggers
}

ramp >> led; // Use the ramp's value to control the LED brightness
println(ramp); // Stream the ramp's value for visualization
}
```

Combining timing units unlocks an even greater range of creative possibilities. Use these tools to design intricate behaviors, smooth transitions, and expressive animations in your projects.

2.4.8 Conclusion

Timing is an essential aspect of creating interactive and dynamic systems, and Plaquette provides an intuitive set of tools to make this process seamless. From measuring durations with the *Chronometer*, to triggering events with the *Alarm*, generating rhythmic patterns with the *Metronome*, and creating smooth transitions with the *Ramp*, each timing unit offers unique possibilities.

The flexibility of these tools allows for countless creative applications, whether you are developing reactive systems, synchronizing events, or designing natural and expressive transitions. By combining these units, you can build intricate behaviors that bring your projects to life.

2.5 Regularizing Signals

Plaquette provides expressive, automated, and robust ways to deal with signals for interactive design using **regularization filters** such as smoothing, min-max scaling, and normalization.

2.5.1 Direct Input-to-Output

Let's review briefly how to handle raw *input and output* signals in Plaquette. We will be using an analog sensor such as a photoresistor for this example.



In order to build this circuit, you will need to create a simple voltage divider circuit. Connect the photoresistor between the ground (GND) and the analog input pin (A0). Then connect a fixed resistor with value matching your photoresistor between analog input pin and +5V (Vcc). For example, for a 1k Ω - 10k Ω photoresistor you could use a fixed resistor of about 5.5k Ω).

Here is a simple Arduino code that allows one to change the value of an output LED using an input photocell:

```
// The photocell analog pin.
int photoCellPin = A0;

// The output analog LED pin.
int ledPin = 9;

void setup() {
    // Initialize pins.
    pinMode(photoCellPin, INPUT);
    pinMode(ledPin, OUTPUT);
```

(continues on next page)

```
void loop() {
    // Read value from photocell (between 0 and 1023).
    int value = analogRead(photoCellPin);

    // Write value to LED (between 0 and 255).
    analogWrite(ledPin, value / 4);
}
```

As explained in *Why Plaquette?* section, this simple code is made complicated by the fact that the programmer needs to remember low-level information concerning the ranges of raw number values (1023, 255, ...) Furthermore, this code fails to adapt to changing conditions such as the range of the ambient light.

Let's see how Plaquette can help us to create more expressive code by using inputs and outputs signals rather than meaningless raw numbers.

To begin, we will re-implement the example above using Plaquette units.

First, let's define our input photocell on pin A0 using an *AnalogIn* unit:

```
AnalogIn photoCell(A0);
```

Then, let's add an output analog LED on pin 9 using an AnalogOut unit:

```
AnalogOut led(9);
```

If we want to directly control the value of the LED from the value of the photocell, all we need to do is to send the photocell's value to the led. The easiest way to do so is by using the >> operator:

```
photoCell >> led;
```

The complete Plaquette code will look like this:

```
#include <Plaquette.h> // include the Plaquette library

// Create input unit for photocell.
AnalogIn photoCell(A0);

// Create output unit for LED.
AnalogOut led(9);

void begin() {}


// Define frame-by-frame operations.

void step() {
    // Send photocell value directly to the LED.
    photoCell >> led;
}
```

2.5.2 Getting the Full Range of a Signal

If we run this program, we will likely notice that the LED brightness will not span the full range from 0% to 100%. That's because depending on ambient lighting conditions, the photocell's values will not move across the full spectrum of possibility. For instance, in the dark, the photocell might range from 10% to 50%, while in full daylight, it might range between 70% and 95%.

In order to resolve this issue, we need to **regularize** the photocell's signal. We can do so using a filtering unit such as a *MinMaxScaler*. This unit automatically keeps track of the minimum and maximum values of the incoming signal over time (for example, 10% and 50%) and remaps them into a new interval of [0, 1] (ie., 0% to 100%).

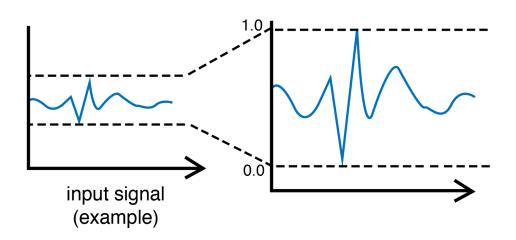

To use this approach, create the unit:

MinMaxScaler regularizer;

... and then insert it in the pipeline between the incoming photocell signal and the output LED:

The above expression will do the following, in order:

- 1. Read the raw photocell value using the photoCell unit.
- 2. Send that raw value from the photoCell unit to the regularizer unit.
- 3. The regularizer unit updates itself if the value is a new extreme value (minimum or maximum).
- 4. The regularizer then remaps the raw photocell value to the full range of [0, 1] and sends it to the led unit.
- 5. The 1ed unit takes the input value in [0, 1] and applies it to the intensity of the LED.

2.5.3 Reacting to Signal Changes

Remember our example from *ealier*, where we were trying to detect high-valued signals using arbitrary numbers?

```
if (value > 716)
  // do something
```

Suppose that instead of directly controlling the LED value based on the photocell's value, we instead want to use sudden changes in the photocell's value to trigger the on/off state of the LED? In other words, we would like to work with the **peaks** in the incoming signal (such as when someone points a light source towards the photocell).

One way to do so would be to pick a threshold in the regularized signal above which we would react to the light source. Let's say that we will react when the signal goes above 70%. The code of the step() function now becomes:

```
void step() {
  photoCell >> regularizer;
  if (regularizer > 0.7)
    1 >> led;
  else
    0 >> led;
}
```

... which can be more compactly rewritten by sending directly the conditional expression (regularizer > 0.7) to the output LED:

```
void step() {
  photoCell >> regularizer;
  (regularizer > 0.7) >> led;
}
```

2.5.4 Adapting to Changing Conditions

So far so good. The number 0.7 is still a bit of an arbitrary, hand-picked number, but it makes more sense than 716 because it refers to a more human-understandable concept (70% instead of 716 / 1023). However, this approach will still be sensitive to changes in the ambient light, and behave differently under different light conditions (for example, it might work as expected in the morning, but work less well in the late afternoon when the sun starts to go down.)

One thing we could do would be to make sure that our regularization unit adapts to changing conditions. In order to do this, rather than having our MinMaxScaler remap values depending on every single incoming value, we can have it adapt over a **time window**. This will allow our regularizer to slowly forget what it has learned, and reprogram itself after a certain amount of time has passed.

This can be accomplished by calling the timeWindow(seconds) function inside the begin() function:

```
void begin() {
   // Allow regularizer to adapt over an approximate period of 1 hour (3600 s).
   regularizer.timeWindow(3600.0f);
}
```

2.5.5 Normalizing Signals to Spot Extreme Values

The MinMaxScaler is a very useful unit for making sure signals stay within a [0, 1] range. However, it is not always the best for signal detection since it only accounts for extreme values (minimum and maximum), which makes it sensitive to rare events. Someone switching the lights on and off again rapidly might completely ruin the show.

A better alternative is the *Normalizer* unit, which regularizes incoming signals by normalizing them around a target **mean** by taking into account **standard deviation**. Once the data is normalized, extreme **outlier** values can be more easily and robustly detected based on how much they diverge from the mean.

Let's replace our MinMaxScaler by a Normalizer unit:

```
Normalizer regularizer;
```

... and use the isHighOutlier() function to find values that are higher than usual:

```
void step() {
  photoCell >> regularizer;
  regularizer.isHighOutlier(photoCell) >> led;
}
```

Ţip

By default, the isHighOutlier() function detects values that are more than 1.5 deviations from the mean. The function can be made more or less sensitive by adjusting the number of deviations (typically between 1.0 and 3.0). For example, isHighOutlier(value, 1.2) will be more sensitive, isHighOutlier(value, 2.5) will be less sensitive, and isHighOutlier(value, 3.0) will only respond to rarely-occurring extremes. While these numbers (1.2, 1.5, 2.5, etc.) still need to be hand-picked, they are much more robust than our 716 and even to our 0.7 number from earlier.


Here is a complete version of the code:

```
#include <Plaquette.h> // include the Plaquette library
// Create input unit for photocell.
AnalogIn photoCell(A0);
// Create output unit for LED.
AnalogOut led(9);
// Create regularization object.
Normalizer regularizer;
// Initialize everything.
void begin() {
  // Allow regularizer to adapt over an approximate period of 1 hour (3600 s).
  regularizer.timeWindow(3600.0f);
}
// Define frame-by-frame operations.
void step() {
  // Update regularizer with raw signal value.
  photoCell >> regularizer;
  // Detect outliers and send the value (1=true=outlier, 0=false=no outlier)
  // directly to the LED.
  regularizer.isHighOutlier(photoCell) >> led;
```

2.5.6 Detecting Peaks

The outlier detection method is useful to find extreme values. However, it also comes with an important limitation. The isHighOutlier() and isOutlierLow() methods return true as long as the received value is considered to be an outlier, making these methods unsuitable for triggering instantanous events, such as toggling the status of an LED, starting a sound event, activating a motor, etc.

The *PeakDetector* unit addresses this limitation. It is best used in combination with a Normalizer unit. We will use the default mode of the PeakDetector (PEAK_MAX): for a peak to be detected. In this mode, the signal will need to (1) cross a *trigger threshold* value (triggerThreshold); (2) reach its *apex* (max); and (3) *fall back* by a certain proportion (%) between the threshold and the apex (controlled by the fallbackTolerance parameter).

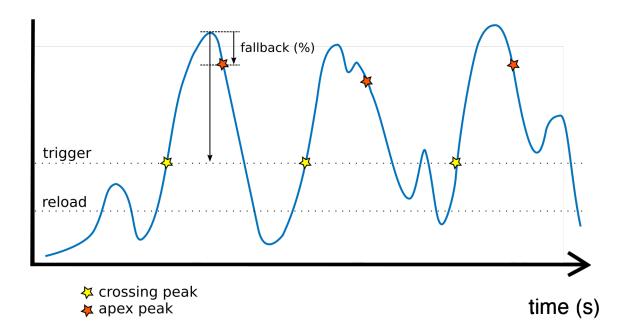

Building on the previous section for outlier detection, we will assign the PeakDetector's triggerThreshold to the value above which a value is considered to be a high outlier, which can be obtained by calling the Normalizer's function highOutlierThreshold():

PeakDetector detector(normalizer.highOutlierThreshold());

Ţip

As for the isHighOutlier() function, the highOutlierThreshold() function is set to return, by default, a threshold that is 1.5 standard deviations from the mean. The function can be made more or less sensitive by adjusting the number of deviations. For example, highOutlierThreshold(1.2) will be more sensitive, while highOutlierThreshold(2.5) will be less sensitive.

Finally, let's rewrite the step() function with our new peak detector, so that only when a **peak** is detected will the LED change state:

```
void step() {
    // Signal is normalized and sent to peak detector.
    sensor >> normalizer >> detector;
    (continues on next page)
```

```
// Toggle LED when peak detector triggers.
  if (detector)
    led.toggle();
}
```

The PeakDetector unit offers many options to fine-tune the peak detection process. Please read the full documentation of the unit for details.

2.5.7 Conclusion

The Plaquette library simplifies signal processing for interactive design by abstracting low-level details and offering intuitive regularization tools like MinMaxScaler and Normalizer. Combined with PeakDetector opens the way to deploy precise event-driven behaviors.

Plaquette's ability to adapt to changing conditions ensures dynamic, robust systems while keeping code concise and expressive. By leveraging its modular architecture, users can streamline signal handling, improve scalability, and focus on innovation in signal-driven creative applications.

2.6 Managing Events

Plaquette supports event-driven programming, allowing you to execute specific actions automatically when an event occurs instead of constantly checking for changes with an if statement. In Plaquette, this is achieved by events and function callbacks.

An **event** is an instantaneous situation that is triggered by a unit under specific conditions, such as the push of a button, the tick of a metronome, the end of a timer, or a peak detection.

A callback is a custom function that is registered with a source event: when the event is triggered, the registered callback is automatically called.



1 Note

In programming, a callback function is like giving someone instructions on what to do when a specific event happens. For example, imagine you are baking cookies and you set a timer. Instead of constantly watching the oven, you set the timer to "call you back" (in other words, alert you) when time is up, so you can take the cookies

This approach offers several advantages:

- **Modularity**: Encapsulates behavior in reusable functions.
- Expressiveness: Focuses on declaring "what happens when".
- Efficiency: Reacts to changes without continuous polling.
- Scalability: Makes it easy to manage complex systems with multiple events.

Let us explore how this works with practical examples.

2.6.1 Supported Events

| Event: | onRise() | onFall() | onChange() | onBang() | onFinish() |
|--------------------|--------------|--------------|---------------|--------------|------------|
| Activation: | Value rises | Value falls | Value changes | Unit fires | Time out |
| Alarm | ✓ | \checkmark | \checkmark | | ✓ |
| DigitalIn | \checkmark | \checkmark | \checkmark | | |
| Metronome | | | | \checkmark | |
| PeakDetector | | | | ✓ | |
| Ramp | | | | | ✓ |

2.6.2 Reacting to an Event

Let us take an example where we want to react to the push of a button by switching an LED on and off.

First, let us create the units we will be working with:

```
#include <Plaquette.h>
DigitalOut led(LED_BUILTIN); // LED connected to built-in pin
DigitalIn button(2, INTERNAL_PULLUP); // Button connected to pin 2
```

In order to react to an event, we first need to create a callback function which will be called when the event will happen:

```
// Callback function to toggle the LED.
void toggleLed() {
  led.toggle();
}
```

Then, we need to register our callback to an event. In this case, we will register our function toggleLed() to the onRise() event of our button unit, which will trigger at the instant the button is pressed.

```
void begin() {
  button.debounce(); // Enable debouncing to avoid multiple events

// Register callbacks for button events.
  button.onRise(toggleLed); // Toggle the LED on button press
}
```

In this case, the step() function can be left empty because the callback will take care of all the logic.

```
void step() {} // Nothing to do here
```

Here is the final code for this example:

```
#include <Plaquette.h>
DigitalOut led(LED_BUILTIN); // LED connected to built-in pin
DigitalIn button(2, INTERNAL_PULLUP); // Button connected to pin 2

// Callback function to toggle the LED.
void toggleLed() {
  led.toggle();
}
(continues on next page)
```

```
void begin() {
  button.debounce(); // Enable debouncing to avoid multiple events

// Register callbacks for button events.
  button.onRise(toggleLed); // Toggle the LED on button press
}

void step() {} // Nothing to do here
```

Now, try changing onRise() to onFall() or to onChange(). How does that affect the interaction between the button and the LED?

2.6.3 Managing Multiple Events

It is possible to register multiple callbacks with the same event, and one callback can be assigned to many events.

Example: Launch both toggleLed() and printButton() on button press, registering printButton() to both press and release events.

```
#include <Plaquette.h>
DigitalOut led(LED_BUILTIN); // LED connected to built-in pin
DigitalIn button(2, INTERNAL_PULLUP); // Button connected to pin 2
// Callback function to toggle the LED.
void toggleLed() {
 led.toggle();
}
// Callback function to print button state.
void printButton() {
  print("Button ");
  println(button ? "pressed" : "released")
void begin() {
  button.debounce(); // Enable debouncing to avoid multiple events
  // Register callbacks for button events.
  button.onRise(toggleLed); // Toggle the LED on button press
  button.onRise(printButton); // Print button state
  button.onFall(printButton); // Same here
}
void step() {} // Nothing to do here
```

2.6.4 Coordinating Parallel Events with Metronomes

There are many applications for which things happen concurrently at different pace, making one wish there could be multiple looping functions like step() running in parallel at different rhythm. This is easy to achieve in Plaquette using event-driven coding. Metronomes tick at a specific period, generating "bang" events which can trigger callbacks by registering them to metronome's onBang() event.

In this example, two metronomes control two LEDs, one digital and one analog, each at a different interval. A ramp is used to fade the analog LED.

```
#include <Plaquette.h>
DigitalOut led1(LED_BUILTIN); // First LED (digital) connected to built-in pin
AnalogOut led2(9); // Second LED (PWM) connected to pin 9
Metronome metro1(1.0); // Metronome with a one second period
Metronome metro2(2.0); // Metronome with a 2 second period
Ramp rampLed(0.5); // Short ramp to control LED 2
// Function to toggle the first LED.
void pingLed1() {
  led1.toggle();
// Function to start the ramp on second LED.
void pingLed2() {
  ramp.start();
 println("Ramp started");
}
void begin() {
  // Register callbacks for the metronomes.
 metro1.onBang(pingLed1); // Toggle LED 1 every second
 metro2.onBang(pingLed2); // Fade in LED 2 every 2 seconds
}
void step() {
  ramp >> led2; // Ramp second LED from 100% to 0%
}
```

2.6.5 Creating On-the-fly Callbacks

For simple, localized actions, you can define callback functions directly inline using an **anonymous function** (also called **lambda function**) which can be created with the following syntax:

```
[]() {
    // Function content goes here.
}
```

It allows you to write concise code without defining separate named functions and is thus especially useful for short, self-contained actions, keeping the code clean and readable.

For example, we could rewrite the callback registration from the example above in a shorter way, like this:

```
void begin() {
    // Register callbacks for the metronomes.
    metro1.onBang([]() { led1.toggle(); }); // Toggle LED 1 every second
    metro2.onBang([]() { // Fade in LED 2 every 2 seconds
    ramp.start();
    println("Ramp started");
});
```

2.6.6 Conclusion

Event-driven programming in Plaquette simplifies the process of reacting to changes and scheduling actions, allowing you to write modular, expressive, and efficient code. By using callbacks and event sources like buttons and metronomes, you can manage complex behaviors that happen concurrently and at different rhythms.

2.7 Advanced Usage

2.7.1 Smoothing Arbitrary Signals

While the *AnalogIn* unit in Plaquette provide a convenient built-in smooth() function for removing noise, there are many cases where you may need to smooth signals coming from other sources such as specialized sensors. The *Smoother* unit provides a highly flexible smoothing solution for such use cases, allowing seamless integration into any signal pipeline. It works using an exponential moving average, acting as a low-pass filter to stabilize fast variations.

Here is an example of using the *Smoother* to smoothen a DHT 22 temperature and humidity sensor using the external DHT sensor library:

```
#include <Plaquette.h>
#include <DHT.h> // External specialized library

DHT dht(2, DHT22); // DHT 22 sensor connected to pin 2

// Create a Smoother with a 10-second time window.
Smoother temperatureSmoother(10.0);

// Stream out for debugging (e.g., to Serial Monitor).
StreamOut serialOut(Serial);

void begin() {
    dht.begin(); // Initialize the DHT sensor
}

void step() {
    // Read temperature in Celsius.
    float rawTemperature = dht.readTemperature();

    // Smooth the temperature and send it to the Serial.
    rawTemperature >> temperatureSmoother >> serialOut;
}
```

2.7.2 Vanilla Coding Style

You can avoid Plaquette's >> operator or auto-conversion of units to values (eg., if (input), input >> output) in favor of a more conventional programming style by simply using the get() and put() functions of Plaquette units.

The get() method returns the current value of the unit:

```
float get()
```

The put() method sends a value to the unit and then returns the current value of the unit (the same that would be returned by get()):

```
float put(float value)
```

Additionally, digital input units such as *DigitalIn*, *Metronome* have a boolean isOn() method that works for boolean true/false values, while digital output units such as *DigitalOut* have a boolean putOn(boolean value) method.

Here are some examples of how to adopt a classic object-oriented functions style instead of the Plaquette style.

| Plaquette Style | Object-Oriented Style | | |
|---|---|--|--|
| <pre>input >> output;</pre> | <pre>output.put(input.get());</pre> | | |
| <pre>digitalInput >> digitalOutput;</pre> | <pre>digitalOutput.putOn(digitalInput.isOn());</pre> | | |
| <pre>(2 * input) >> output;</pre> | <pre>output.put(2 * input.get());</pre> | | |
| !digitalInput >> digitalOutput; | <pre>digitalOutput.putOn(!digitalInput.isOn());</pre> | | |
| <pre>if (digitalInput)</pre> | <pre>if (digitalInput.isOn())</pre> | | |
| if (input < 0.4) | <pre>if (input.get() < 0.4)</pre> | | |
| <pre>input >> filter >> output;</pre> | <pre>output.put(filter.put(input.get()));</pre> | | |

2.7.3 Using Plaquette as an External Library

Seasoned Arduino coders might want to avoid rewriting their code using Plaquette's builtin begin() and step() functions, or they may want to include Plaquette's self-updating loop in a timer interrupt function. It is possible to do so by including the file PlaquetteLib.h instead of Plaquette.h.

After this step, you is then responsible for calling Plaquette.begin() at the beginning of the setup() function, and also to call Plaquette.step() at the beginning of the loop() function, or inside the interrupt.

Here is an example of our blinking code rewritten by using this feature:

```
#include <PlaquetteLib.h>
using namespace pq;
DigitalOut myLed(13);
SquareWave myWave(2.0, 0.5);

void setup() {
   Plaquette.begin();
}

void loop() {
   Plaquette.step();
   myWave >> myLed;
}
```

CHAPTER

THREE

REFERENCE

3.1 Base Units

Basic input-output units.

3.1.1 AnalogIn

An analog (ie. continuous) input unit that returns values between 0 and 1 (ie. 0% and 100%).

The unit is assigned to a specific pin on the board.

The mode specifies the behavior of the component attached to the pin:

- in DIRECT mode (default) the value is expressed as a percentage of the reference voltage (Vref, typically 5V)
- in INVERTED mode the value is inverted (ie. 0V corresponds to 100% while 2.5V corresponds to 50%).

A Warning

If the analog input pin is **not connected** to anything, the value returned by get() will fluctuate based on a number of factors (e.g. the values of the other analog inputs, how close your hand is to the board, etc.).

Example

Control an LED using a potentiometer.

```
#include <Plaquette.h>
AnalogIn potentiometer(A0);
AnalogOut led(9);
SineWave oscillator;

void begin() {}

void step() {
    // The analog input controls the frequency of the LED's oscillation.
    oscillator.frequency(potentiometer.mapTo(2.0, 10.0));
    oscillator >> led;
}
```

Reference

```
class AnalogIn: public Unit, public PinUnit, public Smoothable
     A generic class representing a simple analog input.
     Public Functions
     AnalogIn(uint8_t pin, uint8_t mode = DIRECT)
           Constructor.
               Parameters
                   • pin – the pin number
                   • mode – the mode (DIRECT or INVERTED)
     inline virtual float get()
           Returns value in [0, 1].
     virtual float mapTo (float toLow, float toHigh)
           Maps value to new range.
     inline uint8_t pin() const
           Returns the pin this component is attached to.
     inline uint8_t mode() const
           Returns the mode of the component.
     inline virtual void mode (uint8_t mode)
           Changes the mode of the component.
     inline virtual void smooth(float smoothTime = PLAQUETTE_DEFAULT_SMOOTH_WINDOW)
           Apply smoothing to object.
     inline virtual void noSmooth()
           Remove smoothing.
     inline virtual void cutoff(float hz)
           Changes the smoothing window cutoff frequency (expressed in Hz).
```

See Also

AnalogOut

inline float cutoff() const

• DigitalIn

3.1.2 AnalogOut

An analog (ie. continuous) output unit that converts a value between 0 and 1 (ie. 0% and 100%) into an analog voltage on one of the analog output pins.

The unit is assigned to a specific pin on the board.

The mode specifies the behavior of the component attached to the pin:

Returns the smoothing window cutoff frequency (expressed in Hz).

• in SOURCE mode (default) the pin acts as the source of current and the value is expressed as a percentage of the maximum voltage (Vcc, typically 5V)

• in SINK mode the source of current is external (Vcc)

Example

```
AnalogOut led(9);

void begin() {
  led.put(0.5);
}

void step() {
  // The LED value is changed randomly by a tiny amount (random walk).
  // Mutliplying by samplePeriod() makes sure the rate of change stays stable.
  (led + randomFloat(-0.1, 0.1) * samplePeriod()) >> led;
}
```

Important

On most Arduino boards analog outputs rely on Pulse Width Modulation (PWM). After a call to put(value), the pin will generate a steady square wave of the specified duty cycle until the next call to put() on the same pin. The frequency of the PWM signal on most pins is approximately 490 Hz. On the Uno and similar boards, pins 5 and 6 have a frequency of approximately 980 Hz.

1 Note

On most Arduino boards (those with the ATmega168 or ATmega328P), this functionality works on pins 3, 5, 6, 9, 10, and 11. On the Arduino Mega, it works on pins 2 - 13 and 44 - 46. Older Arduino boards with an ATmega8 only support AnalogOut on pins 9, 10, and 11. The Arduino DUE supports analog output on pins 2 through 13, plus pins DAC0 and DAC1. Unlike the PWM pins, DAC0 and DAC1 are Digital to Analog converters, and act as true analog outputs.

Reference

```
class AnalogOut: public AnalogSource, public PinUnit
```

A generic class representing a simple PWM output.

Public Functions

```
AnalogOut (uint8_t pin, uint8_t mode = DIRECT)

Constructor.
```

Parameters

- pin the pin number
- mode the mode (SOURCE or SINK)

virtual float put (float value)

Pushes value into the component and returns its (possibly filtered) value.

inline virtual void invert()

Inverts value by calling put(1-get()) (eg. 0.2 becomes 0.8).

3.1. Base Units 57

```
inline virtual float get()
Returns value in [0, 1].

inline uint8_t pin() const
Returns the pin this component is attached to.

inline uint8_t mode() const
Returns the mode of the component.

inline virtual void mode(uint8_t mode)
Changes the mode of the component.
```

See Also

- AnalogIn
- DigitalOut

3.1.3 DigitalIn

A digital (ie. binary) input unit that can be either "on" or "off".

The unit is assigned to a specific pin on the board.

The mode specifies the behavior of the component attached to the pin:

- in DIRECT mode (default) the unit will be "on" when the voltage on the pin is high (Vref, typically 5V)
- in INVERTED mode the unit will be "on" when the voltage on the pin is low (GND)
- in INTERNAL_PULLUP mode the internal pullup resistor is used, simplifying usage of switches and buttons

Debouncing

Some digital inputs such as push-buttons often generate spurious open/close transitions when pressed, due to mechanical and physical issues: these transitions called "bouncing" may be read as multiple presses in a very short time, fooling the program.

The DigitalIn object features debouncing capabilities which can prevent this kind of problems. Debouncing can be achieved using different modes: stable (default) (DEBOUNCE_STABLE), lock-out (DEBOUNCE_LOCK_OUT) and prompt-detect (DEBOUNCE_PROMPT_DETECT). For more information please refer to the documentation of the Bounce2 Arduino Library.

Example

Turns on and off a light emitting diode (LED) connected to digital pin 13, when pressing a pushbutton attached to digital pin 2. Pushbutton should be wired by connecting one side to pin 2 and the other to ground.

```
#include <Plaquette.h>
DigitalIn button(2, INTERNAL_PULLUP);

DigitalOut led(13);

void begin() {
  button.debounce(); // debounce button
}
```

(continues on next page)

```
void step() {
    // Toggle the LED each time the button is pressed.
    if (button.rose())
        led.toggle();
}
```

Reference

class **DigitalIn**: public DigitalSource, public PinUnit, public Debounceable

A generic class representing a simple digital input.

Public Functions

```
\label{eq:distance} \textbf{DigitalIn}(\text{uint8\_t pin}, \text{uint8\_t mode} = \text{DIRECT})
```

Constructor.

Parameters

- **pin** the pin number
- **mode** the mode (DIRECT, INVERTED, or INTERNAL_PULLUP)

virtual void mode(uint8_t mode)

Changes the mode of the component.

inline virtual bool isOn()

Returns true iff the input is "on".

inline virtual bool rose()

Returns true if the value rose.

inline virtual bool fell()

Returns true if the value fell.

inline virtual bool changed()

Returns true if the value changed.

inline virtual int8_t changeState()

Difference between current and previous value of the unit.

inline virtual void onRise(EventCallback callback)

Registers event callback on rise event.

inline virtual void onFall(EventCallback callback)

Registers event callback on fall event.

inline virtual void onChange (EventCallback callback)

Registers event callback on change event.

inline virtual bool isOff()

Returns true iff the input is "off".

inline virtual int getInt()

Returns value as integer (0 or 1).

3.1. Base Units 59

```
inline virtual float get()
     Returns value as float (either 0.0 or 1.0).
inline uint8_t pin() const
     Returns the pin this component is attached to.
inline uint8 t mode() const
     Returns the mode of the component.
inline virtual void debounce(float debounceTime = PLAQUETTE_DEFAULT_DEBOUNCE_WINDOW)
     Apply smoothing to object.
inline virtual void noDebounce()
     Remove smoothing.
inline uint8_t debounceMode() const
     Returns the debounce mode.
inline void debounceMode(uint8_t mode)
     Sets debounce mode.
         Parameters
            mode – the debounce mode (DEBOUNCE_DEFAULT, DEBOUNCE_LOCK_OUT or DE-
            BOUNCE_PROMPT_DETECT)
```

See Also

- AnalogIn
- DigitalOut
- Bounce2 Arduino Library

3.1.4 DigitalOut

A digital (ie. binary) output unit that can be switched "on" or "off".

The unit is assigned to a specific pin on the board.

The mode specifies the behavior of the component attached to the pin:

- in SOURCE mode (default) the pin acts as the source of current and the component is "on" when the pin is "high" (Vcc, typically 5V)
- in SINK mode the source of current is external (Vcc) and the component is "on" when the pin is "low" (GND)

Example

Switches off an LED connected in "sink" mode after a timeout.

```
#include <Plaquette.h>

DigitalOut led(13, SINK);

void begin() {
  led.on();
}

void step() {
```

(continues on next page)

```
// Switch the LED off after 5 seconds.
if (seconds() > 5)
  led.off();
}
```

Reference

```
class DigitalOut: public DigitalSource, public PinUnit
A generic class representing a simple digital output.
```

Public Functions

```
DigitalOut(uint8_t pin, uint8_t mode = DIRECT)
```

Constructor.

Parameters

- **pin** the pin number
- mode the mode (SOURCE or SINK)

virtual void mode(uint8_t mode)

Changes the mode of the component.

inline virtual bool is0n()

Returns true iff the input is "on".

inline virtual bool rose()

Returns true if the value rose.

inline virtual bool fell()

Returns true if the value fell.

inline virtual bool changed()

Returns true if the value changed.

inline virtual bool toggle()

Switches between on and off.

inline virtual int8_t changeState()

Difference between current and previous value of the unit.

inline virtual void onRise(EventCallback callback)

Registers event callback on rise event.

inline virtual void onFall(EventCallback callback)

Registers event callback on fall event.

 $in line\ virtual\ void\ \textbf{onChange} (EventCallback\ callback)$

Registers event callback on change event.

inline virtual bool isOff()

Returns true iff the input is "off".

inline virtual int getInt()

Returns value as integer (0 or 1).

3.1. Base Units 61

```
inline virtual float get()
     Returns value as float (either 0.0 or 1.0).
inline virtual bool on()
     Sets output to "on" (ie. true, 1).
inline virtual bool off()
     Sets output to "off" (ie. false, 0).
inline virtual float put (float value)
     Pushes value into the unit.
          Parameters
              value – the value sent to the unit
          Returns
              the new value of the unit
inline uint8_t pin() const
     Returns the pin this component is attached to.
inline uint8_t mode() const
     Returns the mode of the component.
```

See Also

- AnalogOut
- DigitalIn


3.2 Generators

Source units that generate different kinds of signals.

3.2.1 SineWave

62

A source unit that can generate a sinusoid or sine wave. The signal is remapped to oscillate between 0 and 1 (rather than -1 and 1 as the traditional sine wave).

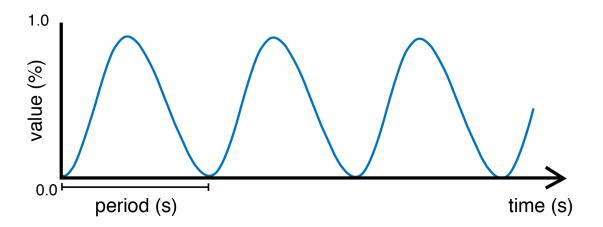

Example

Pulses an LED.

```
#include <Plaquette.h>
AnalogOut led(9);
SineWave osc;

void begin() {
  osc.frequency(5.0); // frequency of 5 Hz
}

void step() {
  osc >> led;
}
```

 $class \ \textbf{SineWave}: public \ AbstractWave$

Sine oscillator. Phase is expressed as % of period.

Public Functions

```
virtual void period(float period)

Sets the period (in seconds).

Parameters

period – the period of oscillation (in seconds)

virtual void frequency(float frequency)

Sets the frequency (in Hz).
```

3.2. Generators 63

Parameters

frequency – the frequency of oscillation (in Hz)

inline virtual float frequency() const

Returns the frequency (in Hz).

virtual void **bpm**(float bpm)

Sets the frequency in beats-per-minute.

Parameters

bpm – the frequency of oscillation (in BPM)

inline virtual float bpm() const

Returns the frequency (in BPM).

virtual void width (float width)

Sets the width of the signal as a % of period.

Parameters

width – the width as a value in [0, 1]

inline virtual float width() const

Returns the width of the signal.

virtual void amplitude (float amplitude)

Sets the amplitude of the wave.

Parameters

amplitude – a value in [0, 1] that determines the amplitude of the wave (centered at 0.5).

inline virtual float amplitude() const

Returns the amplitude of the wave.

virtual void **phase**(float phase)

Sets the phase (ie.

the offset, in % of period).

Parameters

phase – the phase (in % of period)

inline virtual float phase() const

Returns the phase (in % of period).

virtual float **shiftBy**(float phaseShift)

Returns oscillator's value with given phase shift (in %).

Supports negative phase shifts. Eg. shiftBy(0.2) returns future value of oscillator after 20% of its period would have passed.

Parameters

phase – the phase shift (in % of period)

Returns

the value of oscillator with given phase shift

inline virtual float get()

Returns value in [0, 1].

inline virtual float mapTo(float toLow, float toHigh)


Maps value to new range.

See Also

- SquareWave
- TriangleWave


3.2.2 SquareWave

A source unit that generates a square wave signal. The signal can be tuned by changing the period and/or frequency of the oscillation, as well as the width.

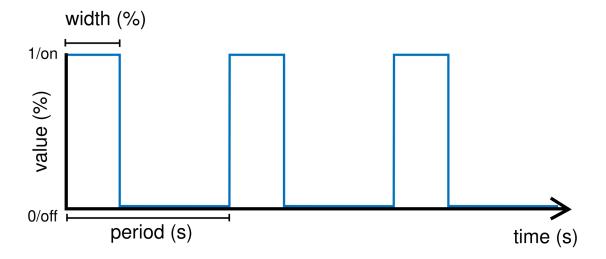

The width represents the proportion of time (expressed as a percentage) in each cycle (period) during which the wave is "on".

3.2. Generators 65

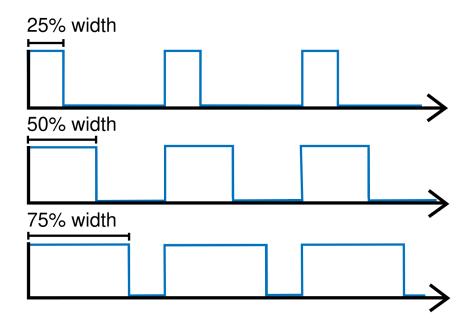

Example

Makes the built-in LED blink with a period of 4 seconds. Because the duty cycle is set to 25%, the LED will stay on for 1 second and then off for 3 seconds.

```
#include <Plaquette.h>

DigitalOut led(13);

SquareWave blinkOsc(4.0);

void begin() {
   blinkOsc.width(0.25); // Sets the duty cycle to 25%
}

void step() {
   blinkOsc >> led;
}
```

class **SquareWave**: public AbstractWave

Square oscillator. Duty cycle is expressed as % of period.

Public Functions

SquareWave (float period = 1.0f, float width = 0.5f)

Constructor.

Parameters

- **period** the period of oscillation (in seconds)
- width the duty-cycle as a value in [0, 1]

```
virtual void period(float period)
     Sets the period (in seconds).
          Parameters
              period – the period of oscillation (in seconds)
virtual void frequency(float frequency)
     Sets the frequency (in Hz).
          Parameters
              frequency – the frequency of oscillation (in Hz)
inline virtual float frequency() const
     Returns the frequency (in Hz).
virtual void bpm(float bpm)
     Sets the frequency in beats-per-minute.
          Parameters
              bpm – the frequency of oscillation (in BPM)
inline virtual float bpm() const
     Returns the frequency (in BPM).
virtual void width (float width)
     Sets the width of the signal as a % of period.
          Parameters
              width – the width as a value in [0, 1]
inline virtual float width() const
     Returns the width of the signal.
virtual void amplitude(float amplitude)
     Sets the amplitude of the wave.
          Parameters
              amplitude – a value in [0, 1] that determines the amplitude of the wave (centered at 0.5).
inline virtual float amplitude() const
     Returns the amplitude of the wave.
virtual void phase(float phase)
     Sets the phase (ie.
     the offset, in % of period).
          Parameters
              phase – the phase (in % of period)
inline virtual float phase() const
     Returns the phase (in % of period).
virtual float shiftBy(float phaseShift)
     Returns oscillator's value with given phase shift (in %).
     Supports negative phase shifts. Eg. shiftBy(0.2) returns future value of oscillator after 20% of its period
     would have passed.
          Parameters
```

3.2. Generators 67

phase – the phase shift (in % of period)

Returns

the value of oscillator with given phase shift

inline virtual float get()

Returns value in [0, 1].

inline virtual float mapTo(float toLow, float toHigh)


Maps value to new range.

See Also


- SineWave
- TriangleWave

3.2.3 TriangleWave

A source unit that can generate a range of triangle-shaped signals such as the triangle wave and the sawtooth wave. The signal can be adjusted by changing the period and/or frequency of the oscillation.

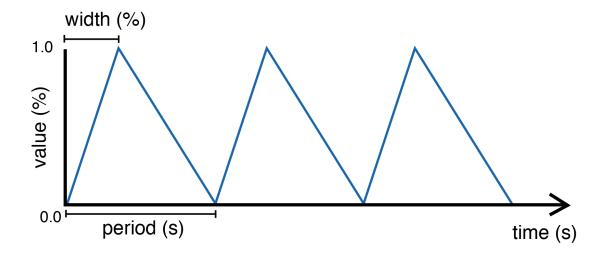

The width parameter represents the "turning point" during the period at which the signals reaches its maximum and starts going down again. Changing the width allows to generate different kinds of triangular-shaped waves. For example, by setting width to 1.0 (100%) one obtains a *sawtooth* wave; by setting it to 0.0 (0%) an *inverted sawtooth* is created; anything in between generates different flavors of *triangle* waves.

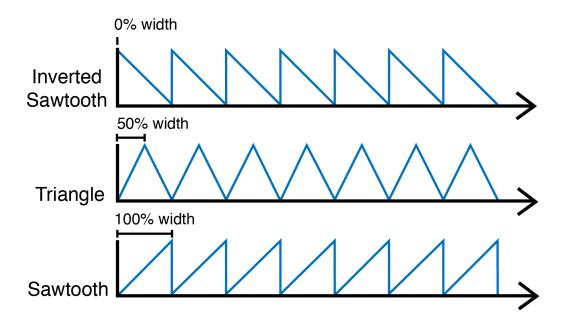

Example

Controls a set of traffic lights that go: red, yellow, green, red, yellow, green, and so on. It uses a sawtooth to iterate through these three states.

```
#include <Plaquette.h>
DigitalOut green(10);
DigitalOut yellow(11);
DigitalOut red(12);
TriangleWave osc(10.0);
void begin() {
  osc.width(1.0); // sawtooth wave
}
void step() {
  // Shut down all lights.
  \emptyset >> led >> yellow >> green;
 // Switch appropriate LED.
  if (osc < 0.4)
    green.on();
  else if (osc < 0.6)
    yellow.on();
  else
    red.on();
}
```

 $class \ \textbf{TriangleWave}: public \ Abstract Wave$

3.2. Generators 69

Triangle/sawtooth oscillator.

```
Public Functions
```

virtual void period(float period)

Sets the period (in seconds).

Parameters

period – the period of oscillation (in seconds)

virtual void **frequency**(float frequency)

Sets the frequency (in Hz).

Parameters

frequency – the frequency of oscillation (in Hz)

inline virtual float frequency() const

Returns the frequency (in Hz).

virtual void **bpm**(float bpm)

Sets the frequency in beats-per-minute.

Parameters

bpm – the frequency of oscillation (in BPM)

inline virtual float bpm() const

Returns the frequency (in BPM).

virtual void width (float width)

Sets the width of the signal as a % of period.

Parameters

width – the width as a value in [0, 1]

inline virtual float width() const

Returns the width of the signal.

virtual void amplitude (float amplitude)

Sets the amplitude of the wave.

Parameters

amplitude – a value in [0, 1] that determines the amplitude of the wave (centered at 0.5).

inline virtual float amplitude() const

Returns the amplitude of the wave.

virtual void phase(float phase)

Sets the phase (ie.

the offset, in % of period).

Parameters

phase – the phase (in % of period)

inline virtual float phase() const

Returns the phase (in % of period).

```
virtual float shiftBy(float phaseShift)
```

Maps value to new range.

Returns oscillator's value with given phase shift (in %).

Supports negative phase shifts. Eg. shiftBy(0.2) returns future value of oscillator after 20% of its period would have passed.

See Also

- Ramp
- SineWave
- SquareWave

3.3 Timing

Time-management source units.

3.3.1 Alarm

An alarm clock digital source unit. Counts time and becomes "on" when time is up. The alarm can be started, stopped, and resumed.

When started, the alarm stays "off" until it reaches its timeout duration, after which it becomes "on".

Example

Uses an alarm to activate built-in LED. Button is used to reset the alarm at random periods of time.

```
#include <Plaquette.h>
Alarm myAlarm(2.0); // an alarm with 2 seconds duration
DigitalOut led(13);
DigitalIn button(2, INTERNAL_PULLUP);

void begin() {
   myAlarm.start(); // start alarm
}

void step() {
   // Activate LED when alarm rings.
   myAlarm >> led; // the alarm will stay "on" until it is stopped or restarted
```

(continues on next page)

3.3. Timing 71

(continued from previous page)

```
// Reset alarm when button is pushed.
if (myAlarm && button.rose())
{
    // Restarts the alarm with a random duration between 1 and 5 seconds.
    myAlarm.duration(randomFloat(1.0, 5.0));
    myAlarm.start();
}
```

Reference

```
class Alarm: public DigitalSource, public AbstractTimer
```

Chronometer class which becomes "on" after a given duration.

Public Functions

```
inline virtual bool finished()
```

Returns true iff the alarm just finished its process this step.

inline virtual void onFinish(EventCallback callback)

Registers event callback on finish event.

virtual void **set**(float time)

Forces current time (in seconds).

inline virtual bool isOn()

Returns true iff the input is "on".

inline virtual void **onRise**(EventCallback callback)

Registers event callback on rise event.

inline virtual void onFall(EventCallback callback)

Registers event callback on fall event.

inline virtual void **onChange**(EventCallback callback)

Registers event callback on change event.

inline virtual bool isOff()

Returns true iff the input is "off".

inline virtual int getInt()

Returns value as integer (0 or 1).

inline virtual float get()

Returns value as float (either 0.0 or 1.0).

virtual void start()

Starts/restarts the chronometer.

virtual void **start**(float duration)

Starts/restarts the chronometer with specific duration.

virtual void **duration**(float duration)

Sets the duration of the chronometer.

```
inline virtual float duration() const
     Returns duration.
virtual float progress() const
     The progress of the timer process (in %).
inline virtual bool isFinished() const
     Returns true iff the chronometer has finished its process.
virtual void stop()
     Interrupts the chronometer and resets to zero.
virtual void pause()
     Interrupts the chronometer.
virtual void resume()
     Resumes process.
inline virtual float elapsed() const
     The time currently elapsed by the chronometer (in seconds).
virtual void add(float time)
     Adds/subtracts time to the chronometer.
inline bool isRunning() const
     Returns true iff the chronometer is currently running.
```

See Also

- Chronometer
- Metronome
- Ramp
- SquareWave

3.3.2 Chronometer

An analog unit that counts time in seconds. It can be started, stopped, paused, and resumed.

Example

Uses a chronometer to change the frequency a blinking LED. Restarts after 10 seconds.

```
#include <Plaquette.h>
Chronometer chrono;
DigitalOut led(13);
SquareOsc osc(1.0); // a square oscillator

void begin() {
   chrono.start(); // start chrono
}
```

(continues on next page)

3.3. Timing 73

(continued from previous page)

```
void step() {
    // Adjust oscillator's duty cycle according to current timer progress.
    osc.frequency(chrono);

    // Apply oscillator to LED state.
    osc >> led;

    // If the chronometer reaches 10 seconds: restart it.
    if (chrono >= 10.0)
    {
        // Restarts the chronometer.
        chrono.start();
    }
}
```

Reference

class **Chronometer**: public Unit, public AbstractChronometer

Public Functions

```
Chronometer()
     Constructor.
inline virtual float get()
     Returns elapsed time since start (in seconds).
virtual void start()
     Starts/restarts the chronometer.
virtual void stop()
     Interrupts the chronometer and resets to zero.
virtual void pause()
     Interrupts the chronometer.
virtual void resume()
     Resumes process.
inline virtual float elapsed() const
     The time currently elapsed by the chronometer (in seconds).
virtual void set(float time)
     Forces current time (in seconds).
virtual void add(float time)
     Adds/subtracts time to the chronometer.
inline bool isRunning() const
```

Returns true iff the chronometer is currently running.

Chapter 3. Reference

See Also

- Alarm
- Metronome
- Ramp

3.3.3 Metronome

A metronome digital source unit. Emits an "on" signal at a regular pace.

Example

Reference

```
class Metronome: public DigitalUnit
```

Chronometer digital unit which emits 1/true/"on" for one frame, at a regular pace.

Public Functions

```
Metronome (float period = 1.0f)

Constructor.

Parameters

period – the period of oscillation (in seconds)

inline virtual bool isOn()

Returns true iff the metronome fires.

virtual void period (float period)

Sets the period (in seconds).

Parameters

period – the period of oscillation (in seconds)

inline virtual float period() const
```

Returns the period (in seconds).

3.3. Timing 75

```
virtual void frequency(float frequency)
     Sets the frequency (in Hz).
          Parameters
              frequency – the frequency of oscillation (in Hz)
inline virtual float frequency() const
     Returns the frequency (in Hz).
virtual void bpm(float bpm)
     Sets the frequency in beats-per-minute.
          Parameters
              bpm – the frequency of oscillation (in BPM)
inline virtual float bpm() const
     Returns the frequency (in BPM).
virtual void phase(float phase)
     Sets the phase (ie.
     the offset, in % of period).
          Parameters
              phase – the phase (in % of period)
inline virtual float phase() const
     Returns the phase (in % of period).
virtual void onBang (EventCallback callback)
     Registers event callback on metronome tick ("bang") event.
inline virtual bool isOff()
     Returns true iff the input is "off".
inline virtual int getInt()
     Returns value as integer (0 or 1).
inline virtual float get()
     Returns value as float (either 0.0 or 1.0).
```

See Also

- Alarm
- Chronometer
- Ramp
- SquareWave

3.3.4 Ramp


A source unit that generates a smooth transition between two values. The unit can be triggered to start transitioning to a target value for a certain duration.

There are two ways to start the ramp.

By calling go(from, to, duration) the ramp will transition from value from to value to in duration seconds.

Alternatively, calling go(to, duration) will start a transition from the ramp's current value to to in duration seconds.

The following diagram shows what happens to the ramp signal if go(5.0, 1.0, 2.0) is called, followed later by go(3.0, 1.0):

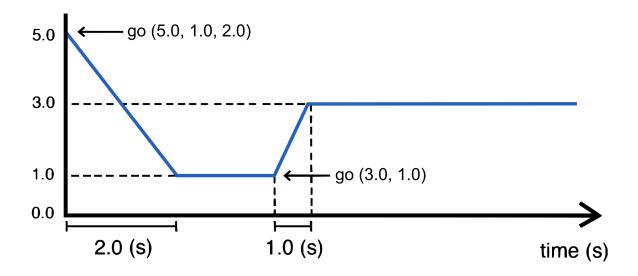

Important

Ramps also support the use of easing functions in order to create different kinds of expressive effects with signals. An easing function can optionally be specified at the end of a go() command or by calling the easing() function.

Please refer to this page for a full list of available easing functions.

Example

Sequentially ramps through different values.

```
#include <Plaquette.h>
Ramp myRamp(3.0); // initial duration: 3 seconds
StreamOut serialOut(Serial);

void begin() {
    // Apply an easing function (optional).
    myRamp.easing(easeOutSine);
    // Launch ramp: ramp from -10 to 10.
    myRamp.go(-10, 10);
}

void step() {
    if (myRamp.isFinished())
    {
```

(continues on next page)

3.3. Timing 77

(continued from previous page)

```
// Launch ramp from current value to half, increasing duration by one second.
myRamp.go(myRamp / 2, myRamp.duration() + 1);
}
myRamp >> serialOut;
}
```

Reference

class Ramp: public Unit, public AbstractTimer

Provides a ramping / tweening mechanism that allows smooth transitions between two values.

Public Functions

```
Ramp (float duration = 1.0f)
```

Constructor with duration.

Parameters

duration – duration of the ramp

inline virtual float get()

Returns value of ramp.

void easing(easing_function easing)

Sets easing function to apply to ramp.

Parameters

easing – the easing function

inline void noEasing()

Remove easing function (linear/no easing).

virtual void to(float to)

Assign final value of the ramp starting from current value.

Parameters

to – the final value

virtual void **from**(float from)

Assign initial value of the ramp.

Parameters

from – the initial value

virtual void **fromTo**(float from, float to)

Assign initial and final values of the ramp.

Parameters

- **from** the initial value
- to the final value

virtual void **duration**(float duration)

Sets the duration of the chronometer.

inline virtual float duration() const

Returns duration.

virtual void speed(float speed)

Sets the speed (rate of change) of the ramp in change-per-second.

virtual float **speed()** const

Returns speed (rate of change) of the ramp in change-per-second.

virtual void start()

Starts/restarts the ramp. Will repeat the last ramp.

virtual void **go**(float from, float to, float durationOrSpeed, easing_function easing = 0)

Starts a new ramp.

Parameters

- **from** the initial value
- to the final value
- **durationOrSpeed** the duration of the ramp (in seconds) or speed (in change-per-second) depending on mode
- **easing** the easing function (optional).

virtual void **go** (float to, float durationOrSpeed, easing_function easing = 0)

Starts a new ramp, starting from current value.

Parameters

- to the final value
- **durationOrSpeed** the duration of the ramp (in seconds) or speed (in change-per-second) depending on mode
- **easing** the easing function (optional)

virtual void **go**(float to, easing_function easing = 0)

Starts a new ramp, starting from current value (keeping the same duration/speed).

Parameters

- to the final value
- **easing** the easing function (optional)

virtual void mode(uint8_t mode)

Changes the mode of the component (RAMP_DURATION or RAMP_SPEED).

inline uint8_t mode() const

Returns the mode of the component (RAMP_DURATION or RAMP_SPEED).

inline virtual bool finished()

Returns true iff the ramp just finished its process this step.

inline virtual void **onFinish**(EventCallback callback)

Registers event callback on finish event.

virtual void **set**(float time)

Forces current time (in seconds).

3.3. Timing 79

```
virtual void start(float duration)
     Starts/restarts the chronometer with specific duration.
virtual float progress() const
     The progress of the timer process (in %).
inline virtual bool isFinished() const
     Returns true iff the chronometer has finished its process.
virtual void stop()
     Interrupts the chronometer and resets to zero.
virtual void pause()
     Interrupts the chronometer.
virtual void resume()
     Resumes process.
inline virtual float elapsed() const
     The time currently elapsed by the chronometer (in seconds).
virtual void add(float time)
     Adds/subtracts time to the chronometer.
```

Returns true iff the chronometer is currently running.

See Also

- Alarm
- Chronometer
- Easings
- Metronome
- TriangleWave


3.4 Filters

Filtering units for real-time signal processing.

inline bool isRunning() const

3.4.1 MinMaxScaler

This filtering unit regularizes incoming signals by remapping them into a new interval of [0, 1]. It does so by keeping track of the minimum and the maximum values ever taken by the signal and rescales it such that the minimum value of the signal is mapped to 0 and the maximum value is mapped to 1.

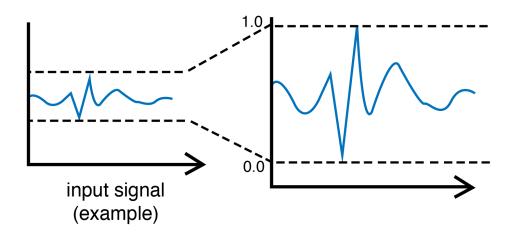

In order to accommodate signals that might be changing through time, the user can specify a "decay time window" to control the rate of decay of the minimum and maximum boundaries. The principle is similar to the how the *Smoother* and the *Normalizer* make use of exponential moving average.

Caution

This filtering unit works well as long as there are no "outliers" in the signal (ie. extreme values) that appear in rare conditions. Such values will replace the minimum or maximum value and greatly restrict the spread of the filtered values.

There are three ways to prevent this:

- 1. Specifying a decay window using the time(decayTime) function.
- 2. Smoothing incoming values using the smooth() method or a *Smoother* unit before sending to the MinMaxScaler.
- 3. Using a regularization unit that is less prone to outliers such as the *Normalizer*.

Example

Reacts to high input values by activating an output LED. Scaler is used to automatically adapt to incoming sensor values.

```
#include <Plaquette.h>
AnalogIn sensor(A0);
MinMaxScaler scaler;
DigitalOut led(13);
(continues on next page)
```

3.4. Filters 81

(continued from previous page)

```
void begin() {}

void step() {
    // Rescale value.
    sensor >> scaler;

    // Light led on threshold of 80%.
    (scaler > 0.8) >> led;
}
```

Reference

class MinMaxScaler: public MovingFilter

Regularizes signal into [0,1] by rescaling it using the min and max values.

Public Functions

```
MinMaxScaler()
```

Constructor.

virtual void infiniteTimeWindow()

Sets time window to infinite.

virtual void timeWindow(float seconds)

Changes the time window (expressed in seconds).

virtual float timeWindow() const

Returns the time window (expressed in seconds).

virtual bool timeWindowIsInfinite() const

Returns true if time window is infinite.

virtual void reset()

Resets the moving filter.

virtual float put (float value)

Pushes value into the unit.

If isRunning() is false the filter will not be updated but will just return the filtered value.

Parameters

value – the value sent to the unit

Returns

the new value of the unit

virtual void resumeCalibrating()

Switches to calibration mode (default).

Calls to put(value) will return filtered value AND update the normalization statistics.

virtual void pauseCalibrating()

Switches to non-calibration mode: calls to put(value) will return filtered value without updating the normalization statistics.

```
virtual bool isCalibrating() const

Returns true iff the moving filter is in calibration mode.

inline virtual float get()

Returns value in [0, 1].

inline virtual float mapTo(float toLow, float toHigh)

Maps value to new range.
```

See Also

- Normalizer
- Smoother

3.4.2 Normalizer

This filtering unit regularizes incoming signals by normalizing them around a target mean and standard deviation. It works by computing the normal distribution of the incoming data (mean and standard variation) and uses this information to re-normalize the data according to a different normal distribution (target mean and variance).

By default, the unit computes the mean and variance over all the data ever received. However, it can instead compute over a time window using an exponential moving average.

Example

Uses a normalizer to analyze input sensor values and detect extreme values.

```
#include <Plaquette.h>

// Analog sensor (eg. photocell or microphone).
AnalogIn sensor(A0);

// Creates a normalizer with mean 0 and standard deviation 1.
Normalizer normalizer(0, 1);

// Output indicator LED.
DigitalOut led(13);

void begin() {}

void step() {
    // Normalize value.
    sensor >> normalizer;

    // Light led if value differs from mean by more
    // than twice the standard deviation.
    (abs(normalizer) > 2.0) >> led;
}
```

Reference

class Normalizer: public MovingFilter, public MovingStats

Adaptive normalizer: normalizes values on-the-run using exponential moving averages over mean and standard deviation.

3.4. Filters 83

Public Functions

Normalizer()

Default constructor.

Will renormalize data around a mean of 0.5 and a standard deviation of 0.15.

Normalizer(float timeWindow)

Will renormalize data around a mean of 0.5 and a standard deviation of 0.15.

Parameters

smoothWindow – specifies the approximate "time window" over which the normalization applies(in seconds)

Normalizer (float mean, float stdDev)

Constructor with infinite time window.

Parameters

- **mean** the target mean
- **stdDev** the target standard deviation
- **smoothWindow** specifies the approximate "time window" over which the normalization applies(in seconds)

Normalizer(float mean, float stdDev, float timeWindow)

Constructor.

Parameters

- **mean** the target mean
- **stdDev** the target standard deviation
- **smoothWindow** specifies the approximate "time window" over which the normalization applies(in seconds)

inline void targetMean(float mean)

Sets target mean of normalized values.

Parameters

mean - the target mean

inline float targetMean() const

Returns target mean.

inline void targetStdDev(float stdDev)

Sets target standard deviation of normalized values.

Parameters

stdDev – the target standard deviation

inline float targetStdDev() const

Returns target standard deviation.

virtual void infiniteTimeWindow()

Sets time window to infinite.

virtual void timeWindow(float seconds)

Changes the time window (expressed in seconds).

virtual float timeWindow() const

Returns the time window (expressed in seconds).

virtual bool timeWindowIsInfinite() const

Returns true if time window is infinite.

virtual void reset()

Resets the statistics.

virtual float put (float value)

Pushes value into the unit.

If isRunning() is false the filter will not be updated but will just return the filtered value.

Parameters

value – the value sent to the unit

Returns

the new value of the unit

virtual float lowOutlierThreshold(float nStdDev = 1.5f) const

Returns value above which value is considered to be a low outler (below average).

Parameters

nStdDev – the number of standard deviations (typically between 1 and 3); low values = more sensitive

virtual float highOutlierThreshold(float nStdDev = 1.5f) const

Returns value above which value is considered to be a high outler (above average).

Parameters

nStdDev – the number of standard deviations (typically between 1 and 3); low values = more sensitive

bool isClamped() const

Return true iff the normalized value is clamped within reasonable range.

void clamp(float nStdDev = NORMALIZER_DEFAULT_CLAMP_STDDEV)

Assign clamping value.

Values will then be clamped between reasonable range (targetMean() +/- nStdDev * targetStdDev()).

Parameters

nStdDev – the number of standard deviations (default: 3.333333333)

void noClamp()

Remove clamping.

virtual float mapTo (float toLow, float toHigh)

Maps value to new range.

virtual void resumeCalibrating()

Switches to calibration mode (default).

Calls to put(value) will return filtered value AND update the normalization statistics.

virtual void pauseCalibrating()

Switches to non-calibration mode: calls to put(value) will return filtered value without updating the normalization statistics.

3.4. Filters 85

virtual bool isCalibrating() const

Returns true iff the moving filter is in calibration mode.

inline virtual float get()

Returns value in [0, 1].

virtual bool **isOutlier**(float value, float nStdDev = 1.5f) const

Returns true if the value is considered an outlier.

Parameters

- **value** the raw value to be tested (non-normalized)
- **nStdDev** the number of standard deviations (typically between 1 and 3); low values = more sensitive

Returns

true if value is nStdDev number of standard deviations above or below mean

virtual bool isLowOutlier(float value, float nStdDev = 1.5f) const

Returns true if the value is considered a low outlier (below average).

Parameters

- **value** the raw value to be tested (non-normalized)
- **nStdDev** the number of standard deviations (typically between 1 and 3); low values = more sensitive

Returns

true if value is nStdDev number of standard deviations below mean

virtual bool **isHighOutlier**(float value, float nStdDev = 1.5f) const

Returns true if the value is considered a high outlier (above average).

Parameters

- **value** the raw value to be tested (non-normalized)
- **nStdDev** the number of standard deviations (typically between 1 and 3); low values = more sensitive

Returns

true if value is nStdDev number of standard deviations above mean

See Also

- MinMaxScaler
- Smoother

3.4.3 PeakDetector


This unit detects peaks (minima or maxima) in an incoming signal. Peaks are detected based on crossing a trigger threshold above (or below) which a peak is detected.

Two different ways are supported to do this:

• In **crossing** modes (PEAK_RISING and PEAK_FALLING) the peak is detected *as soon as the signal crosses* the triggerThreshold.

• In apex modes (PEAK_MAX and PEAK_MIN) the peak is detected after the signal crosses the triggerThreshold, reaches its apex, and then *falls back* by a certain proportion (%) between the threshold and the apex (controlled by the fallbackTolerance parameter).

In all cases, after a peak is detected, the detector will wait until the signal crosses back the reloadThreshold (which can be adjusted to control detection sensitivity) before it can be triggered again.

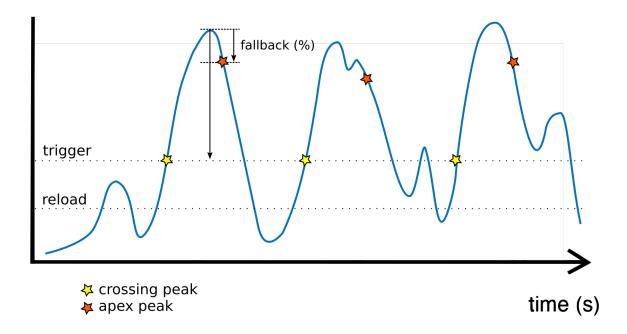

In summary, the four different modes available are:

- PEAK_RISING: peak detected as soon as value >= triggerThreshold, then wait until value < reloadThreshold
- PEAK_FALLING: peak detected as soon as value <= triggerThreshold, then wait until value > reloadThreshold
- PEAK_MAX : peak detected after value >= triggerThreshold and then *falls back* after peaking; then waits until value < reloadThreshold
- PEAK_MIN: peak detected after value <= triggerThreshold and then *falls back* after peaking; then waits until value > reloadThreshold

Important

Before sending a signal to a PeakDetector unit, it is recommended to normalize signals, preferably using the *Normalizer* unit. Furthermore, to avoid a noisy signal to generate false peaks, it is recommended to smooth the signal by calling the source unit's smooth() method or by using a *Smoother* unit.

Example

Uses a Normalizer and a PeakDetector to analyze input sensor values and detect peaks. Toggle and LED each time a peak is detected.

3.4. Filters 87

```
#include <Plaquette.h>
// Analog sensor (eg. photocell or microphone).
AnalogIn sensor(A0);
// Normalization unit to normalize values.
Normalizer normalizer:
// Peak detector. Threshold is set at 1.5 standard deviations above normal.
PeakDetector detector(normalizer.highOutlierThreshold(1.5)); // default mode = PEAK_MAX
// NOTE: You can change mode using optional 2nd parameter, example:
// PeakDetector detector(1.5, PEAK_FALLING));
// Digital LED output.
DigitalOut led;
void begin() {
  // Adjust reload threshold to smaller value than reloadThreshold.
  detector.reloadThreshold(normalizer.highOutlierThreshold(1.0));
  // Adjust fallback tolerance as % between apex and trigger threshold.
  detector.fallbackTolerance(0.2); // 0.2 = 20% (default: 10%)
  // Smooth signal to avoid false peaks due to noise.
  sensor.smooth();
  // Set a time window of 1 minute (60 seconds) on normalizer.
  // This will allow the normalier to slowly readjust itself
  // if the lighting conditions change.
 normalizer.timeWindow(60.0f);
};
void step() {
  // Signal is normalized and sent to peak detector.
  sensor >> normalizer >> detector;
  // Toggle LED when peak detector triggers.
  if (detector)
   led.toggle();
}
```

Reference

```
class PeakDetector: public DigitalUnit Emits a signals when a signal peaks.
```

Public Functions

PeakDetector(float triggerThreshold, uint8_t mode = PEAK_MAX)

Constructor.

Possible modes are:

- PEAK_RISING: peak detected when value becomes >= triggerThreshold, then wait until it becomes
 reloadThreshold(*)
- PEAK_FALLING: peak detected when value becomes <= triggerThreshold, then wait until it becomes > reloadThreshold (*)
- PEAK_MAX : peak detected after value becomes >= triggerThreshold and then falls back after peaking; then waits until it becomes < reloadThreshold (*)
- PEAK_MIN: peak detected after value becomes <= triggerThreshold and then rises back after peaking; then waits until it becomes > reloadThreshold (*)

Parameters

- triggerThreshold value that triggers peak detection
- **mode** peak detection mode

void triggerThreshold(float triggerThreshold)

Sets triggerThreshold.

inline float triggerThreshold() const

Returns triggerThreshold.

void **reloadThreshold**(float reloadThreshold)

Sets minimal threshold that "resets" peak detection in crossing (rising/falling) and peak (min/max) modes.

inline float reloadThreshold() const

Returns minimal value "drop" for reset.

void fallbackTolerance(float fallbackTolerance)

Sets minimal relative "drop" after peak to trigger detection in peak (min/max) modes, expressed as proportion (%) of peak minus triggerThreshold.

inline float fallbackTolerance() const

Returns minimal relative "drop" after peak to trigger detection in peak modes.

bool modeInverted() const

Returns true if mode is PEAK_FALLING or PEAK_MIN.

bool modeCrossing() const

Returns true if mode is PEAK_RISING or PEAK_FALLING.

void mode(uint8_t mode)

Sets mode.

inline uint8_t mode() const

Returns mode.

virtual float put (float value)

Pushes value into the unit.

Parameters

value – the value sent to the unit

Returns

the new value of the unit

inline virtual bool isOn()

Returns true iff the triggerThreshold is crossed.

3.4. Filters 89

virtual void onBang (EventCallback callback)

Registers event callback on peak detection.

inline virtual float get()


Returns value as float (either 0.0 or 1.0).

See Also

- Normalizer
- MinMaxScaler
- Smoother

3.4.4 Smoother

Smooths the incoming signal by removing fast variations and noise (high frequencies).

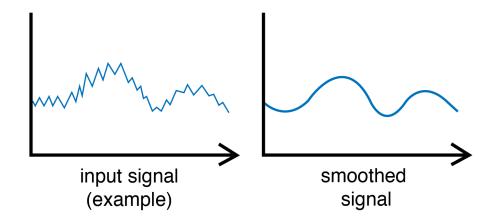

Example

Smooth a sensor over time.

```
#include <Plaquette.h>
AnalogIn sensor(A0);

// Smooths over time window of 10 seconds.
Smoother smoother(10.0);

StreamOut serialOut(Serial);

void begin() {}
```

(continues on next page)

(continued from previous page)

```
void step() {
  // Smooth value and send it to serial output.
  sensor >> smoother >> serialOut;
}
```

1 Note

The filter uses an exponential moving average which corresponds to a form of low-pass filter.

Reference

class **Smoother**: public Unit, public MovingAverage

Simple moving average transform filter.

Public Functions

Smoother(float timeWindow = PLAQUETTE_DEFAULT_SMOOTH_WINDOW)

Constructor.

Parameters

factor – a parameter in [0, 1] representing the importance of new values as opposed to old values (ie. lower smoothing factor means *more* smoothing)

virtual float put (float value)

Pushes value into the unit.

Parameters

value – the value sent to the unit

Returns

the new value of the unit

inline virtual float get()

Returns smoothed value.

void timeWindow(float seconds)

Changes the smoothing window (expressed in seconds).

inline float timeWindow() const

Returns the smoothing window (expressed in seconds).

void cutoff(float hz)

Changes the smoothing window cutoff frequency (expressed in Hz).

float **cutoff()** const

Returns the smoothing window cutoff frequency (expressed in Hz).

See Also

- AnalogIn
- DigitalIn

3.4. Filters 91

3.5 Functions

Standalone utility functions.

3.5.1 mapFloat()

Re-maps a number from one range to another. That is, a value of fromLow would get mapped to toLow, a value of fromHigh to toHigh, and values in-between to values in-between, proportionally.

```
float y = mapFloat(x, 10.0, 50.0, 100.0, 0.0);
```

The function also handles negative numbers well, so that this example

```
float y = mapFloat(x, 10.0, 50.0, 100.0, -100.0);
```

is also valid and works well.

By default, does *not* constrain output to stay within the [fromHigh, toHigh] range, because out-of-range values are sometimes intended and useful. In order to constrain the return value within range, you can use one of the alternative modes: * the CONSTRAIN mode to simply keep the value within range by restricting extreme values as in *constrain()* https://www.arduino.cc/reference/en/language/functions/math/constrain/ * the WRAP mode to wrap the values around as in wrap()

```
mapFloat(x, 10.0, 50.0, 100.0, -100.0, CONSTRAIN);
mapFloat(x, 10.0, 50.0, 100.0, -100.0, WRAP);
```

1 Note

The "lower bounds" (fromLow and toLow) of either range may be larger or smaller than the "upper bounds" (fromHigh and toHigh) so the mapFloat() function may be used to reverse a range of numbers.

Important

Unlike the Arduino map() function, mapFloat() uses floating-point math and will generate fractions.

Example

(continues on next page)

(continued from previous page)

```
oscillator.frequency(freq);

// Send to LED.
oscillator >> led;
}
```

Reference

float pq::mapFloat(double value, double fromLow, double fromHigh, double toLow, double toHigh, uint8_t mode = UNCONSTRAIN)

Re-maps a number from one range to another.

Parameters

- **value** the number to map
- **fromLow** the lower bound of the value's current range
- **fromHigh** the upper bound of the value's current range
- **toLow** the lower bound of the value's target range
- toHigh the upper bound of the value's target range
- mode set to CONSTRAIN to constrain the return value between toLow and toHigh or WRAP for the value to wrap around

Returns

the mapped value

See Also

- *mapFrom01()*
- mapTo01()

3.5.2 mapFrom01()

Re-maps a number in the range [0, 1] to another range. That is, a value of 0 would get mapped to toLow, a value of 1 to toHigh, values in-between to values in-between, etc.

```
mapFrom01(x, toLow, toHigh)
```

is equivalent to:

```
mapFloat(x, 0, 1, toLow, toHigh)
```

By default, does *not* constrain output to stay within the [fromHigh, toHigh] range, because out-of-range values are sometimes intended and useful. In order to constrain the return value within range, use the CONSTRAIN argument as the last parameter:

```
mapFrom01(x, toLow, toHigh, CONSTRAIN)
```

See *mapFloat()* for more details.

3.5. Functions 93

Example

```
#include <Plaquette.h>
SineWave modulator(10.0);

SquareWave oscillator(1.0);

DigitalOut led(13);

void begin() {
    // Change duty-cycle of oscillator in range [0.2, 0.8].
    float width = mapFrom01(modulator, 0.2, 0.8); // alternative: modulator.mapTo(0.2, 0.8)
    oscillator.width(width);

// Send to LED.
    oscillator >> led;
}
```

Reference

float pq::mapFrom01(double value, double toLow, double toHigh, uint8_t mode = UNCONSTRAIN)

Re-maps a number in range [0, 1] to a new range.

Parameters

- value the number to map (in [0,1])
- toLow the lower bound of the value's target range
- toHigh the upper bound of the value's target range
- mode set to CONSTRAIN to constrain the return value between toLow and toHigh or WRAP for the value to wrap around

Returns

the mapped value in [toLow, toHigh]

See Also

- *mapFloat()*
- *mapTo01()*

3.5.3 mapTo01()

Re-maps a number between 0.0 and 1.0. That is, a value of fromLow would get mapped to 0.0, a value of fromHigh to 1.0, values in-between to values in-between, etc.

```
mapToO1(x, fromLow, fromHigh)
```

is equivalent to:

```
mapFloat(x, fromLow, fromHigh, 0, 1)
```

By default, does *not* constrain output to stay within the [fromHigh, toHigh] range, because out-of-range values are sometimes intended and useful. In order to constrain the return value within range, use the CONSTRAIN argument as the last parameter:

```
mapTo01(x, fromLow, fromHigh, CONSTRAIN)
```

See *mapFloat()* for more details.

Example

```
#include <Plaquette.h>
AnalogOut led(9);

void begin() {
}

void step() {
    // Generate a sinusoidal values between -1 and 1.
    float x = sin(seconds());

    // Remap to the range [0, 1] and send to LED.
    mapToO1(x, -1, 1) >> led;
}
```

Reference

float pq::mapTo01(double value, double fromLow, double fromHigh, uint8_t mode = UNCONSTRAIN)

Re-maps a number to the [0, 1] range.

Parameters

- value the number to map
- **fromLow** the lower bound of the value's current range
- **fromHigh** the upper bound of the value's current range
- mode set to CONSTRAIN to constrain the return value between toLow and toHigh or WRAP for the value to wrap around

Returns

the mapped value in [0, 1]

See Also

- mapFloat()
- *mapFrom01()*

3.5.4 randomFloat()

This function returns a random real-valued number.

3.5. Functions 95

Example

Reference

```
float pq::randomFloat()
    Generates a uniform random number in the interval [0,1).
float pq::randomFloat(float max)
    Generates a uniform random number in the interval [0,max).
float pq::randomFloat(float min, float max)
    Generates a uniform random number in the interval [min,max) (b>a).
```

See Also

• random()

3.5.5 seconds()

This function returns the number of seconds since the program started.

Example

```
#include <Plaquette.h>

DigitalOut led(13, SOURCE);

void begin() {
    led.off();
}

void step() {
    // Switch the LED on after 10 seconds.
    if (seconds() > 10)
        led.on();
}
```

Reference

float pq::seconds(bool referenceTime = true)

Returns time in seconds.

Optional parameter allows to ask for reference time (default) which will yield the same value through one iteration of step(), or "real" time which Will return the current total running time.

Parameters

referenceTime – determines whether the function returns the reference time or the real time

Returns

the time in seconds

See Also

- micros()
- millis()

3.5.6 wrap()

Restricts a value to an interval [low, high) by wrapping it around.

| Code | Result |
|------------------------|--------|
| wrap(1.0, 1.0, 5.0) | 1.0 |
| wrap(3.0, 1.0, 5.0) | 3.0 |
| wrap(4.9999, 1.0, 5.0) | 4.9999 |
| wrap(5.0, 1.0, 5.0) | 1.0 |
| wrap(10.0, 1.0, 5.0) | 1.0 |
| wrap(13.0, 1.0, 5.0) | 3.0 |

Two alternative versions are provided:

| Version | Equivalent to |
|---------------|--------------------|
| wrap(x, high) | wrap(x, 0.0, high) |
| wrap01(x) | wrap(x, 0.0, 1.0) |

Example

Ramp LED up and then back to zero once every 10 second:

```
#include <Plaquette.h>
AnalogOut led(9);

void begin() {
}

void step() {
   wrap(seconds(), 10.0) >> led;
}
```

3.5. Functions 97

Reference

float pq::wrap(double x, double low, double high)

Restricts value to the interval [low, high) by wrapping it around.

Parameters

- **x** the value to wrap
- **low** the lower boundary
- **high** the higher boundary

Returns

the value wrapped around [low, high) or [high, low) if high < low

float pq::wrap(double x, double high)

Restricts value to the interval [0, high) by wrapping it around.

Parameters

- \mathbf{x} the value to wrap
- **high** the higher bound

Returns

the value wrapped around [0, high) or [high, 0) if high is negative

float pq::wrap01(double x)

Restricts value to the interval [0, 1) by wrapping it around.

Parameters

 \mathbf{x} – the value to wrap

Returns

the value wrapped around [0, 1).

See Also

- *mapFloat()*
- *mapTo01()*

3.6 Structure

Core structural functions and operators.

3.6.1 begin()

The begin() function is called when a sketch starts. Use it to initialize units, start using libraries, etc. The begin() function will only run once, after each powerup or reset of the board.



Hint

Function begin() is the Plaquette equivalent of Arduino's setup(). However, Plaquette takes care of many of the initialization calls that need to be done in Arduino such as pinMode(). Therefore in many cases it will contain only a few calls or even be left empty.

Example

```
#include <Plaquette.h>

SquareWave oscillator;
AnalogIn input(A0);

void begin() {
  oscillator.period(1.0);
  oscillator.width(0.75);
  input.smooth();
}

void step() {
  // ...
}
```

See Also

• *step()*

3.6.2 step()

After creating a begin() function, which initializes and sets the initial values, the step() function does precisely what its name suggests, and performs one processing step that loops indefinitely as fast as possible, allowing your program to change and respond. Use it to actively control the board.

Important

Function step() is the Plaquette equivalent of Arduino's loop(). However, it is highly recommended that this function executes as fast as possible. Hence, one should performing computationally-intensive processing or calling blocking functions such as delay()

Example

```
#include <Plaquette.h>
DigitalIn button(2);
DigitalOut led(13);

void begin() {
}

void step() {
 button >> led;
}
```

3.6. Structure 99

See Also

• begin()

3.6.3 [] (arrays)

An array is a collection of variables or objects that are accessed with an index number. Arrays can be complicated, but using simple arrays is relatively straightforward.

For a general description of arrays, please refer to this page.

Arrays of Plaquette units such as *DigitalIn*. *SineWave*, and *MinMaxScaler* can be easily created using the following syntax:

```
UnitType array[] = { UnitType(...), UnitType(...), ... };
```

For example, the following code will create an array of three (3) digital outputs on pins 10, 11, and 12:

```
DigitalOut leds[] = { DigitalOut(10), DigitalOut(11), DigitalOut(12) };
```

When initializing a unit with a single parameter, one can simply use the value of the parameter at creation time. Hence the previous code could be rewritten as:

```
DigitalOut leds[] = { 10, 11, 12 };
```

When more than a single parameter is used, however, it needs to be called explicitely with the unit name:

```
SquareWave oscillators[] = { 1.0, 2.0, SquareWave(3.0, 0.8) };
```

A Warning

Units in array need to be all of the same type. In other words, it is not currently possible to mix different types of objects such as DigitalIn and SquareWave in the same array.

Example

```
#include <Plaquette.h>
AnalogOut leds[] = { 9, 10, 11 };

// Creates three triangle oscillators with a 2 seconds period, with different width.
TriangleWave oscillators[] = { TriangleWave(2.0, 0.0), 2.0, TriangleWave(2.0, 1.0) };

void begin() {}

void step() {
    // Send each oscillator to its corresponding LED.
    for (int i=0; i<3; i++) {
        oscillators[i] >> leds[i];
    }
}
```

3.6.4 . (dot)

Provides access to an object's methods and data. An object is one instance of a class and may contain both methods (object functions) and data (object variables and constants), as specified in the class definition. The dot operator directs the program to the information encapsulated within an object.

Example

Switches LED on every 4 seconds.

```
#include <Plaquette.h>

DigitalOut led(13);

void begin() {
  led.off();
}

void step() {
  if (round(seconds()) % 4 == 0)
    led.on();
  else
    led.off();
}
```

Syntax

```
object.method()
object.variable
```

3.6.5 >> (pipe)

Sends data across units from left to right. This operator is specific to Plaquette and can be used in a chained manner.

The operation uses the get() and put() methods of units in such a way that:

```
input >> output;
```

is equivalent to:

```
output.put(input.get());
```

Numerical and boolean values can also be used:

```
12 >> output;
0.8 >> output;
true >> output;
```

Example

```
#include <Plaquette.h>
AnalogIn sensor(A0);

(continues on next page)
```

3.6. Structure 101

(continued from previous page)

```
MinMaxScaler scaler;
AnalogOut led(9);

void begin() {}

void step() {
    // Rescale value and send the result to LED.
    sensor >> scaler >> led;
}
```

Syntax

```
input >> output
input >> filter >> output
```

3.7 Extra

Extra units and functions.

3.7.1 Easings


Easing functions apply non-linear effects to changing values, in order to create expressive real-time outputs. Plaquette provides users with a wide range of such functions, typically used with a Ramp unit.

All easing functions have the same signature:

```
float easeFunction(float t)
```

Value x should be between 0.0 and 1.0, the returned value is also between 0.0 and 1.0.

This is the list of all easing functions (source: http://easings.net):

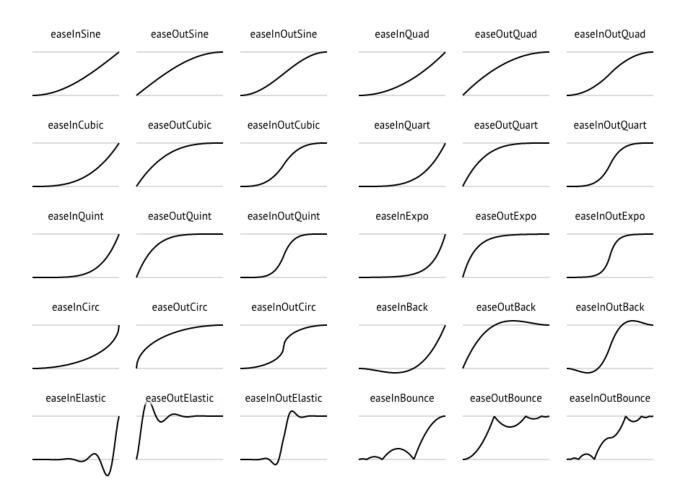

See Also

• Ramp

3.7.2 ContinuousServoOut

A source unit that controls a continuous rotation servo-motor. A continuous servo-motor can move indefinitely forward or backwards.

Servo motors have three wires: power, ground, and signal. The power wire is typically red, and should be connected to the 5V pin on the Arduino board. The ground wire is typically black or brown and should be connected to a ground pin on the Arduino board. The signal pin is typically yellow, orange or white and should be connected to a digital pin on the Arduino board. Note that servos draw considerable power, so if you need to drive more than one or two, you'll probably need to power them from a separate supply (i.e. not the +5V pin on your Arduino). Be sure to connect the grounds of the Arduino and external power supply together.

Example

Every time a button is pushed, the motor is stopped. Then upon button release it starts moving in the opposite direction.

```
#include <Plaquette.h>
#include <PqServo.h>

// The servo-motor output on pin 9.
ContinuousServoOut servo(9);

(continuous on next page)
```

3.7. Extra 103

(continued from previous page)

```
// The push-button.
DigitalIn button(2);
// Preserves the servo last speed value.
float lastValue = 0;
void begin() {
  // Debounce button.
 button.debounce();
  // Starts the servo.
 servo.put(1.0);
}
void step() {
 if (button) {
    // Save speed.
   lastValue = servo.get();
   // Stop servo.
   servo.stop();
 else if (button.fell()) {
   // Reset speed.
   servo.put(lastValue);
   // ... then invert it.
   servo.reverse();
 }
}
```

class ContinuousServoOut: public AbstractServoOut

Continuous servo-motor.

Public Functions

```
ContinuousServoOut(uint8_t pin = 9)
```

Constructor for a continuous rotation servo-motor.

Parameters

pin - the pin number

virtual void stop()

Stops the servo-motor.

virtual void reverse()

Sends servo-motor in reverse mode.

virtual float put (float value)

Pushes value into the unit.

Parameters

value – the value sent to the unit

Returns

the new value of the unit

```
inline uint8_t pin() const

Returns the pin this servomotor is attached to.
inline virtual float get()

Returns value in [0, 1].
```

See Also

- AnalogOut
- ServoOut

3.7.3 ServoOut

A source unit that controls a standard servo-motor.

Servo motors have three wires: power, ground, and signal. The power wire is typically red, and should be connected to the 5V pin on the Arduino board. The ground wire is typically black or brown and should be connected to a ground pin on the Arduino board. The signal pin is typically yellow, orange or white and should be connected to a digital pin on the Arduino board. Note that servos draw considerable power, so if you need to drive more than one or two, you'll probably need to power them from a separate supply (i.e. not the +5V pin on your Arduino). Be sure to connect the grounds of the Arduino and external power supply together.

Example

Sweeps the shaft of a servo motor back and forth across 180 degrees.

```
#include <Plaquette.h>
#include <PqServo.h>

// The servo-motor output on pin 9.
ServoOut servo(9);

// Oscillator to make the servo sweep.
SineWave oscillator(2.0);

void begin() {
   // Position the servo in center.
   servo.center();
}

void step() {
   // Updates the value and send it back as output.
   oscillator >> servo;
}
```

```
class ServoOut : public AbstractServoOut
Standard servo-motor (angular).

Public Functions

ServoOut (uint8_t pin = 9)

Constructor for a standard servo-motor.

Parameters

pin – the pin number
```

3.7. Extra 105

```
virtual float putAngle(float angle)
     Sets the servomotor position to a specific angle between 0 and 180 degrees.
          Parameters
              angle – the angle in degrees
          Returns
              the current angle
virtual float getAngle()
     Return the current angular angle in [0, 180].
inline virtual void center()
     Re-centers the servo-motor.
virtual float put (float value)
     Pushes value into the unit.
          Parameters
              value – the value sent to the unit
          Returns
              the new value of the unit
inline uint8 t pin() const
     Returns the pin this servomotor is attached to.
inline virtual float get()
     Returns value in [0, 1].
```

See Also

- AnalogOut
- ContinuousServoOut

3.7.4 StreamIn

An input unit that can receive values transmitted through a stream – for example, the Arduino serial line. Values are sent in clear text and separated by newlines and/or carriage returns.

Example

Controls the value of a LED using serial. Try opening the serial monitor and sending values between 0 and 1.

```
#include <Plaquette.h>
StreamIn serialIn(Serial);
AnalogOut led(9);
void begin() {}
void step() {
   serialIn >> led;
}
```

To run this example:

- 1. Upload the code.
- 2. In the Arduino software open the serial monitor: **Tools > Serial Monitor**.
- 3. Make sure the default baudrate of **9600** bps is selected.
- 4. Make sure one of the options "Newline", "Carriage return", or "Both NL + CR" is selected.
- 5. Write a number between 0.0 and 1.0 and press "Enter". This should allow you to set the LED intensity.
- 6. Try different values.

Reference

```
class StreamIn: public AnalogSource
```

Stream/serial input. Reads float values using Arduino built-in parseFloat().

Public Functions

```
StreamIn(Stream & stream = Serial)

Constructor.

Parameters

stream - a reference to a Stream object inline virtual float get()

Returns value in [0, 1].
```

See Also

- AnalogIn
- DigitalIn
- StreamOut
- · Arduino serial
- · Arduino streams

3.7.5 StreamOut

An output unit that transmits values through a stream – for example, the Arduino serial line. Values are sent in clear text and separated by newlines and/or carriage returns.

Example

Outputs the number of seconds to serial.

```
#include <Plaquette.h>
StreamOut serialOut(Serial);

void begin() {}

void step() {
    // Output the number of seconds
    seconds() >> serialOut;
}
```

3.7. Extra 107

To run this example:

- 1. Upload the code.
- 2. In the Arduino software open the serial monitor: **Tools > Serial Monitor**.
- 3. Make sure the default baudrate of **9600** bps is selected.
- 4. You should see the seconds increase.
- 5. Close the monitor and open serial plotter: **Tools > Serial Plotter**.
- 6. You should see a graphical representation of the seconds.
- 7. Replace the line in step() by: sin(seconds()) >> serialOut and upload. You should now see a sine wave signal in the serial plotter.

Reference

class StreamOut: public AnalogSource

Stream/serial output. Number of digits of precision is configurable.

Public Functions

StreamOut(Stream &stream = Serial)

Constructor.

Parameters

stream – a reference to a Stream object

virtual float put (float value)

Pushes value into the unit.

Parameters

value – the value sent to the unit

Returns

the new value of the unit

virtual void precision(uint8_t digits)

Sets precision of the output.

Parameters

digits – the number of digits to show after decimal point

inline virtual float get()

Returns value in [0, 1].

See Also

- AnalogOut
- DigitalOut
- StreamIn
- · Arduino serial
- · Arduino streams

CHAPTER

FOUR

RELATED INFO

4.1 Credits

Core Developers:

- Sofian Audry (main code, system architecture & design, documentation) Website GitHub
- Thomas Ouellet Fredericks (original concept, system architecture & design) Website GitHub

Contributors:

- Code: Matthew Loewen Website GitHub
- Code: Samuel Favreau Website
- Logo: Ian Donnelly Website
- Testing: Luana Belinsky Website
- Documentation Editing: Erin Gee Website GitHub

Plaquette's base source code was produced as part of a research project at labXmodal. A special thanks to Chris Salter for his support.

Plaquette borrows ideas from the Arduino, Chuck, mbed, Processing, and Pure Data.

4.2 License

Plaquette is distributed under the Gnu General Public License v 3.0.

The text of the Plaquette documentation is licensed under a Creative Commons Attribution-ShareAlike 3.0 License. Parts of the text was copied and/or adapted from the Arduino documentation. Code samples in the guide are released into the public domain.

The Plaquette documentation is licensed under a Creative Commons Attribution-Share Alike 3.0 License. Parts of the documentation has been borrowed and/or adapted from the Arduino Reference and from the Processing Reference texts.

INDEX

| Alarm (C++ class), 72 Alarm: :add (C++ function), 73 | Chronometer::Chronometer (C++ function), 74 Chronometer::elapsed (C++ function), 74 Chronometer::get (C++ function), 74 |
|--|---|
| Alarm::duration(C++ function), 72 | Chronometer::isRunning $(C++function)$, 74 |
| Alarm::elapsed $(C++function)$, 73 | Chronometer::pause $(C++function)$, 74 |
| Alarm::finished $(C++function)$, 72 | Chronometer::resume $(C++function)$, 74 |
| Alarm::get(C++ function), 72 | Chronometer::set $(C++function)$, 74 |
| Alarm::getInt(C++ function), 72 | Chronometer::start $(C++function)$, 74 |
| Alarm::isFinished (C++ function), 73 | Chronometer::stop $(C++function)$, 74 |
| Alarm::isOff $(C++function)$, 72 | ContinuousServoOut(C++ class), 104 |
| Alarm::isOn $(C++function)$, 72 | ${\tt ContinuousServoOut::ContinuousServoOut} \ \ (C++$ |
| Alarm::isRunning (C++ function), 73 | function), 104 |
| Alarm::onChange $(C++function)$, 72 | ContinuousServoOut::get $(C++function)$, 105 |
| Alarm::onFall $(C++function)$, 72 | ContinuousServoOut::pin(C++function), 104 |
| Alarm::onFinish $(C++function)$, 72 | ContinuousServoOut::put (C++ function), 104 |
| Alarm::onRise $(C++function)$, 72 | ContinuousServoOut::reverse (C++ function), 104 |
| Alarm::pause $(C++function)$, 73 | ContinuousServoOut::stop(C++function), 104 |
| Alarm::progress (C++ function), 73 | D |
| Alarm::resume $(C++function)$, 73 | D |
| Alarm::set $(C++function)$, 72 | DigitalIn ($C++$ class), 59 |
| Alarm::start $(C++function)$, 72 | DigitalIn::changed $(C++function)$, 59 |
| Alarm::stop $(C++function)$, 73 | <pre>DigitalIn::changeState (C++ function), 59</pre> |
| AnalogIn $(C++ class)$, 56 | DigitalIn::debounce(C++ function), 60 |
| AnalogIn::AnalogIn $(C++function)$, 56 | <pre>DigitalIn::debounceMode (C++ function), 60</pre> |
| AnalogIn::cutoff $(C++function)$, 56 | DigitalIn::DigitalIn(C++function), 59 |
| AnalogIn::get $(C++function)$, 56 | DigitalIn::fell (C++ function), 59 |
| AnalogIn::mapTo $(C++function)$, 56 | DigitalIn::get $(C++function)$, 59 |
| AnalogIn:: $mode(C++function)$, 56 | DigitalIn::getInt $(C++function)$, 59 |
| AnalogIn::noSmooth $(C++function)$, 56 | DigitalIn::isOff $(C++function)$, 59 |
| AnalogIn::pin $(C++function)$, 56 | DigitalIn::isOn $(C++function)$, 59 |
| AnalogIn::smooth $(C++function)$, 56 | DigitalIn:: $mode(C++function), 59, 60$ |
| AnalogOut $(C++ class)$, 57 | <pre>DigitalIn::noDebounce (C++ function), 60</pre> |
| AnalogOut::AnalogOut(C++ function), 57 | DigitalIn::onChange $(C++function)$, 59 |
| AnalogOut::get $(C++function)$, 57 | DigitalIn::onFall $(C++function)$, 59 |
| <pre>AnalogOut::invert (C++ function), 57</pre> | DigitalIn::onRise(C++ function), 59 |
| AnalogOut::mode $(C++function)$, 58 | DigitalIn::pin $(C++function)$, 60 |
| AnalogOut::pin $(C++function)$, 58 | DigitalIn::rose $(C++function)$, 59 |
| AnalogOut::put $(C++function)$, 57 | DigitalOut ($C++$ class), 61 |
| | <pre>DigitalOut::changed (C++ function), 61</pre> |
| C | DigitalOut::changeState(C++ function), 61 |
| Chronometer $(C++ class)$, 74 | <pre>DigitalOut::DigitalOut (C++ function), 61</pre> |
| Chronometer::add $(C++function)$, 74 | <pre>DigitalOut::fell (C++ function), 61</pre> |
| (| |

| DigitalOut::get (C++ function), 61 | Normalizer::isHighOutlier(C++ function), 86 |
|--|--|
| <pre>DigitalOut::getInt (C++ function), 61</pre> | Normalizer::isLowOutlier(C++ function), 86 |
| DigitalOut::isOff $(C++function)$, 61 | Normalizer::isOutlier(C++ function), 86 |
| DigitalOut::isOn ($C++$ function), 61 | ${\tt Normalizer::lowOutlierThreshold}\ (C++\textit{function}),$ |
| DigitalOut:: $mode(C++function), 61, 62$ | 85 |
| DigitalOut::off $(C++function)$, 62 | Normalizer::mapTo $(C++function)$, 85 |
| DigitalOut::on $(C++function)$, 62 | Normalizer::noClamp $(C++function)$, 85 |
| DigitalOut::onChange $(C++function)$, 61 | Normalizer::Normalizer (C++ function), 84 |
| DigitalOut::onFall $(C++function)$, 61 | Normalizer::pauseCalibrating ($C++$ function), 85 |
| DigitalOut::onRise $(C++function)$, 61 | Normalizer::put $(C++function)$, 85 |
| DigitalOut::pin $(C++function)$, 62 | Normalizer::reset $(C++function)$, 85 |
| DigitalOut::put $(C++function)$, 62 | Normalizer::resumeCalibrating($C++function$), 85 |
| DigitalOut::rose (C++ function), 61 | Normalizer::targetMean ($C++$ function), 84 |
| <pre>DigitalOut::toggle (C++ function), 61</pre> | Normalizer::targetStdDev(C++function),84 |
| | Normalizer::timeWindow ($C++$ function), 84 |
| M | Normalizer::timeWindowIsInfinite ($C++$ func- |
| Metronome ($C++$ class), 75 | tion), 85 |
| Metronome::bpm $(C++function)$, 76 | D |
| Metronome::frequency $(C++function)$, 75, 76 | P |
| Metronome::get $(C++function)$, 76 | PeakDetector (C++ class), 88 |
| Metronome::getInt $(C++function)$, 76 | <pre>PeakDetector::fallbackTolerance(C++ function),</pre> |
| Metronome::isOff $(C++function)$, 76 | 89 |
| Metronome::isOn $(C++function)$, 75 | PeakDetector::get(C++function), 90 |
| Metronome::Metronome $(C++function)$, 75 | PeakDetector::isOn (C++ function), 89 |
| Metronome::onBang $(C++function)$, 76 | PeakDetector::mode(C++ function), 89 |
| Metronome::period $(C++function)$, 75 | PeakDetector::modeCrossing(C++function), 89 |
| Metronome::phase(C++function),76 | PeakDetector::modeInverted(C++function), 89 |
| MinMaxScaler (C++ class), 82 | PeakDetector::onBang (C++ function), 89 |
| MinMaxScaler::get (C++ function), 83 | PeakDetector::PeakDetector(C++ function), 88 |
| MinMaxScaler::infiniteTimeWindow (C++ func- | PeakDetector::put (C++ function), 89 |
| tion), 82 | PeakDetector::reloadThreshold(C++function), 89 |
| MinMaxScaler::isCalibrating (C++ function), 82 | <pre>PeakDetector::triggerThreshold (C++ function),</pre> |
| MinMaxScaler::mapTo (C++ function), 83 | 89 |
| MinMaxScaler::MinMaxScaler(C++ function), 82 | pq::mapFloat(C++function), 93 |
| <pre>MinMaxScaler::pauseCalibrating (C++ function),</pre> | pq::mapFrom01(C++function), 94 |
| 82 | pq::mapTo01 (C++ function), 95 |
| MinMaxScaler::put (C++ function), 82 | pq::randomFloat (C++ function), 96 |
| MinMaxScaler::reset (C++ function), 82 | pq::seconds(C++function), 97 |
| <pre>MinMaxScaler::resumeCalibrating (C++ function),</pre> | pq::wrap(C++function), 98 |
| 82 | pq::wrap01 (C++ function), 98 |
| MinMaxScaler::timeWindow (C++ function), 82 | _ |
| <pre>MinMaxScaler::timeWindowIsInfinite (C++ func-</pre> | R |
| tion), 82 | Ramp $(C++ class)$, 78 |
| | Ramp::add $(C++ function)$, 80 |
| N | Ramp::duration (C++ function), 78 |
| Normalizer ($C++$ class), 83 | Ramp::easing $(C++function)$, 78 |
| Normalizer::clamp (C++ function), 85 | Ramp::elapsed (C++ function), 80 |
| Normalizer::get (C++ function), 86 | Ramp::finished ($C++$ function), 79 |
| Normalizer::highOutlierThreshold (C++ func- | Ramp::from $(C++function)$, 78 |
| tion), 85 | Ramp::fromTo $(C++function)$, 78 |
| Normalizer::infiniteTimeWindow (C++ function), | Ramp::get $(C++function)$, 78 |
| 84 | Ramp::go $(C++function)$, 79 |
| Normalizer::isCalibrating (C++ function), 85 | Ramp::isFinished (C++ function), 80 |
| Normalizer::isClamped (C++ function), 85 | Ramp::isRunning $(C++function)$, 80 |

112 Index

70

70

| Ramp::mode(C++ function), 79 Ramp::noEasing(C++ function), 78 Ramp::onFinish(C++ function), 79 | StreamOut::precision (C++ function), 108 StreamOut::put (C++ function), 108 StreamOut::StreamOut (C++ function), 108 |
|--|--|
| Ramp::pause (C++ function), 80 Ramp::progress (C++ function), 80 | Т |
| Ramp::Ramp $(C++function)$, 78 Ramp::resume $(C++function)$, 80 Ramp::set $(C++function)$, 79 Ramp::speed $(C++function)$, 79 | TriangleWave (C++ class), 69 TriangleWave::amplitude (C++ function), 70 TriangleWave::frequency (C++ function), 70 |
| Ramp::start(C++ function), 79 Ramp::stop(C++ function), 80 Ramp::to(C++ function), 78 | TriangleWave::get (C++ function), 71 TriangleWave::mapTo (C++ function), 71 TriangleWave::period (C++ function), 70 |
| S | TriangleWave::phase (C++ function), 70 TriangleWave::shiftBy (C++ function), 70 |
| ServoOut (C++ class), 105 ServoOut::center (C++ function), 106 ServoOut::get (C++ function), 106 ServoOut::getAngle (C++ function), 106 | TriangleWave::width(C++ function), 70 |
| ServoOut::pin(C++ function), 106 ServoOut::put(C++ function), 106 | |
| ServoOut::putAngle (C++ function), 106 ServoOut::ServoOut (C++ function), 105 | |
| SineWave $(C++ class)$, 63 SineWave::amplitude $(C++ function)$, 64 | |
| SineWave::bpm (C++ function), 64 SineWave::frequency (C++ function), 63, 64 SineWave::get (C++ function), 64 | |
| SineWave::mapTo (C++ function), 64 SineWave::period (C++ function), 63 | |
| SineWave::phase (C++ function), 64 SineWave::shiftBy (C++ function), 64 SineWave::width (C++ function), 64 | |
| Smoother ($C++$ class), 91 Smoother::cutoff ($C++$ function), 91 | |
| Smoother::get (C++ function), 91 Smoother::put (C++ function), 91 | |
| Smoother::Smoother (C++ function), 91 Smoother::timeWindow (C++ function), 91 | |
| SquareWave::amplitude (C++ function), 67 | |
| SquareWave::bpm(C++ function), 67 SquareWave::frequency(C++ function), 67 SquareWave::get(C++ function), 68 | |
| SquareWave::mapTo(C++ function), 68 SquareWave::period(C++ function), 66 | |
| SquareWave::phase(C++ function), 67 SquareWave::shiftBy(C++ function), 67 | |
| SquareWave::SquareWave (C++ function), 66 SquareWave::width (C++ function), 67 | |
| StreamIn (C++ class), 107 StreamIn::get (C++ function), 107 StreamIn::StreamIn (C++ function), 107 | |
| StreamOut (C++ class), 108 StreamOut::get (C++ function), 108 | |

Index 113