

6






5

4

3

2

1

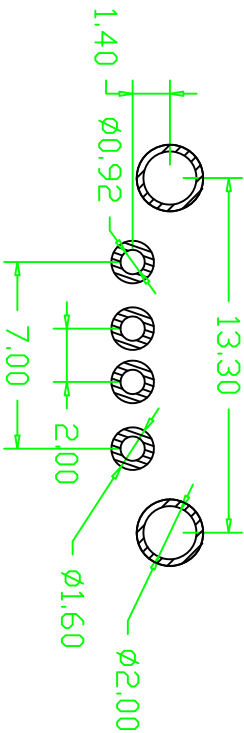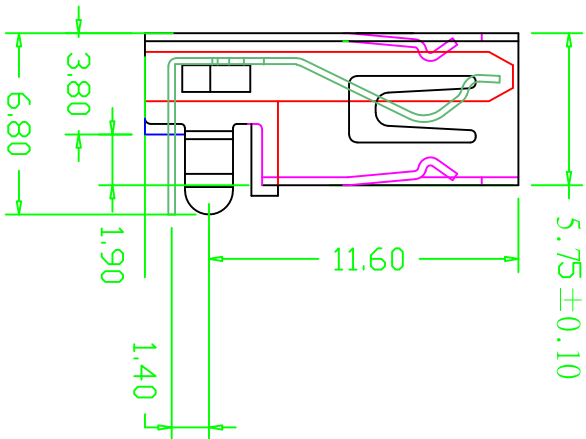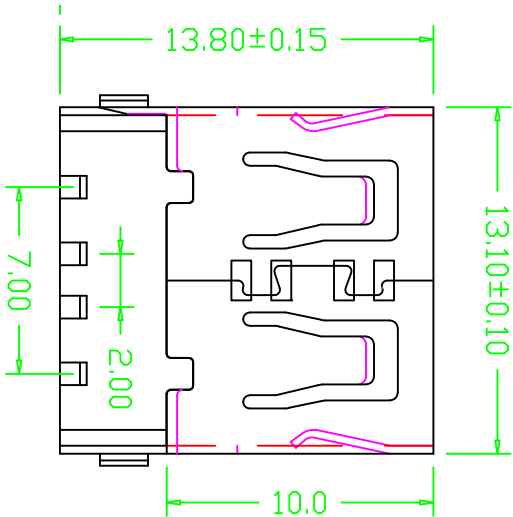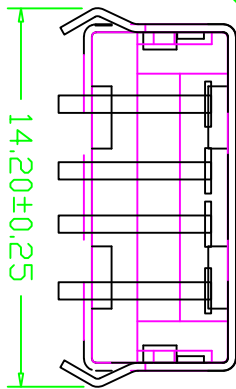

RECOMMENDED P.C.B LAYOUT

TOL.: ±0.05

规格说明: Specifications:

电气特性: Electrical:

- 额定电流: Current Rating  
1.5A/contact terminal
- 额定电压: Voltage Rating  
30V DC
- 接触电阻: Contact Resistance  
30 milliohms MAX
- 耐压: Dielectric Withstanding Voltage:  
500 V AC AT Sea Level
- 绝缘电阻: Insulation Resistance:  
1000MEGA ohms MIN

物理性能: Mechanical:

- 插拔力: Connector Mate and Unmate Force  
Mate force: 3.57kgf(MAX)  
Unmate force: 1.02kgf(MIN)
- 端子保持力: Terminal Retention  
1.0kgf(MIN)

原材料: Material:

- 塑胶: Housing:  
Hing Temperature Thermoplastics, black

电镀: Finish:

- 端子: Contact: Plated Gold in Mating Area;  
Tin On Solder Tails
- 端子包层: Terminal Retention  
1.0kgf(MIN)

- 端子包层: Terminal Retention  
1.0kgf(MIN)
- 外壳: Shell: Nickel Plating

REV	EC No.	DESCRIPTION	Symbol	DATE
A	/	new release	/	Oct. 12, 2021

www.connmold.com		ConnMold	
DIMENSION UNITS	TOLERANCE	PART NAME	USB 2.0 A MID-MOUNT TYPE
MM	X ± 0.50 . XX ± 0.25 . X ± 0.35 . XXX ± 0.15	PART NUMBER	CMUSB661022B
DRWN: Robert	Oct. 12, 2021	CUSTOMER	GENERAL MARKET
CHK' D: Yuri	Oct. 12, 2021	SHEET NUMBER	1 OF 1
APPR: Linda	Oct. 12, 2021		
THIRD ANGLE PROJECTION	CUSTOMER P/N		
	/		