






PRODUCTS



LOCATIONS



FAVORITE LIST



DOWNLOAD



CONTACT US

ENGINEERING
SERVICES



Products

Downloads

Videos

Contact Us

Favorites

Engineering Services

More information



 Videos

3:20

Hira Walraven
Inauguration Video
Hira Walraven LLC
862 Views 2 years ago



1:44

Interview with Ravi
Wadhwani, General
Manager of Hira...
Logistics Middle East
291 views 2 years ago



2:37

#Leaders Talk with
Hira Walraven, Ravi
Radhwani, General...
GineersNow
394 views 2 years ago



1:30

Swiss Bureau: Office
Design & Build for
HIRA Walraven
Swiss Bureau Interior D...
659 views 2 years ago



2:36

#Leaders Talk with
Hira Walraven, Khalid
Khalifa, technical...
GineersNow
351 views 2 years ago



0:26

Hira Walraven Factory
Opening
Fredpaille
530 views 2 years ago



Hira Walraven
Fredpaille
530 views 2 years ago



⬇️ Download



Document 1



Document 2



Document 3



Document 4



Document 5



Document 6



Document 7



Document 8



Document 9





Engineering Service 1



Engineering Service 2



Engineering Service 3



Engineering Service 4



Engineering Service 5



Engineering Service 6



Engineering Service 7



Engineering Service 8



Engineering Service 9

< Engineering Service 1



Engineering Service 1

Lorem Ipsum is simply dummy text of the printing and typesetting industry. Lorem Ipsum has been the industry's standard dummy text ever since the 1500s, when an unknown printer took a galley of type and scrambled it to make a type specimen book. It has survived not only five centuries, but also the leap into electronic typesetting, remaining essentially unchanged.



Global Corporate Offices



Search



Hira Walraven AC Industry LLC

P.O. Box 241579

Dubai, United Arab Emirates

Email: enquiry@hirawalraven.com

Mob: +971 4 882 1114



BIS Metal Pipe Clamps with Lining



BIS Metal Pipe Clamps



BIS Clamps For Insulated Pipe



BIS Fixing Points and Sliding Devices



BIS RapidStrut® Fixing System



BIS Rooftop and Solar Fixing System



BIS Fixing Accessories



BIS Fastenings



BIS Pipe Connectors

BIS Metal Pipe Clamps with... 

BIS Clamps Lined Split Clamp



BIS Heavy Duty Clamp HD1501
(BUP1000) – M8/10/12



BIS Heavy Duty Clamp HD1501
(BUP1000) – M16



Lined Sprinkler Clamp



Lined U Bolt



Lined Two Bolt Clamp



Lined Riser Clamp



Lined U-Strap Clamp



Lined Clevis Hanger

BIS Clamps Lined Split Clamp



BIS Clamps Lined Split Clamp

Features and Benefits

- Lock bolts with combi cross recessed head
- For horizontal and vertical applications
- Profiled for extra strength
- Screws secured with anti-loss washer
- Material: steel
- Electrogalvanized as per ASTM B 633
- Standards (SC3), BS 1706 FE/ZN 12
- Temperature resistance from -20 °C to +110 °C
- Noise insulating lining, EPDM, black
- Noise reduction up to 18dB (A).

[VIEW CHART](#)[DOWNLOAD](#)[LETS CHAT](#)



ⓘ More information



Contact

Call-Back

Send us a message

Connect with us

Facebook

Instagram

LinkedIn

Further information

Careers

Learn more about us



ⓘ More information

Contact



Type in your details:

Name

Sumiaz Syed

Company Name

Clicktap Digital

Phone Number

000 0000 000000

Email

example@gmail.com

Location

000 0000 000000

Submit



Careers



Learn more about the group



ⓘ More information



Send us a message

Name

Sumiaz Syed

Company Name

Clicktap Digital

Phone Number

000 0000 000000

Email

example@gmail.com

Location

000 0000 000000

Message

Type here...

Submit



Learn more about the group

BIS Clamps Lined Split Clamp



BIS Clamps Lined Split Clamp

Features and Benefits

- Lock bolts with combi cross recessed head
- For horizontal and vertical applications
- Profiled for extra strength
- Screws secured with anti-loss washer
- Material: steel
- Electrogalvanized as per ASTM B 633
- Standards (SC3), BS 1706 FE/ZN 12
- Temperature resistance from -20 °C to +110 °C
- Noise insulating lining, EPDM, black
- Noise reduction up to 18dB (A).

[VIEW CHART](#)[DOWNLOAD](#)[LETS CHAT](#)

Category: BIS Metal Pipe Clamps with Lining

Hot Dip Galvanized and Stainless Steel Option available on request.

With connection nut M8/M10, M10/M12 available on request.

With M6 Side Nuts available on request.

This series replaces part number DMC115 series.

◀ BIS Clamps Lined Split Clamp ▶




BIS Clamps Lined Split Clamp

Features and Benefits

- Lock bolts with combi cross recessed head
- For horizontal and vertical applications
- Profiled for extra strength
- Screws secured with anti-loss washer
- Material: steel
- Electrogalvanized as per ASTM B 633
- Standards (SC3), BS 1706 FE/ZN 12
- Temperature resistance from -20 °C to +110 °C
- Noise insulating lining, EPDM, black
- Noise reduction up to 18dB (A).

[VIEW CHART](#)[DOWNLOAD](#)[LETS CHAT](#)

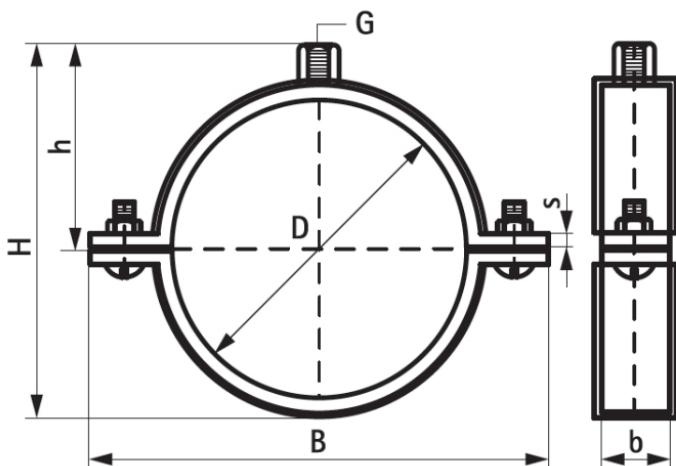

BIS Clamps Lined Split Clamp

Features and Benefits

- Lock bolts with combi cross recessed head
- For horizontal and vertical applications
- Profiled for extra strength
- Screws secured with anti-loss washer
- Material: steel
- Electrogalvanized as per ASTM B 633
- Standards (SC3), BS 1706 FE/ZN 12
- Temperature resistance from -20 °C to +110 °C
- Noise insulating lining, EPDM, black
- Noise reduction up to 18dB (A).

[VIEW CHART](#)[DOWNLOAD](#)[LETS CHAT](#)

BIS Clamps Lined Split Clamp



Part No.	D (mm)	D (")	Dia (mm)	G	B (mm)	H (mm)
DM C21 5 018	15 - 19	3/8	15	M8	60	36
DM C21 5 022	20 - 24	1/2	22	M8	65	43
DM C21 5 028	25 - 30	3/4	28	M8	70	50
DM C21 5 035	32 - 36	1	35	M8	85	56
DM C21 5 040	38 - 43	1 1/4	42	M8	92	63
DM C21 5 048	47 - 51	1 1/2	48	M8	98	72
DM C21 5 054	53 - 58	-	54	M8	104	75
DM C21 5 060	60 - 64	2	60	M8	110	81
DM C21 5 063	63 - 66	-	63	M8	115	88
DM C21 5 070	68 - 72	-	70	M8	120	91
DM C21 5 075	74 - 80	2 1/2	75	M8/10	125	96
DM C21 5 083	81 - 86	-	83	M8/10	139	108
DM C21 5 090	87 - 92	3	90	M8/10	146	111
DM C21 5 100	99 - 105	3 1/2	100	M8/10	156	121
DM C21 5 110	107 - 112	-	110	M8/10	166	131
DM C21 5 115	113 - 118	4	115	M8/10	171	136
DM C21 5 125	125 - 130	-	125	M8/10	181	146
DM C21 5 133	131 - 137	-	133	M8/10	184	154
DM C21 5 140	138 - 142	5	140	M8/10	196	161
DM C21 5 150	148 - 153	-	150	M8/10	206	171
DM C21 5 160	159 - 166	-	160	M8/10	216	181
DM C21 5 168	168 - 172	6	168	M8/10	224	189
DM C21 5 200	200 - 212	-	200	M8/10	256	221
DM C21 5 220	215 - 220	8	220	M8/10	276	241
DM C21 5 250	249	-	250	M8/10	306	271
DM C21 5 315	313 - 318	-	315	M8/10	371	336

- Temperature resistance from -20 °C to +110 °C
- Noise insulating lining, EPDM, black
- Noise reduction up to 18dB (A).

[VIEW CHART](#)

[DOWNLOAD](#)

[LETS CHAT](#)




BIS Clamps Lined Split Clamp



G	B (mm)	H (mm)	h (mm)	b x s (mm)	F _{a,z} (N)	Pack 1
M8	60	36	26	19 x 1.2	850	450
M8	65	43	29	19 x 1.2	850	400
M8	70	50	32	19 x 1.2	850	350
M8	85	56	36	19 x 1.2	850	300
M8	92	63	39	19 x 1.2	850	250
M8	98	72	42	19 x 1.2	850	200
M8	104	75	45	19 x 1.2	850	200
M8	110	81	48	19 x 1.2	850	125
M8	115	88	51	19 x 1.2	850	125
M8	120	91	53	19 x 1.2	850	125
M8/10	125	96	56	19 x 1.5	1,250	200
M8/10	139	108	60	19 x 1.5	1,250	200
M8/10	146	111	63	19 x 1.5	1,250	200
M8/10	156	121	68	19 x 1.5	1,250	175
M8/10	166	131	73	19 x 1.5	1,250	150
M8/10	171	136	76	19 x 1.5	1,250	150
M8/10	181	146	81	19 x 2.0	1,450	100
M8/10	184	154	85	19 x 2.0	1,450	100
M8/10	196	161	88	19 x 2.0	1,450	100
M8/10	206	171	93	19 x 2.0	1,450	80
M8/10	216	181	98	19 x 2.0	1,450	80
M8/10	224	189	102	19 x 2.0	1,450	80
M8/10	256	221	118	19 x 2.0	2,000	60
M8/10	276	241	128	19 x 2.0	2,000	40
M8/10	306	271	143	19 x 2.0	2,000	40
M8/10	371	336	176	19 x 2.0	2,000	40

- Temperature resistance from -20 °C to +110 °C
- Noise insulating lining, EPDM, black
- Noise reduction up to 18dB (A).

[VIEW CHART](#)

[DOWNLOAD](#)

[LETS CHAT](#)
