

HS SERIES - HS-100P/125P/150P/200P/250P/315P



Structural configuration for models HS-100/125



Structural configuration for models HS-150



Structural configuration for models HS-200/250/315

Product Features

1. Fan body is made of eco-friendly raw material with beautiful lines and double insulation.
2. Fan blade is designed according to fluid dynamics principle to reach optimal airflow and air pressure.
3. Special design of joint for easy installation and maintenance.
4. Japanese NMB ball bearing with long working life over 50000hours.
5. IP44 protection class.
6. Optional timer delay, humidity sensor, temperature sensor or other functions.
7. Operating temperature range: -20°C~60°C.
8. Perfect for homes, apartments, office, public place, hotel, gym and etc.

Application: It is ideal for air exhaust systems in high-humidity areas such as bathrooms and kitchens, as well as for ventilation in apartments, offices, hotels, grow tents, and basements.

Optional Functions:

1. Three-speed motor (high, middle, low)
2. Timer
3. Temperature, humidity sensor


Performance Parameters

Prior to installation, make sure the electrical parameters on the unit's data plate match the specifications of the electrical supply.

Model No	Speed	Voltage Frequency V/Hz	Current (Amps)	Power (W)	Speed (RPM)	Airflow (m3/h)	Air Pressure (Pa)	Noise (dB)	Net Weight (kgs)
HS-100	H	220-240/50	0.12	26	2200	198	156	31	1.5
	L		0.11	23	1850	165	131	26	
	H	100-120/60	0.31	35	2200	198	156	31	
	L		0.28	30	1850	165	131	26	
HS-125	H	220-240/50	0.14	33	2250	284	159	32	1.5
	L		0.13	28	1850	248	106	26	
	H	100-120/60	0.35	38	2250	284	159	32	
	L		0.31	32	1850	248	106	26	
HS-150	H	220-240/50	0.22	54	2550	530	300	33	2.6
	L		0.19	44	1850	410	240	29	
	H	100-120/60	0.55	62	2550	530	300	33	
	L		0.45	49	1850	410	240	29	
HS-200	H	220-240/50	0.53	128	2450	840	352	63	4.9
	L		0.52	123	1950	690	274	55	
	H	100-120/60	1.6	165	2450	840	352	63	
	L		1.3	135	1950	690	274	55	
HS-250	H	220-240/50	1.2	225	2450	1405	488	66	7.5
	L		0.75	165	1850	1064	371	50	
	H	100-120/60	2.6	290	2450	1405	488	66	
	L		1.8	210	1850	1064	371	58	
HS-315	H	220-240/50	1.9	390	2350	2206	693	69	11
	L		1.4	275	1650	1750	435	61	
	H	100-120/60	3.7	412	2350	2206	693	69	
	L		3	330	1650	1750	435	61	

DIMENSIONS (mm)

For HS-100/125/150/200/250/315

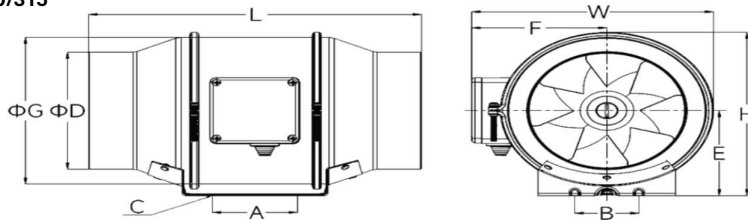


MODEL	A	B	C	ØD	E	F	ØG	L	W	H
HS-100	80	60	4-Ø4.5	97	99	116	163	302	204	195
HS-125	80	60	4-Ø4.5	123	99	116	163	257	204	195
HS-150	80	60	4-Ø5.0	147	109	127	187	313	227	208
HS-200	100	94	4-Ø5.5	197	125	137	205	302	249	237
HS-250	150	150	4-Ø8*11	247	150	174	261	383	310	286
HS-315	181	178	4-Ø8*11	312	187	216	325	446	386	357


PERFORMANCE CURVES

The fan performance curve illustrates the airflow delivered at various static pressures to determine the fan operating point.


Model HS-100P

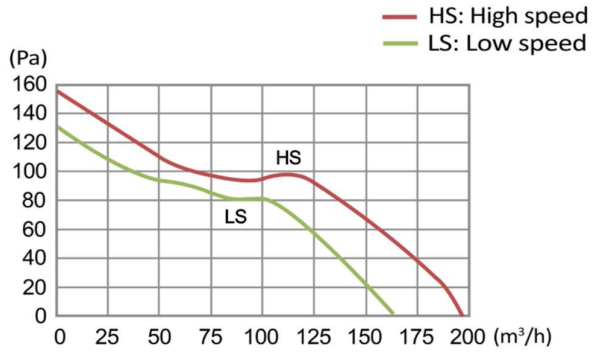


Model HS-125P

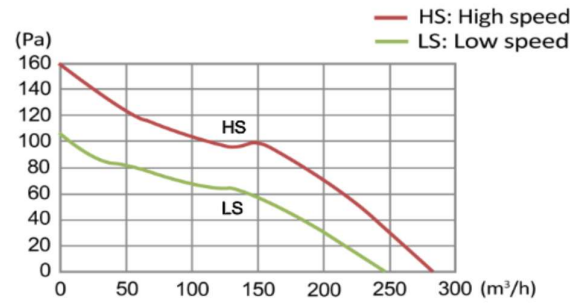


Model HS-150P

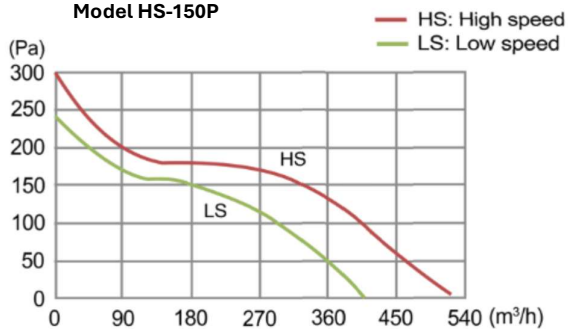


Model HS-200P

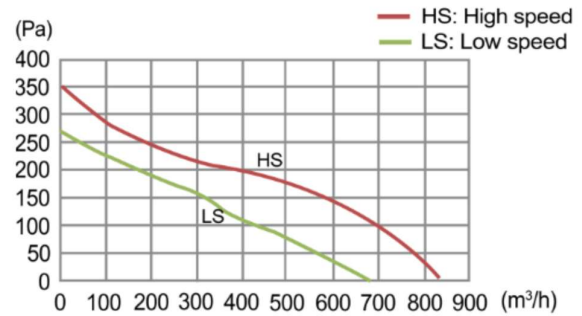

Model HS-250P

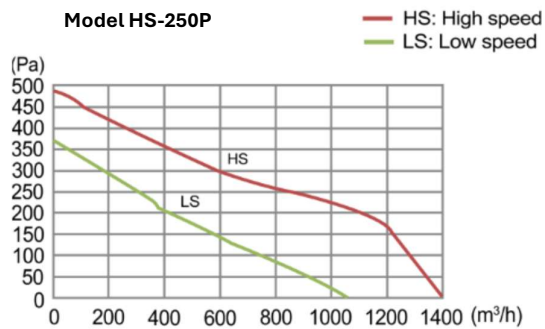

Model HS-315P

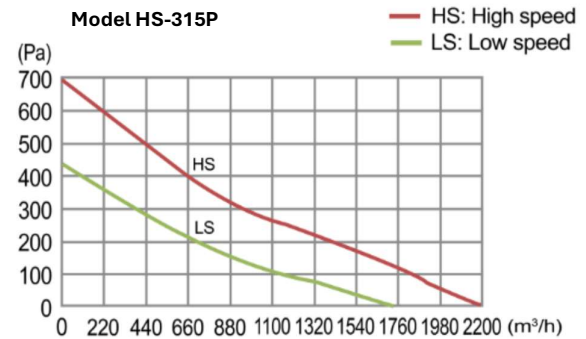


Sound Pressure Level (SPL) Measurement


The sound pressure level of the inline fan was measured using a calibrated two-channel sound analyzer under controlled conditions. Measurements include overall SPL, Leq, Peak, and octave-band distribution.

- Channel 1 represents the primary airflow side of the inline fan.
- Channel 2 represents the opposite side or secondary measurement position.


Model HS-100P

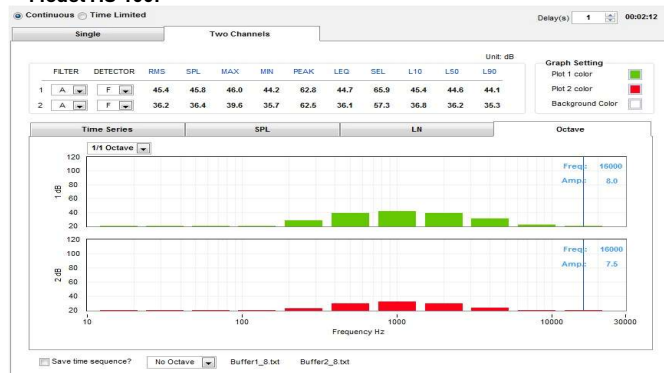


Model HS-125P

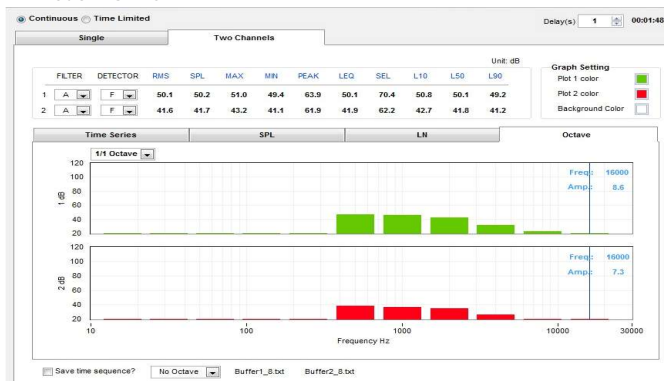


Model HS-150P

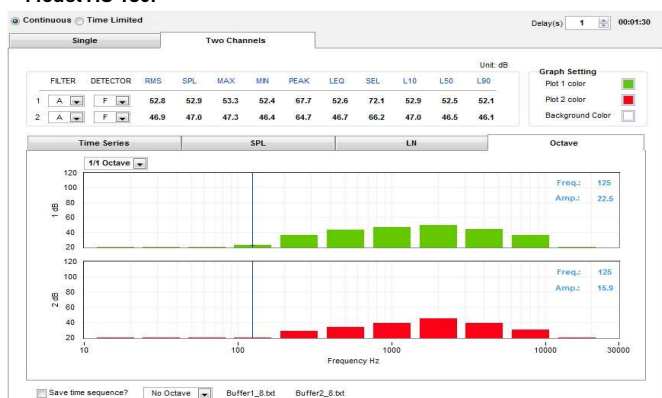

Model HS-200P

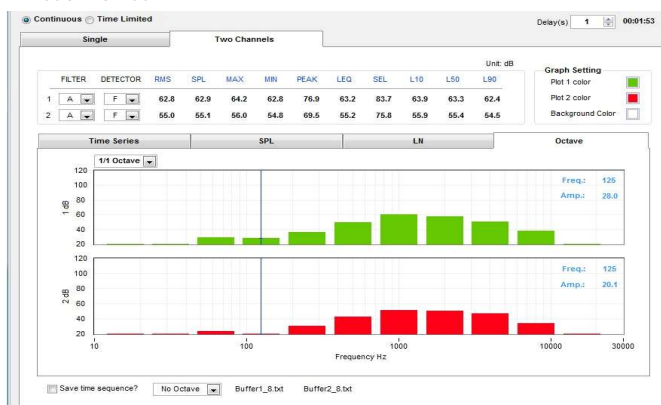


Model HS-250P

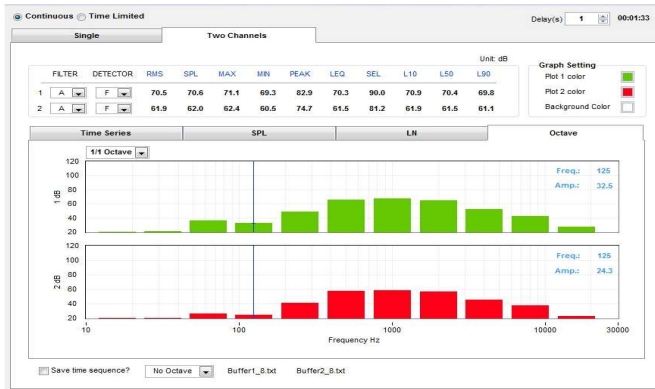

Measurement	63	125	250	500	1000	2000	4000	8000	LwA
Inlet (Ch1)	0	6	14	30	45	48	40	18	60
Outlet (Ch2)	0	3	10	28	38	40	32	12	50


Model HS-315P

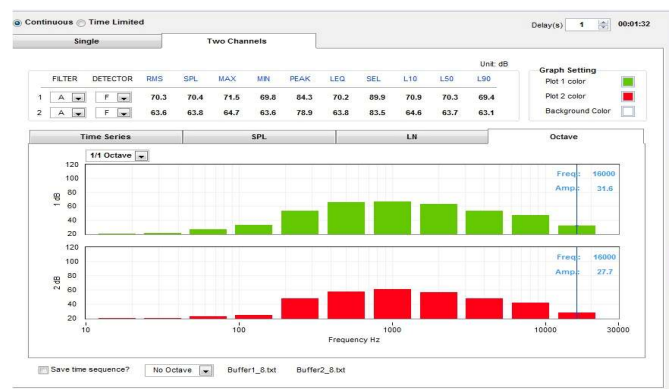


Measurement	63	125	250	500	1000	2000	4000	8000	LwA
Inlet (Ch1)	0	8	20	40	55	58	48	20	65
Outlet (Ch2)	0	5	15	32	45	48	38	12	55

WIRING INSTRUCTION


Wiring diagram

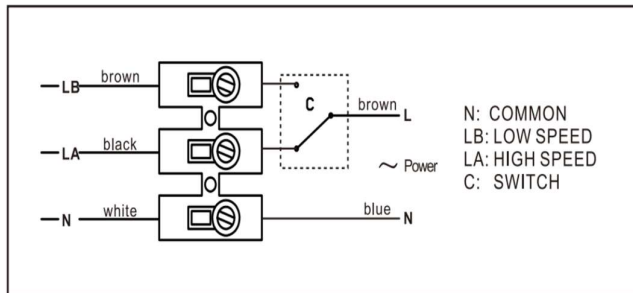

Wiring with REB speed control

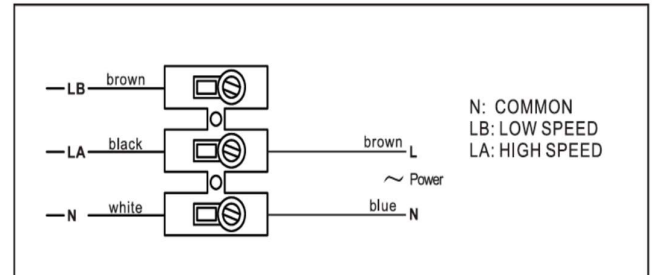

Switch control

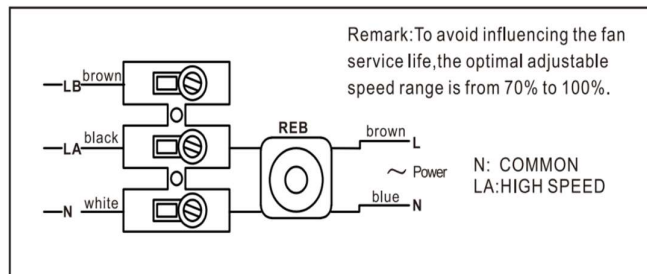

Remark: To avoid influencing the fan service life, the optimal adjustable speed range is from 70% to 100%.

Dismounting diagram

Apply to 100/125mm
Remove clamping buckle



Apply to 100/125mm Fit
clamping buckle



Apply to 150/200/250/315mm
remove clamp



Apply to 150/200/250/315mm
Fit clamp



The specially engineered mounting bracket permits the complete motor-impeller cartridge to be inserted or withdrawn as a single unit, eliminating the requirement for ductwork disassembly.

Easy to mount

Fix the support



Connect the ducts



Place the motor body



Carry the connections out



The compact, low-profile design of the range provides an optimal solution for installations where space is limited, such as confined ceiling areas.