PVsyst V8.1.8

PVsyst - Simulation report

Grid-Connected System

Project: soalr_trial

Variant: New simulation variant

Sheds on a building

System power: 78.3 kWp

SOLAR_TRIAL - India

Author

PVsyst TRIAL

PVsyst V8.1.8
VC0, Simulation date:
06/11/26 01:51
with V8.1.8

Project summary

Geographical Site
SOLAR_TRIAL
India

Situation

Latitude	22.4433 °(N)
Longitude	88.3736 °(E)
Altitude	20 m
Time zone	UTC+5.5

Project settings
Albedo 0.20

Weather data
SOLAR_TRIAL
Meteonorm 9.0 dll, Sat=100% - Synthetic

System summary

Grid-Connected System
Sheds on a building

Orientation #1
Fixed plane
Tilt/Azimuth 21 / -4 °

Near Shadings
According to strings : Fast (table)
Electrical effect 100 %

User's needs
Unlimited load (grid)

System information

PV Array

Nb. of modules	135 units
Pnom total	78.3 kWp

Inverters

Nb. of units	0.9 unit
Total power	72 kWac
Pnom ratio	1.09

Results summary

Simulation step Hourly

Produced Energy	111924 kWh/year	Specific production	1429 kWh/kWp/year	Perf. Ratio PR	79.94 %

Table of contents

Project and results summary 2
General parameters, PV Array Characteristics, System losses 3
Near shading definition - Iso-shadings diagram 4
Main results 5
Loss diagram 6
Predef. graphs 7

PVsyst TRIAL

PVsyst V8.1.8
VC0, Simulation date:
06/11/26 01:51
with V8.1.8

General parameters

Grid-Connected System

Sheds on a building

Simulation step
Hourly

Orientation #1

Fixed plane
Tilt/Azimuth 21 / -4 °

Sheds configuration
Nb. of sheds 9 units
Identical arrays
Shading limit angle
Limit profile angle 31.3 °

Sizes
Sheds spacing 3.50 m
Sensitive width 2.28 m
GCR Shading 65.7 %
Top inactive band 0.02 m
Bottom inactive band 0.02 m

Models used
Transposition Perez
Diffuse Perez, Meteonorm
Circumsolar separate

Horizon
Free Horizon

Near Shadings
According to strings : Fast (table)
Electrical effect 100 %

User's needs
Unlimited load (grid)

PV Array Characteristics

PV module
Manufacturer Generic
Model HYPERSOL VSMDH.72.AAA.05
(Custom parameters definition)
HYPERSOL VSMDH.72.AAA.05.PAN
Unit Nom. Power 580 Wp
Number of PV modules 135 units
Nominal (STC) 78.3 kWp
Modules 9 units x 15 In series
At operating cond. (50°C)
Pmpp 72.9 kWp
U mpp 594 V
I mpp 123 A

Inverter
Manufacturer Generic
Model SH80CX
(Original PVsyst database)
Unit Nom. Power 80.0 kWac
Number of inverters 9 * MPPT 10% 0.9 unit
Total power 72.0 kWac
Operating voltage 180-1000 V
Max. power (=>30°C) 88.0 kWac
Pnom ratio (DC:AC) 1.09
No power sharing between MPPTs

Total PV power
Nominal (STC) 78 kWp
Total 135 modules
Module area 349 m²
Cell area 322 m²

Total inverter power
Total power 72 kWac
Nb. of inverters 1 unit
0.1 unused
Pnom ratio 1.09

Array losses

Thermal Loss factor
Module temperature according to irradiance
Uc (const) 20.0 W/m²K
Uv (wind) 0.0 W/m²K/m/s

DC wiring losses
Global array res. 79 mΩ
Loss Fraction 1.50 % at STC

Module Quality Loss
Loss Fraction -0.75 %


Module mismatch losses
Loss Fraction 2.00 % at MPP

IAM loss factor
Incidence effect (IAM): Fresnel smooth glass, n = 1.526

0°	30°	50°	60°	70°	75°	80°	85°	90°
1.000	0.998	0.981	0.948	0.862	0.776	0.636	0.402	0.000

Near shadings parameter


Perspective of the PV-field and surrounding shading scene

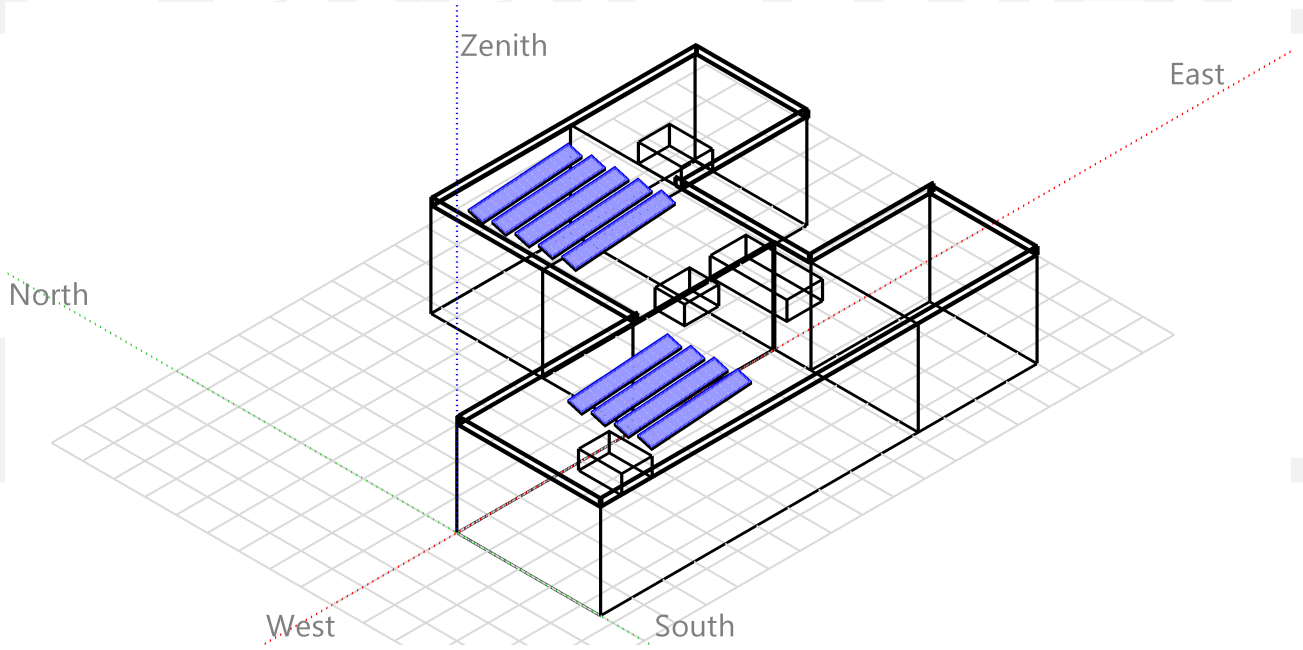

Iso-shadings diagram

Orientation #1 - Fixed plane, Tilts/azimuths: 21° / -4°

Beam shading factor (according to strings) : Iso-shadings curves

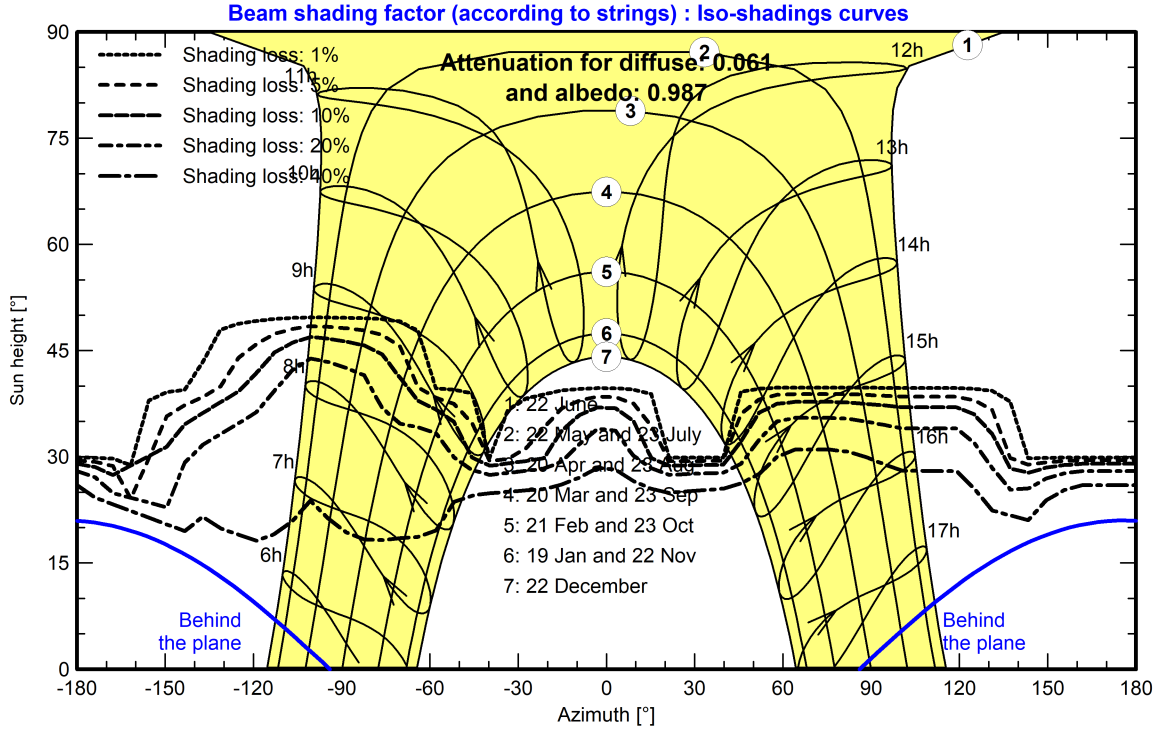

PVsyst V8.1.8
VC0, Simulation date:
06/11/26 01:51
with V8.1.8


Main results

Simulation step
Hourly


System Production

Produced Energy	111924 kWh/year	Specific production	1429 kWh/kWp/year
		Perf. Ratio PR	79.94 %

Normalized productions (per installed kWp)

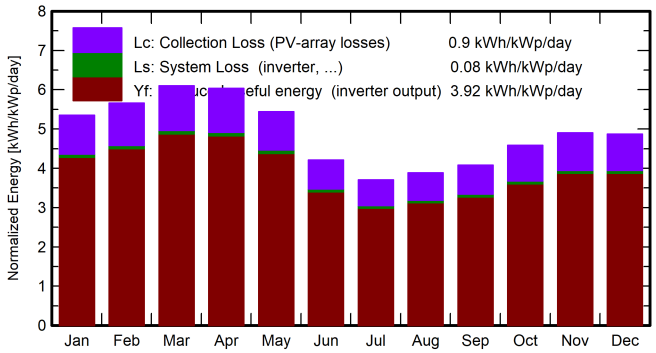

Performance Ratio PR

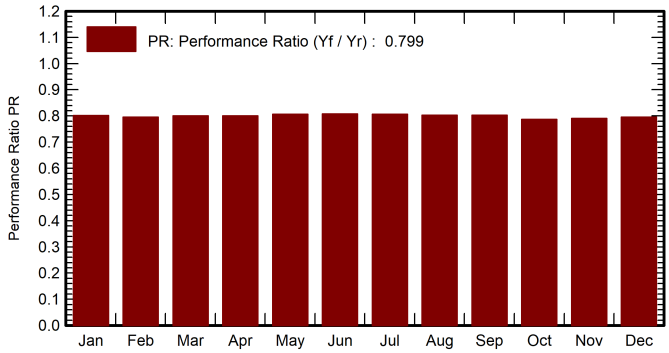

Balances and main results

	GlobHor kWh/m²	DiffHor kWh/m²	T_Amb °C	GlobInc kWh/m²	GlobEff kWh/m²	EArray kWh	E_Grid kWh	PR ratio
January	131.4	51.59	17.47	165.9	157.7	10606	10407	0.801
February	134.9	56.01	22.13	158.5	151.2	10062	9869	0.795
March	174.1	78.94	27.26	189.0	180.5	12067	11841	0.800
April	180.2	88.51	30.41	181.0	172.5	11561	11340	0.800
May	178.3	95.52	31.20	168.7	160.1	10855	10647	0.806
June	136.3	89.20	30.80	126.4	118.5	8165	7996	0.808
July	122.8	82.90	29.63	115.0	107.2	7424	7261	0.807
August	123.7	79.14	29.26	120.6	113.1	7752	7585	0.803
September	119.2	77.61	28.60	122.4	114.7	7866	7696	0.803
October	127.2	64.00	27.20	142.3	134.6	8948	8769	0.787
November	120.4	56.32	23.50	147.2	139.0	9287	9110	0.790
December	118.6	51.34	18.77	151.1	142.6	9587	9403	0.795
Year	1667.3	871.08	26.37	1788.2	1691.6	114183	111924	0.799


Legends

GlobHor	Global horizontal irradiation
DiffHor	Horizontal diffuse irradiation
T_Amb	Ambient Temperature
GlobInc	Global incident in coll. plane
GlobEff	Effective Global, corr. for IAM and shadings
EArray	Effective energy at the output of the array
E_Grid	Energy injected into grid
PR	Performance Ratio

PVsyst TRIAL

PVsyst V8.1.8
VC0, Simulation date:
06/11/26 01:51
with V8.1.8


Loss diagram

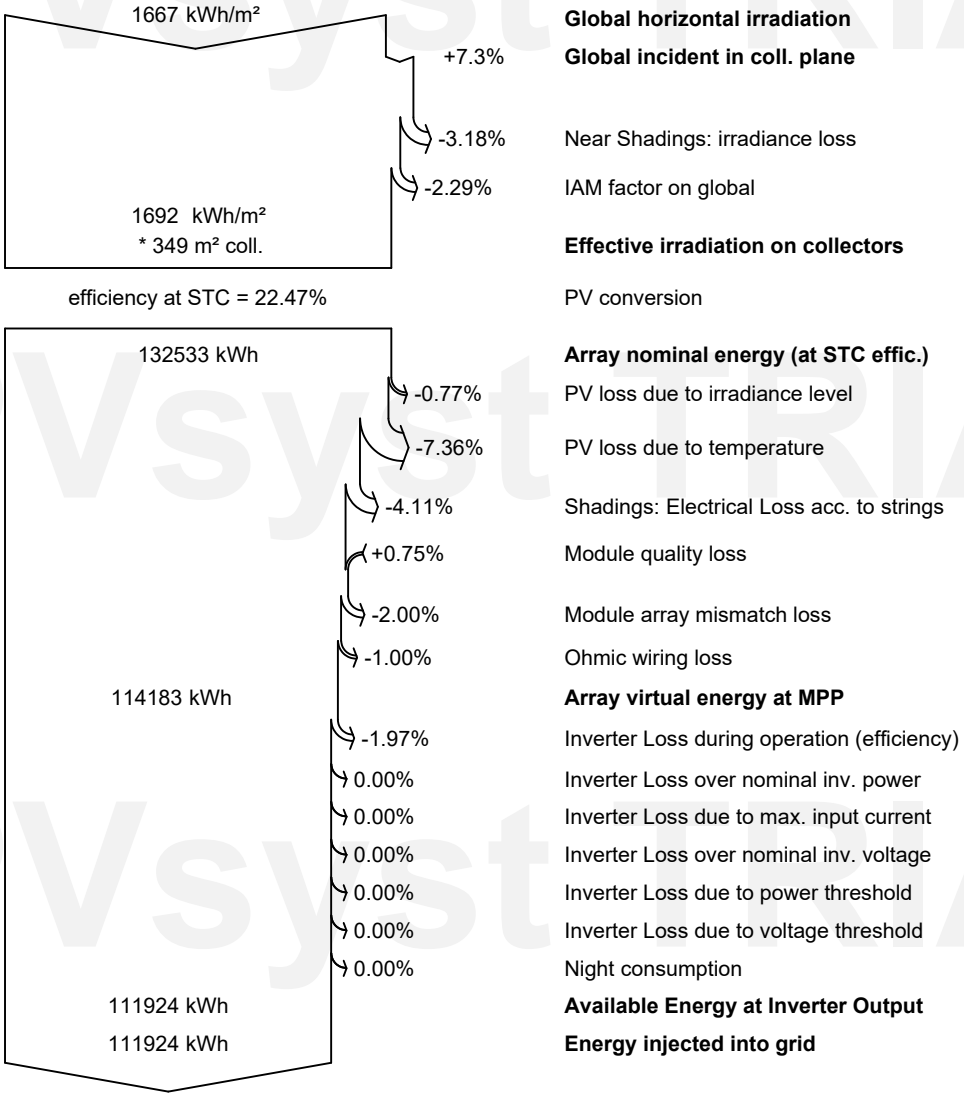

PVsyst TRIAL

Predef. graphs

Daily Input/Output diagram

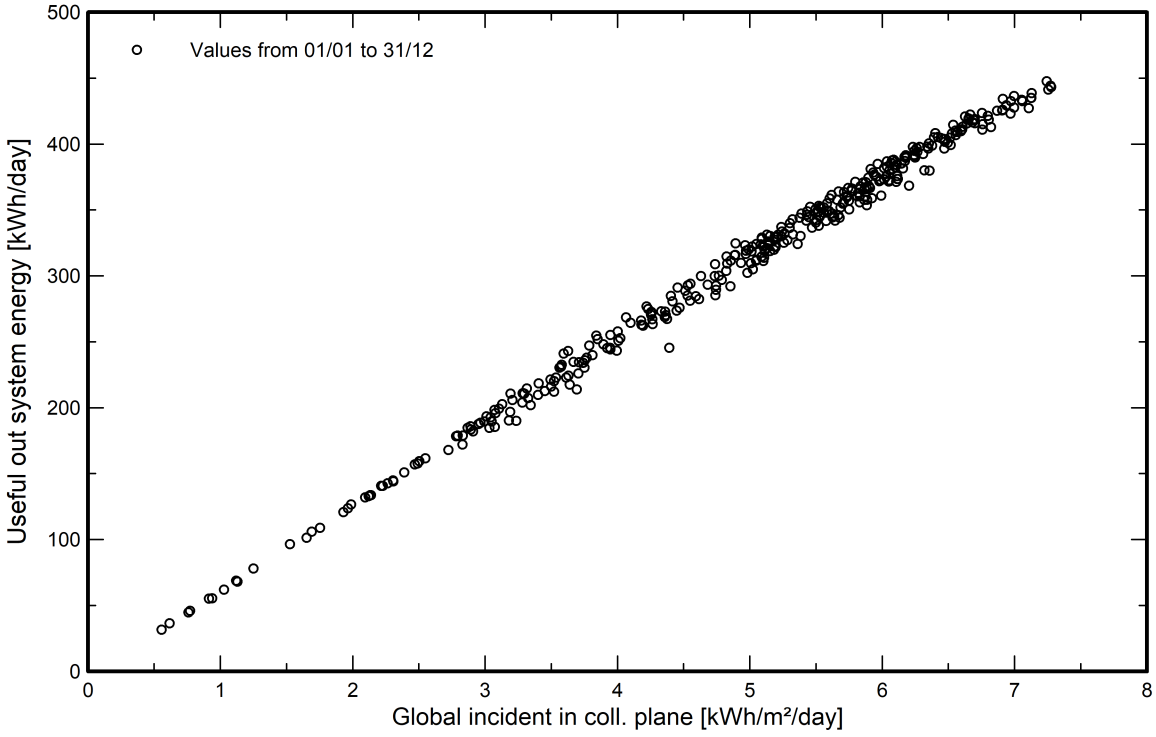

System Output Power Distribution

