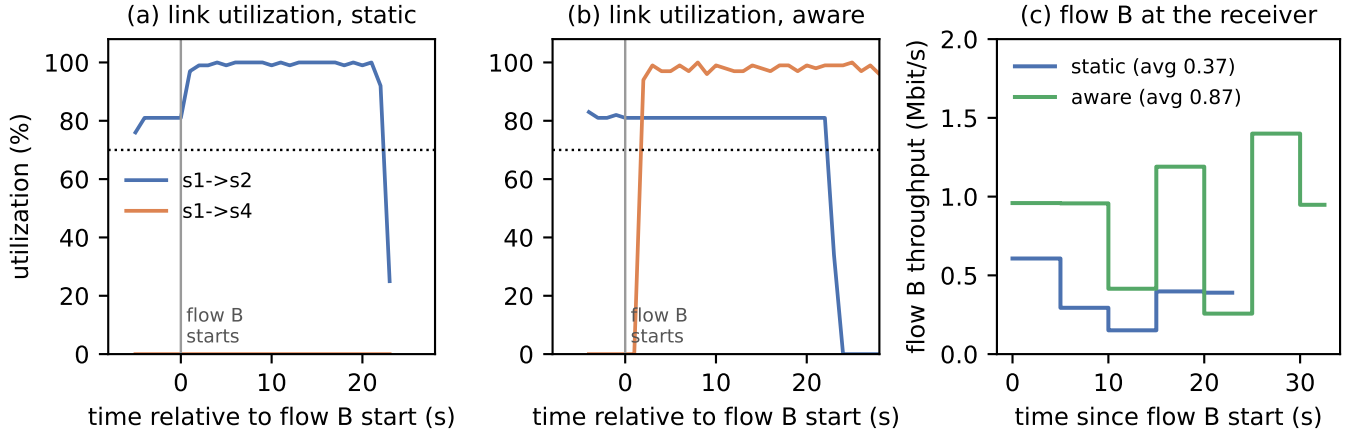
(a) link utilization, static
utilization (%)
100
80
60
40
20
0
s1->s2
s1->s4
flow B
starts
0
10
20
time relative to flow B start (s)
(b) link utilization, aware
100
80
60
40
20
0
flow B
starts
0
10
20
time relative to flow B start (s)
(c) flow B at the receiver
flow B throughput (Mbit/s)
2.0
1.5
1.0
0.5
0.0
static (avg 0.37)
aware (avg 0.87)
0
10
20
30
time since flow B start (s)