


AN MI TOOLS



AN MI TOOLS
PROFILE

DỤNG CỤ **CHO MÁY CẤP PHÔI TỰ ĐỘNG** AUTOMATIC BLADES FEEDING MACHINE



Hà Nội: P.409, Cầu thang 5, CT4-ĐN3 ,
Khu DT mới Mỹ Đình-Mễ Trì, Phường
Mỹ Đình 1, Quận Nam Từ Liêm, Hà
Nội.

Hải Phòng: P2825 Hoàng Huy Grand
Tower, số 2A Sở Dầu, Phường Sở Dầu,
Quận Hồng Bàng, Hải Phòng

Đà Nẵng: 85 Hoàng Văn Thái, Quận Liên
Chiểu, Đà Nẵng

Vĩnh Phúc: 68 Ngõ 17 Tôn Đức Thắng,
Phường Khai Quang, TP Vĩnh Yên, Vĩnh
Phúc

Bắc Ninh: 76 Nguyễn Đăng, Phường Suối
Hoa, TP Bắc Ninh, Bắc Ninh

Nhà máy Hưng Yên: Lô đất L3, KCN Dệt
may Phố Nối B, Xã Dị Sử, Huyện Mỹ Hào,
Hưng Yên

Xưởng Hồ Chí Minh: 75 Đỗ Xuân Hợp,
Phường Phước Long B, TP Thủ Đức, Hồ
Chí Minh



AN MI TOOLS

Công ty TNHH Dụng cụ An Mi được thành lập vào năm 2009. Cho đến nay, chúng tôi tự hào là một trong những đơn vị hàng đầu Việt Nam trong lĩnh vực mài chính xác, chế tạo dụng cụ cắt, chế tạo chi tiết cơ khí chính xác và dịch vụ tráng phủ kim loại PVD



Trụ sở chính – văn phòng Hà Nội




Xưởng chi nhánh Hồ Chí Minh



Nhà máy Hưng Yên




- VP chi nhánh Bắc Ninh
- VP chi nhánh Hải Phòng
- VP chi nhánh Vĩnh Phúc
- VP chi nhánh Đà Nẵng

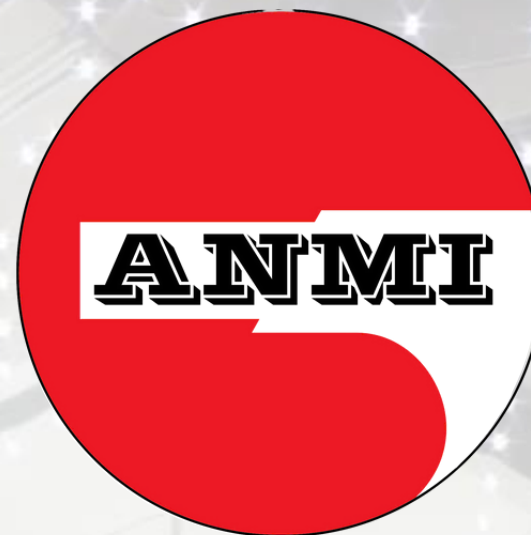


An Mi chuyên nghiên cứu, phát triển, sản xuất và kinh doanh dụng cụ cắt chính xác, thiết bị công nghiệp....

Với kinh nghiệm phong phú qua hàng thập kỷ và tích lũy công nghệ tiên tiến, chúng tôi có thể cung cấp cho khách hàng loạt giải pháp tổng thể trong lĩnh vực gia công cắt gọt trên dòng máy

**TIỆN CẤP PHÔI TỰ ĐỘNG
– SWISS TYPE MACHINE,
STAR, CITIZEN, TORNOS,
ISUGAMI, MIYANO,
NOMURA, MORI-SEIKI**

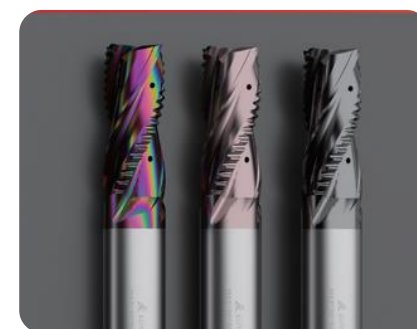

PHẦN I: GIẢI PHÁP DỤNG CỤ CHO MÁY TIỆN CẤP PHÔI TỰ ĐỘNG & MÁY TIỆN CỖ NHỎ

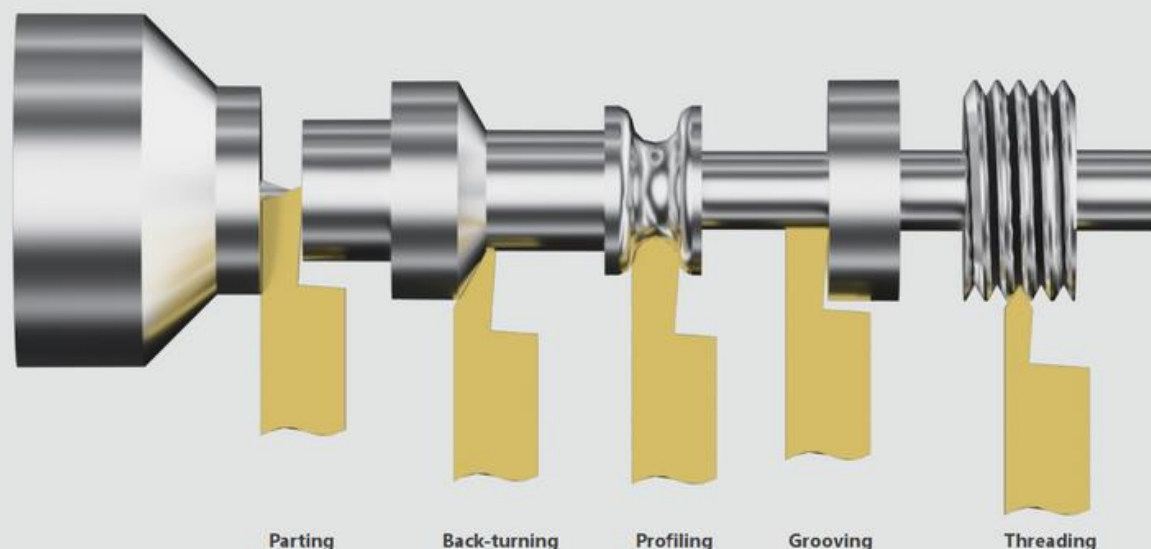

QCMT - Quick Change Modular Tool Holder Đầu dao modul thay nhanh

ƯU ĐIỂM:

- Thay dao dễ dàng, nhanh chóng
- Định vị chính xác, kẹp chặt cứng vững

Y-axis – Kết cấu cho tiện chi tiết nhỏ Đầu dao modul thay nhanh





ƯU ĐIỂM:

Cải thiện chất lượng bề mặt do phoi thoát xuống dưới, không tiếp xúc trở lại vùng gia công.

Đa dạng thiết kế hình học bề phoi

Chuyên sâu cho từng ứng dụng cụ thể:

- Hình học bề phoi CF: Không gian mặt trước lớn, lưỡi cắt sắc, lực cắt nhỏ, ứng dụng tốt vật liệu phoi mềm với chiều sâu cắt lớn
- Hình học bề phoi SF: Ứng dụng gia công trung bình đến bán tinh / mảnh được phủ PVD lớp với phủ Nano

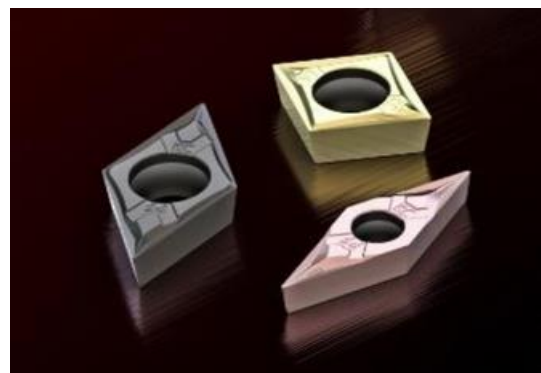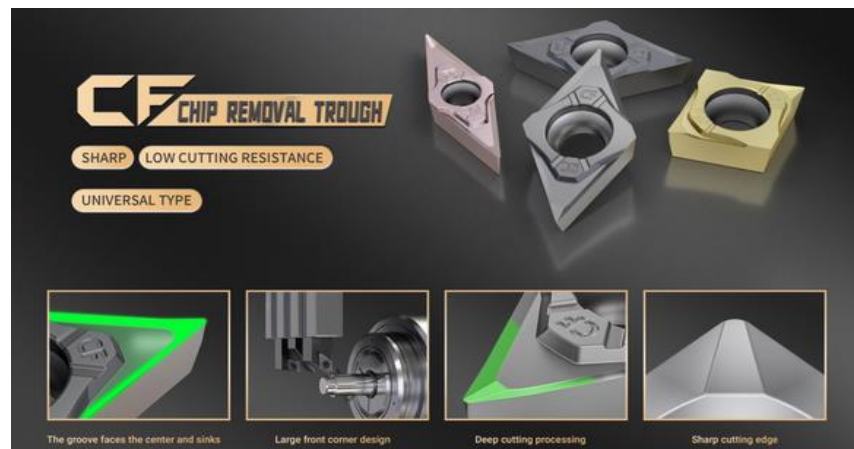


KDC - Gấp 2 số lưỡi cắt

Giải pháp kinh tế "MÀNH ÂM GÓC SAU DƯƠNG"

ƯU ĐIỂM:

- Tiết diện kẹp lớn với góc nghiêng giúp tăng khả năng kẹp
- Đột phá với thiết kế mảnh âm có "góc sau dương"
- Lực cắt nhỏ với thiết kế rãnh thoát bề phoi lớn

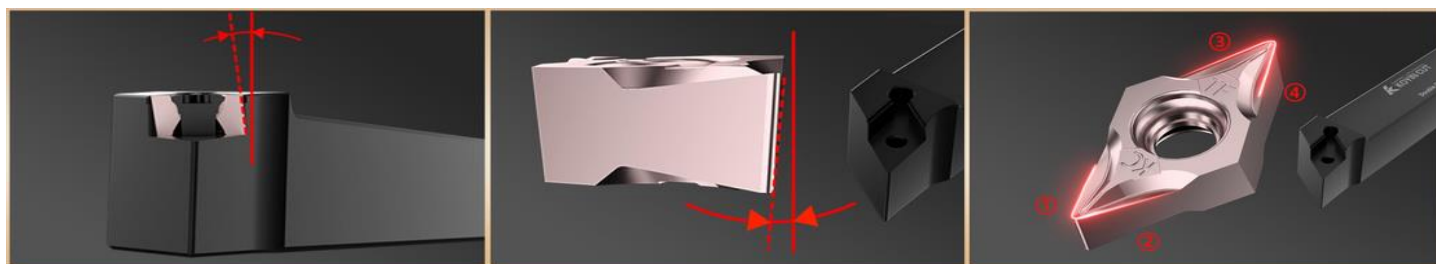

KX- PRECISION SMALL PARTS

Giải pháp cho chi tiết nhỏ

ĐẶC ĐIỂM:

- Mặt lắp ghép 3D cứng vững.
- Lắp lẫn các mảnh cắt khác nhau.
- Lực cắt nhỏ với thiết kế lưỡi cắt sắc.





SPECIAL INSERTS – Multil profile cutting

Mảnh dao đặc biệt năng suất cao

ĐẶC ĐIỂM:

- Gia công chính xác theo biên dạng
- Cải thiện năng suất

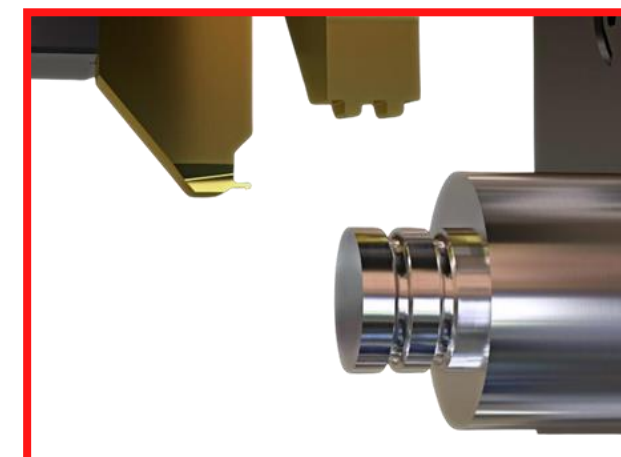


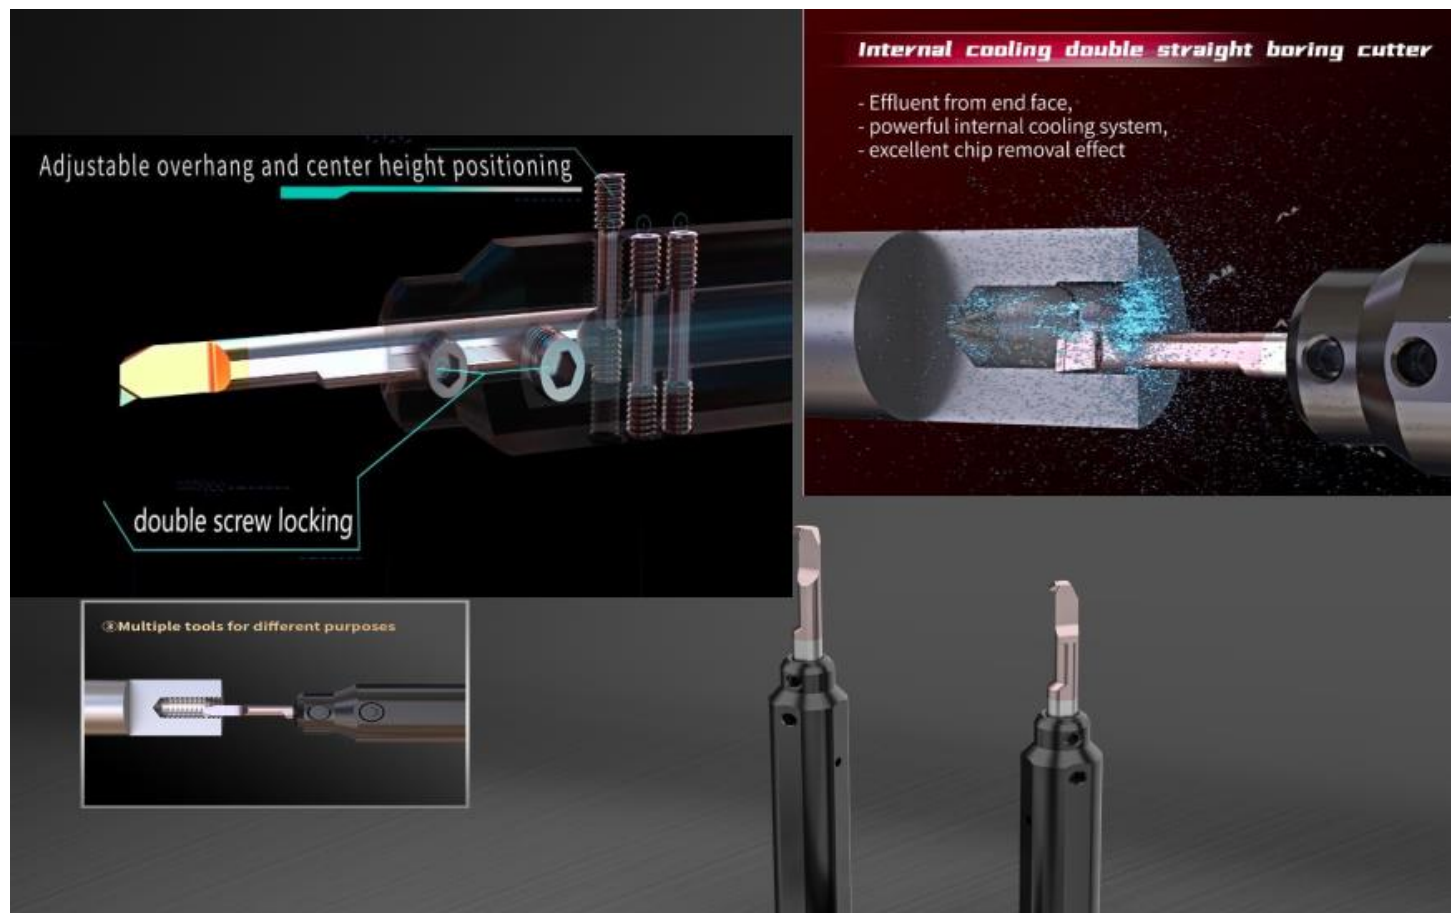

SBT – Small bore tools Dao boring 1 hoặc 2 đầu

ĐẶC ĐIỂM:

- Cữ chặn cán dao giúp định vị nhanh, cứng vững hơn với 2 vít kẹp
- Đa dạng ứng dụng gia công

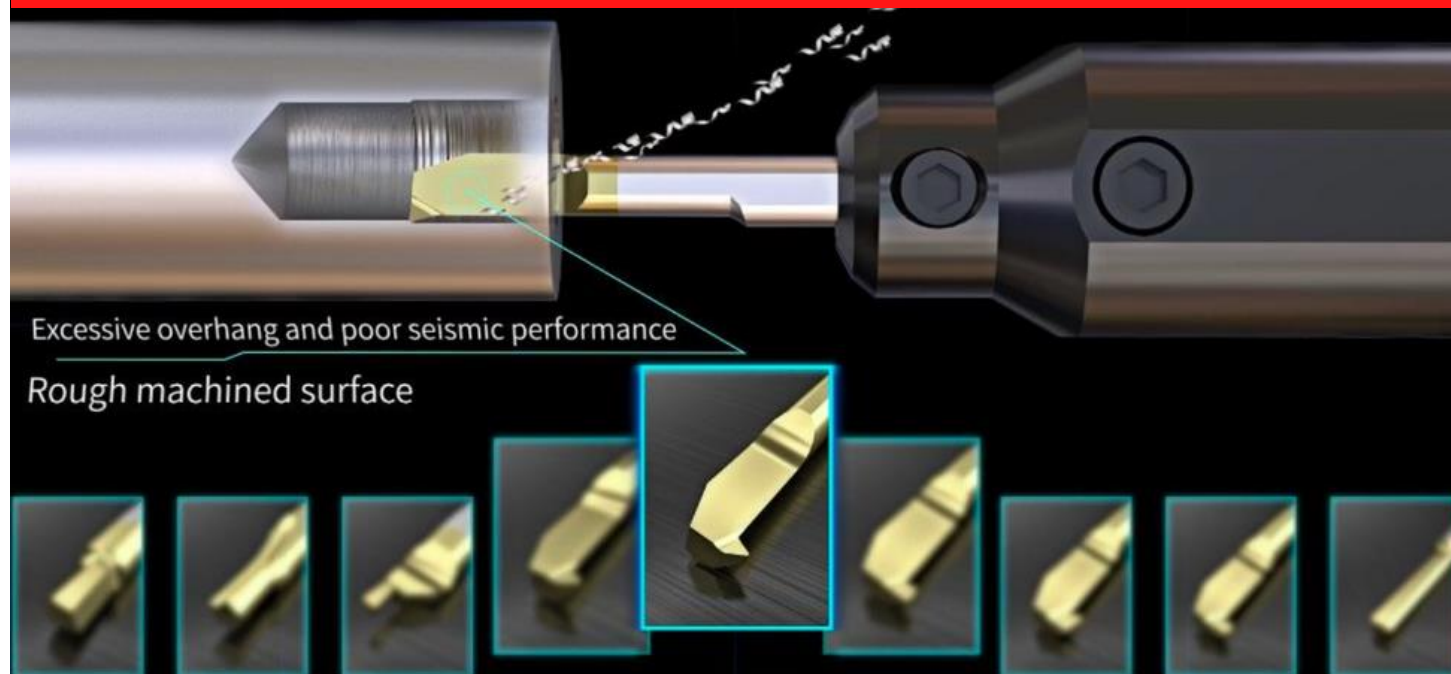

SLOTTING INSERTS – SLOT Profile Cutting Mảnh cà rãnh lắp mảnh & nguyên khối

ĐẶC ĐIỂM:

- Gia công chính xác theo biên dạng
- Cải thiện năng suất




HIGH PERFORMANCE ENDMILL – UNIVERSAL APPLICATION

Dao phay vạn năng – năng suất chính xác

ĐẶC ĐIỂM:

- Ứng dụng cắt đa vật liệu
- Cải thiện năng suất thông qua việc dùng 1 dao thay cho nhiều dao

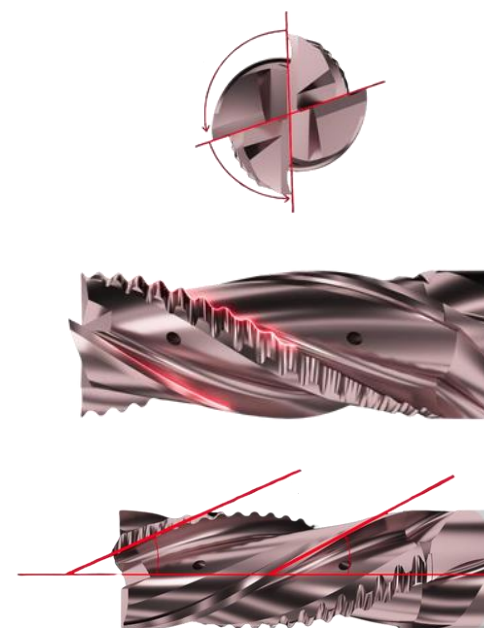


NEWER MODULAR COLLET

Kẹp khỏe chống rung

ĐẶC ĐIỂM:

- Kẹp khỏe & ổn định nhờ vùng tiếp xúc lớn
- Sử dụng cùng với bộ dụng cụ modul cho từng ứng dụng. Tăng hiệu suất nhờ kết nối hoàn hảo.

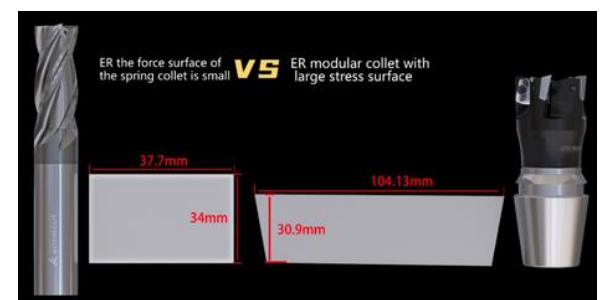

PHẦN II: LINH KIỆN & PHỤ KIỆN


Đầy đủ các loại chấu
kẹp và nhiều sản
phẩm kẹp cũng như
phụ kiện máy




Collets,
Guide Bushes,
Finger Chuck

Special collets:
Hexagon,
Extended Nose,
External Diameter
Clamping,
Diaphragm laws

Drill & Tap Holders,
ER collets, Toggles, Sleeve

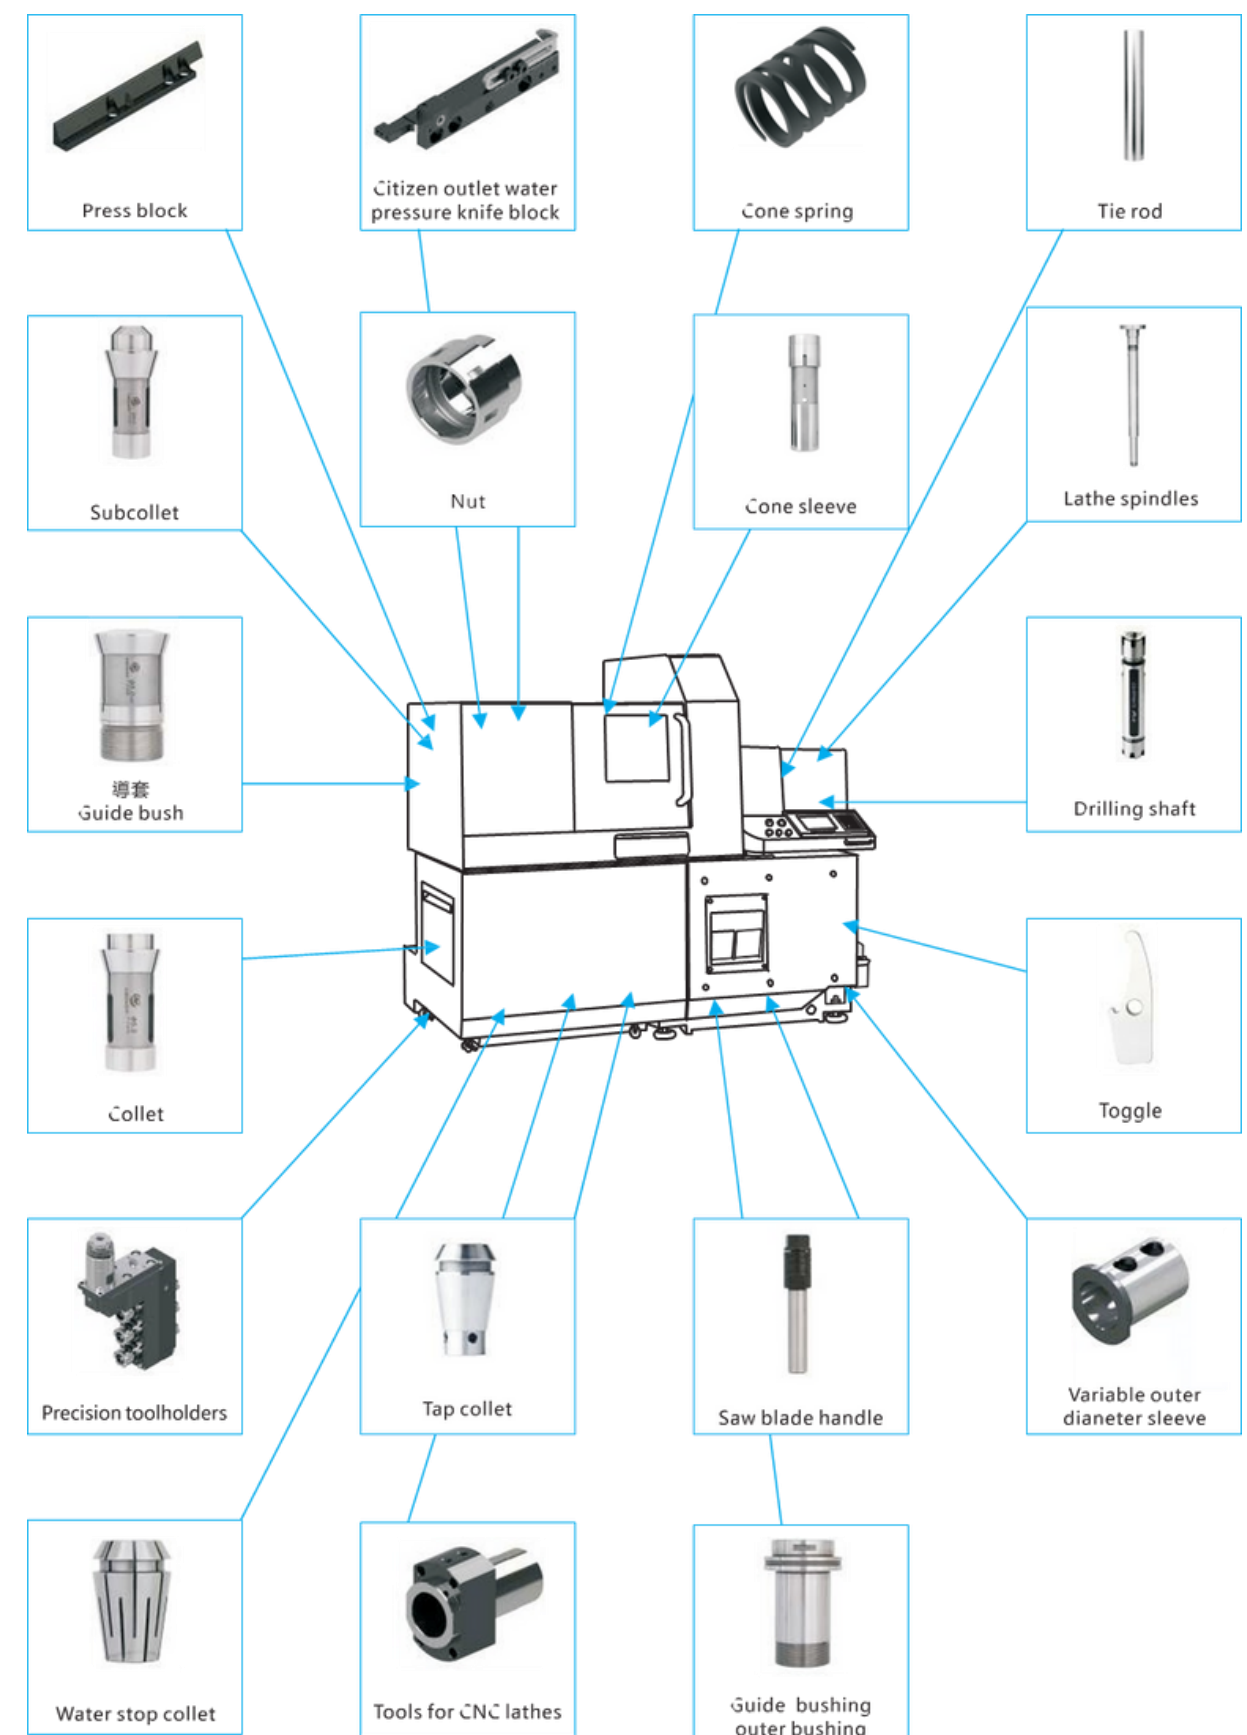


FRONT SIDE MILLING STRAIGHT SHANK ROTARY TOOL HOLDER

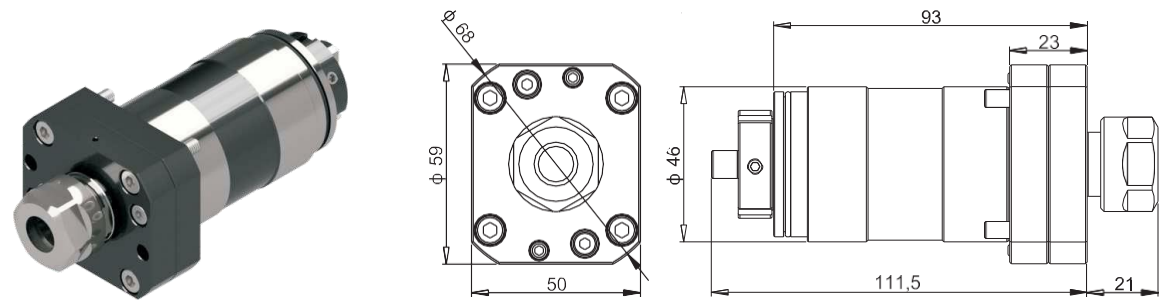


Model	TSUGAMI Number	Speed Ratio	Max rpm	Shank	Aperture	Use Collet
3268-T051	3268-T051	1:1	6000rpm	46	10.0	ER16

BACK STRAIGHT SHANK ROTARY TOOL HOOLDER

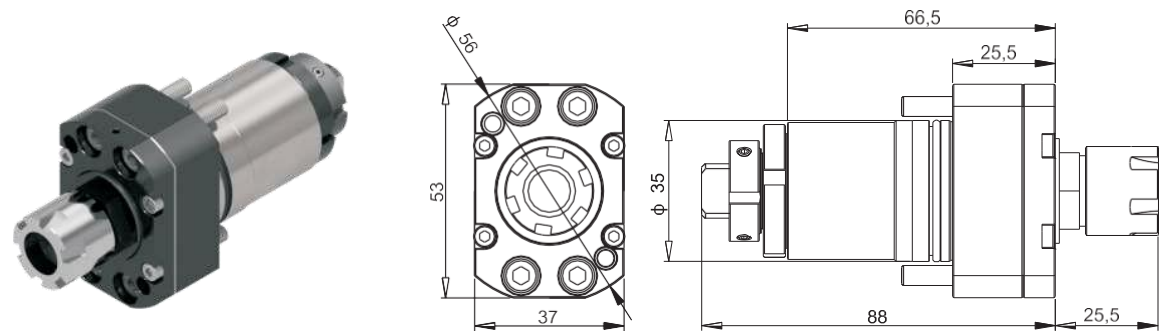


Model	TSUGAMI Number	Speed Ratio	Max rpm	Shank	Aperture	Use Collet
3281-S080	3281-S080	1:1	8000rpm	35	10.0	ER16

BACK STRAIGHT SHANK ROTARY TOOL HOOLDER

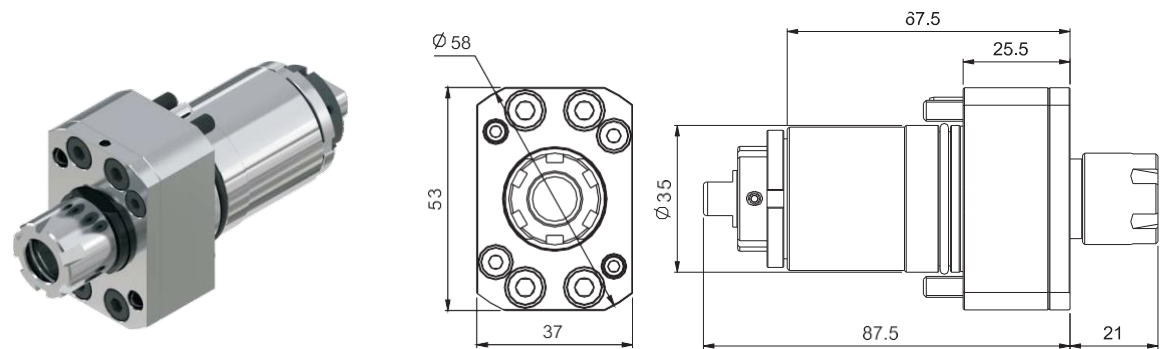


Model	TSUGAMI Number	Speed Ratio	Max rpm	Shank	Aperture	Use Collet
3281-Z79098	3281-Z79098	1:1	8000rpm	35	10.0	ER16

REDUCER SLEEVE (CENTER OUTLET)

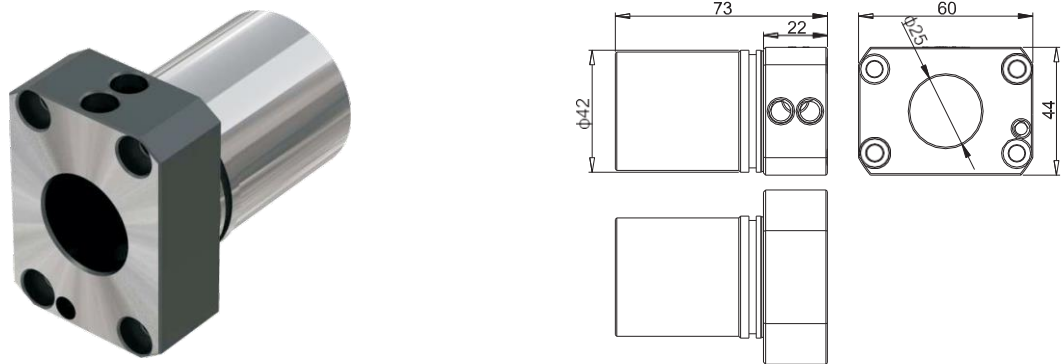


Model	TSUGAMI Number	Speed Ratio	Max rpm	Shank	Aperture	Use Collet
3282-Y212	3282-Y212	/	/	42	25.0	/

BACK DRILLING SEAT

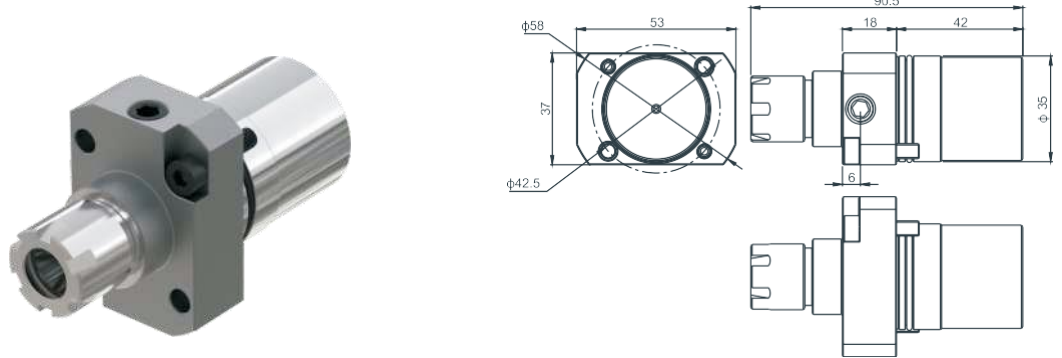


Model	TSUGAMI Number	Speed Ratio	Max rpm	Shank	Aperture	Use Collet
3282-Z71051-9010	3282-Z71051-9010	/	/	35	10.0	ER16

REDUCING SLEEVE

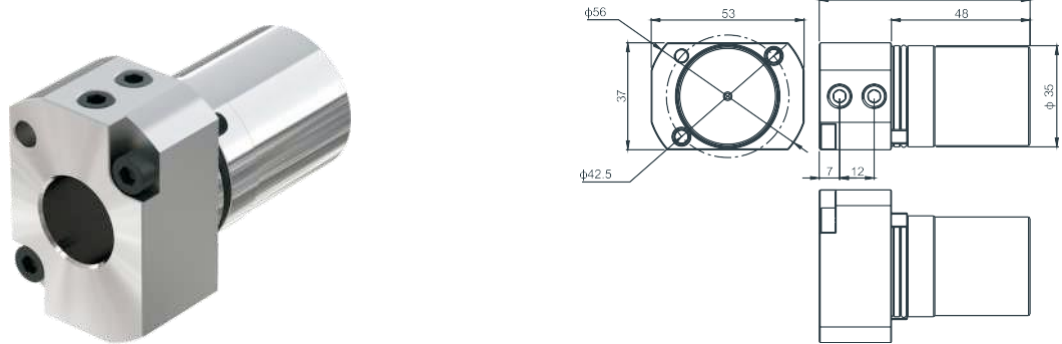

Model	TSUGAMI Number	Speed Ratio	Max rpm	Shank	Aperture	Use Collet
3281-Z79055-0302	3281-Z79055-0302	/	/	35	20.0	/


HEADSTOCK COLLETS FOR LATHES

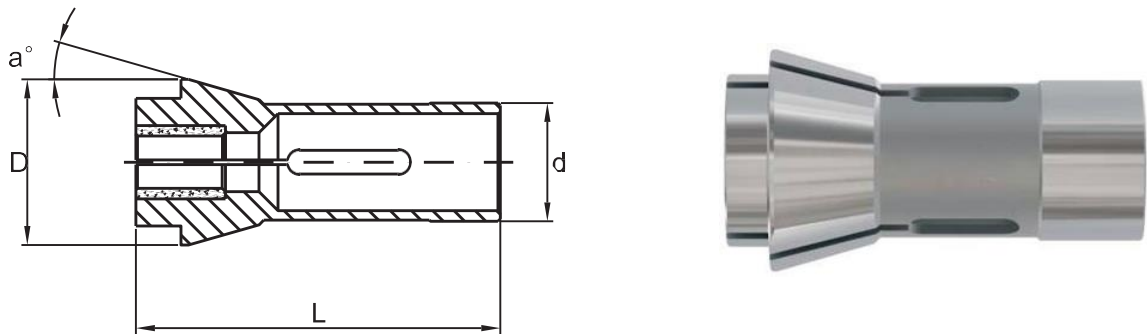

Machines	Type	Item No	d	L	D	Article No			
CITIZEN	R04	3204	ø 8.0	36	ø 11.5				
	R07,D/F/G/L-10	3910	ø 15.0	64	ø 21.0	F15/580	120E	TF15	40.003
	B12,F12	3212	ø 16.0	64	ø 21.0				
	D/E/F/L/M-16,E/F/L/M-20	3720	ø 25.0	77	ø 35.0	D25/64	145E	TF25	
	L16/20,F16/20,M16,G20,E20	3216	ø 26.0	67	ø 36.0				511.001
	F25,L25,E25,E25J	3225	ø 30.0	78	ø 42.0				
STAR	L32,M32,E32,G32	3232	ø 37.0	92	ø 47.0				
	SW7,SW10,JNC10,RNC10,SNC10	3910	ø 15.0	64	ø 21.0	F15/580	120E	TF15	40.003
	SE12,S13,VNC12,SJ15	3512	ø 18.0	64	ø 25.0				
	SB16	3616	ø 20.0	67	ø 26.0				
	RNC16,SE16,SR16,SH16	3516	ø 20.0	67	ø 28.0	F20/87	138E	TF20	40.004
	JNC16, VNC20	3520	ø 24.0	65.5	ø 32.0				
	KNC16/20,SR20,VNC20	3720	ø 25.0	77	ø 35.0				
	JNC16, ZNC16,VNC20	3216	ø 26.0	67	ø 36.0				
TSUGAMI	KJR25,SCN25	3725	ø 30.0	80	ø 42.0	F30/63	157E	TF30	40.006
	JNC32/25,VNC32,MR32	3932	ø 37.0	92	ø 47.0				
	T7,BOO7,BM07	3707	ø 10.0	46	ø 16.0	F10/1178	111E		140.001
	L10	3710	ø 14.0	47	ø 20.0				
	NT-11,NP-11	3910	ø 15.0	64	ø 21.0	F15/580	120E	TF15	40.003
	BO12	3616	ø 20.0	67	ø 26.0				S16-HMS
	NP-17,NP-16,NT-17	3717	ø 23.8	62	ø 28.0				S20-HM
	NP-20,BS20,BO18,BS18	3721	ø 28.0	77	ø 35.0				
	BA-26L	3726	ø 33.0	80	ø 40.0				S25-HM
	S-25,BS-26	3725	ø 30.0	80	ø 42.0				
	NP-32	3232	ø 37.0	92	ø 47.0				
	BH38	3738	ø 43.0	92	ø 53.0	F43		TF43	511.024
	BH38(SUB)	3739	ø 48.0	100	ø 54.0	F48		BS38	511.028


Live rolls for CNC lathes & Fixed knife holder	Live rolls for CNC lathes & Fixed knife holder
Headstock collets	Headstock collets
Guide bushes for lathes	Guide bushes for lathes
Toggle	Toggle
Automatic bar feeder parts	Automatic bar feeder parts
CNC Lathe parts	CNC Lathe parts
Automatic lathe parts	Automatic lathe parts
CNC Extension rod	CNC Extension rod
ER Collet/ Masterstop collet/ Tapping collet/ SK collet	ER Collet/ Masterstop collet/ Tapping collet/ SK collet
Cutting Tool G Series	Cutting Tool G Series
Cutting Tool J Series	Cutting Tool J Series

SCHAUBLIN SHARPENING MACHINE COLLET

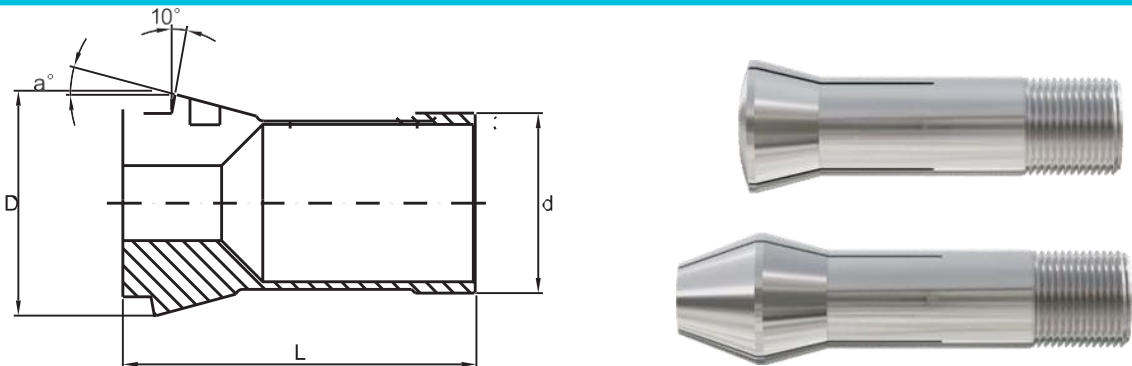

Machines	Type	Item No	d	L	D
Schaublin	B8	72-137	ø6	31.3	ø10.5
	W10	80-1	ø10	43.6	ø14
	W15	80-3	ø15.0	58.3	ø 20.2
	W20	80-4	ø20.0	73	ø 26.3
	W20	80-107	ø20.0	73	ø 26.3
	W20	80-92744	ø20.0	84.5	ø 26.3
	W25	80-5	ø25.0	97.6	ø 33.7

RUBBER COLLET

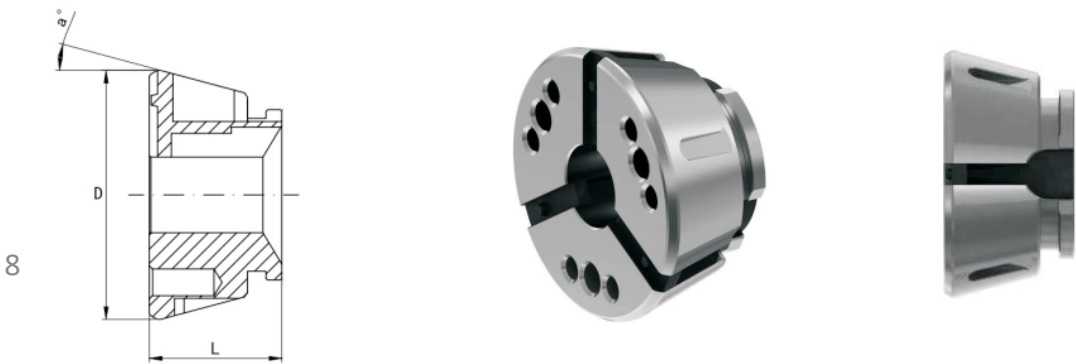

Machines	Type	L	D	a°
Rubber collet	RC32	44	57.7	12°
	RC32N	49	57.7	12°
	RC42S	42	79.3	15°
	RC42N	47	79.3	15°
	RC52S	46	79.2	15°
	RC52N	46	79.2	15°
	RC65S	53	99.5	15°
	RC65N	58	99.5	15°
	RC80S	53	114.5	15°
	RC80N	53	114.5	15°
	RC100S	59	144.5	15°
	RC100N	59	144.5	15°
	RC120S	61	180	15°
	RC120N	61	180	15°




T212XS





T212-3

Live tools for CNC lathes & Fixed knife holder	Live tools for CNC lathes & Fixed knife holder
Headstock collets	Headstock collets
Guide bushes for lathes	Guide bushes for lathes
Toggle	Toggle
Automatic bar feeder parts	Automatic bar feeder parts
CNC Lathe parts	CNC Lathe parts
Automatic lathe parts	Automatic lathe parts
CNC Extension rod	CNC Extension rod
ER Collet / Waterslop collet / Tapping collet / SK collet	ER Collet / Waterslop collet / Tapping collet / SK collet
Cutting Tool G Series	Cutting Tool G Series
Cutting Tool J Series	Cutting Tool J Series

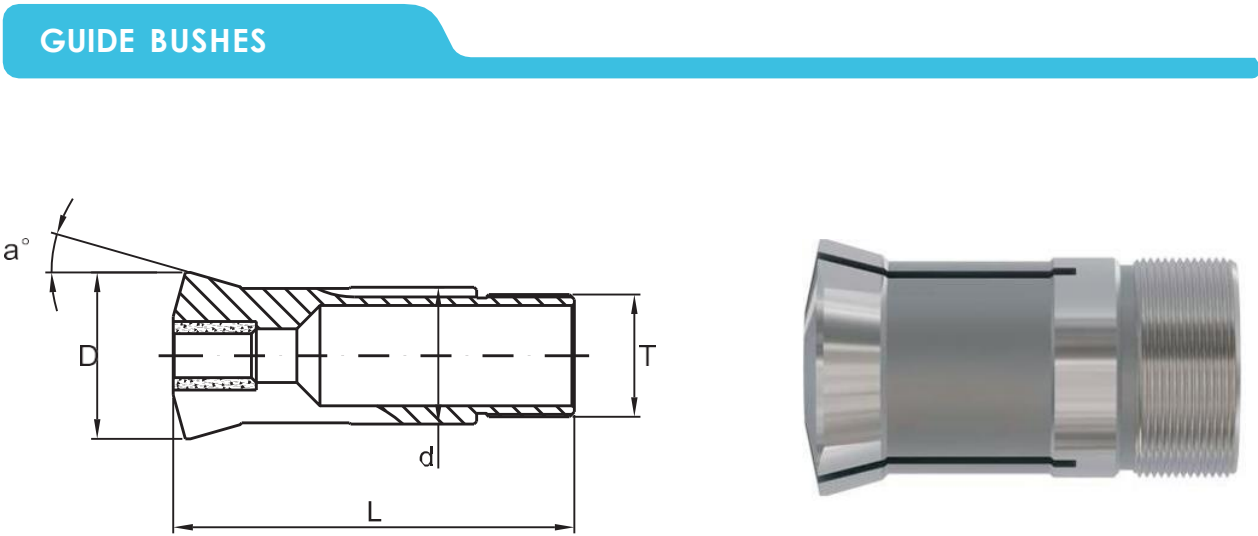


Machines	Type	Item No	d	L	D	T	Article No	
CITIZEN	R04	5204	ø 9.0	38.5	ø 12.5	M8X0.75	263.001	
	R07	5907	ø 11.0	52	ø 14.5	M10X0.75	3134E	3.001 TD-7
	D10,E10,F10,L10	5910	ø 16.0	59	ø 20.5	M14X1.0	3260E	8.001 TD10
	B12,F12,C12,A12	5212	ø 18.0	60	ø 22.0	M18X1.0	3319E	174.001 SD125R
	B20,M20,L20	5920	ø 28.0	82	ø 34.0	M25X1.0	3602E	22.001 TD25S
	L16/20,F16/F20,E20,WF6,206M	5216	ø 30.0	59	ø 35.0	M30X1.0		510.001
	F25,L25,E25,E25J	5725	ø 34.0	87.5	ø 41.0	M34X1.0	3733E	451.001 CD25
	L32,M32,G32,E32	5232	ø 42.0	82	ø 48.0	M40X1.0		28.01 TD32
	SW-7	5907	ø 11.0	52	ø 14.5	M10X0.75	3134E	3.001 TD-7
	JNC-10,RNC-10,SNC-10	5910	ø 16.0	59	ø 20.5	M14X1.0	3260E	8.001 TD10
STAR	SE12,VNC12,SJ15,SNC15	5512	ø 21.0	58	ø 24.0	M18X1.0	3438E	450.001 SNC15
	SB16,SR16	5616	ø 22.0	70.5	ø 26.0	M20X1.0		487.001 P1653D
	RNC16,SE16,SA16,VNC16,KNC16	5516	ø 22.0	68	ø 29.0	M22X1.0		
	SA-16,SR-16	5916	ø 22.0	68	ø 29.0	M22X1.0	3455E	39.001 TD20R
	SR20,KNC16,VNC20	5920	ø 28.0	82	ø 34.0	M25X1.0	3602E	22.001 TD25S
	JNC16,L16/20,ZNC16,VNC20	5216	ø 30.0	59	ø 35.0	M30X1.0		510.001
	SCN-25,KJR-25	5725	ø 34.0	87.5	ø 41.0	M34X1.0	3733E	451.001 CD25
	JNC32/25,VNC32/25,MR32,SR32	5532	ø 42.0	82	ø 49.0	M40X1.0	3827E	28.001 TD32S
	NP-4W	5907	ø 11.0	52	ø 14.5	M10X0.75	3134E	3.001 TD-7
	T7,BOO7,BM07	5707	ø 12.0	52	ø 15.8	M12X1.0	3149E	261.001
TSUGAMI	L10	5710	ø 15.0	54	ø 19.0	M14X1.0		
	NT-11,NP-11	5212	ø 18.0	60	ø 22.0	M18X1.0	3319E	174.001 SD125R
	BO12	5616	ø 22.0	70.5	ø 26.0	M20X1.0		487.001 P1653D
	NP-17,NP-16,NT-17	5717	ø 23.0	72	ø 28.0	M22X1.0		483.001 TSG20R
	NP-20,BS20,BO18,BS18	5720	ø 30.0	70	ø 36.0	M28X1.0		486.001 NN20KD
	BO20-CV	5721	ø 26.0	77	ø 29.0	M25X1.0		TD26
	BA-26	5726	ø 33.0	70	ø 38.0	M30X1.0		
	BA-26L	5724	ø 32.0	70	ø 38.0	M30X1.0		
	S-25,BS-26	5725	ø 34.0	87.5	ø 41.0	M34X1.0	3733E	451.001 CD25
	NP-32	5532	ø 42.0	82	ø 49.0	M40X1.0	3827E	28.001 TD32S
	BH38	5738	ø 48.0	81	ø 54.0	M46X1.0		

PHẦN III: CATALOGUE DỤNG CỤ

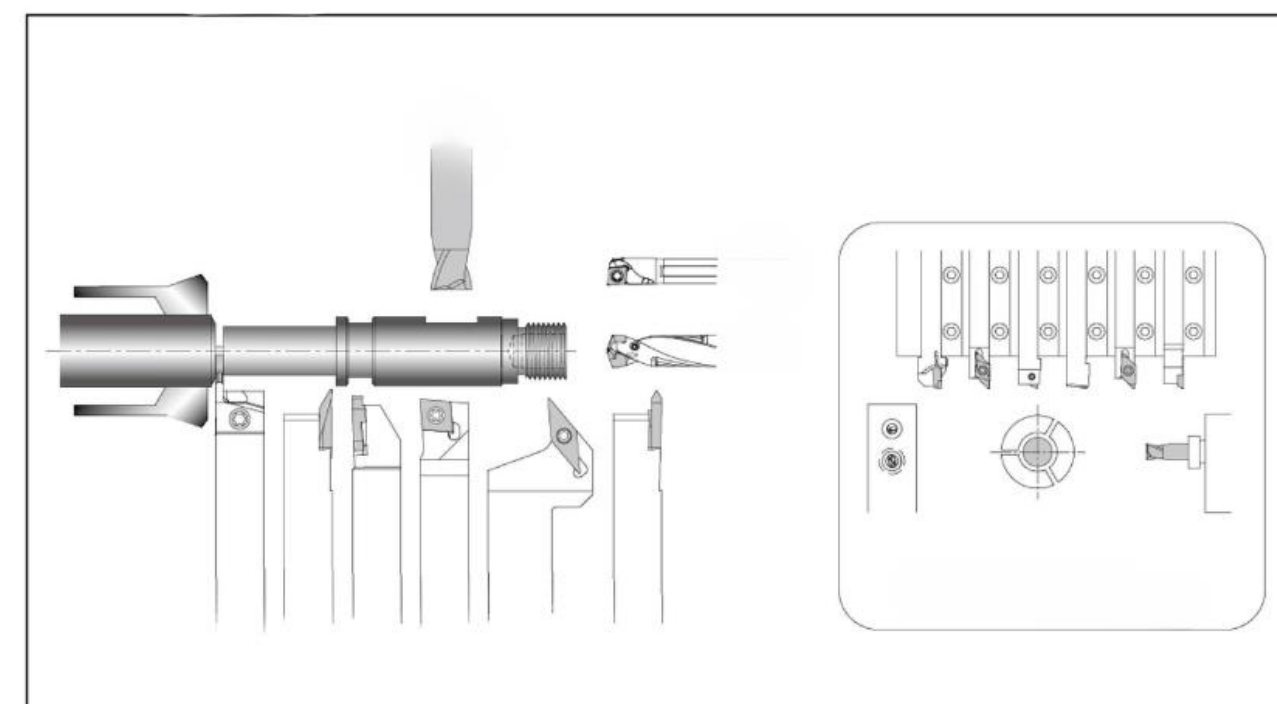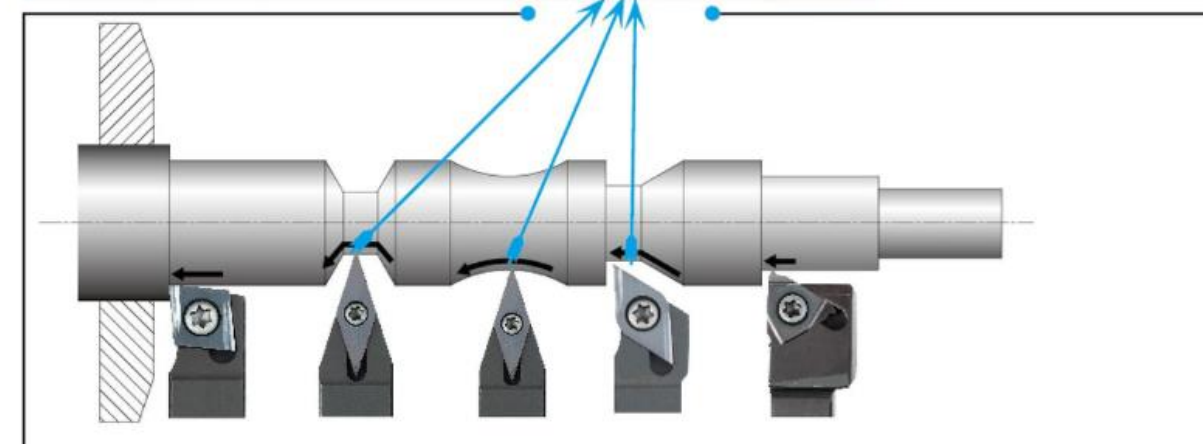

For Small Part Cutting KTKF type

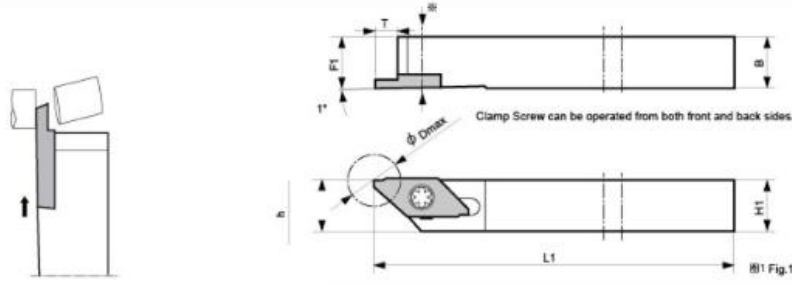

Designation	Stock		Dimensions(mm)						shape	Spare parts		Applicable Inserts
	R	L	H1=h	B	L1	L2	F1	T		screw	Wrench	
THKTKFR/L 1010JX-12	●	●	10	10	120	15	10	6	Fig.1	M4.0*9	T15	TKF12R/L ...
1212JX-12	●	●	12	12	120	-	12	6				
1616JX-12	●	●	16	16	120	-	16	6				
2020JX-12	●	●	20	20	120	-	20	6				
THKTKFR/L 1010JX-16	●	●	10	10	120	20	10	8	Fig.1	M4.0*9	T15	TKF16R/L ...
1212JX-16	●	●	12	12	120	-	12	8				
1616JX-16	●	●	16	16	120	-	16	8				
2020JX-16	●	●	20	20	120	-	20	8				

Cut-Off


Shape	Description	Dimension (mm)						Angle	PVD Coating	Related holder
		W	ϕD_{max}	R(re)	T	H	ϕd			
	ICTKF12R/L 050-S-16DR	0.50	5	0.03	3	8.7	5	16°	●	KTKFR/L ...12
	070-S-16DR	0.70	8	0.03	3	8.7	5	16°	●	
	100-S-16DR	1.00	12	0.03	3	8.7	5	16°	●	
	125-S-16DR	1.25	12	0.03	3	8.7	5	16°	●	
	150-S-16DR	1.50	12	0.03	3	8.7	5	16°	●	
	200-S-16DR	2.00	12	0.03	3	8.7	5	16°	●	
	ICTKF12R/L 050-S	0.50	5	0.03	3	8.7	5	0°	●	KTKFR/L ...12
	070-S	0.70	8	0.03	3	8.7	5	0°	●	
	100-S	1.00	12	0.03	3	8.7	5	0°	●	
	125-S	1.25	12	0.03	3	8.7	5	0°	●	
	150-S	1.50	12	0.03	3	8.7	5	0°	●	
	200-S	2.00	12	0.03	3	8.7	5	0°	●	

Shape	Description	Dimension (mm)						Angle	PVD Coating	Related holder
		W	ϕD_{max}	R(re)	T	H	ϕd			
	ICTKF16R/L 150-S-16DR	1.5	16	0.05	4	9.5	5	16°	●	KTKFR/L ...16
	200-S-16DR	2.0	16	0.05	4	9.5	5	16°	●	
	ICTKF16R/L 150-S	1.5	16	0.05	4	9.5	5	0°	●	KTKFR/L ...16
	200-S	2.0	16	0.05	4	9.5	5	0°	●	

Shape	Description	Dimension (mm)						Angle	PVD Coating	Related holder
		W	a	B	R(re)	T	H			
	ICTKFB 12R15005M	1.5	0.25	2.6	<0.05	3.0	8.7	5.2	●	KTKFR ...12
	12R28005M	2.8	0.30	4.6	<0.05	3.0	8.7	5.2	●	
	12R28010M	2.8	0.30	4.6	<0.10	3.0	8.7	5.2	●	
	ICTKFB 16R38005M	3.8	0.30	6.3	<0.05	4.0	9.5	5.2	●	KTKFR ...16
	16R38010M	3.8	0.30	6.3	<0.10	4.0	9.5	5.2	●	
	ICTKFB 12L28005MR	2.8	0.30	4.6	<0.05	3.0	8.7	5.2	●	KTKFL ...12
	12L28010MR	2.8	0.30	4.6	<0.10	3.0	8.7	5.2	●	
	ICTKFB 16L38005MR	3.8	0.30	6.3	<0.05	4.0	9.5	5.2	●	KTKFL ...16
	16L38010MR	3.8	0.30	6.3	<0.10	4.0	9.5	5.2	●	

Recommended Cutting Conditions (TKF12/16)

Workpiece Material	Recommended Insert Grade Vc m/min	TKF12						TKF16		Remarks
		Width W(mm)						Width W(mm)		
	PVD Coating	0.5	0.7	1.0	1.25	1.5	2.0	1.5	2.0	
	CCG20E	Feed Rate(mm/rev)						Feed Rate(mm/rev)		
Carbon Steel (SxxC etc)	☆ 60-130	0.01-0.02	0.01-0.03	0.01-0.04 (0.01-0.05)	0.01-0.04	0.01-0.04 (0.02-0.1)	0.01-0.04 (0.02-0.1)	0.02-0.07 (0.02-0.1)	0.02-0.07 (0.02-0.1)	Wet
Alloy Steel (SCM etc)	☆ 60-130	0.01-0.02	0.01-0.03	0.01-0.04 (0.01-0.05)	0.01-0.04	0.01-0.04 (0.02-0.1)	0.01-0.04 (0.02-0.1)	0.02-0.07 (0.02-0.1)	0.02-0.07 (0.02-0.1)	
Stainless Steel (SUS304 etc)	☆ 50-100	0.005-0.015	0.01-0.02	0.01-0.02 (0.01-0.03)	0.01-0.02	0.01-0.02 (0.01-0.05)	0.01-0.02 (0.01-0.05)	0.01-0.04 (0.01-0.05)	0.01-0.04 (0.01-0.05)	

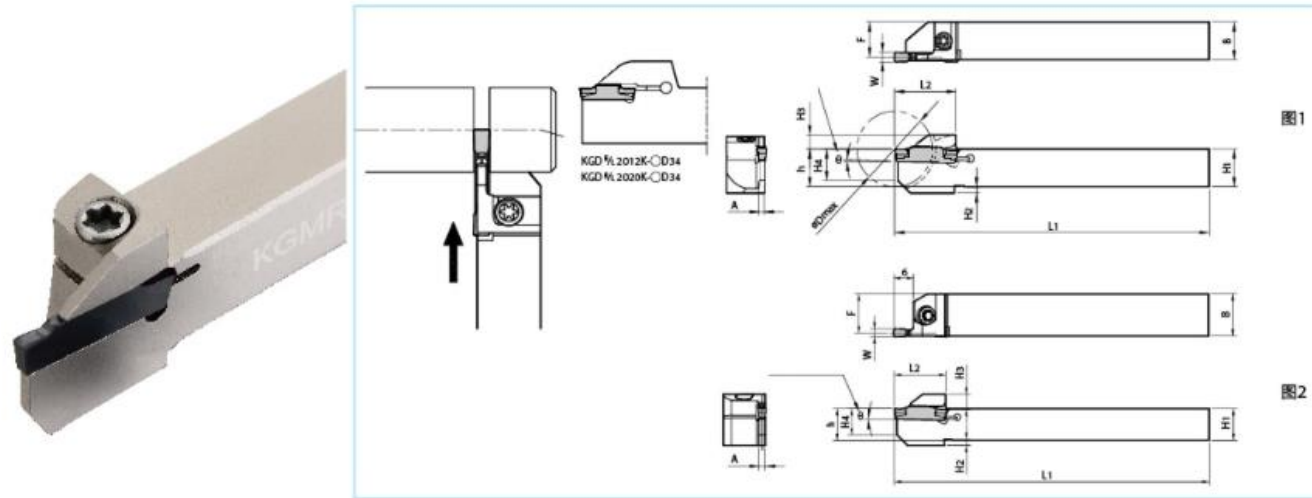

Toolholder Dimensions

Designation	Stock		Dimensions(mm)											W(mm)	shape	Spare parts	
	R	L	øDmax	H1=h	H2	H3	H4	B	L1	L2	F	A	θ			screw	Wrench
THKGDR/L 1010JX-1.3D16	●	●	16	10	2	4.5	8	10	120	18	9.9	1.0	5°	1.3	Fig.1	M4.0*14	T15
1010JX-1.3	●	●	20	10	2	4.5	8	10	120	18	9.5	1.0	5°	1.3		M4.0*14	T15
1212F-1.3D16	●	●	16	12	2	4.5	10	12	85	19.5	11.9	1.0	5°	1.3		M4.0*16	T20
1212JX-1.3D16	●	●	16	12	2	4.5	10	12	120	19.5	11.9	1.0	5°	1.3		M4.0*16	T20
1212F-1.3	●	●	24	12	2	4.5	10	12	85	19.5	11.5	1.0	5°	1.3		M4.0*16	T20
1212JX-1.3	●	●	24	12	2	4.5	10	12	120	19.5	11.5	1.0	5°	1.3	Fig.1	M4.0*16	T20
THKGDR/L 1010JX-1.5D16	●	●	16	10	2	4.5	8	10	120	18	9.7	1.2	5°	1.5		M4.0*14	T15
1010JX-1.5	●	●	20	10	2	4.5	8	10	120	18	9.4	1.2	5°	1.5		M4.0*14	T15
1212F-1.5D16	●	●	16	12	2	4.5	10	12	85	19.5	11.7	1.2	5°	1.5		M4.0*16	T20
1212JX-1.5D16	●	●	16	12	2	4.5	10	12	120	19.5	11.7	1.2	5°	1.5		M4.0*16	T20
1212F-1.5	●	●	24	12	2	4.5	10	12	85	19.5	11.4	1.2	5°	1.5		M4.0*16	T20
1212JX-1.5	●	●	24	12	2	4.5	10	12	120	19.5	11.4	1.2	5°	1.5	Fig.1	M4.0*16	T20
THKGDR/L 1010JX-2	●	●	20	10	2	4.5	8	10	120	18	9.15	1.7	1°	2.0		M4.0*14	T15
1212F-2	●	●	24	12	2	4.5	10	12	85	19.5	11.15	1.7	1°	2.0		M4.0*16	T20
1212JX-2	●	●	24	12	2	4.5	10	12	120	19.5	11.15	1.7	1°	2.0		M4.0*16	T20
1616JX-2	●	●	32	16	-	4.5	10	16	120	24.5	15.15	1.7	1°	2.0		M4.0*16	T20
2012K-2D34	●	●	34	20	-	9.5	20	12	125	32.5	11.2	1.6	0°	2.0	Fig.1	M4.0*16	T20
2020K-2D34	●	●	34	20	-	9.5	20	20	125	32.5	19.2	1.6	0°	2.0		M4.0*16	T20
THKGDR/L 1010JX-2.4	●	●	20	10	2	4.5	8	10	120	18	9	2.0	1°	2.4		M4.0*14	T15
1212F-2.4	●	●	24	12	2	4.5	10	12	85	19.5	11	2.0	1°	2.4	Fig.1	M4.0*16	T20
1212JX-2.4	●	●	24	12	2	4.5	10	12	120	19.5	11	2.0	1°	2.4		M4.0*16	T20
1616JX-2.4	●	●	32	16	-	4.5	10	16	120	24.5	15	2.0	1°	2.4		M4.0*16	T20
2012K-2.4D34	●	●	34	20	-	9.5	20	12	125	32.5	11	2.0	0°	2.4		M4.0*16	T20
2020K-2.4D34	●	●	34	20	-	9.5	20	20	125	32.5	19	2.0	0°	2.4		M4.0*16	T20
THKGDR/L 1212JX-3	●	●	24	12	2	4.5	10	12	120	19.5	10.8	2.4	1°	3.0	Fig.1	M4.0*16	T20
1616JX-3	●	●	32	16	-	4.5	10	16	120	24.5	14.8	2.4	1°	3.0		M4.0*16	T20
1616JX-3D38	●	●	38	16	-	6	10	16	120	29	14.8	2.4	1°	3.0		M4.0*16	T20
1913JX-3D38	●	●	38	19	-	6	13	13	125	29	11.8	2.4	1°	3.0		M4.0*16	T20
2012JX-3D42	●	●	42	20	-	6	14	12	120	31	10.8	2.4	1°	3.0		M4.0*16	T20
2012JX-3D51	●	●	51	20	-	7.5	14	12	120	36	10.8	2.4	1°	3.0		M4.0*16	T20
2020JX-3D42	●	●	42	20	-	6	14	20	120	31	18.8	2.4	1°	3.0		M4.0*16	T20
2020JX-3D51	●	●	51	20	-	7.5	14	20	120	36	18.8	2.4	1°	3.0		M4.0*16	T20
1216JX-3T06	●	●	-	12	2	5.5	10	16	120	19.5	14.8	2.4	-	3.0		M4.0*16	T20

Cut-Off


Shape	Description	(CW)		Dimension (mm)			Angle θ	PVD Coating CCG20E	Related holder
		RE	INSL	S					
	ICGDM 2020N-020PM	2.0	0.2					●	H18~H23
	2520N-020PM	2.5	0.25					●	
	3020N-025PM	3.0	0.3					●	H18~H25
	4020N-030PM	4.0	0.4					●	H18~H25

Workpiece Material	Recommended Insert Grade Vc m/min	Feed Rate(mm/rev)			Remarks
		PM	PH		
	PVD Coating	Width CW(mm)	Width CW(mm)		
	CCG20E	2~4	2	3~4	
Carbon Steel (SxxC etc)	☆ 100~200	0.08~0.18	0.10~0.25	0.15~0.28	Wet
Alloy Steel (SCM etc)	☆ 80~180	0.08~0.18	0.10~0.25	0.15~0.28	
Stainless Steel (SUS304 etc)	☆ 60~150	0.06~0.12	0.05~0.12	0.08~0.15	
Cast Iron (FC/FCD etc)	★ 100~200	0.08~0.18	0.10~0.25	0.15~0.28	

1st Recommendation

2nd Recommendation

Workpiece Material	Vc m/min	Feed Rate(mm/rev)
Carbon Steel (SxxC etc)	60~200	0.08~0.18
Alloy Steel (SCM etc)	60~150	0.08~0.18
Stainless Steel (SUS304 etc)	50~140	0.08~0.18

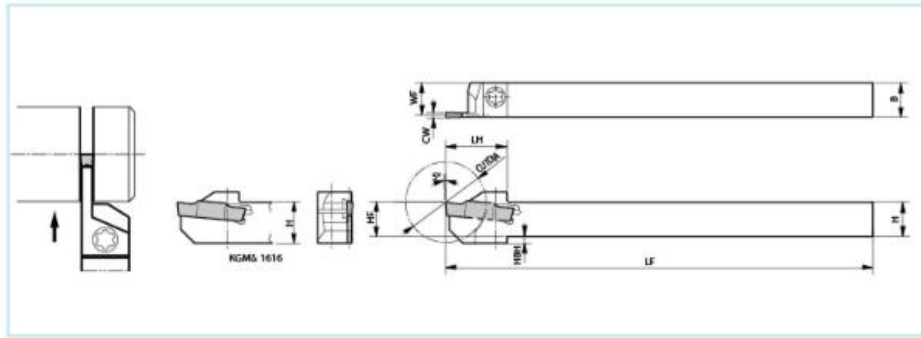


Toolholder Dimensions

Designation		Stock		Dimensions(mm)								CW(mm)		Spare parts	
		R	L	CUTDIA	H	HF	HBH	B	LF	LH	WF	MIN.	MAX.	 screw	 Wrench
THKGMR/L	1010JX-1.5	●	●	18	10	10	2	10	120	18	9.4	1.5	2.0	M4.0*16	T20
	1212JX-1.5	●	●	23	12	12	2	12	120	19	11.4	1.5	2.0	M4.0*16	T20
THKGMR/L	1010JX-2	●	●	18	10	10	2	10	120	18	9.15	2.0	3.0	M4.0*16	T20
	1212JX-2	●	●	23	12	12	2	12	120	19	11.15	2.0	3.0	M4.0*16	T20
	1616JX-2	●	●	30	16	16	-	16	120	24.5	15.15	2.0	3.0	M5.0*12	T20
THKGMR/L	1212JX-2.5	●	●	23	12	12	2	12	120	19	11	2.4	3.0	M4.0*16	T20
	1616JX-2.5	●	●	30	16	16	-	16	120	24.5	15	2.4	3.0	M5.0*12	T20
THKGMR/L	1616JX-3	●	●	30	16	16	-	16	120	24.5	14.8	3.0	4.0	M5.0*12	T20
THKGMRR/L	1212F-1.5-85	●	●	23	12	12	2	12	85	19	11.4	1.5	2.0	M4.0*16	T20
THKGMR/L	1212F-2-85	●	●	23	12	12	2	12	85	19	11.15	2.0	3.0	M4.0*16	T20
THKGMR	1212F-2.5-85	●	●	23	12	12	2	12	85	19	11	2.4	3.0	M4.0*16	T20


Shape	Description	Dimension (mm)				Angle	PVD Coating	Related holder
		CW	RE	INSL	S			
	ICGMMR/L 1520R/L-MT-15D	1.5	0.05	20	4.3	15°	○	KGMRL
	2020R/L-MT-15D	2.0	0.05	20	4.3	15°	○	
	2520R/L-MT-15D	2.5	0.05	20	4.3	15°	○	
	3020R/L-MT-15D	3.0	0.05	20	4.3	15°	○	


Workpiece Material	Recommended Insert Grade	Width CW(mm)				Remarks
	PVD Coating	1.5	2.0/2.5	3.0	4.0	
	CCG20E	Feed Rate(mm/rev)				
Carbon Steel (SxxC etc)	★ 60～150	0.01～0.04	0.02～0.15	0.03～0.20	0.08～0.30	Wet
Alloy Steel (SCM etc)	★ 60～150	0.01～0.04	0.02～0.15	0.03～0.20	0.08～0.30	
Stainless Steel (SUS304 etc)	★ 60～140	0.01～0.03	0.02～0.10	0.03～0.15	0.08～0.25	

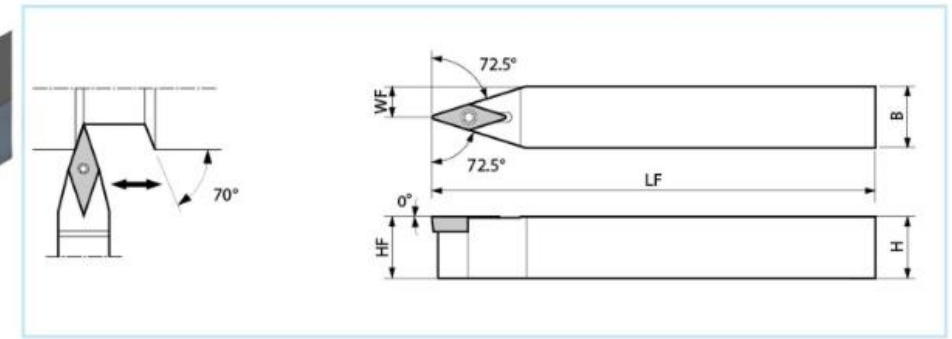

Toolholder Dimensions


Designation	Stock		Dimensions(mm)						(RE)	Spare parts	
	R	N	L	H	HF	B	LF	WF		screw	Wrench
THSVBN	1010JX-11	●		10	10	10	120	5	0.4	M2.5*6	T8
	1212JX-11	●		12	12	12	120	6	0.4	M2.5*6	T8
	1616JX-11	●		16	16	16	120	8	0.4	M2.5*6	T8


Cut Type		Continuous Cut		General Cut		Interrupted Cut		
Shape	Designation	Size				PVD Coating CCG20E	No Coating CCG10A	Holders
		d	t	r	D			
	ICCCGT09T301FL-U	9.525	3.97	0.1	4.4	●	○	SCLCR/L
	ICCCGT09T301FR-U	9.525	3.97	0.1	4.4	●	○	SCLCR/L
	ICCCGT09T302FL-U	9.525	3.97	0.2	4.4	●	○	SCLCR/L
	ICCCGT09T302FR-U	9.525	3.97	0.2	4.4	○	○	SCLCR/L
	ICDCGT070201EL-U	6.35	2.38	0.1	2.8	○	○	SDJCR/L SDNCN
	ICDCGT070201ER-U	6.35	2.38	0.1	2.8	○	○	SDJCR/L SDNCN
	ICDCGT070202EL-U	6.35	2.38	0.2	2.8	○	○	SDJCR/L SDNCN
	ICDCGT070202ER-U	6.35	2.38	0.2	2.8	●	○	SDJCR/L SDNCN
	ICDCGT11T301EL-U	9.525	3.97	0.1	4.4	●	○	SDJCR/L SDNCN
	ICDCGT11T301ER-U	9.525	3.97	0.1	4.4	●	○	SDJCR/L SDNCN
	ICDCGT11T302EL-U	9.525	3.97	0.2	4.4	●	○	SDJCR/L SDNCN
	ICDCGT11T302ER-U	9.525	3.97	0.2	4.4	●	○	SDJCR/L SDNCN
	ICVBGT110301L-F	6.35	3.18	0.1	2.8	●	○	SVJBR/L SVVBN
	ICVBGT110301R-F	6.35	3.18	0.1	2.8	●	○	SVJBR/L SVVBN
	ICVBGT110302L-F	6.35	3.18	0.2	2.8	●	○	SVJBR/L SVVBN
	ICVBGT110302R-F	6.35	3.18	0.2	2.8	●	○	SVJBR/L SVVBN
	ICXCCGT09T301E-NB	9.525	3.97	0.1	4.4		○	SCLCR/L
	ICXCCGT09T302E-NB	9.525	3.97	0.2	4.4	●	○	SCLCR/L
	ICXCCGT09T304E-NB	9.525	3.97	0.4	4.4	●	○	SCLCR/L
	ICXDCGT11T301E-NB	9.525	3.97	0.1	4.4		○	SDJCR/L SDNCN
	ICXDCGT11T302E-NB	9.525	3.97	0.2	4.4	●	○	SDJCR/L SDNCN
	ICXDCGT11T304E-NB	9.525	3.97	0.4	4.4	●	○	SDJCR/L SDNCN

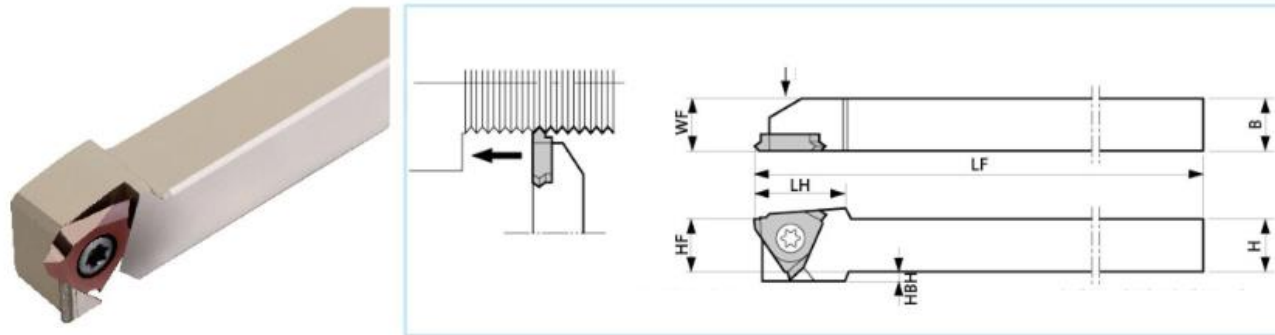

Toolholder Dimensions


Designation		Stock	Dimensions(mm)							Spare parts		
			H	HF	HBH	B	LF	LH	WF	 screw	 Wrench	
THKTTXR	1010JX-16	●	10	10	2	10	120	17.6	10	M4.0*9	T15	
	1212JX-16F	●	12	12	-	12	120	17.6	12	M4.0*9	T15	
	1616JX-16F	●	16	16	-	16	120	17.6	16	M4.0*9	T15	
	1212F-16F	●	12	12	-	12	85	17.6	12	M4.0*9	T15	
	2020K-16F	●	20	20	-	20	125	17.6	20	M4.0*9	T15	

Shape Handed Insert shows Right-hand.		Description		Dimension (mm)				Angle	PVD Coating	Related holder
				mm		RE	PDX		PDX1	
 	ICTTX32R 6000	M UN	0.5~1.0 -	- 56~32	0.00	0.6	1.12	60°	●	KTTXR...-16 S...KTTXL16
	6000S	M UN	0.5~1.0 -	- 48~32	0.05	0.6	1.12	60°	●	
	6001	M UN	1.0~2.0 -	- 28~14	0.10	1.1	1.62	60°	●	
	ICTTX32R 600S	M UN	0.5 -	- 56~48	0.00	0.3	1.12	60°	●	
	6000S5	M UN	0.5 -	- 48	0.05	0.3	1.12	60°	●	
	ICTTX32R 5501	G R W	-	28~19 24~20	0.10	0.75	1.01	55°	●	
	5501S	G R W	-	19~11 20~11	0.15	1.20	1.46	55°	●	
M		R (PT)(BSPT)								
UN		W								
UNF		NPT								
G(PF)										

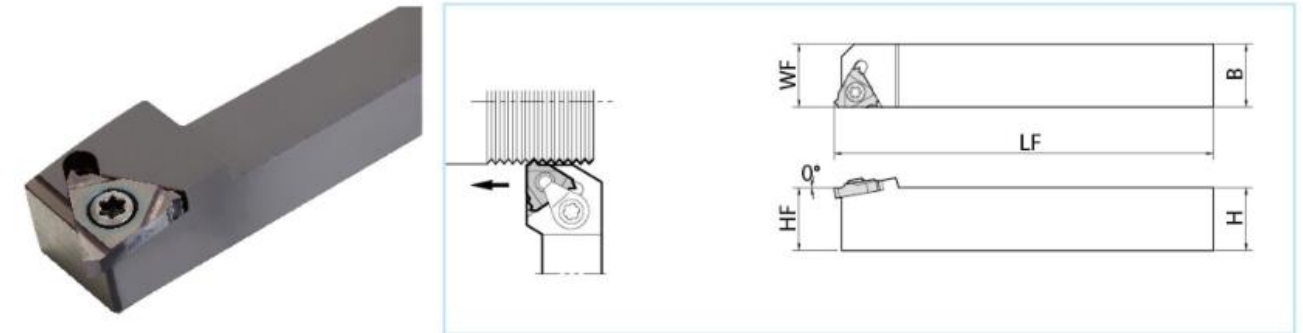

Toolholder Dimensions

Designation	Stock		Dimensions(mm)						shape	Spare parts				Applicable inserts		
	R	L	H	HF	B	LF	LH	WF								
THSER/L	1216JX-16F	●	●	12	12	16	120	-	16	Fig.1	M3.5*9	T15	-	-	16E R/L	
	1616H-16	●	●	16	16	16	100	25	20	Fig.2	M3.5*12	T15	TN-32	SP3X8		
	1616JX-16F	●	●	16	16	16	120	-	16	Fig.1	M3.5*12	T15	-	-		
	2020H-16*	●	●	20	20	20	100	25	25	Fig.2	M3.5*12	T15	TN-32	SP3X8		...
	2020JX-16F	●	●	20	20	20	120	-	20	Fig.1	M3.5*12	T15	-	-		

Shape Handed Insert shows Right-hand.		Description		Dimension (mm)		Angle	PVD Coating
			M	RE	PDX	PNA	CCG20E
			mm				
 	IC16ER/L 050ISO	0.5	0.06	0.40	60°	●	
	075ISO	0.8	0.09	0.53	60°	●	
	100ISO	1.0	0.12	0.80	60°	●	
	125ISO	1.25	0.15	0.90	60°	●	
	150ISO	1.5	0.19	1.00	60°	●	
	175ISO	1.75	0.22	1.50	60°	●	
	200ISO	2.0	0.25	1.50	60°	●	
	250ISO	2.5	0.32	1.60	60°	●	
	300ISO	3.0	0.41	2.10	60°	●	
	350ISO	3.5	0.48	2.10	60°	●	
	400ISO	4.0	0.55	2.80	60°	●	
	450ISO	4.5	0.62	2.80	60°	●	
	500ISO	5.0	0.70	2.80	60°	●	

Symbols of QCMT and KM Tools

KM: KM Series	10: 10 Handle				F: 80		JCT=With Inner Cooling
QCMT: QCMT Series	12: 12 Handle				H: 100		Without Inner Cooling
Series	Tool Size	—	Tool Height	Tool Width	Tool Length	—	With Inner Cooling
QCMT	12	—	12	12	F	—	JCT

Symbols of ISO Standard Cutting Heads

KM: KM Series		10: 10 Handle				N: 62.5°		B: 5°				
QCMT: QCMTSeries		12: 12 Handle		D: 55° Rhombic		V: 72.5°		C: 7°		R: Right Handed Holders		
		16: 16 Handle		V: 35°Rhombic		J: 93°		P: 11°		L: Left Handed Holders		JCT=With Inner Cooling
						I: 93°		X: Others		N: Versatile Holders		Without Inner Cooling
Series		Head Size		= screw clamping		Insert Shape		Entering Angle		Clearance Angle		Insert Direction
Edge Length		=		With Inner Cooling		=		Others				
QCMT		12		=		S		V		J		C
R		11		=		JCT		=		P		

Symbols of ISO-Y axis Cutting Heads

		10: 10 Handle						N: 62.5°		B: 5°		R: right handed holders						
KM: KM Series	12: 12 Handle						D: 55°Rhombic	V: 72.5°		C: 7°		L: left handed holders						
QCMT: QCMT Series	16: 16 Handle						V: 35°Rhombic	J: 93°		X: Others		N: Versatile Holders						
Series		Head Size		—	Y axis	—	Screw Clamping		Insert Shape	Entering Angle	Clearance Angle	Insert Direction		Edge Length	—	With Inner Cooling	—	Others
QCMT		12		—	Y	—	S		V	J	C	R		11	—	JCT	—	P

Symbols of KX618 Cutting Heads

KM: KM Series	10: 10 Handle					R: Right Handed Holders		JCT=With Inner Cooling
QCMT: QCMT Series	12: 12 Handle					Without Inner Cooling		
Series	Head Size	—	Kx618 Insert	Cutting Heads Direction	—	With Inner Cooling	—	Others
QCMT	12	—	KX618	R	—	JCT	—	P


Symbols of KSI12 Cutting Heads

	10: 10 Handle							
KM: KM Series	12: 12 Handle			R: Right Handed Holders		JCT=With Inner Cooling		
QCMT: QCMT Series	16: 16 Handle			L: Left Handed Holders		Without Inner Cooling		
Series	Head Size	—	Ksi12 Insert	Cutting Heads Direction	—	With Inner Cooling	—	Others
QCMT	12	—	KSI12	R	—	JCT	—	P

Symbols of KST Cutting Heads


	10: 10 Handle							
KM: KM Series	12: 12 Handle				R: Right Handed Holders	JCT=With Inner Cooling		
QCMT: QCMT Series	16: 16 Handle				L: Left Handed Holders	Without Inner Cooling		
Series	Head Size	—	KST16 Insert	Cutting Heads Direction	—	With Inner Cooling	—	Others
QCMT	12	—	KST16	R	—	JCT	—	P

Turning-Inner Cooling Modular Tools

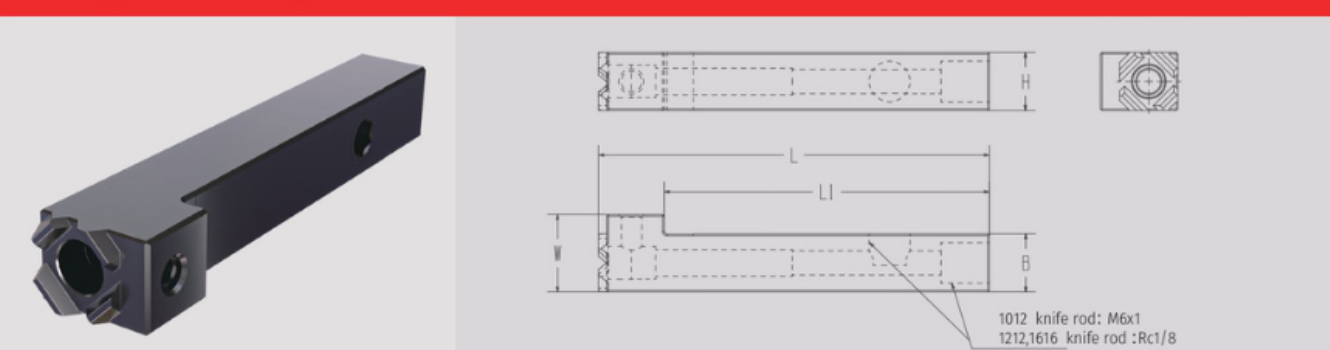


Type	Size					Accessories	
	H	B	W	L	L1	Screw	Wrenth
THQCMT10-1012F-JCT	10	12	16	80	67	KS-4006-HS-P0.5	KW-LH2
THQCMT12-1212F-JCT	12	12	16	80	67	KS-5007-TS-IP	KW-IP10
THQCMT12-1212H-JCT	12	12	16	100	87		
THQCMT16-1616F-JCT	16	16	18	80	67	KS-6009-HS-P0.75	KW-LH3
THQCMT16-1616H-JCT	16	16	18	100	87		

V-shape Cutting Heads

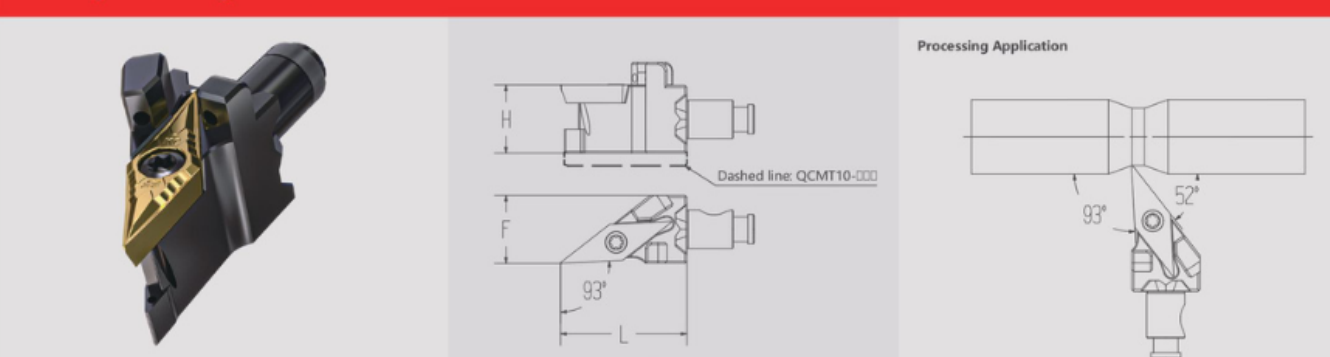


Type	Size			Accessories		Corresponding Insert
	L	H	F	Screw	Wrenth	
THQCMT10-SVJB 1/11-JCT-P	22	10	16			
THQCMT12-SVJB 1/11-JCT-P		12	16	KS-2503-T	KW-T8	VB□□1103□□
THQCMT16-SVJB 1/11-JCT-P	23	16	16			
THQCMT10-SVJC 1/11-JCT-P	22	10	16			
THQCMT12-SVJC 1/11-JCT-P		12	16	KS-2503-T	KW-T8	VC□□1103□□
THQCMT16-SVJC 1/11-JCT-P	23	16	16			
THQCMT10-SVJP 1/11-JCT-P	22	10	16			
THQCMT12-SVJP 1/11-JCT-P		12	16	KS-2503-T	KW-T8	VP□□1103□□
THQCMT16-SVJP 1/11-JCT-P	23	16	16			

V-shape Cutting Heads

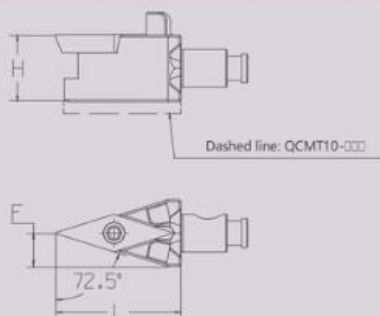


Processing Application




Type	Size			Accessories		Corresponding Insert
	L	H	F	Screw	Wrenth	
THQCMT10-Y-SVVCN11-JCT-P	22	10	5	KS-2503-T	KW-T8	VB□□1103□□
THQCMT12-Y-SVVCN11-JCT-P	22	12	6			
THQCMT16-Y-SVVCN11-JCT-P	23	16	8			
THQCMT10-Y-SVVCN11-JCT-P	22	10	5	KS-2503-T	KW-T8	VC□□1103□□
THQCMT12-Y-SVVCN11-JCT-P	22	12	6			
THQCMT16-Y-SVVCN11-JCT-P	23	16	8			

V-shape Y-axis Cutting Heads

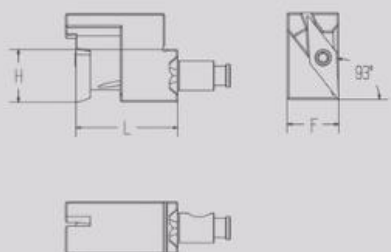


Processing Application




Type	Size			Accessories		Corresponding Insert
	L	H	F	Screw	Wrenth	
THQCMT10-Y-SVJCR11-JCT-P	23	10	16	KS-2503-T	KW-T8	VC□□1103□□
THQCMT12-Y-SVJCR11-JCT-P	23	12	16			
THQCMT16-Y-SVJCR11-JCT-P	23	16	16			

D-shape Cutting Heads

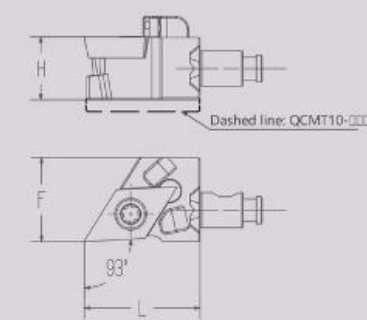


Processing Application




Type	Size			Accessories		Corresponding Insert
	L	H	F	Screw	Wrenth	
THQCMT10-SDJC 1/11-JCT-P	22	10	16	KS-4008-T	KW-T15	DC□□1113□□
THQCMT12-SDJC 1/11-JCT-P		12	16			
THQCMT16-SDJC 1/11-JCT-P	23	16	16			

D-shape Cutting Heads


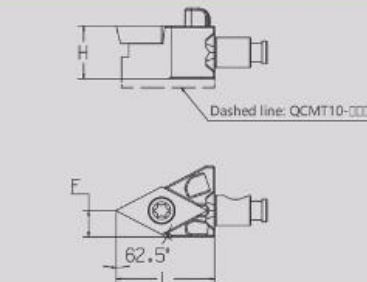


Processing Application




Type	Size			Accessories		Corresponding Insert
	L	H	F	Screw	Wrenth	
THQCMT10-SDNCN11-JCT-P	22	10	5	KS-4008-T	KW-T15	DC□□1113□□
THQCMT12-SDNCN11-JCT-P	22	12	6			
THQCMT16-SDNCN11-JCT-P	23	16	8			

D-shape Y-axis Cutting Heads

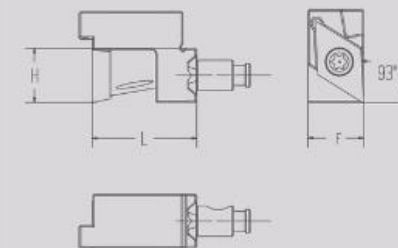


Processing Application



Type	Size			Accessories		Corresponding Insert
	L	H	F	Screw	Wrenth	
THQCMT10-Y-SDJCR11-JCT-P	23	10	16	KS-4008-T	KW-T15	DC□□1113□□
THQCMT12-Y-SDJCR11-JCT-P		12	16			
THQCMT16-Y-SDJCR11-JCT-P	23	16	16			


KDC Cutting Heads

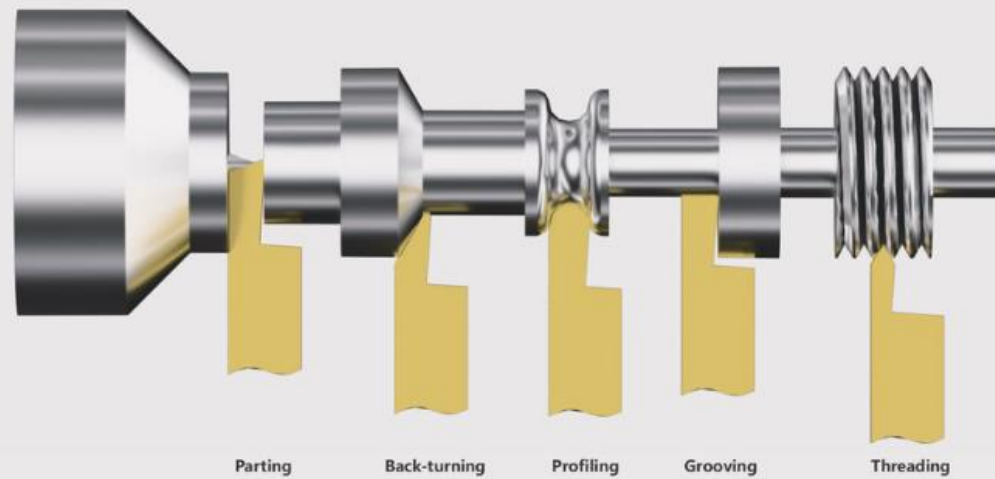


● Notice

1. Maximum Diameter of parting is 7mm
2. Maximum Diameter of parting is 3.5MM, Groove depth varies according to the diameter of the material, please refer to the figure below

Dmax	32	42	51	65	100
Lmax	3.5	3.3	3.2	3.0	2.5


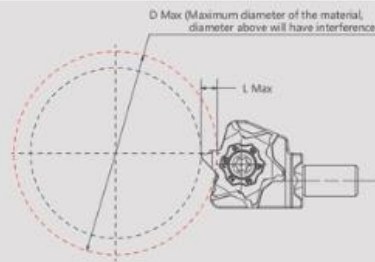


KX618 Cutting Heads

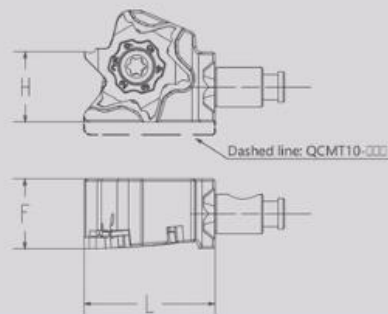


Type	Size			Accessories		Corresponding Insert
	L	H	F	Screw	Wrenth	
THQCMT10-KX618R-JCT-P	22	10	16	KS-4008-T	KW-T15	KX618R □ □ □
THQCMT12-KX618R-JCT-P		12	16			
THQCMT16-KX618R-JCT-P	23	16	16			

KX618-Y axis Cutting heads

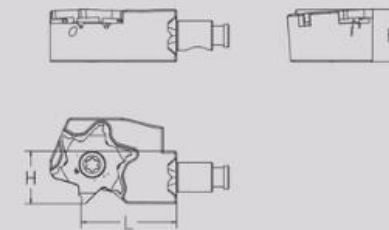
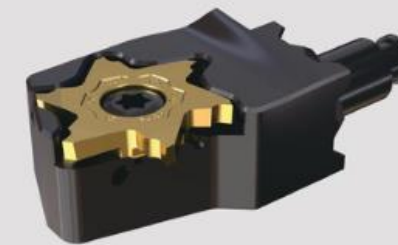


Processing Application





Type	Size			Accessories		Corresponding Insert
	L	H	F	Screw	Wrenth	
THQCMT12-Y-KX618R-JCT-P	19.5	12	16	KS-4008-T	KW-T15	KX618R □ □ □

KSI12 Cutting Heads

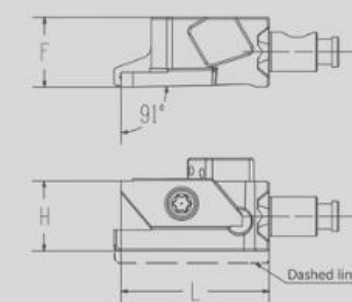


Type	Size			Accessories		Corresponding Insert
	L	H	F	Screw	Wrenth	
THQCMT10-KSI12 ^{91°} -JCT-P	25	10	16	KS-35065-T	KW-T15	KSI12R ^{91°} □ □ □
THQCMT12-KSI12 ^{91°} -JCT-P		12	16			
THQCMT16-KSI12 ^{91°} -JCT-P	26	16	16			

KSI12 Y-axis Cutting Heads

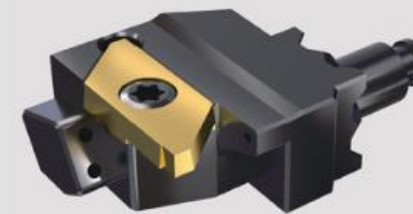

Processing Application



Type	Size			Accessories		Corresponding Insert
	L	H	F	Screw	Wrenth	
THQCMT12-Y-KSI12 ^{91°} -JCT-P	20	12	16	KS-35065-T	KW-T15	KSI12R ^{91°} □ □ □

Grooving tools									
Processing Application		P	Soft steel	◆	◆	◆			
			Carbon steel/alloy steel	◆	◆	◆			
		M	Martensitic	◆	◆	◆	◆		
			Austenitic	◆	◆	◆	◆		
		K	Grey Cast Iron			◆			
			Ductile Cast Iron			◆			
		N	Nonferrous					◆	◆
		S	Heat Resisting Alloy		◆	◆	◆		
			Titanium Alloy		◆	◆	◆		
		H	Hardened Materials			◆			

shape Right Handed Tool		Type	Size			PVD Coated Cemented Carbide						cemented carbide
			W	L	R	KPM30N	KXM15S	KHS10M	KMS20	KCN10D	KCN10	
		ICKX618GR 050-150-005	0.5	1.5	0.05		●	●				
		ICKX618GR 060-150-005	0.6				●	●				
		ICKX618GR 070-150-005	0.7				●	●				
		ICKX618GR 075-150-005	0.75				●	●				
		ICKX618GR 070-200-005	0.7				●	●				
		ICKX618GR 075-200-005	0.75				●	●				
		ICKX618GR 080-200-005	0.8				●	●				
		ICKX618GR 090-200-005	0.9				●	●				
		ICKX618GR 100-200-005	1.0				●	●				
		ICKX618GR 100-200-010					●	●				
		ICKX618GR 110-200-005	1.1				●	●				
		ICKX618GR 110-200-010					●	●				
		ICKX618GR 120-200-005	1.2				●	●				
		ICKX618GR 120-200-010					●	●				
		ICKX618GR 125-200-005	1.25				●	●				
		ICKX618GR 125-200-010					●	●				
		ICKX618GR 130-200-010	1.3	2.0	0.1		●	●				
		ICKX618GR 130-200-020			0.2		●	●				
		ICKX618GR 140-200-010	1.4		0.1		●	●				
		ICKX618GR 140-200-020			0.2		●	●				
		ICKX618GR 150-200-010	1.5		0.1		●	●				
		ICKX618GR 150-200-020			0.2		●	●				
		ICKX618GR 160-200-010	1.6		0.1		●	●				
		ICKX618GR 160-200-020			0.2		●	●				
		ICKX618GR 170-200-010	1.7		0.1		●	●				
		ICKX618GR 170-200-020			0.2		●	●				
		ICKX618GR 175-200-010	1.75		0.1		●	●				
		ICKX618GR 175-200-020			0.2		●	●				
		ICKX618GR 100-300-005	1.0		0.05		●	●				
		ICKX618GR 100-300-010			0.1		●	●				
		ICKX618GR 110-300-005	1.1		0.05		●	●				
		ICKX618GR 110-300-010			0.1		●	●				
		ICKX618GR 120-300-005	1.2		0.05		●	●				
		ICKX618GR 120-300-010			0.1		●	●				
		ICKX618GR 125-300-005	1.25		0.05		●	●				
		ICKX618GR 125-300-010			0.1		●	●				
		ICKX618GR 130-300-010	1.3		0.1		●	●				
		ICKX618GR 130-300-020			0.2		●	●				
		ICKX618GR 140-300-010	1.4		0.1		●	●				
		ICKX618GR 140-300-020			0.2		●	●				
		ICKX618GR 150-300-010	1.5		0.1		●	●				
		ICKX618GR 150-300-020			0.2		●	●				
		ICKX618GR 160-300-010	1.6		0.1		●	●				
		ICKX618GR 160-300-020			0.2		●	●				

shape Right Handed Tool		Type	Size			PVD Coated Cemented Carbide						cemented carbide
			W	L	R	KPM30N	KXM15S	KHS10M	KMS20	KCN10D	KCN10	
		ICKX618GR 170-300-010	1.7	3.0	0.1		●	●				
		ICKX618GR 170-300-020			0.2		●	●				
		ICKX618GR 175-300-010	1.75		0.1		●	●				
		ICKX618GR 175-300-020			0.2		●	●				
		ICKX618GR 180-300-010	1.8		0.1		●	●				
		ICKX618GR 180-300-020			0.2		●	●				
		ICKX618GR 190-300-010	1.9		0.1		●	●				
		ICKX618GR 190-300-020			0.2		●	●				
		ICKX618GR 200-300-010	2.0		0.1		●	●				
		ICKX618GR 200-300-020			0.2		●	●				
		ICKX618GR 210-300-010	2.1		0.1		●	●				
		ICKX618GR 210-300-020			0.2		●	●				
		ICKX618GR 220-300-010	2.2		0.1		●	●				
		ICKX618GR 220-300-020			0.2		●	●				
		ICKX618GR 230-300-010	2.3		0.1		●	●				
		ICKX618GR 230-300-020			0.2		●	●				
		ICKX618GR 240-300-010	2.4		0.1		●	●				
		ICKX618GR 240-300-020			0.2		●	●				
		ICKX618GR 250-300-010	2.5		0.1		●	●				
		ICKX618GR 250-300-020			0.2		●	●				
		ICKX618GR 150-350-010	1.5	3.5	0.1		●	●				
		ICKX618GR 150-350-020			0.2		●	●				
		ICKX618GR 160-350-010	1.6		0.1		●	●				
		ICKX618GR 160-350-020			0.2		●	●				
		ICKX618GR 170-350-010	1.7		0.1		●	●				
		ICKX618GR 170-350-020			0.2		●	●				
		ICKX618GR 175-350-010	1.75		0.1		●	●				
		ICKX618GR 175-350-020			0.2		●	●				
		ICKX618GR 180-350-010	1.8		0.1		●	●				
		ICKX618GR 180-350-020			0.2		●	●				
		ICKX618GR 190-350-010	1.9		0.1		●	●				
		ICKX618GR 190-350-020			0.2		●	●				
		ICKX618GR 200-350-010	2.0		0.1		●	●				
		ICKX618GR 200-350-020			0.2		●	●				
		ICKX618GR 210-350-010	2.1		0.1		●	●				
		ICKX618GR 210-350-020			0.2		●	●				
		ICKX618GR 220-350-010	2.2		0.1		●	●				
		ICKX618GR 220-350-020			0.2		●	●				
		ICKX618GR 230-350-010	2.3		0.1		●	●				
		ICKX618GR 230-350-020			0.2		●	●				
		ICKX618GR 240-350-010	2.4		0.1		●	●				
		ICKX618GR 240-350-020			0.2		●	●				
		ICKX618GR 250-350-010	2.5		0.1		●	●				
		ICKX618GR 250-350-020			0.2		●	●				

Grades: ◆ Recommended ◆ Suitable ◇ Applicable ● Standard Stock



Symbols of KX618 Threading Tools

			040: 0.4		A: left
			080: 0.8		B: right
KX618: KX618 Series	T: Threading Tools	R: Right Handed	125: 1.25		N: central
Series	Insert Type	Insert Direction	Tip Width	—	Edge Position
KX618	T	R	125	—	A

Threading Tools

processing diagram

P	Soft steel	◆	◇	◆			
	Carbon steel/alloy steel	◆	◇	◆			
M	Martensitic	◇	◆	◆	◆		
	Austenitic	◆	◆	◆	◆		
K	Grey Cast Iron			◇			
	Ductile Cast Iron			◇			
N	Nonferrous					◆	◆
S	Heat Resisting Alloy		◆	◆	◆		
	Titanium Alloy		◆	◆	◆		
H	Hardened Materials			◆			

shape		Type	Size					PVD Coated Cemented Carbide						cemented carbide
Right Handed Tool			F	A	R	Pitch (MM)	Teeth per inch (TPI)	KPM30N	KXM15S	KHS10M	KMS20	KCN10D	KCN10	
	Type A	ICKX618TR 040-A	0.4	60°	0.05	0.2~0.75	127~34		●	●				
		ICKX618TR 080-A	0.8	60°	0.05	0.4~1.25	63~21		●	●				
	Type B	ICKX618TR 040-B	0.4	60°	0.05	0.2~0.75	127~34		●	●				
		ICKX618TR 080-B	0.8	60°	0.05	0.4~1.25	63~21		●	●				
	Type N	ICKX618TR 125-N	1.25	60°	0.1	1.0~1.5	25~17		●	●				
														

Grades: ◆ Recommended ◇ Suitable ◇ Applicable ● Standard Stock

Symbols of KX618 Back-turning tools

			005: R0.05		
			010: R0.1		
KX618: KX618 Series	B: Back-turning	R: right handed	015: R0.15		
Series	Insert Type	Insert Direction	Nose Radius	—	with chipbreaking slot
KX618	B	R	005	—	S

Back-turning tools

processing diagram

P	Soft steel	◆	◇	◆			
	Carbon steel/alloy steel	◆	◇	◆			
M	Martensitic	◇	◆	◆	◆		
	Austenitic	◆	◆	◆	◆		
K	Grey Cast Iron			◇			
	Ductile Cast Iron			◇			
N	Nonferrous					◆	◆
S	Heat Resisting Alloy		◆	◆	◆		
	Titanium Alloy		◆	◆	◆		
H	Hardened Materials			◆			

shape Right Handed Tool			Type	Size				PVD Coated Cemented Carbide						cemented carbide
				W	L	R	B	KPM30N	KXM15S	KHS10M	KMS20	KCN10D	KCN10	
		ICKX618BR 005-S			<0.05			●	●					
		ICKX618BR 010-S	0.3	3.5	<0.1	3.5		●	●					
		ICKX618BR 015-S			<0.15			●	●					

Grades: ◆ Recommended ◇ Suitable ◇ Applicable ● Standard Stock

**TIẾT KIỆM
NĂNG SUẤT
CHẤT LƯỢNG**