


01 / TICKET

CONSTRUCTION GUIDE / NOT AN INK LAYER

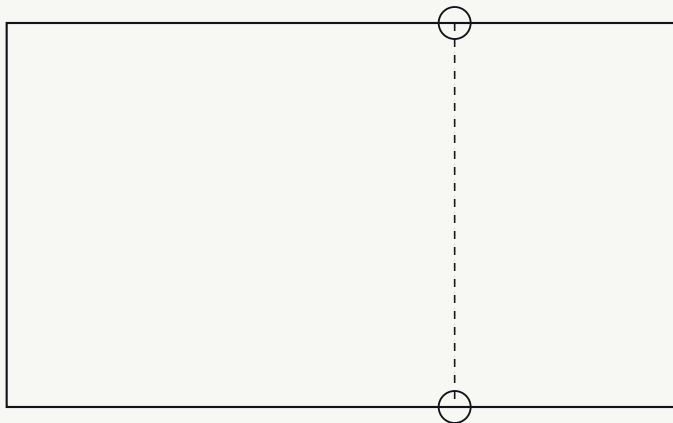

Trim: 88.9 x 50.8 mm (3.5 x 2 in).

Perforation: $x = 59.27$ mm from left.


Notches: radius 2.12 mm, centered on tear line.

Print both faces before perforation.

The barcode-like stripes are decorative, not scannable.

02 / SETLIST

CONSTRUCTION GUIDE / NOT AN INK LAYER



Trim: 88.9 x 50.8 mm.

Torn tape is printed artwork, not an adhesive layer.


Uncoated paper; two-sided ink printing.

No special cutting is required.

Keep the 7 pt labels at original print size.

03 / VINYL

CONSTRUCTION GUIDE / NOT AN INK LAYER

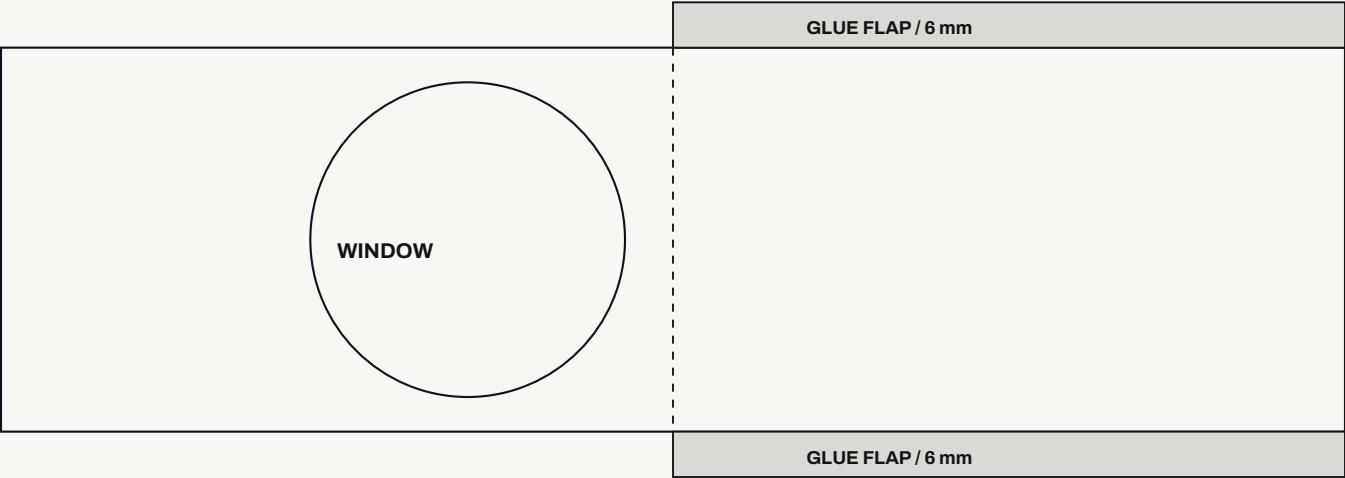

Sleeve panel: 88.9 x 50.8 mm; opening on right.

Window: diameter 41.63 mm; center (61.74, 25.4) mm.


Pocket uses two 6 mm glue flaps and one fold.

Suggested insert trim: 86.9 x 48.8 mm; test the fit.

Use insert-print.pdf for the separate inner card.

04 / BACKSTAGE

CONSTRUCTION GUIDE / NOT AN INK LAYER

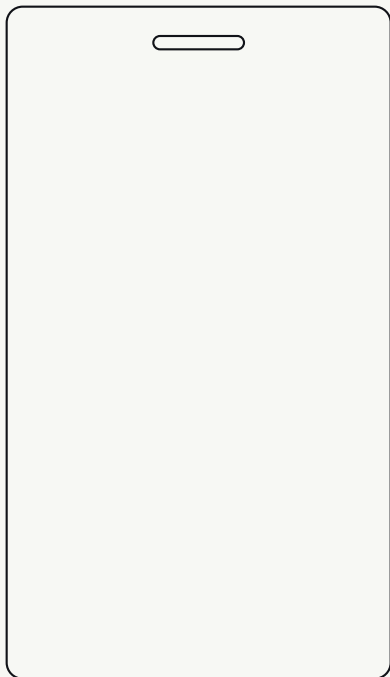

Trim: 50.8 x 88.9 mm; corner radius 2.12 mm.


Slot: 12.0 x 1.76 mm, 3.88 mm from top.

Slot and rounded corners are die cut, not printed.

The green band is flat ink; lanyard is separate.

05 / JCARD

CONSTRUCTION GUIDE / NOT AN INK LAYER

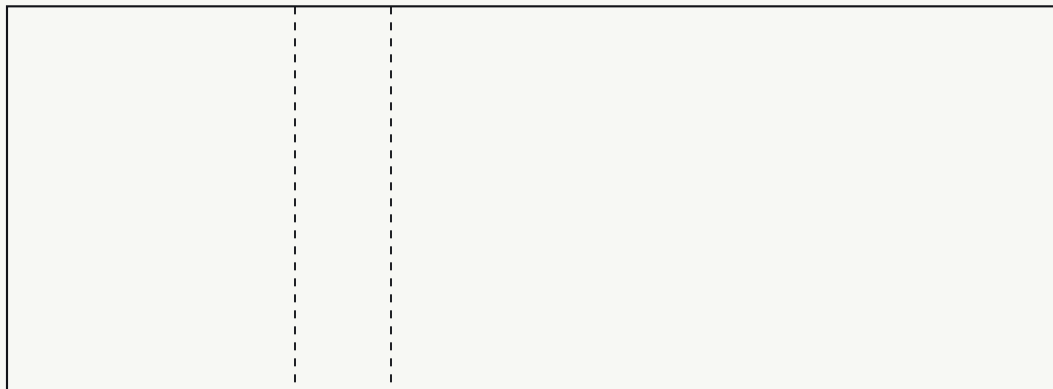

38.1 mm

88.9 mm

12.7

Open trim: 139.7 x 50.8 mm; closed face: 88.9 x 50.8 mm.

Outer panel order: rear flap / spine / front cover.


Inside sheet is mirrored for two-sided registration.

Score before folding; confirm paper caliper with printer.

Mini business-card insert; not a standard full-size cassette J-card.

06 / MATERIAL

CONSTRUCTION GUIDE / NOT AN INK LAYER

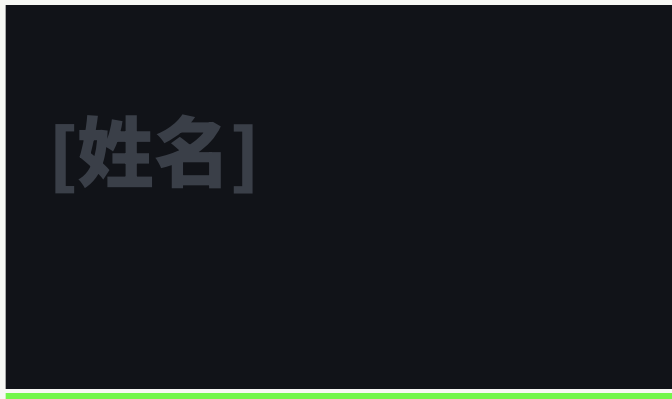

Material intent: 600 gsm black cotton, green painted edges.

Name and First Last: blind deboss from separate mask.

No green gradient or printed fake depth.

Back copy and original white logo use opaque white ink.

Confirm stock caliper, deboss depth and edge-paint sample.