

# LM393LV Dual and LM339LV Quad Low Voltage, Rail-to-Rail Comparators

## 1 Features

- 1.65 V to 5.5 V Supply range
- Rail-to-Rail input with Failsafe
- Low input offset voltage 400  $\mu$ V Typ
- 600ns Typ propagation delay
- Low quiescent current 25  $\mu$ A/Ch Typ
- Low input bias current 5 pA Typ
- Open-drain output
- Full -40°C to +125°C temperature range
- Power-On Reset (POR) for known start-up
- 2 kV ESD protection
- Improved replacement for LM393 & LM339 family for  $V_{CC} \leq 5$  V.

## 2 Applications

- Vacuum robot
- Single phase UPS
- Server PSU
- Cordless power tool
- Wireless Infrastructure
- Appliances
- Building Automation
- Factory automation & control
- Motor drives
- Infotainment & cluster

## 3 Description

The LV device family consists of two (LM393LV), or four (LM339LV), independent voltage comparators that are designed to operate from a wide range of supply voltages. The LV devices can drop-in replace the standard LM2xx, LM3xx and LM290x comparator family in low voltage ( $\leq 5$  V) applications for improved performance and added features.

The LV devices include a Power On Reset (POR) feature that ensures the output is in a High-Z state until the minimum supply voltage has been reached. This prevents output transients during system power-up and power-down.


These comparators also feature Rail to Rail inputs and no output phase inversion with inputs that can go up to 6V without damage. This makes this family of comparators well suited for precision voltage monitoring in harsh, noisy environments.

The LV devices are specified for the temperature range of -40°C to +125°C, which covers the temperature ranges of all the LM2xx, LM3xx and LM290x comparator families.

### Device Information

| PART NUMBER       | PACKAGE <sup>(1)</sup> | BODY SIZE (NOM)   |
|-------------------|------------------------|-------------------|
| LM393LV<br>(Dual) | SOIC (8)               | 3.91 mm × 4.90 mm |
|                   | TSSOP (8)              | 3.00 mm × 4.40 mm |
|                   | VSSOP (8)              | 3.00 mm × 3.00 mm |
|                   | WSO8 (8)               | 2.00 mm × 2.00 mm |
|                   | SOT-23 (8)             | 1.60 mm × 2.90 mm |
| LM339LV<br>(Quad) | SOIC (14)              | 3.91 mm × 8.65 mm |
|                   | TSSOP (14)             | 4.40 mm × 5.00 mm |
|                   | SOT-23-THIN (14)       | 4.20 mm × 2.00 mm |
|                   | WQFN (16)              | 3.00 mm × 3.00 mm |

(1) For all available packages, see the orderable addendum at the end of the datasheet.

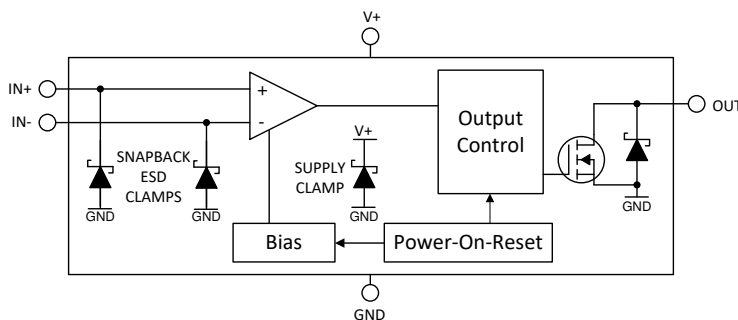

**Block Diagram**



## Table of Contents


|  |           |  |           |
|--|-----------|--|-----------|
| <b>1 Features</b> .....                        | <b>1</b>  | 7.2 Functional Block Diagram.....                                | <b>16</b> |
| <b>2 Applications</b> .....                    | <b>1</b>  | 7.3 Feature Description.....                                     | <b>16</b> |
| <b>3 Description</b> .....                     | <b>1</b>  | 7.4 Device Functional Modes.....                                 | <b>16</b> |
| <b>4 Revision History</b> .....                | <b>2</b>  | <b>8 Application and Implementation</b> .....                    | <b>19</b> |
| <b>5 Pin Configuration and Functions</b> ..... | <b>3</b>  | 8.1 Application Information.....                                 | <b>19</b> |
| 5.1 Pin Functions: LM393LV.....                | <b>3</b>  | 8.2 Typical Applications.....                                    | <b>22</b> |
| 5.2 Pin Functions: LM339LV.....                | <b>4</b>  | <b>9 Power Supply Recommendations</b> .....                      | <b>30</b> |
| <b>6 Specifications</b> .....                  | <b>5</b>  | <b>10 Layout</b> .....   | <b>30</b> |
| 6.1 Absolute Maximum Ratings .....             | <b>5</b>  | 10.1 Layout Guidelines.....                                      | <b>30</b> |
| 6.2 ESD Ratings .....                          | <b>5</b>  | 10.2 Layout Example.....   | <b>30</b> |
| 6.3 Recommended Operating Conditions .....     | <b>5</b>  | <b>11 Device and Documentation Support</b> .....                 | <b>31</b> |
| 6.4 Thermal Information, LM393LV .....         | <b>6</b>  | 11.1 Related Documentation.....                                  | <b>31</b> |
| 6.5 Thermal Information, LM339LV .....         | <b>6</b>  | 11.2 Receiving Notification of Documentation Updates..           | <b>31</b> |
| 6.6 Electrical Characteristics, LM393LV .....  | <b>7</b>  | 11.3 Support Resources.....                                      | <b>31</b> |
| 6.7 Switching Characteristics, LM393LV .....   | <b>8</b>  | 11.4 Trademarks.....   | <b>31</b> |
| 6.8 Electrical Characteristics, LM339LV .....  | <b>9</b>  | 11.5 Electrostatic Discharge Caution.....                        | <b>31</b> |
| 6.9 Switching Characteristics, LM339LV .....   | <b>10</b> | 11.6 Glossary.....   | <b>31</b> |
| 6.10 Typical Characteristics.....              | <b>11</b> | <b>12 Mechanical, Packaging, and Orderable Information</b> ..... | <b>31</b> |
| <b>7 Detailed Description</b> .....            | <b>16</b> |  |           |
| 7.1 Overview.....                              | <b>16</b> |  |           |

## 4 Revision History


NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

|   |             |
|---|-------------|
| <b>Changes from Revision A (September 2020) to Revision B (December 2020)</b>                         | <b>Page</b> |
| • Updated LM339LV quad tables.....  | <b>5</b>    |
| <b>Changes from Revision * (June 2020) to Revision A (September 2020)</b>                             | <b>Page</b> |
| • Updated the numbering format for tables, figures, and cross-references throughout the document..... | <b>1</b>    |
| • Added LM339LV quad tables.....  | <b>5</b>    |
| • Added Typical Graphs.....   | <b>11</b>   |

## 5 Pin Configuration and Functions

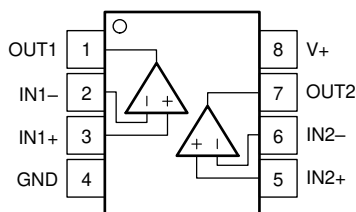

**Figure 5-1. D, DGK, PW, DDF Packages**  
**8-Pin SOIC, VSSOP, TSSOP, SOT-23-8**  
**Top View**




NOTE: Connect exposed thermal pad directly to GND pin.


**Figure 5-2. DSG Package**  
**8-Pad WSON With Exposed Thermal Pad**  
**Top View**

### 5.1 Pin Functions: LM393LV

| PIN         |     | I/O | DESCRIPTION                            |
|-------------|-----|-----|--|
| NAME        | NO. |     |  |
| OUT1        | 1   | O   | Output pin of the comparator 1         |
| IN1–        | 2   | I   | Inverting input pin of comparator 1    |
| IN1+        | 3   | I   | Noninverting input pin of comparator 1 |
| GND         | 4   | —   | Negative supply                        |
| IN2+        | 5   | I   | Noninverting input pin of comparator 2 |
| IN2–        | 6   | I   | Inverting input pin of comparator 2    |
| OUT2        | 7   | O   | Output pin of the comparator 2         |
| V+          | 8   | —   | Positive supply                        |
| Thermal Pad | —   | —   | Connect directly to GND pin            |



**Figure 5-3. D, PW, DYY Package  
14-Pin SOIC, TSSOP, SOT-23  
Top View**

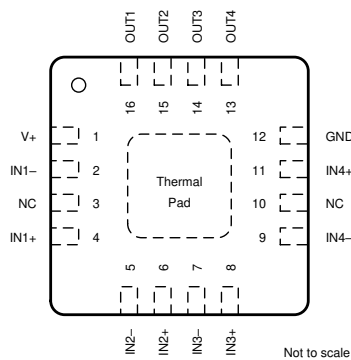

NOTE: Connect exposed thermal pad directly to GND pin.

**Figure 5-4. RTE Package  
16-Pad WQFN With Exposed Thermal Pad  
Top View**

## 5.2 Pin Functions: LM339LV

| PIN                 |      |      | I/O    |  | DESCRIPTION                                    |
|---------------------|------|------|--------|--|--|
| NAME <sup>(1)</sup> | SOIC | WQFN |        |  |  |
| OUT1                | 1    | 15   | Output |  | Output pin of the comparator 1                 |
| OUT2                | 2    | 16   | Output |  | Output pin of the comparator 2                 |
| V+                  | 3    | 1    | —      |  | Positive supply                                |
| IN2–                | 4    | 2    | Input  |  | Negative input pin of the comparator 2         |
| IN2+                | 5    | 4    | Input  |  | Positive input pin of the comparator 2         |
| IN1–                | 6    | 5    | Input  |  | Negative input pin of the comparator 1         |
| IN1+                | 7    | 6    | Input  |  | Positive input pin of the comparator 1         |
| IN3–                | 8    | 7    | Input  |  | Negative input pin of the comparator 3         |
| IN3+                | 9    | 8    | Input  |  | Positive input pin of the comparator 3         |
| IN4–                | 10   | 9    | Input  |  | Negative input pin of the comparator 4         |
| IN4+                | 11   | 11   | Input  |  | Positive input pin of the comparator 4         |
| GND                 | 12   | 12   | —      |  | Negative supply                                |
| OUT3                | 13   | 13   | Output |  | Output pin of the comparator 4                 |
| OUT4                | 14   | 14   | Output |  | Output pin of the comparator 3                 |
| NC                  | —    | 3    | —      |  | No Internal Connection - Leave floating or GND |
| NC                  | —    | 10   | —      |  | No Internal Connection - Leave floating or GND |
| Thermal Pad         | —    | PAD  | —      |  | Connect directly to GND pin                    |

(1) Some manufacturers transpose the names of channels 1 & 2. Electrically the pinouts are identical, just a difference in channel naming convention.

## 6 Specifications

### 6.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)<sup>(1)</sup>

|   | MIN  | MAX | UNIT |
|---|------|-----|------|
| Supply voltage: $V_S = (V+) - (GND)$          | –0.3 | 6   | V    |
| Input pins (IN+, IN–) from GND <sup>(2)</sup> | –0.3 | 6   | V    |
| Current into Input pins (IN+, IN–)            | –10  | 10  | mA   |
| Output (OUT) from GND <sup>(3)</sup>          | –0.3 | 6   | V    |
| Output short circuit duration <sup>(4)</sup>  |      | 10  | s    |
| Junction temperature, $T_J$                   |      | 150 | °C   |
| Storage temperature, $T_{stg}$                | –65  | 150 | °C   |

- (1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions*. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- (2) Input terminals are diode-clamped to GND pin. Input signals that can swing more than 0.3 V beyond the supply rails must be current-limited to 10 mA or less. Additionally, Inputs (IN+, IN–) can be greater than V+ and OUT as long as it is within the –0.3 V to 6 V range
- (3) Output (OUT) can be greater than V+ and inputs (IN+, IN–) as long as it is within the –0.3 V to 6 V range
- (4) Short circuits from outputs to V+ can cause excessive heating and eventual destruction.

### 6.2 ESD Ratings

|             |                         |  | VALUE | UNIT |
|-------------|-------------------------|--|-------|------|
| $V_{(ESD)}$ | Electrostatic discharge | Human-body model (HBM), per ANSI/ESDA/JEDEC JS-001 <sup>(1)</sup>              | ±2000 | V    |
|             |                         | Charged-device model (CDM), per JEDEC specification JESD22-C101 <sup>(2)</sup> | ±1000 |      |

- (1) JEDEC document JEP155 states that 500 V HBM allows safe manufacturing with a standard ESD control process.
- (2) JEDEC document JEP157 states that 250 V CDM allows safe manufacturing with a standard ESD control process.

### 6.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

|   | MIN  | MAX | UNIT |
|---|------|-----|------|
| Supply voltage: $V_S = (V+) - (GND)$      | 1.65 | 5.5 | V    |
| Input voltage range (IN+, IN–) from (GND) | –0.1 | 5.6 | V    |
| Ambient temperature, $T_A$                | –40  | 125 | °C   |

## 6.4 Thermal Information, LM393LV

| THERMAL METRIC <sup>(1)</sup> |  | LM393LV  |            |             |            |              | UNIT |
|-------------------------------|--|----------|------------|-------------|------------|--------------|------|
|                               |  | D (SOIC) | PW (TSSOP) | DGK (VSSOP) | DSG (WSON) | DDF (SOT-23) |      |
|                               |  | 8 PINS   | 8 PINS     | 8 PINS      | 8 PINS     | 8 PINS       |      |
| R <sub>qJA</sub>              | Junction-to-ambient thermal resistance       | 167.7    | 221.7      | –           | 175.2      | –            | °C/W |
| R <sub>qJC(top)</sub>         | Junction-to-case (top) thermal resistance    | 107.0    | 109.1      | –           | 178.1      | –            | °C/W |
| R <sub>qJB</sub>              | Junction-to-board thermal resistance         | 111.2    | 152.5      | –           | 139.5      | –            | °C/W |
| Y <sub>JT</sub>               | Junction-to-top characterization parameter   | 53.1     | 36.4       | –           | 47.2       | –            | °C/W |
| Y <sub>JB</sub>               | Junction-to-board characterization parameter | 110.4    | 150.7      | –           | 138.9      | –            | °C/W |
| R <sub>qJC(bot)</sub>         | Junction-to-case (bottom) thermal resistance | –        | –          | –           | 127.3      | –            | °C/W |

(1) For more information about traditional and new thermal metrics, see the [Semiconductor and IC Package Thermal Metrics](#) application report.

## 6.5 Thermal Information, LM339LV

| THERMAL METRIC <sup>(1)</sup> |  | LM339LV  |            |            |              | UNIT |
|-------------------------------|--|----------|------------|------------|--------------|------|
|                               |  | D (SOIC) | PW (TSSOP) | RTE (WQFN) | DYY (SOT-23) |      |
|                               |  | 14 PINS  | 14 PINS    | 16 PINS    | 14 PINS      |      |
| R <sub>qJA</sub>              | Junction-to-ambient thermal resistance       | 136.0    | 155.0      | 134.1      | –            | °C/W |
| R <sub>qJC(top)</sub>         | Junction-to-case (top) thermal resistance    | 91.2     | 82.0       | 122.6      | –            | °C/W |
| R <sub>qJB</sub>              | Junction-to-board thermal resistance         | 92.0     | 98.5       | 109.3      | –            | °C/W |
| Y <sub>JT</sub>               | Junction-to-top characterization parameter   | 46.9     | 25.7       | 30.9       | –            | °C/W |
| Y <sub>JB</sub>               | Junction-to-board characterization parameter | 91.6     | 97.6       | 108.3      | –            | °C/W |
| R <sub>qJC(bot)</sub>         | Junction-to-case (bottom) thermal resistance | –        | –          | 98.7       | –            | °C/W |

(1) For more information about traditional and new thermal metrics, see the [Semiconductor and IC Package Thermal Metrics](#) application report.

## 6.6 Electrical Characteristics, LM393LV

For  $V_S$  (Total Supply Voltage) =  $(V+) - (GND) = 5\text{ V}$ ,  $V_{CM} = (GND)$  at  $T_A = 25^\circ\text{C}$  (Unless otherwise noted)

| PARAMETER                  |   | TEST CONDITIONS  | MIN   | TYP       | MAX  | UNIT                         |
|----------------------------|---|--|-------|-----------|------|------------------------------|
| <b>OFFSET VOLTAGE</b>      |   |  |       |           |      |                              |
| $V_{OS}$                   | Input offset voltage                            | $V_S = 1.8\text{ V and } 5\text{ V}$   | -2    | $\pm 0.4$ | 2    | mV                           |
| $V_{OS}$                   | Input offset voltage                            | $V_S = 1.8\text{ V and } 5\text{ V}$ , $T_A = -40^\circ\text{C to } +125^\circ\text{C}$                      | -3    |           | 3    | mV                           |
| $dV_{IO}/dT$               | Input offset voltage drift                      | $V_S = 1.8\text{ V and } 5\text{ V}$ , $T_A = -40^\circ\text{C to } +125^\circ\text{C}$                      |       | $\pm 1.5$ |      | $\mu\text{V}/^\circ\text{C}$ |
| <b>POWER SUPPLY</b>        |   |  |       |           |      |                              |
| $I_Q$                      | Quiescent current per comparator                | $V_S = 1.8\text{ V and } 5\text{ V}$ , No Load, Output Low   |       | 25        | 35   | $\mu\text{A}$                |
| $I_Q$                      | Quiescent current per comparator                | $V_S = 1.8\text{ V and } 5\text{ V}$ , No Load, Output Low, $T_A = -40^\circ\text{C to } +125^\circ\text{C}$ |       |           | 50   |                              |
| PSRR                       | Power-supply rejection ratio                    | $V_S = 1.8\text{ V to } 5\text{ V}$ , $T_A = -40^\circ\text{C to } +125^\circ\text{C}$                       | 70    | 80        |      | dB                           |
| <b>INPUT BIAS CURRENT</b>  |   |  |       |           |      |                              |
| $I_B$                      | Input bias current                              | $V_{CM} = V_S/2$   |       | 5         |      | pA                           |
| $I_{OS}$                   | Input offset current                            | $V_{CM} = V_S/2$   |       | 1         |      | pA                           |
| <b>INPUT CAPACITANCE</b>   |   |  |       |           |      |                              |
| $C_{ID}$                   | Input Capacitance, Differential                 | $V_{CM} = V_S/2$   |       | 2         |      | pF                           |
| $C_{IC}$                   | Input Capacitance, Common Mode                  | $V_{CM} = V_S/2$   |       | 3         |      | pF                           |
| <b>INPUT VOLTAGE RANGE</b> |   |  |       |           |      |                              |
| $V_{CM\text{-Range}}$      | Common-mode voltage range                       | $V_S = 1.8\text{ V and } 5\text{ V}$ , $T_A = -40^\circ\text{C to } +125^\circ\text{C}$                      | (GND) |           | (V+) | V                            |
| CMRR                       | Common-mode rejection ratio                     | $V_S = 5\text{ V}$ , (GND) < $V_{CM}$ < (V+), $T_A = -40^\circ\text{C to } +125^\circ\text{C}$               | 60    | 65        |      | dB                           |
| CMRR                       | Common-mode rejection ratio                     | $V_S = 1.8\text{ V}$ , (GND) < $V_{CM}$ < (V+), $T_A = -40^\circ\text{C to } +125^\circ\text{C}$             | 50    | 60        |      | dB                           |
| <b>OPEN-LOOP GAIN</b>      |   |  |       |           |      |                              |
| $A_{VD}$                   | Large signal differential voltage amplification |  | 50    | 200       |      | V/mV                         |
| <b>OUTPUT</b>              |   |  |       |           |      |                              |
| $V_{OL}$                   | Voltage swing from GND                          | $I_{SINK} = 4\text{ mA}$ , $T_A = 25^\circ\text{C}$  |       | 150       | 200  | mV                           |
| $V_{OL}$                   | Voltage swing from GND                          | $I_{SINK} = 4\text{ mA}$ , $T_A = -40^\circ\text{C to } +125^\circ\text{C}$                                  |       |           | 300  | mV                           |
| $I_{LKG}$                  | Open-drain output leakage current               | $V_{PULLUP} = (V+)$ , $T_A = 25^\circ\text{C}$   |       | 100       |      | pA                           |
| $I_{SC}$                   | Short-circuit current                           | $V_S = 5\text{ V}$ , Sinking   | 60    | 100       |      | mA                           |

## 6.7 Switching Characteristics, LM393LV

For  $V_S$  (Total Supply Voltage) =  $(V+) - (GND) = 5\text{ V}$ ,  $V_{CM} = V_S / 2$ ,  $C_L = 15\text{ pF}$  at  $T_A = 25^\circ\text{C}$  (Unless otherwise noted)

| PARAMETER            |                                     | TEST CONDITIONS   | MIN | TYP | MAX | UNIT          |
|----------------------|-------------------------------------|---|-----|-----|-----|---------------|
| <b>OUTPUT</b>        |                                     |   |     |     |     |               |
| $T_{PD-HL}$          | Propagation delay time, high-to-low | $V_{ID} = -10\text{ mV}$ ; Delay from mid-point of input to mid-point of output ( $R_P = 2.5\text{ K}\Omega$ )  |     | 600 |     | ns            |
| $T_{PD-LH}$          | Propagation delay time, low-to-high | $V_{ID} = 10\text{ mV}$ ; Delay from mid-point of input to mid-point of output ( $R_P = 2.5\text{ K}\Omega$ )   |     | 600 |     | ns            |
| $T_{FALL}$           | 5V Output Fall Time, 80% to 20%     | $V_{ID} = -100\text{ mV}$   |     | 20  |     | ns            |
| $F_{TOGGLE}$         | 5V, Toggle Frequency                | $V_{ID} = 100\text{ mV}$ ( $R_P = 2.5\text{ K}\Omega$ )   |     | 1   |     | MHz           |
| <b>POWER ON TIME</b> |                                     |   |     |     |     |               |
| $P_{ON}$             | Power on-time                       | $V_S = 1.8\text{ V}$ and $5\text{ V}$ , $V_{CM} = (GND)$ , $V_{ID} = -0.1\text{ V}$ , $V_{PULL-UP} = V_S / 2$ , Delay from $V_S / 2$ to $V_{OUT} = 0.1 \times V_S / 2$ ( $R_P = 2.5\text{ K}\Omega$ ) |     | 50  |     | $\mu\text{s}$ |



## 6.8 Electrical Characteristics, LM339LV

For  $V_S$  (Total Supply Voltage) =  $(V+) - (GND) = 5\text{ V}$ ,  $V_{CM} = (GND)$  at  $T_A = 25^\circ\text{C}$  (Unless otherwise noted)

| PARAMETER                  |   | TEST CONDITIONS  | MIN   | TYP       | MAX  | UNIT                         |
|----------------------------|---|--|-------|-----------|------|------------------------------|
| <b>OFFSET VOLTAGE</b>      |   |  |       |           |      |                              |
| $V_{OS}$                   | Input offset voltage                            | $V_S = 1.8\text{ V and } 5\text{ V}$   | -2    | $\pm 0.4$ | 2    | mV                           |
| $V_{OS}$                   | Input offset voltage                            | $V_S = 1.8\text{ V and } 5\text{ V}$ , $T_A = -40^\circ\text{C to } +125^\circ\text{C}$                      | -3    |           | 3    | mV                           |
| $dV_{IO}/dT$               | Input offset voltage drift                      | $V_S = 1.8\text{ V and } 5\text{ V}$ , $T_A = -40^\circ\text{C to } +125^\circ\text{C}$                      |       | $\pm 1.5$ |      | $\mu\text{V}/^\circ\text{C}$ |
| <b>POWER SUPPLY</b>        |   |  |       |           |      |                              |
| $I_Q$                      | Quiescent current per comparator                | $V_S = 1.8\text{ V and } 5\text{ V}$ , No Load, Output Low   |       | 25        | 35   | $\mu\text{A}$                |
| $I_Q$                      | Quiescent current per comparator                | $V_S = 1.8\text{ V and } 5\text{ V}$ , No Load, Output Low, $T_A = -40^\circ\text{C to } +125^\circ\text{C}$ |       |           | 50   |                              |
| PSRR                       | Power-supply rejection ratio                    | $V_S = 1.8\text{ V to } 5\text{ V}$ , $T_A = -40^\circ\text{C to } +125^\circ\text{C}$                       | 70    | 80        |      | dB                           |
| <b>INPUT BIAS CURRENT</b>  |   |  |       |           |      |                              |
| $I_B$                      | Input bias current                              | $V_{CM} = V_S/2$   |       | 5         |      | pA                           |
| $I_{OS}$                   | Input offset current                            | $V_{CM} = V_S/2$   |       | 1         |      | pA                           |
| <b>INPUT CAPACITANCE</b>   |   |  |       |           |      |                              |
| $C_{ID}$                   | Input Capacitance, Differential                 | $V_{CM} = V_S/2$   |       | 2         |      | pF                           |
| $C_{IC}$                   | Input Capacitance, Common Mode                  | $V_{CM} = V_S/2$   |       | 3         |      | pF                           |
| <b>INPUT VOLTAGE RANGE</b> |   |  |       |           |      |                              |
| $V_{CM\text{-Range}}$      | Common-mode voltage range                       | $V_S = 1.8\text{ V and } 5\text{ V}$ , $T_A = -40^\circ\text{C to } +125^\circ\text{C}$                      | (GND) |           | (V+) | V                            |
| CMRR                       | Common-mode rejection ratio                     | $V_S = 5\text{ V}$ , (GND) < $V_{CM}$ < (V+), $T_A = -40^\circ\text{C to } +125^\circ\text{C}$               | 60    | 65        |      | dB                           |
| CMRR                       | Common-mode rejection ratio                     | $V_S = 1.8\text{ V}$ , (GND) < $V_{CM}$ < (V+), $T_A = -40^\circ\text{C to } +125^\circ\text{C}$             | 50    | 60        |      | dB                           |
| <b>OPEN-LOOP GAIN</b>      |   |  |       |           |      |                              |
| $A_{VD}$                   | Large signal differential voltage amplification |  | 50    | 200       |      | V/mV                         |
| <b>OUTPUT</b>              |   |  |       |           |      |                              |
| $V_{OL}$                   | Voltage swing from GND                          | $I_{SINK} = 4\text{ mA}$ , $T_A = 25^\circ\text{C}$  |       | 150       | 200  | mV                           |
| $V_{OL}$                   | Voltage swing from GND                          | $I_{SINK} = 4\text{ mA}$ , $T_A = -40^\circ\text{C to } +125^\circ\text{C}$                                  |       |           | 300  | mV                           |
| $I_{LKG}$                  | Open-drain output leakage current               | $V_{PULLUP} = (V+)$ , $T_A = 25^\circ\text{C}$   |       | 100       |      | pA                           |
| $I_{SC}$                   | Short-circuit current                           | $V_S = 5\text{ V}$ , Sinking   | 60    | 100       |      | mA                           |

## 6.9 Switching Characteristics, LM339LV

For  $V_S$  (Total Supply Voltage) =  $(V+) - (GND) = 5\text{ V}$ ,  $V_{CM} = V_S / 2$ ,  $C_L = 15\text{ pF}$  at  $T_A = 25^\circ\text{C}$  (Unless otherwise noted)

| PARAMETER            |                                     | TEST CONDITIONS   | MIN | TYP | MAX | UNIT          |
|----------------------|-------------------------------------|---|-----|-----|-----|---------------|
| <b>OUTPUT</b>        |                                     |   |     |     |     |               |
| $T_{PD-HL}$          | Propagation delay time, high-to-low | $V_{ID} = -10\text{ mV}$ ; Delay from mid-point of input to mid-point of output ( $R_P = 2.5\text{ K}\Omega$ )  |     | 600 |     | ns            |
| $T_{PD-LH}$          | Propagation delay time, low-to-high | $V_{ID} = 10\text{ mV}$ ; Delay from mid-point of input to mid-point of output ( $R_P = 2.5\text{ K}\Omega$ )   |     | 600 |     | ns            |
| $T_{FALL}$           | 5V Output Fall Time, 80% to 20%     | $V_{ID} = -100\text{ mV}$   |     | 20  |     | ns            |
| $F_{TOGGLE}$         | 5V, Toggle Frequency                | $V_{ID} = 100\text{ mV}$ ( $R_P = 2.5\text{ K}\Omega$ )   |     | 1   |     | MHz           |
| <b>POWER ON TIME</b> |                                     |   |     |     |     |               |
| $P_{ON}$             | Power on-time                       | $V_S = 1.8\text{ V}$ and $5\text{ V}$ , $V_{CM} = (GND)$ , $V_{ID} = -0.1\text{ V}$ , $V_{PULL-UP} = V_S / 2$ , Delay from $V_S / 2$ to $V_{OUT} = 0.1 \times V_S / 2$ ( $R_P = 2.5\text{ K}\Omega$ ) |     | 50  |     | $\mu\text{s}$ |

## 6.10 Typical Characteristics

$T_A = 25^\circ\text{C}$ ,  $V_S = 5\text{ V}$ ,  $R_{\text{PULLUP}} = 2.5\text{ k}$ ,  $C_L = 15\text{ pF}$ ,  $V_{\text{CM}} = \text{GND}$ ,  $V_{\text{UNDERDRIVE}} = 100\text{ mV}$ ,  $V_{\text{OVERDRIVE}} = 100\text{ mV}$  unless otherwise noted.

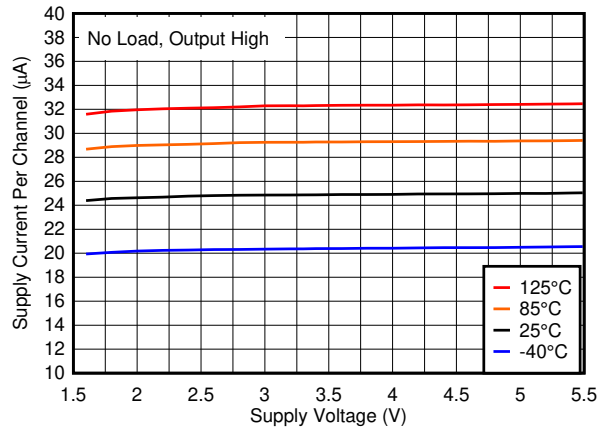


Figure 6-1. Supply Current vs. Supply Voltage

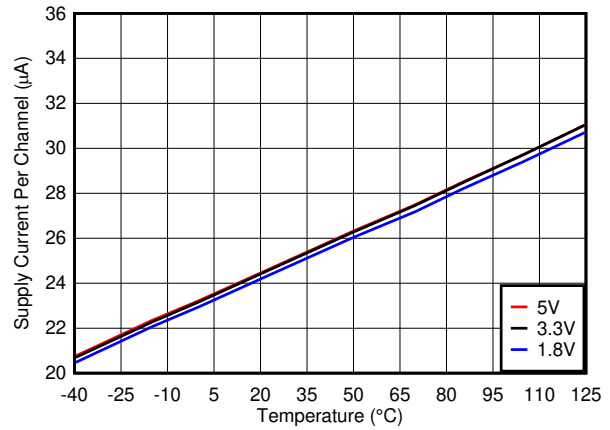


Figure 6-2. Supply Current vs. Temperature

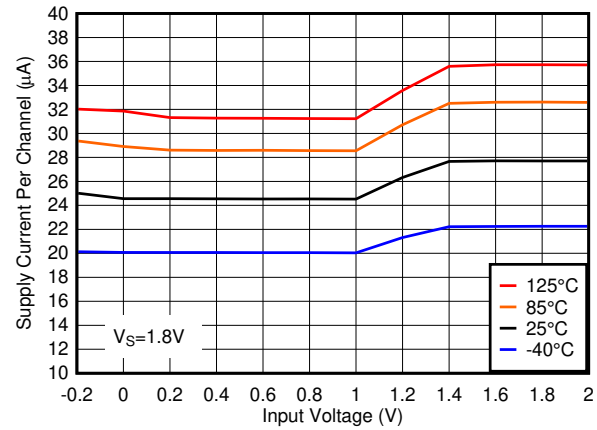


Figure 6-3. Supply Current vs. Input Voltage, 1.8V

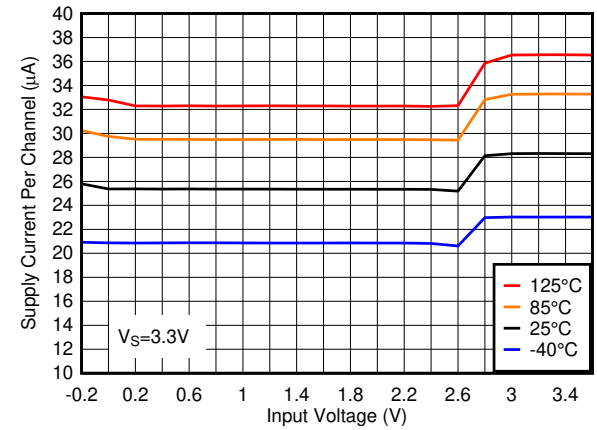


Figure 6-4. Supply Current vs. Input Voltage, 3.3V

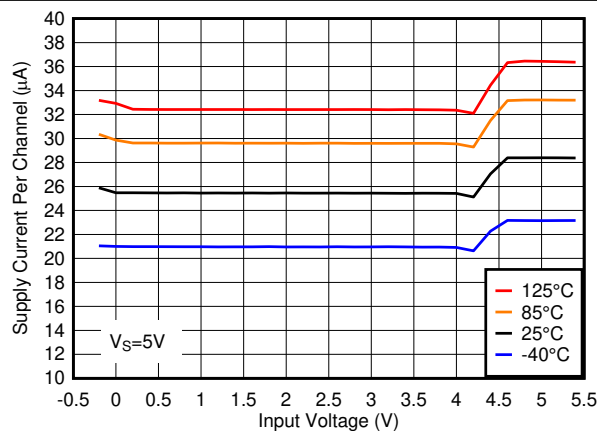


Figure 6-5. Supply Current vs. Input Voltage, 5V

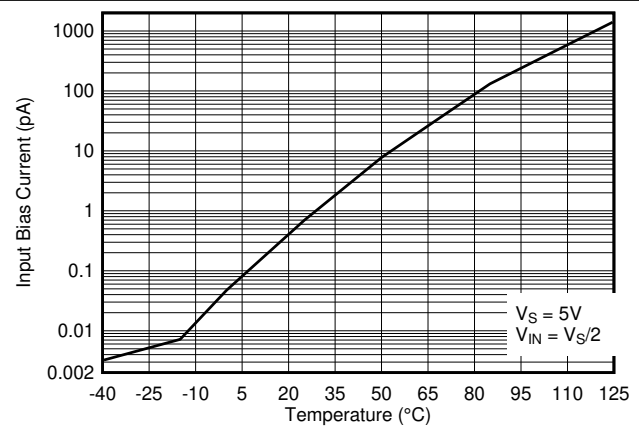


Figure 6-6. Input Bias Current vs. Temperature

## 6.10 Typical Characteristics (continued)

$T_A = 25^\circ\text{C}$ ,  $V_S = 5\text{ V}$ ,  $R_{\text{PULLUP}} = 2.5\text{ k}\Omega$ ,  $C_L = 15\text{ pF}$ ,  $V_{\text{CM}} = \text{GND}$ ,  $V_{\text{UNDERDRIVE}} = 100\text{ mV}$ ,  $V_{\text{OVERDRIVE}} = 100\text{ mV}$  unless otherwise noted.

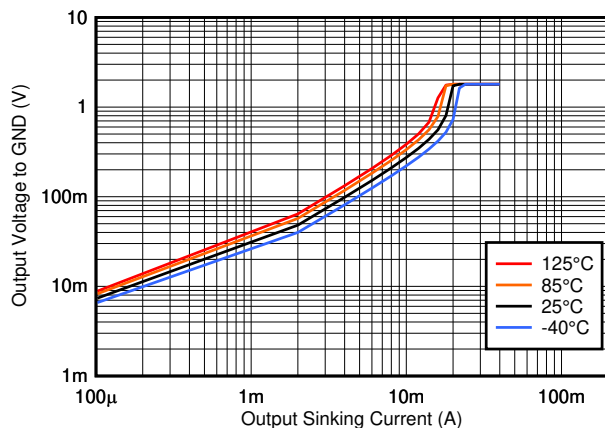


Figure 6-7. Output Sinking Current vs. Output Voltage, 1.8V

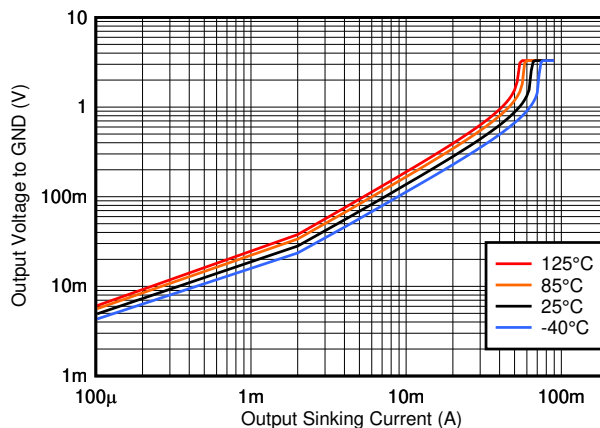


Figure 6-8. Output Sinking Current vs. Output Voltage, 3.3V

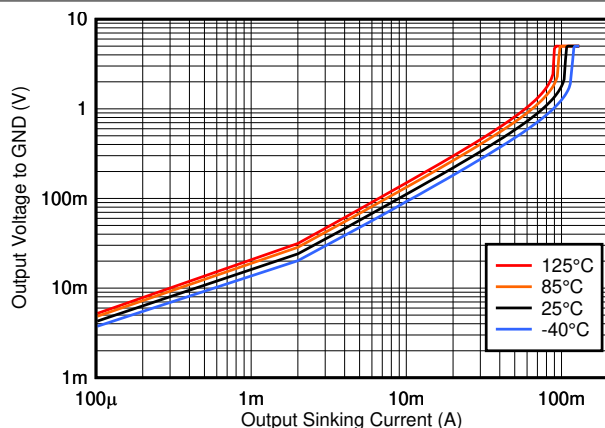


Figure 6-9. Output Sinking Current vs. Output Voltage, 5V

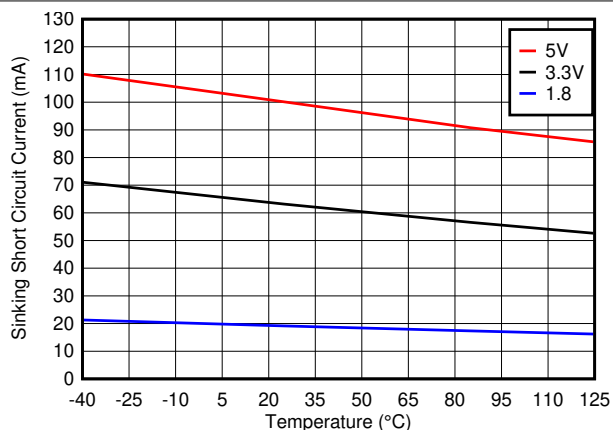


Figure 6-10. Sinking Short Circuit Current vs. Temperature

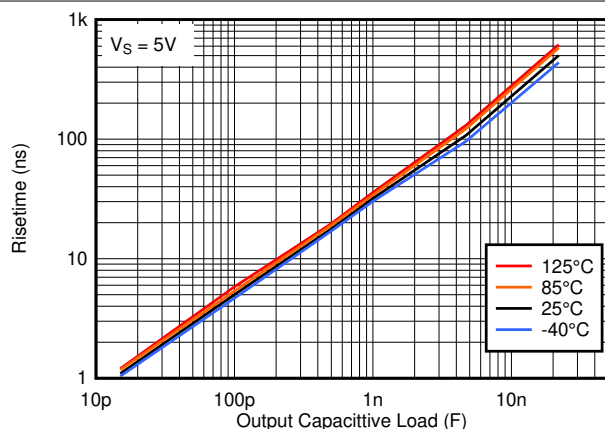


Figure 6-11. Risettime vs. Capacitive Load

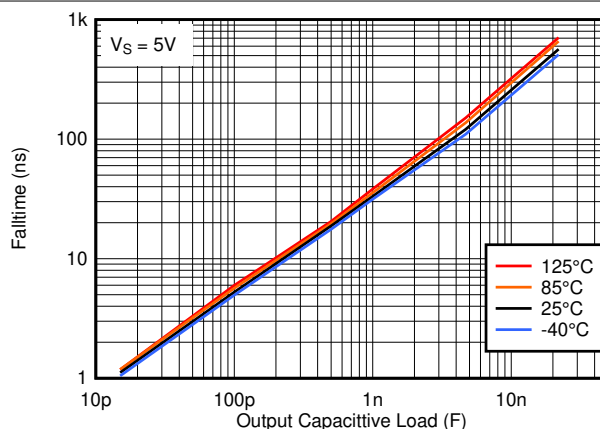


Figure 6-12. Falltime vs. Capacitive Load

## 6.10 Typical Characteristics (continued)

$T_A = 25^\circ\text{C}$ ,  $V_S = 5\text{ V}$ ,  $R_{\text{PULLUP}} = 2.5\text{ k}\Omega$ ,  $C_L = 15\text{ pF}$ ,  $V_{\text{CM}} = \text{GND}$ ,  $V_{\text{UNDERDRIVE}} = 100\text{ mV}$ ,  $V_{\text{OVERDRIVE}} = 100\text{ mV}$  unless otherwise noted.

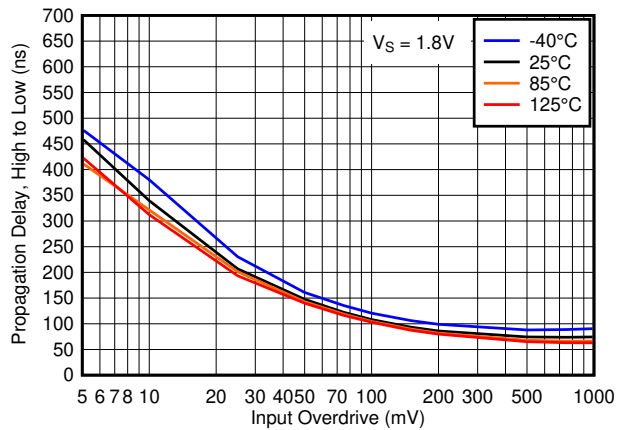


Figure 6-13. Propagation Delay, High to Low, 1.8V

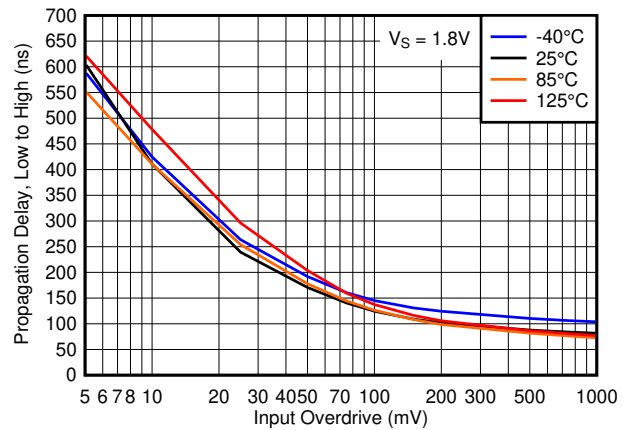


Figure 6-14. Propagation Delay, Low to High, 1.8V

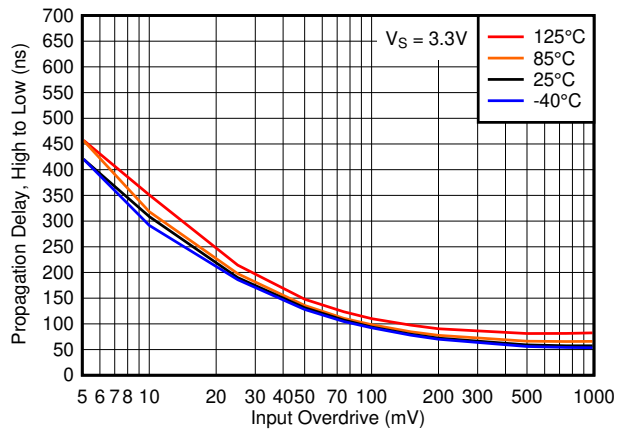


Figure 6-15. Propagation Delay, High to Low, 3.3V

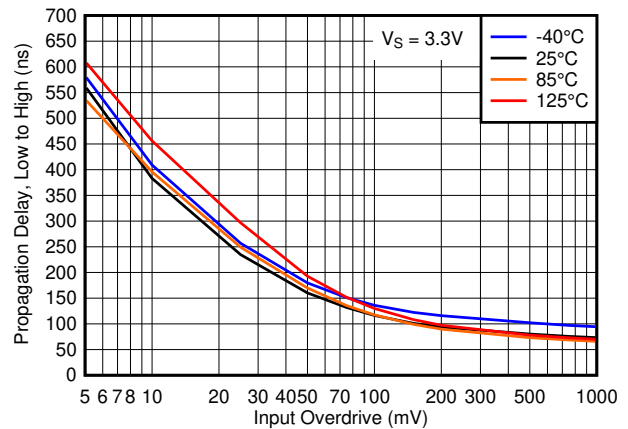


Figure 6-16. Propagation Delay, Low to High, 3.3V

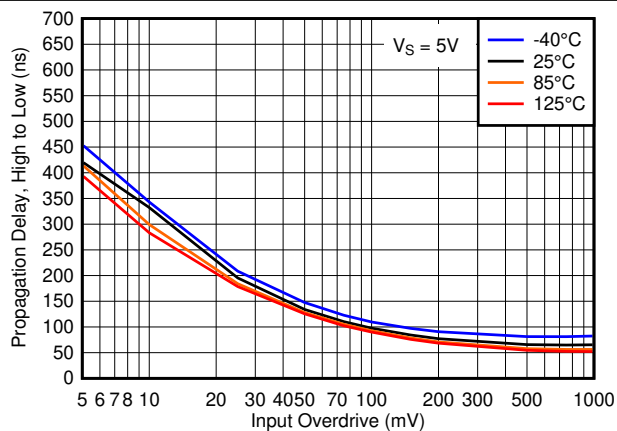


Figure 6-17. Propagation Delay, High to Low, 5V

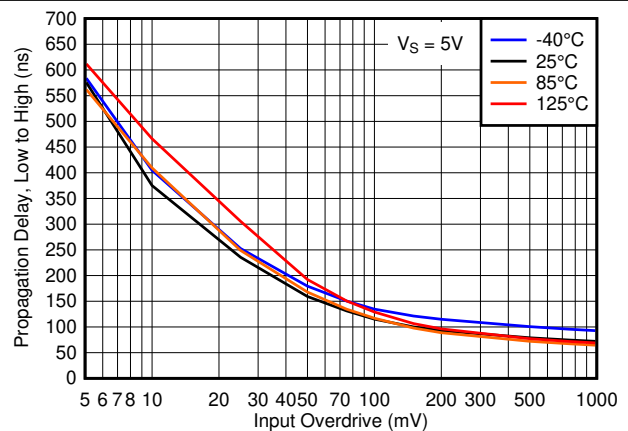


Figure 6-18. Propagation Delay, Low to High, 5V

## 6.10 Typical Characteristics (continued)

$T_A = 25^\circ\text{C}$ ,  $V_S = 5\text{ V}$ ,  $R_{\text{PULLUP}} = 2.5\text{ k}\Omega$ ,  $C_L = 15\text{ pF}$ ,  $V_{\text{CM}} = \text{GND}$ ,  $V_{\text{UNDERDRIVE}} = 100\text{ mV}$ ,  $V_{\text{OVERDRIVE}} = 100\text{ mV}$  unless otherwise noted.

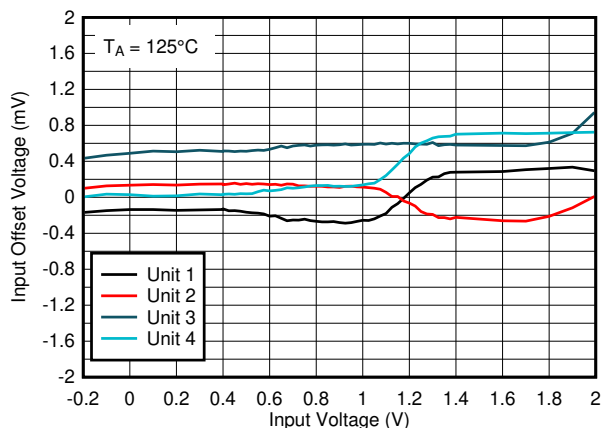


Figure 6-19. Offset Voltage vs. Input Voltage at  $125^\circ\text{C}$ , 1.8V

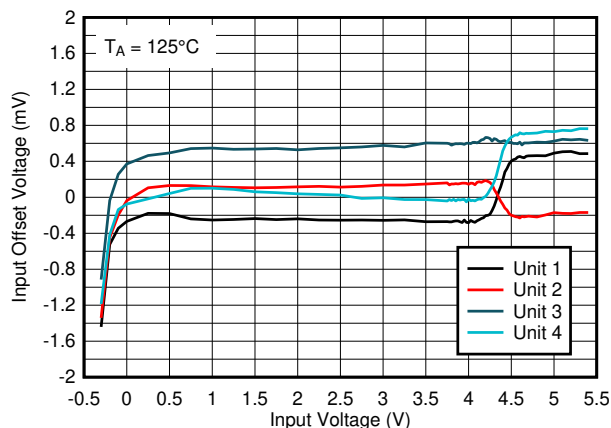


Figure 6-20. Offset Voltage vs. Input Voltage at  $125^\circ\text{C}$ , 5V

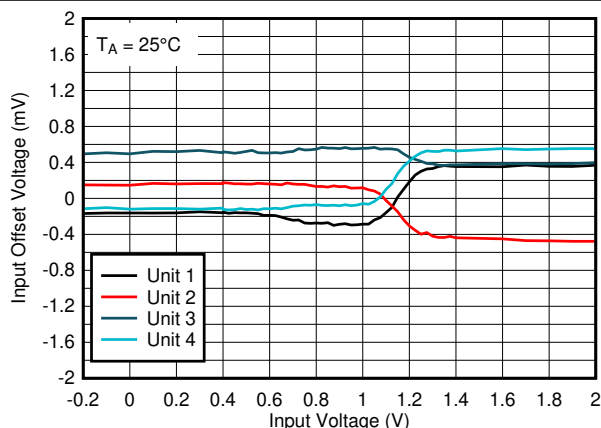


Figure 6-21. Offset Voltage vs. Input Voltage at  $25^\circ\text{C}$ , 1.8V

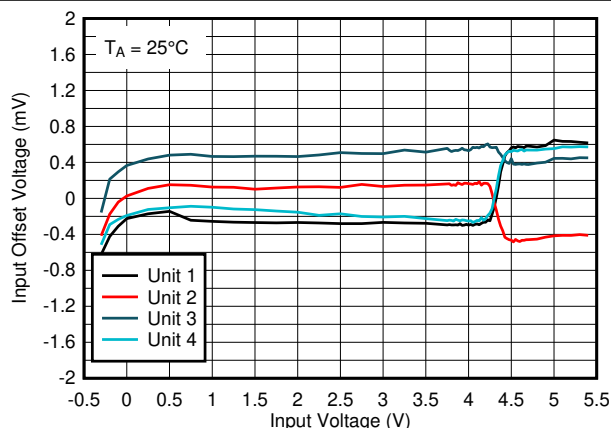


Figure 6-22. Offset Voltage vs. Input Voltage at  $25^\circ\text{C}$ , 5V

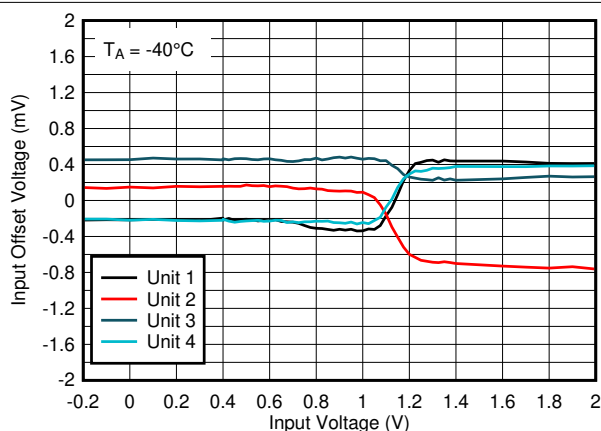


Figure 6-23. Offset Voltage vs. Input Voltage at  $-40^\circ\text{C}$ , 1.8V

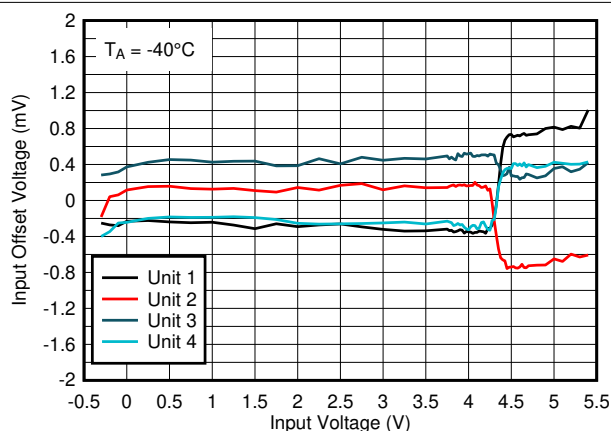


Figure 6-24. Offset Voltage vs. Input Voltage at  $-40^\circ\text{C}$ , 5V

## 6.10 Typical Characteristics (continued)

$T_A = 25^\circ\text{C}$ ,  $V_S = 5\text{ V}$ ,  $R_{\text{PULLUP}} = 2.5\text{ k}\Omega$ ,  $C_L = 15\text{ pF}$ ,  $V_{\text{CM}} = \text{GND}$ ,  $V_{\text{UNDERDRIVE}} = 100\text{ mV}$ ,  $V_{\text{OVERDRIVE}} = 100\text{ mV}$  unless otherwise noted.

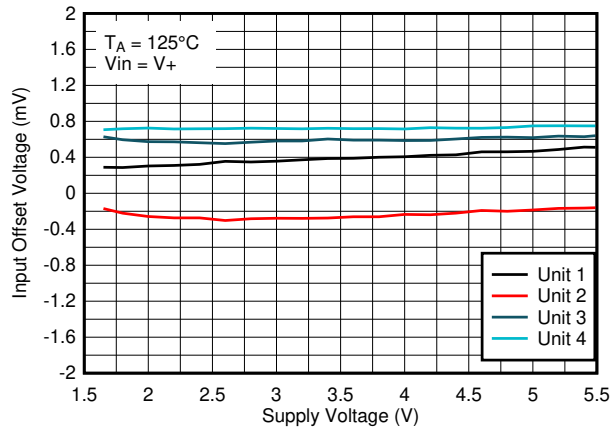


Figure 6-25. Offset Voltage vs. Supply Voltage at  $125^\circ\text{C}$ ,  $V_{\text{IN}}=V_+$

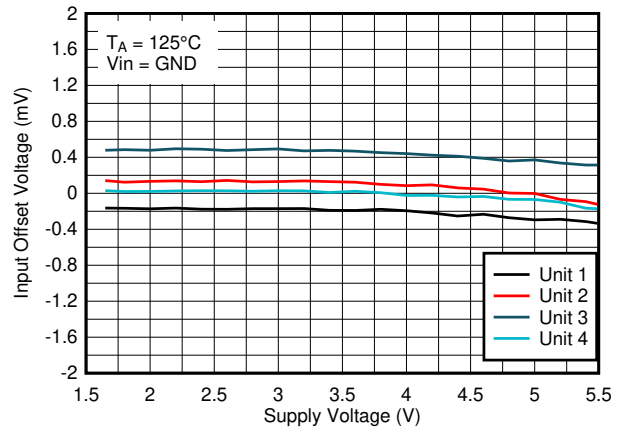


Figure 6-26. Offset Voltage vs. Supply Voltage at  $125^\circ\text{C}$ ,  $V_{\text{IN}}=0\text{V}$

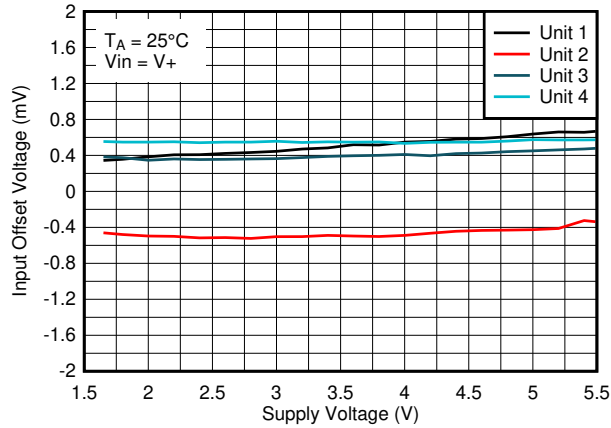


Figure 6-27. Offset Voltage vs. Supply Voltage at  $25^\circ\text{C}$ ,  $V_{\text{IN}}=V_+$

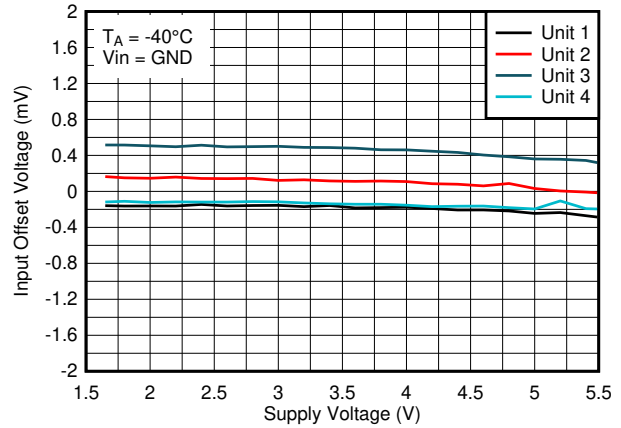


Figure 6-28. Offset Voltage vs. Supply Voltage at  $25^\circ\text{C}$ ,  $V_{\text{IN}}=0\text{V}$

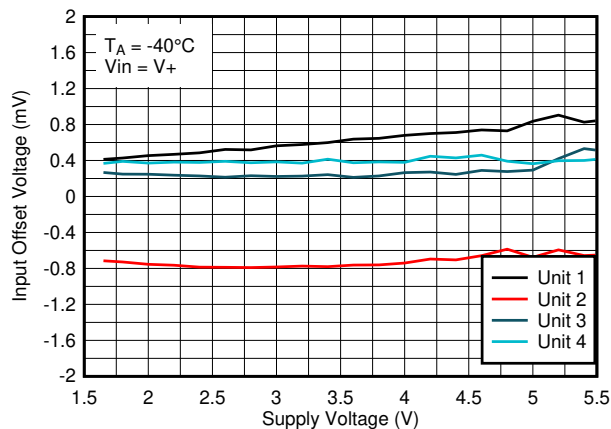


Figure 6-29. Offset Voltage vs. Supply Voltage at  $-40^\circ\text{C}$ ,  $V_{\text{IN}}=V_+$

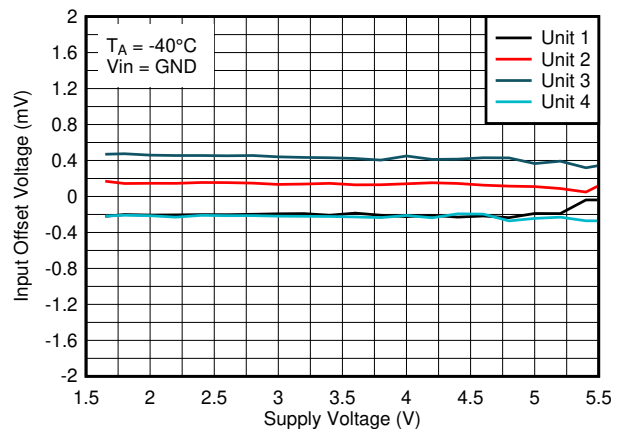



Figure 6-30. Offset Voltage vs. Supply Voltage at  $-40^\circ\text{C}$ ,  $V_{\text{IN}}=0\text{V}$

## 7 Detailed Description

### 7.1 Overview

The LV Family devices are micro-power comparators with open-drain outputs and improved input offset voltage that operate down to 1.65 V while only consuming only 25  $\mu$ A per channel. The LV family are ideally suited for portable, automotive and industrial applications. An internal power-on reset circuit ensures that the output remains in a known state during power-up and power-down while fail-safe inputs can tolerate input transients without damage or false outputs.

### 7.2 Functional Block Diagram

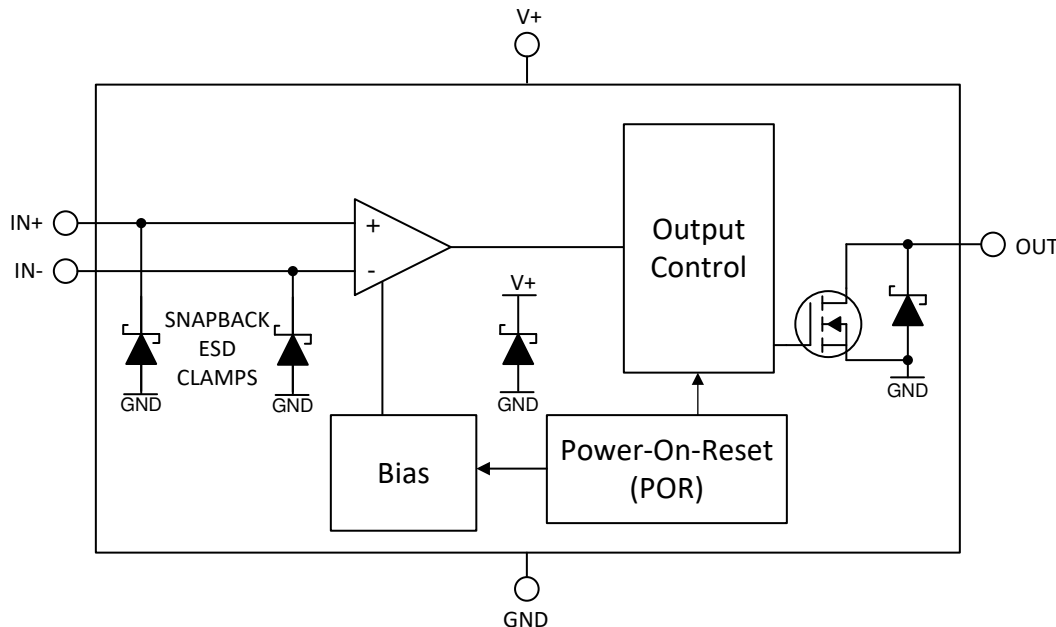

### 7.3 Feature Description

The LV family devices are micro-power comparators that have low input offset voltages and are capable of operating at low voltages. The LV family feature a rail-to-rail input stage capable of operating up to 100 mV beyond the power supply rails. The comparators also feature an open-drain output stage options with Power On Reset for known start-up conditions.

### 7.4 Device Functional Modes

#### 7.4.1 Open Drain Output

The LV family features an open-drain (also commonly called open collector) sinking-only output stage enabling the output logic levels to be pulled up to an external voltage from 0 V up to 5.5 V, independent of the comparator supply voltage ( $V_{+}$ ). The open-drain output also allows logical OR'ing of multiple open drain outputs and logic level translation. TI recommends setting the pull-up resistor current to between 100 $\mu$ A and 1mA. Lower pull-up resistor values will help increase the rising edge risetime, but at the expense of increasing  $V_{OL}$  and higher power dissipation. The risetime will be dependant on the time constant of the total pull-up resistance and total load capacitance. Large value pull-up resistors ( $>1$  M $\Omega$ ) will create an exponential rising edge due to the RC time constant and increase the risetime.

Unused open drain outputs should be left floating, or can be tied to the GND pin if floating pins are not allowed. While an individual output can typically sink up to 100 mA, the total combined current for all channels must be less than 200 mA.


#### 7.4.2 Power-On Reset (POR)

The LV family has an internal Power-on-Reset (POR) circuit for known start-up or power-down conditions. While the power supply ( $V_{+}$ ) is ramping up or ramping down, the POR circuitry will be activated for up to 30 $\mu$ s after the



minimum supply voltage threshold of 1.5V is crossed, or immediately when the supply voltage drops below 1.5V. When the supply voltage is equal to or greater than the minimum supply voltage, and after the delay period, the comparator output reflects the state of the differential input ( $V_{ID}$ ).

The POR circuit will keep the output high impedance (HI-Z) during the POR period ( $t_{on}$ ).

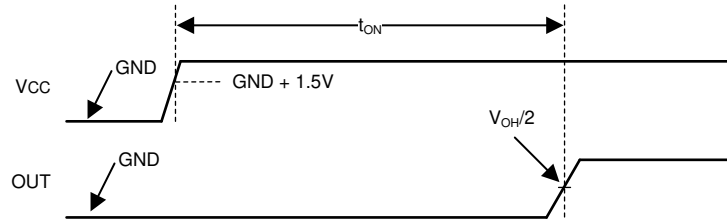

**Figure 7-1. Power-On Reset Timing Diagram**

Note that it is the nature of an open collector output that the output will rise with the pull-up voltage during the POR period.

A light pull-up (to  $V_+$ ) or pull-down (to GND) resistor can be used to pre-bias the output condition to prevent the output from floating.

### 7.4.3 Inputs

#### 7.4.3.1 Rail to Rail Input

The LV family input voltage range extends from 100mV below GND to 100 mV above  $V_+$ . The differential input voltage ( $V_{ID}$ ) can be any voltage within these limits. No phase-inversion of the comparator output will occur when the input pins exceed  $V_+$  or GND.

#### 7.4.3.2 Fault Tolerant Inputs

The LV family inputs are fault tolerant up to 5.5V independent of  $V_+$ . Fault tolerant is defined as maintaining the same high input impedance when  $V_+$  is unpowered or within the recommended operating ranges.

The fault tolerant inputs can be any value between 0 V and 5.5 V, even while  $V_+$  is zero or ramping up or down. This feature avoids power sequencing issues as long as the input voltage range and supply voltage are within the specified ranges. This is possible since the inputs are not clamped to  $V_+$  and the input current maintains its value even when a higher voltage is applied to the inputs.

As long as one of the input pins remains within the valid input range, and the supply voltage is valid and not in POR, the output state will be correct.

The following is a summary of input voltage excursions and their outcomes:

1. When both IN- and IN+ are within the specified input voltage range:
  - a. If IN- is higher than IN+ and the offset voltage, the output is low.
  - b. If IN- is lower than IN+ and the offset voltage, the output is high.
2. When IN- is outside the specified input voltage range and IN+ is within the specified voltage range, the output is low.
3. When IN+ is higher than the specified input voltage range and IN- is within the specified input voltage range, the output is high.
4. When IN- and IN+ are both outside the specified input voltage range, the output is **indeterminate** (random).  
*Do not operate in this region.*

Even with the fault tolerant feature, TI *strongly* recommends keeping the inputs within the specified input voltage range during normal system operation to maintain datasheet specifications. Operating outside the specified input range can cause changes in specifications such as propagation delay, which can lead to unpredictable behavior.

#### 7.4.3.3 Input Protection

The input bias current is typically 5 pA for input voltages between  $V_+$  and GND. The comparator inputs are protected from reverse voltage by the internal ESD diodes connected to GND. As the input voltage goes under

GND, or above the input Absolute Maximum ratings the protection diodes become forward biased and begin to conduct causing the input bias current to increase exponentially. Input bias current typically doubles for each 10°C temperature increase.

If the inputs are to be connected to a low impedance source, such as a power supply or buffered reference line, TI recommends adding a current-limiting resistor in series with the input to limit any transient currents should the clamps conduct. The current should be limited 10 mA or less. This series resistance can be part of any resistive input dividers or networks.

#### 7.4.4 ESD Protection

The LV family incorporates internal ESD protection circuits on all pins. The inputs, and the open-drain output, use a proprietary "snapback" type ESD clamp from each pin to GND, which allows the pins to exceed the supply voltage (V+). While shown as Zener diodes, snapbacks momentarily "short" and go low impedance (like an SCR) when the threshold is exceeded, as opposed to clamping to a defined voltage like a Zener. There is no ESD clamp from the inputs to V+.

The open-drain output protection also consists of a ESD clamp between the output and GND to allow the output to be pulled above V+ to a maximum of 5.5V. There is no ESD clamp from the output to V+.

If the inputs are to be connected to a low impedance source, such as a power supply or buffered reference line, TI recommends adding a current-limiting resistor in series with the input to limit any transient currents should the clamps conduct. The current should be limited 10 mA or less. This series resistance can be part of any resistive input dividers or networks.

TI does not specify the performance of the ESD clamps and external clamping diodes should be added if the inputs or output could exceed the maximum ratings as part of normal operation.

#### 7.4.5 Unused Inputs

If a channel is not to be used, DO NOT tie the inputs together. Due to the high equivalent bandwidth and low offset voltage, tying the inputs directly together can cause high frequency oscillations as the device triggers on it's own internal wideband noise. Instead, the inputs should be tied to any available voltage that resides within the specified input voltage range and provides a minimum of 50mV differential voltage. For example, one input can be grounded and the other input connected to a reference voltage, or even V+ (as long as the input is directly connected to the V+ pin to avoid transients).

#### 7.4.6 Hysteresis

The LV family does not have internal hysteresis. Due to the wide effective bandwidth and low input offset voltage, it is possible for the output to "chatter" (oscillate) when the absolute differential voltage near zero, as the comparator triggers on it's own internal wideband noise. TI recommends that the user add external hysteresis if slow moving signals are expected. See [Section 8.1.2](#) in the following section.

## 8 Application and Implementation

### Note

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

### 8.1 Application Information

#### 8.1.1 Basic Comparator Definitions

##### 8.1.1.1 Operation


The basic comparator compares the input voltage ( $V_{IN}$ ) on one input to a reference voltage ( $V_{REF}$ ) on the other input. In the [Figure 8-1](#) example below, if  $V_{IN}$  is less than  $V_{REF}$ , the output voltage ( $V_O$ ) is logic low ( $V_{OL}$ ). If  $V_{IN}$  is greater than  $V_{REF}$ , the output voltage ( $V_O$ ) is at logic high ( $V_{OH}$ ). [Table 8-1](#) summarizes the output conditions. The output logic can be inverted by simply swapping the input pins.

**Table 8-1. Output Conditions**

| Inputs Condition | Output   |
|------------------|--|
| $IN+ > IN-$      | HIGH ( $V_{OH}$ )  |
| $IN+ = IN-$      | Indeterminate (chatters - see <a href="#">Hysteresis</a> ) |
| $IN+ < IN-$      | LOW ( $V_{OL}$ )   |

##### 8.1.1.2 Propagation Delay

There is a delay between from when the input crosses the reference voltage and the output responds. This is called the Propagation Delay. Propagation delay can be different between high-to low and low-to-high input transitions. This is shown as  $t_{pLH}$  and  $t_{pHL}$  in [Figure 8-1](#) and is measured from the mid-point of the input to the midpoint of the output.

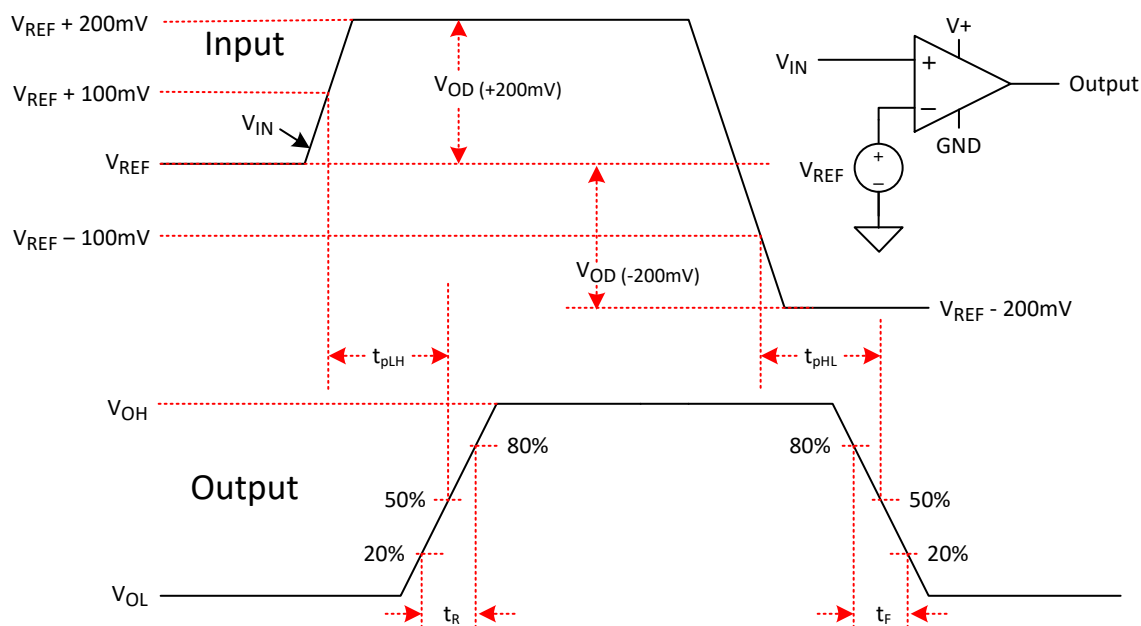

**Figure 8-1. Comparator Timing Diagram**

##### 8.1.1.3 Overdrive Voltage

The overdrive voltage,  $V_{OD}$ , is the amount of input voltage beyond the reference voltage (and not the total input peak-to-peak voltage). The overdrive voltage is 100mV as shown in the [Figure 8-1](#) example. The overdrive

voltage can influence the propagation delay ( $t_p$ ). The smaller the overdrive voltage, the longer the propagation delay, particularly when  $<100\text{mV}$ . If the fastest speeds are desired, it is recommended to apply the highest amount of overdrive possible.

The risetime ( $t_r$ ) and falltime ( $t_f$ ) is the time from the 20% and 80% points of the output waveform.


### 8.1.2 Hysteresis

The basic comparator configuration may oscillate or produce a noisy "chatter" output if the applied differential input voltage is near the comparator's offset voltage. This usually occurs when the input signal is moving very slowly across the switching threshold of the comparator.

This problem can be prevented by the addition of hysteresis or positive feedback.

The hysteresis transfer curve is shown in [Figure 8-2](#). This curve is a function of three components:  $V_{TH}$ ,  $V_{OS}$ , and  $V_{HYST}$ :

- $V_{TH}$  is the actual set voltage or threshold trip voltage.
- $V_{OS}$  is the internal offset voltage between  $V_{IN+}$  and  $V_{IN-}$ . This voltage is added to  $V_{TH}$  to form the actual trip point at which the comparator must respond to change output states.
- $V_{HYST}$  is the hysteresis (or trip window) that is designed to reduce comparator sensitivity to noise.

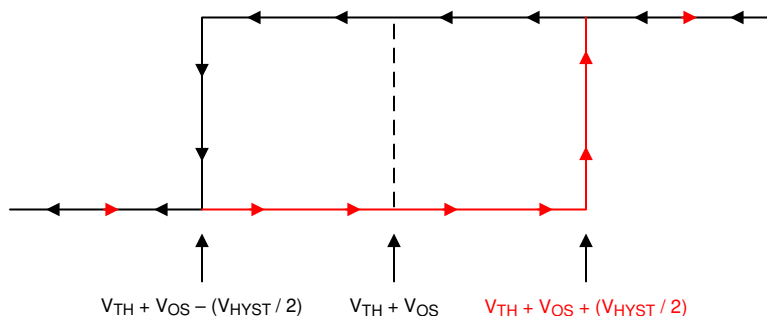


**Figure 8-2. Hysteresis Transfer Curve**

For more information, please see Application Note SBOA219 "[Comparator with and without hysteresis circuit](#)".


#### 8.1.2.1 Inverting Comparator With Hysteresis

The inverting comparator with hysteresis requires a three-resistor network that is referenced to the comparator supply voltage ( $V_{CC}$ ), as shown in [Figure 8-3](#).

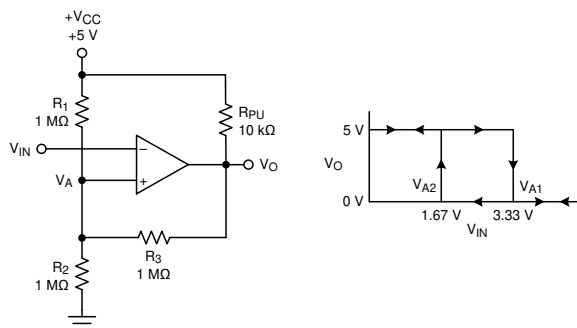

**Figure 8-3. Inverting Configuration With Hysteresis**

The equivalent resistor networks when the output is high and low are shown in [Figure 8-3](#). Note that  $R_{PU}$  should be considered in series with  $R_3$  when the output is high.  $R_{PU}$  should be at least 10x less than  $R_3$ .

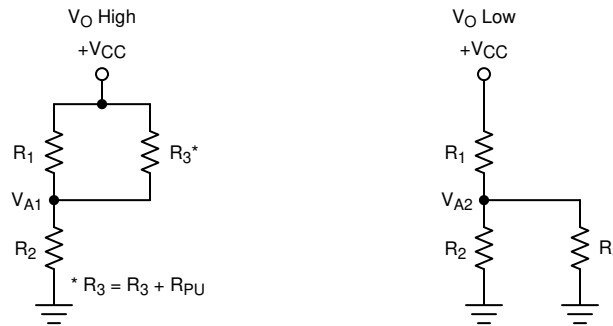

**Figure 8-4. Inverting Configuration Resistor Equivalent Networks**

When  $V_{IN}$  is less than  $V_A$ , the output voltage is high (for simplicity, assume  $V_O$  switches as high as  $V_{CC}$ ). The three network resistors can be represented as  $R1 \parallel R3$  in series with  $R2$ , as shown in [Figure 8-4](#).

[Equation 1](#) below defines the high-to-low trip voltage ( $V_{A1}$ ).

$$V_{A1} = V_{CC} \times \frac{R2}{(R1 \parallel R3) + R2} \quad (1)$$

When  $V_{IN}$  is greater than  $V_A$ , the output voltage is low. In this case, the three network resistors can be presented as  $R2 \parallel R3$  in series with  $R1$ , as shown in [Equation 2](#).

Use [Equation 2](#) to define the low to high trip voltage ( $V_{A2}$ ).


$$V_{A2} = V_{CC} \times \frac{R2 \parallel R3}{R1 + (R2 \parallel R3)} \quad (2)$$

[Equation 3](#) defines the total hysteresis provided by the network.

$$\Delta V_A = V_{A1} - V_{A2} \quad (3)$$


### 8.1.2.2 Non-Inverting Comparator With Hysteresis

A noninverting comparator with hysteresis requires a two-resistor network and a voltage reference ( $V_{REF}$ ) at the inverting input, as shown in [Figure 8-5](#),

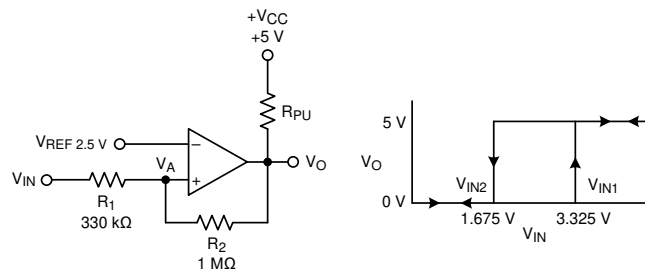

**Figure 8-5. Non-Inverting Configuration With Hysteresis**

The equivalent resistor networks when the output is high and low are shown in [Figure 8-6](#). Note that  $R_{PU}$  should be considered in series with  $R2$  when the output is high.  $R_{PU}$  should be at least 10x less than  $R2$ .

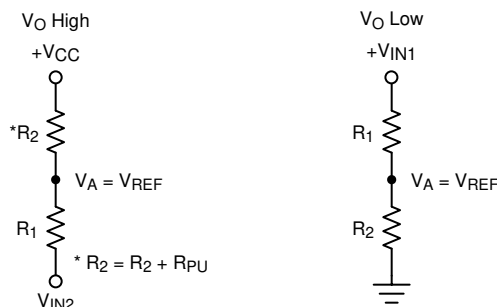

**Figure 8-6. Non-Inverting Configuration Resistor Networks**

When  $V_{IN}$  is less than  $V_{REF}$ , the output is low. For the output to switch from low to high,  $V_{IN}$  must rise above the  $V_{IN1}$  threshold. Use [Equation 4](#) to calculate  $V_{IN1}$ .

$$V_{IN1} = R1 \times \frac{V_{REF}}{R2} + V_{REF} \quad (4)$$

When  $V_{IN}$  is greater than  $V_{REF}$ , the output is high. For the comparator to switch back to a low state,  $V_{IN}$  must drop below  $V_{IN2}$ . Use [Equation 5](#) to calculate  $V_{IN2}$ .

$$V_{IN2} = \frac{V_{REF}(R1 + R2) - V_{CC} \times R1}{R2} \quad (5)$$

The hysteresis of this circuit is the difference between  $V_{IN1}$  and  $V_{IN2}$ , as shown in [Equation 6](#).


$$\Delta V_{IN} = V_{CC} \times \frac{R1}{R2} \quad (6)$$

For more information, please see Application Notes SNOA997 "[Inverting comparator with hysteresis circuit](#)" and SBOA313 "[Non-Inverting Comparator With Hysteresis Circuit](#)".

## 8.2 Typical Applications

### 8.2.1 Window Comparator

Window comparators are commonly used to detect undervoltage and overvoltage conditions. [Figure 8-7](#) shows a simple window comparator circuit. Window comparators require open drain outputs if the outputs are directly connected together.

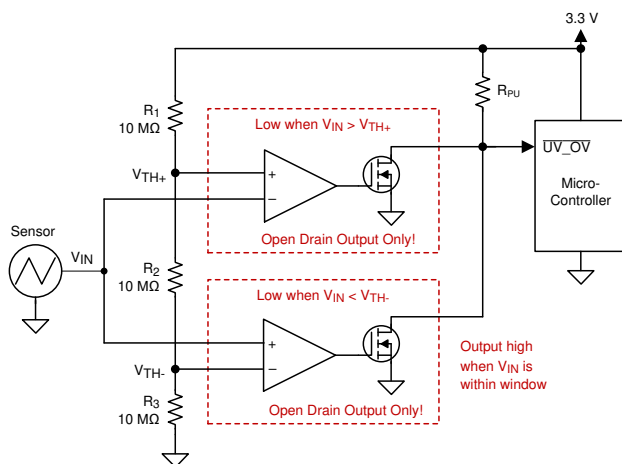

**Figure 8-7. Window Comparator**

### 8.2.1.1 Design Requirements

For this design, follow these design requirements:

- Alert (logic low output) when an input signal is less than 1.1 V
- Alert (logic low output) when an input signal is greater than 2.2 V
- Alert signal is active low
- Operate from a 3.3-V power supply

### 8.2.1.2 Detailed Design Procedure


Configure the circuit as shown in [Figure 8-7](#). Connect  $V_{CC}$  to a 3.3-V power supply and  $V_{EE}$  to ground. Make R1, R2 and R3 each 10-M $\Omega$  resistors. These three resistors are used to create the positive and negative thresholds for the window comparator ( $V_{TH+}$  and  $V_{TH-}$ ).

With each resistor being equal,  $V_{TH+}$  is 2.2 V and  $V_{TH-}$  is 1.1 V. Large resistor values such as 10-M $\Omega$  are used to minimize power consumption. The resistor values may be recalculated to provide the desired trip point values.

The sensor output voltage is applied to the inverting and noninverting inputs of the two comparators. Using two open-drain output comparators allows the two comparator outputs to be Wire-OR'ed together.

The respective comparator outputs will be low when the sensor is less than 1.1 V or greater than 2.2 V. The respective comparator outputs will be high when the sensor is in the range of 1.1 V to 2.2 V (within the "window"), as shown in [Figure 8-8](#).

### 8.2.1.3 Application Curve

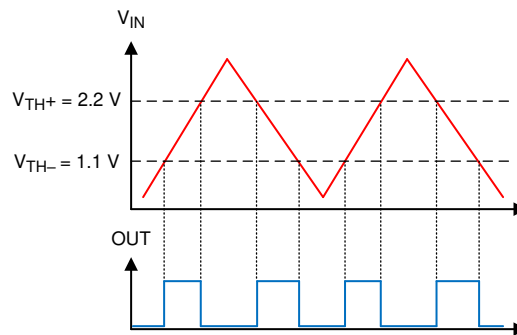


**Figure 8-8. Window Comparator Results**

For more information, please see Application note SBOA221 "[Window comparator circuit](#)".

### 8.2.2 Square-Wave Oscillator

Square-wave oscillator can be used as low cost timing reference or system supervisory clock source.

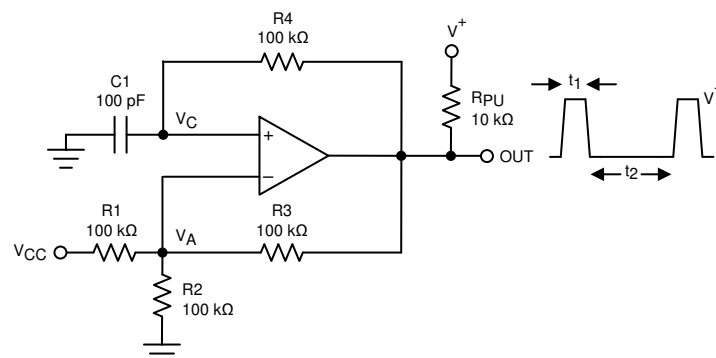


**Figure 8-9. Square-Wave Oscillator**

### 8.2.2.1 Design Requirements

The square-wave period is determined by the RC time constant of the capacitor  $C_1$  and resistor  $R_4$ . The maximum frequency is limited by propagation delay of the device and the capacitance load at the output. The low input bias current allows a lower capacitor value and larger resistor value combination for a given oscillator frequency, which may help to reduce BOM cost and board space.  $R_4$  should be over several kilo-ohms to minimize loading the output.

### 8.2.2.2 Detailed Design Procedure

The oscillation frequency is determined by the resistor and capacitor values. The following calculation provides details of the steps.

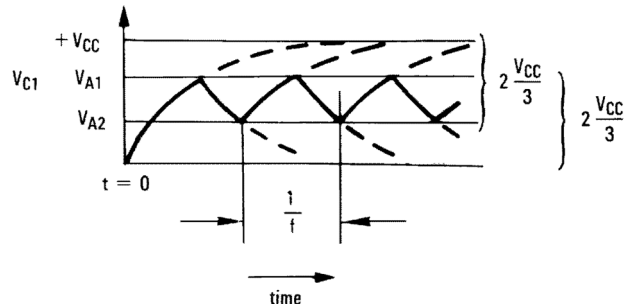

**Figure 8-10. Square-Wave Oscillator Timing Thresholds**

First consider the output of Figure 8-9 as high, which indicates the inverted input  $V_C$  is lower than the noninverting input ( $V_A$ ). This causes the  $C_1$  to be charged through  $R_4$ , and the voltage  $V_C$  increases until it is equal to the noninverting input. The value of  $V_A$  at the point is calculated by Equation 7.

$$V_{A1} = \frac{V_{CC} \times R_2}{R_2 + R_1 \parallel R_3} \quad (7)$$

if  $R_1 = R_2 = R_3$ , then  $V_{A1} = 2 V_{CC} / 3$

At this time the comparator output trips pulling down the output to the negative rail. The value of  $V_A$  at this point is calculated by Equation 8.

$$V_{A2} = \frac{V_{CC} (R_2 \parallel R_3)}{R_1 + R_2 \parallel R_3} \quad (8)$$

if  $R_1 = R_2 = R_3$ , then  $V_{A2} = V_{CC} / 3$

The  $C_1$  now discharges through the  $R_4$ , and the voltage  $V_{CC}$  decreases until it reaches  $V_{A2}$ . At this point, the output switches back to the starting state. The oscillation period equals to the time duration from for  $C_1$  from  $2V_{CC}/3$  to  $V_{CC} / 3$  then back to  $2V_{CC}/3$ , which is given by  $R_4 C_1 \times \ln 2$  for each trip. Therefore, the total time duration is calculated as  $2 R_4 C_1 \times \ln 2$ .

The oscillation frequency can be obtained by Equation 9:

$$f = 1 / (2 R_4 \times C_1 \times \ln 2) \quad (9)$$


### 8.2.2.3 Application Curve

Figure 8-11 shows the simulated results of an oscillator using the following component values:

- $R_1 = R_2 = R_3 = R_4 = 100 \text{ k}\Omega$
- $C_1 = 100 \text{ pF}$ ,  $C_L = 20 \text{ pF}$
- $V_+ = 5 \text{ V}$ ,  $V_- = \text{GND}$



- $C_{\text{stray}}$  (not shown) from  $V_A$  TO GND = 10 pF

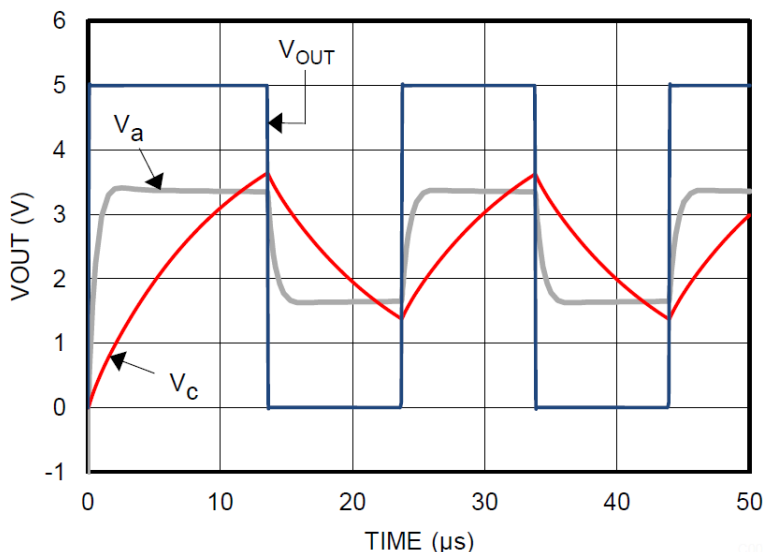


**Figure 8-11. Square-Wave Oscillator Output Waveform**

### 8.2.3 Adjustable Pulse Width Generator

Figure 8-12 is a variation on the square wave oscillator that allows adjusting the pulse widths.

$R_4$  and  $R_5$  provide separate charge and discharge paths for the capacitor C depending on the output state.

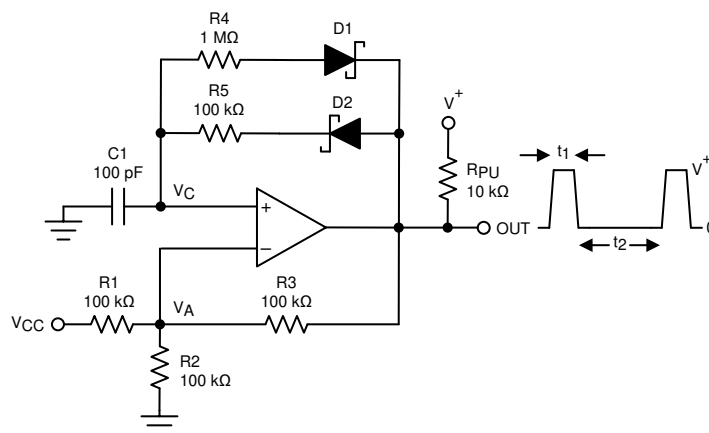


**Figure 8-12. Adjustable Pulse Width Generator**

The charge path is set through  $R_5$  and  $D_2$  when the output is high. Similarly, the discharge path for the capacitor is set by  $R_4$  and  $D_1$  when the output is low.

The pulse width  $t_1$  is determined by the RC time constant of  $R_5$  and C. Thus, the time  $t_2$  between the pulses can be changed by varying  $R_4$ , and the pulse width can be altered by  $R_5$ . The frequency of the output can be changed by varying both  $R_4$  and  $R_5$ . At low voltages, the effects of the diode forward drop (0.8 V, or 0.15 V for Schottky) must be taken into account by altering output high and low voltages in the calculations.  $R_{PU}$  should be at least 10x less than the smallest value of  $R_4$  or  $R_5$ .

### 8.2.4 Time Delay Generator

The circuit shown in Figure 8-13 provides output signals at a prescribed time interval from a time reference and automatically resets the output low when the input returns to 0V. This is useful for sequencing a "power on" signal to trigger a controlled start-up of power supplies.

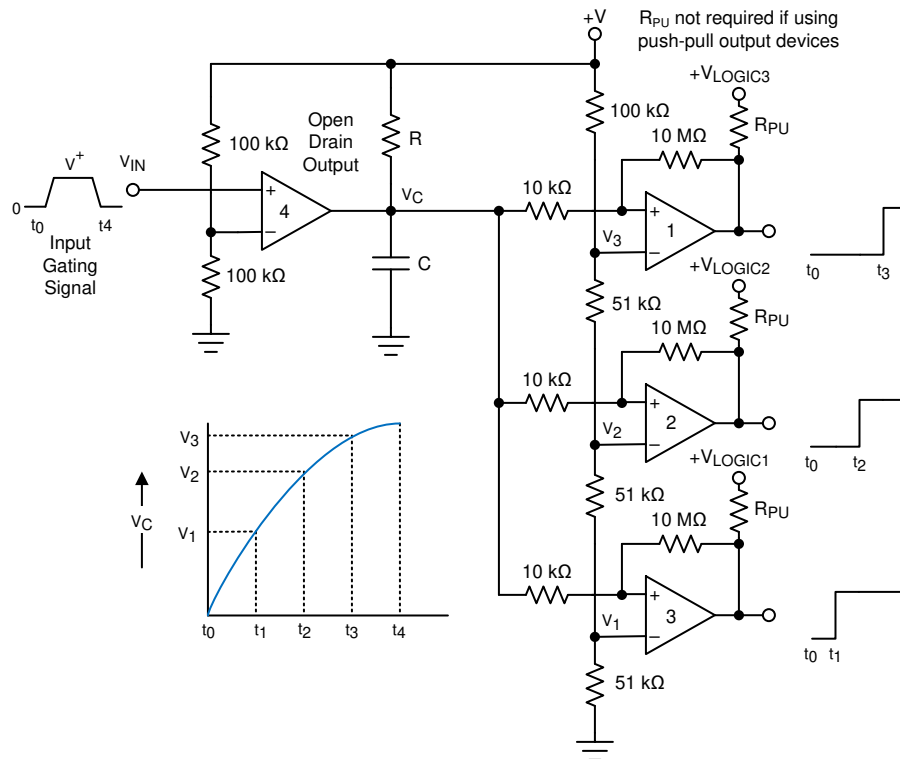

### Figure 8-13. Time Delay Generator


Consider the case of  $V_{IN} = 0$ . The output of comparator 4 is also at ground, "shorting" the capacitor and holding it at 0V. This implies that the outputs of comparators 1, 2, and 3 are also at 0V. When an input signal is applied, the output of open drain comparator 4 goes High-Z and C charges exponentially through R. This is indicated in the graph. The output voltages of comparators 1, 2, and 3 switch to the high state in sequence when  $V_C$  rises above the reference voltages  $V_1$ ,  $V_2$  and  $V_3$ . A small amount of hysteresis has been provided by the 10 k $\Omega$  and 10 M $\Omega$  resistors to insure fast switching when the RC time constant is chosen to give long delay times. A good starting point is  $R = 100$  k $\Omega$  and  $C = 0.01$   $\mu$ F to 1  $\mu$ F.

All outputs will immediately go low when  $V_{IN}$  falls to 0V, due to the comparator output going low and immediately discharging the capacitor.

Comparator 4 must be a open-drain type output (TLV902x), whereas comparators 1 though 3 may be either open drain or push-pull output, depending on system requirements. R<sub>PU</sub> is not required for push-pull output devices.

### 8.2.5 Logic Level Shifter


The output is the uncommitted drain of the output transistor. Many open-drain outputs can be tied together to provide an output OR'ing function if desired.

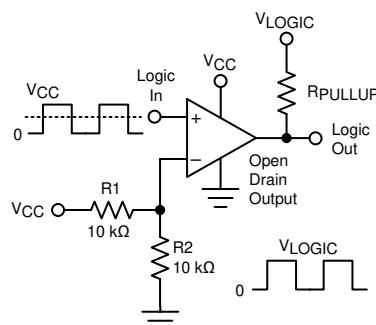

### Figure 8-14. Universal Logic Level Shifter

The two 10 kΩ resistors bias the input to half of the input logic supply level to set the threshold in the mid-point of the input logic levels. Only one shared output pull-up resistor is needed and may be connected to any pull-up voltage between 0 V and 5.5 V. The pullup voltage should match the driven logic input "high" level.

### 8.2.6 One-Shot Multivibrator

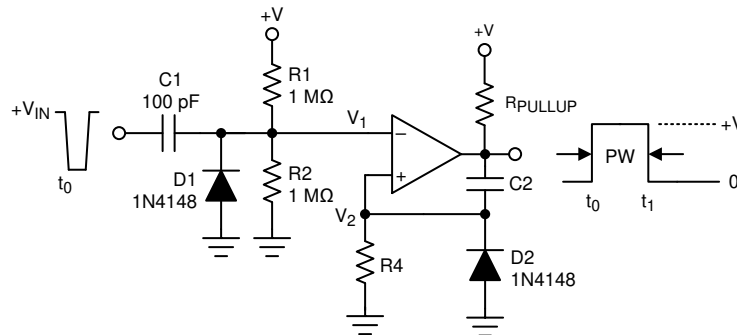


**Figure 8-15. One-Shot Multivibrator**

A monostable multivibrator has one stable state in which it can remain indefinitely. It can be triggered externally to another quasi-stable state. A monostable multivibrator can thus be used to generate a pulse of desired width.

The desired pulse width is set by adjusting the values of  $C_2$  and  $R_4$ . The resistor divider of  $R_1$  and  $R_2$  can be used to determine the magnitude of the input trigger pulse. The output will change state when  $V_1 < V_2$ . Diode  $D_2$  provides a rapid discharge path for capacitor  $C_2$  to reset at the end of the pulse. The diode also prevents the non-inverting input from being driven below ground.


### 8.2.7 Bi-Stable Multivibrator

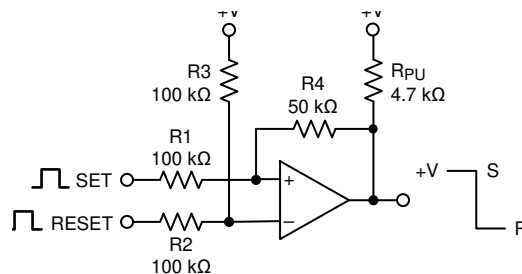

**Figure 8-16. Bi-Stable Multivibrator**

A bi-stable multivibrator has two stable states. The reference voltage is set up by the voltage divider of  $R_2$  and  $R_3$ . A pulse applied to the SET terminal will switch the output of the comparator high. The resistor divider of  $R_1$ ,  $R_4$ , and  $R_5$  now clamps the non-inverting input to a voltage greater than the reference voltage. A pulse applied to RESET will now toggle the output low.

### 8.2.8 Zero Crossing Detector

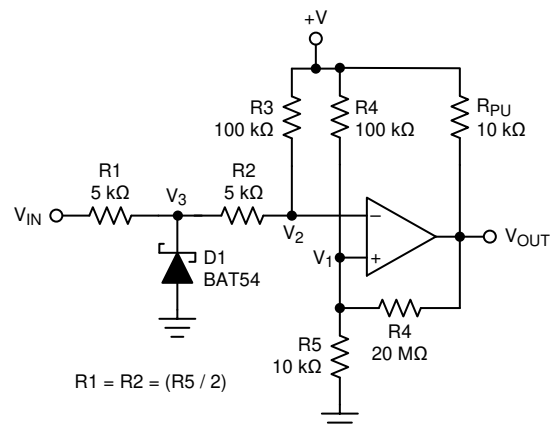


**Figure 8-17. Zero Crossing Detector**

A voltage divider of  $R_4$  and  $R_5$  establishes a reference voltage  $V_1$  at the non-inverting input. By making the series resistance of  $R_1$  and  $R_2$  equal to  $R_5$ , the comparator will switch when  $V_{IN} = 0$ . Diode  $D_1$  insures that  $V_3$  clamps near ground. The voltage divider of  $R_2$  and  $R_3$  then prevents  $V_2$  from going below ground. A small amount of hysteresis is setup to ensure rapid output voltage transitions.

### 8.2.9 Pulse Slicer

A Pulse Slicer is a variation of the Zero Crossing Detector and is used to detect the zero crossings on an input signal with a varying baseline level. This circuit works best with symmetrical waveforms. The RC network of  $R_1$  and  $C_1$  establishes an mean reference voltage  $V_{REF}$ , which tracks the mean amplitude of the  $V_{IN}$  signal. The noninverting input is directly connected to  $V_{REF}$  through  $R_2$ .  $R_2$  and  $R_3$  are used to produce hysteresis to keep transitions free of spurious toggles. The time constant is a tradeoff between long-term symmetry and response time to changes in amplitude.

If the waveform is data, it is recommended that the data be encoded in NRZ (Non-Return to Zero) format to maintain proper average baseline. Asymmetrical inputs may suffer from timing distortions caused by the changing  $V_{REF}$  average voltage.

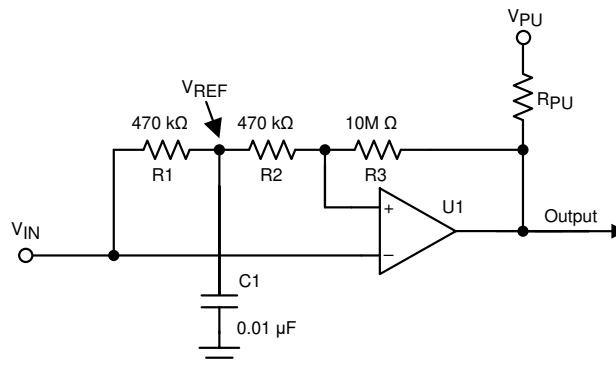


**Figure 8-18. Pulse Slicer**

For this design, follow these design requirements:

- The RC constant value ( $R_2$  and  $C_1$ ) must support the targeted data rate in order to maintain a valid tripping threshold.
- The hysteresis introduced with  $R_2$  and  $R_{43}$  helps to avoid spurious output toggles.

Figure 8-19 shows the results of a 9600 baud data signal riding on a varying baseline.

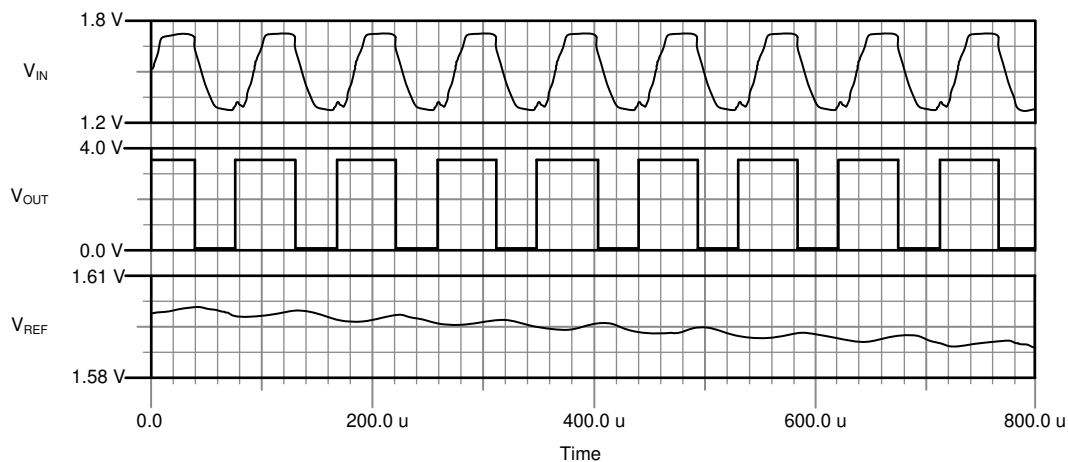

**Figure 8-19. Pulse Slicer Waveforms**

## 9 Power Supply Recommendations

Due to the fast output edges, it is critical to have bypass capacitors on the supply pin to prevent supply ringing and false triggers and oscillations. Bypass the supply directly at *each* device with a low ESR 0.1  $\mu$ F ceramic bypass capacitor directly between  $V_{CC}$  pin and ground pins. Narrow, peak currents will be drawn during the output transition time, particularly for the push-pull output device. These narrow pulses can cause un-bypassed supply lines and poor grounds to ring, possibly causing variation that can eat into the input voltage range and create an inaccurate comparison or even oscillations.

The device may also be powered from "split" supplies ( $V+$ ,  $V-$  and GND), with  $V-$  applied to the GND pin.

Input signals must stay within the specified input range (between  $V+$  and  $V-$ ) for both supply types.

Note that the output will now swing "low" (VOL) to  $V-$  potential and not system GND on split supplies.

## 10 Layout

### 10.1 Layout Guidelines

For accurate comparator applications it is important maintain a stable power supply with minimized noise and glitches. Output rise and fall times are in the tens of nanoseconds, and should be treated as high speed logic devices. The bypass capacitor should be as close to the supply pin as possible and connected to a solid ground plane, and preferably directly between the  $V_{CC}$  and GND pins.

Minimize coupling between outputs and inputs to prevent output oscillations. Do not run output and input traces in parallel unless there is a  $V_{CC}$  or GND trace between output to reduce coupling. When series resistance is added to inputs, place resistor close to the device. A low value (<100 ohms) resistor may also be added in series with the output to dampen any ringing or reflections on long, non-impedance controlled traces. For best edge shapes, controlled impedance traces with back-terminations should be used when routing long distances.

### 10.2 Layout Example

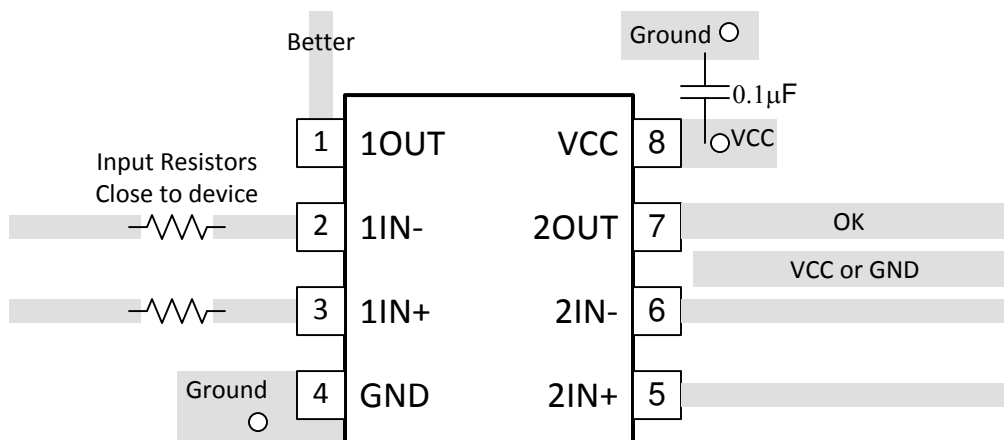


Figure 10-1. Dual Layout Example

## 11 Device and Documentation Support

### 11.1 Related Documentation

*Analog Engineers Circout Cookbook: Amplifiers (See Comparators section) - SLYY137*

*Precision Design, Comparator with Hysteresis Reference Design— TIDU020*

*Window comparator circuit - SBOA221*

*Reference Design, Window Comparator Reference Design— TIPD178*

*Comparator with and without hysteresis circuit - SBOA219*

*Zero crossing detection using comparator circuit - SNOA999*

*A Quad of Independently Func Comparators - SNOA654*

### 11.2 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on [ti.com](https://www.ti.com). Click on *Subscribe to updates* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

### 11.3 Support Resources

[TI E2E™ support forums](#) are an engineer's go-to source for fast, verified answers and design help — straight from the experts. Search existing answers or ask your own question to get the quick design help you need.

Linked content is provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's [Terms of Use](#).

### 11.4 Trademarks

TI E2E™ is a trademark of Texas Instruments.

All trademarks are the property of their respective owners.

### 11.5 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

### 11.6 Glossary

[TI Glossary](#) This glossary lists and explains terms, acronyms, and definitions.

## 12 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

## PACKAGING INFORMATION

| Orderable Device | Status<br>(1) | Package Type | Package<br>Drawing | Pins | Package<br>Qty | Eco Plan<br>(2)         | Lead finish/<br>Ball material<br>(6) | MSL Peak Temp<br>(3) | Op Temp (°C) | Device Marking<br>(4/5) | Samples                 |
|------------------|---------------|--------------|--------------------|------|----------------|-------------------------|--------------------------------------|----------------------|--------------|-------------------------|-------------------------|
| LM339LVPWR       | PREVIEW       | TSSOP        | PW                 | 14   | 2000           | Non-RoHS &<br>Non-Green | Call TI                              | Call TI              | -40 to 125   |                         |                         |
| LM339LVRTER      | ACTIVE        | WQFN         | RTE                | 16   | 3000           | RoHS & Green            | NIPDAU                               | Level-2-260C-1 YEAR  | -40 to 125   | L339LV                  | <a href="#">Samples</a> |
| LM393LVDR        | ACTIVE        | SOIC         | D                  | 8    | 2500           | RoHS & Green            | NIPDAU                               | Level-1-260C-UNLIM   | -40 to 125   | L393LV                  | <a href="#">Samples</a> |
| PLM339LVPWR      | ACTIVE        | TSSOP        | PW                 | 14   | 2000           | Non-RoHS &<br>Non-Green | Call TI                              | Call TI              | -40 to 125   |                         | <a href="#">Samples</a> |

(1) The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

(2) **RoHS:** TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

**RoHS Exempt:** TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

**Green:** TI defines "Green" to mean the content of Chlorine (Cl) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

(3) MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

(5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

(6) Lead finish/Ball material - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and



continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

**OTHER QUALIFIED VERSIONS OF LM339LV, LM393LV :**

- Automotive: [LM339LV-Q1](#), [LM393LV-Q1](#)

NOTE: Qualified Version Definitions:

- Automotive - Q100 devices qualified for high-reliability automotive applications targeting zero defects

**TAPE AND REEL INFORMATION**


\*All dimensions are nominal

| Device      | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|-------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| LM339LVRTER | WQFN         | RTE             | 16   | 3000 | 330.0              | 12.4               | 3.3     | 3.3     | 1.1     | 8.0     | 12.0   | Q2            |
| LM393LVDR   | SOIC         | D               | 8    | 2500 | 330.0              | 12.4               | 6.4     | 5.2     | 2.1     | 8.0     | 12.0   | Q1            |

## TAPE AND REEL BOX DIMENSIONS



\*All dimensions are nominal

| Device      | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|-------------|--------------|-----------------|------|------|-------------|------------|-------------|
| LM339LVRTER | WQFN         | RTE             | 16   | 3000 | 367.0       | 367.0      | 35.0        |
| LM393LVDR   | SOIC         | D               | 8    | 2500 | 367.0       | 367.0      | 35.0        |


PW (R-PDSO-G14)

PLASTIC SMALL OUTLINE



4040064-3/G 02/11

- NOTES:
- A. All linear dimensions are in millimeters. Dimensioning and tolerancing per ASME Y14.5M-1994.
  - B. This drawing is subject to change without notice.
  - C. Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0,15 each side.
  - D. Body width does not include interlead flash. Interlead flash shall not exceed 0,25 each side.
  - E. Falls within JEDEC MO-153



**D0008A**

# PACKAGE OUTLINE

**SOIC - 1.75 mm max height**

SMALL OUTLINE INTEGRATED CIRCUIT



4214825/C 02/2019

## NOTES:

1. Linear dimensions are in inches [millimeters]. Dimensions in parenthesis are for reference only. Controlling dimensions are in inches. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed .006 [0.15] per side.
4. This dimension does not include interlead flash.
5. Reference JEDEC registration MS-012, variation AA.

# EXAMPLE BOARD LAYOUT

D0008A

SOIC - 1.75 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT



LAND PATTERN EXAMPLE  
EXPOSED METAL SHOWN  
SCALE:8X



SOLDER MASK DETAILS

4214825/C 02/2019

NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.

7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

## EXAMPLE STENCIL DESIGN

D0008A

SOIC - 1.75 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT



SOLDER PASTE EXAMPLE  
BASED ON .005 INCH [0.125 MM] THICK STENCIL  
SCALE:8X


4214825/C 02/2019


NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.

RTE (S-PWQFN-N16)

PLASTIC QUAD FLATPACK NO-LEAD

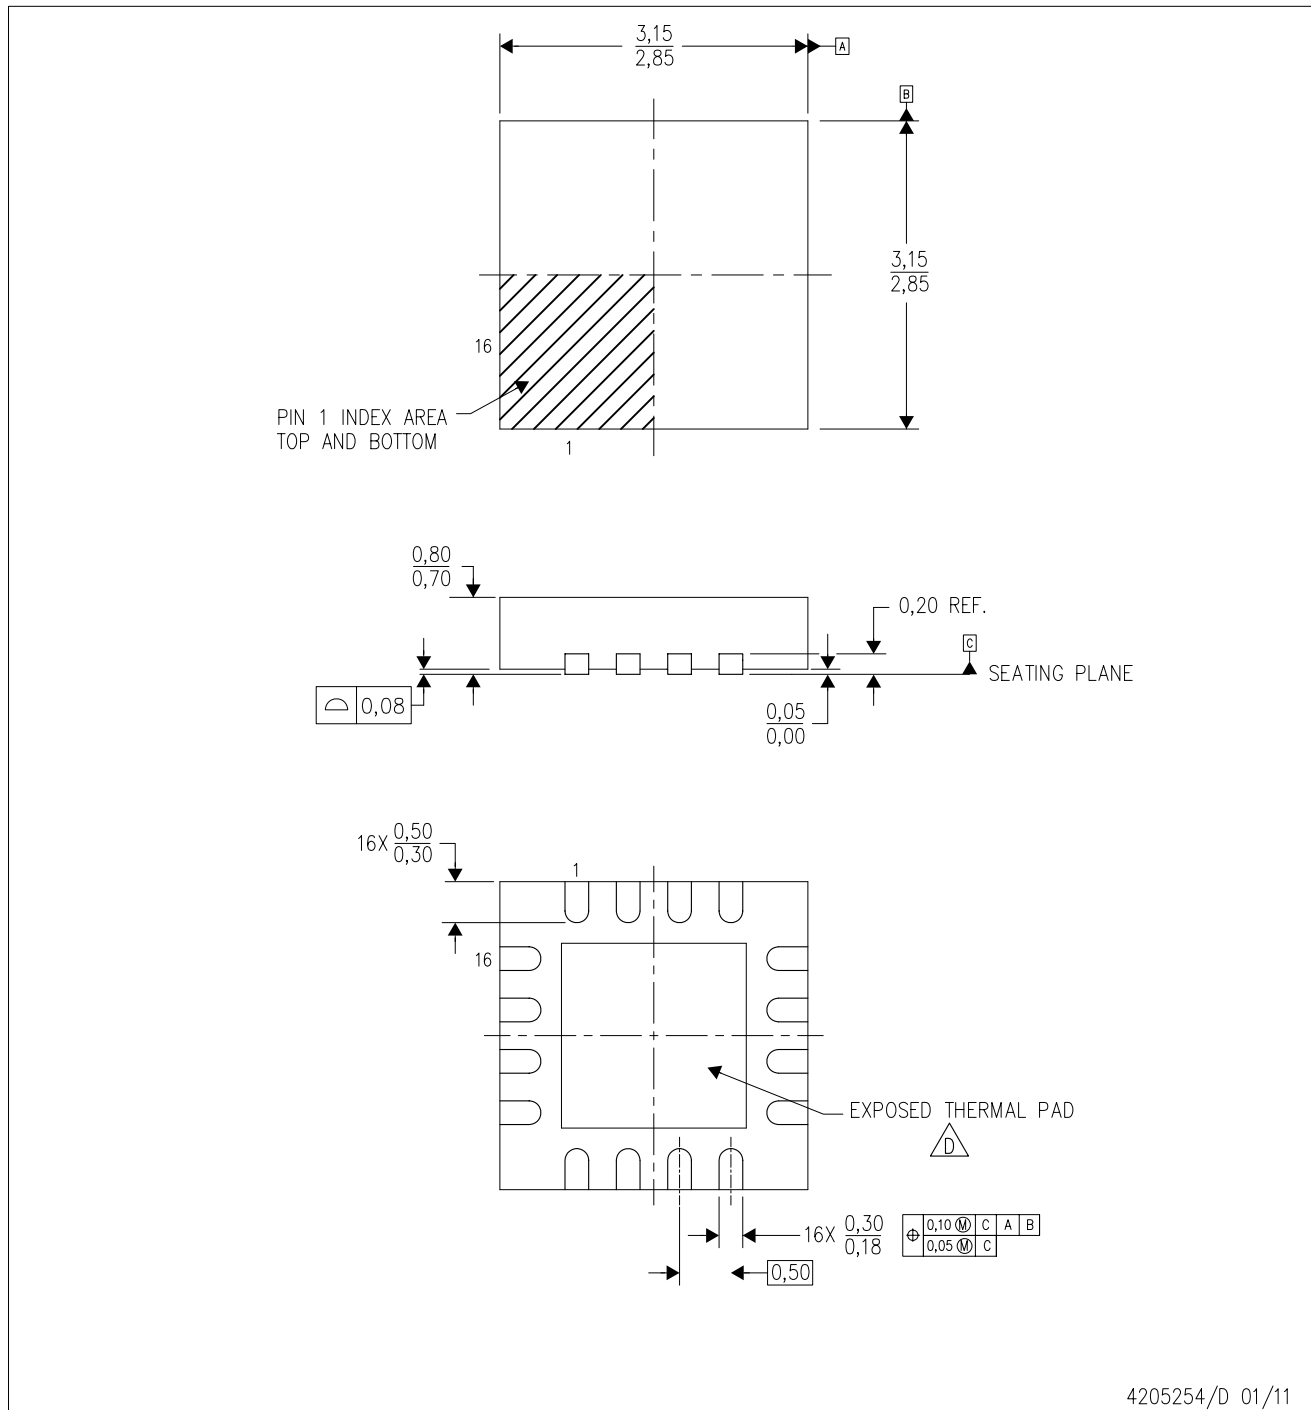

- NOTES:
- A. All linear dimensions are in millimeters. Dimensioning and tolerancing per ASME Y14.5M-1994.
  - B. This drawing is subject to change without notice.
  - C. Quad Flatpack, No-leads (QFN) package configuration.
  -  The package thermal pad must be soldered to the board for thermal and mechanical performance. See the Product Data Sheet for details regarding the exposed thermal pad dimensions.
  - E. Falls within JEDEC MO-220.



RTE (S-PWQFN-N16)


PLASTIC QUAD FLATPACK NO-LEAD

## THERMAL INFORMATION

This package incorporates an exposed thermal pad that is designed to be attached directly to an external heatsink. The thermal pad must be soldered directly to the printed circuit board (PCB). After soldering, the PCB can be used as a heatsink. In addition, through the use of thermal vias, the thermal pad can be attached directly to the appropriate copper plane shown in the electrical schematic for the device, or alternatively, can be attached to a special heatsink structure designed into the PCB. This design optimizes the heat transfer from the integrated circuit (IC).

For information on the Quad Flatpack No-Lead (QFN) package and its advantages, refer to Application Report, QFN/SON PCB Attachment, Texas Instruments Literature No. SLUA271. This document is available at [www.ti.com](http://www.ti.com).

The exposed thermal pad dimensions for this package are shown in the following illustration.

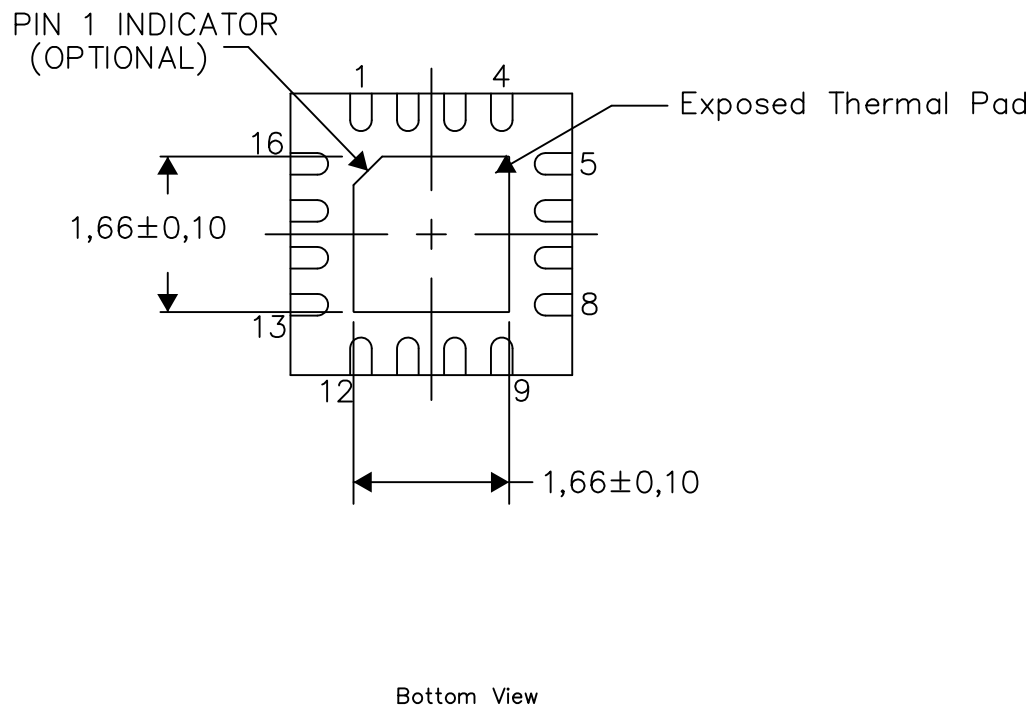


Exposed Thermal Pad Dimensions

4206446-8/U 08/15

NOTE: A. All linear dimensions are in millimeters

RTE (S-PWQFN-N16)

PLASTIC QUAD FLATPACK NO-LEAD

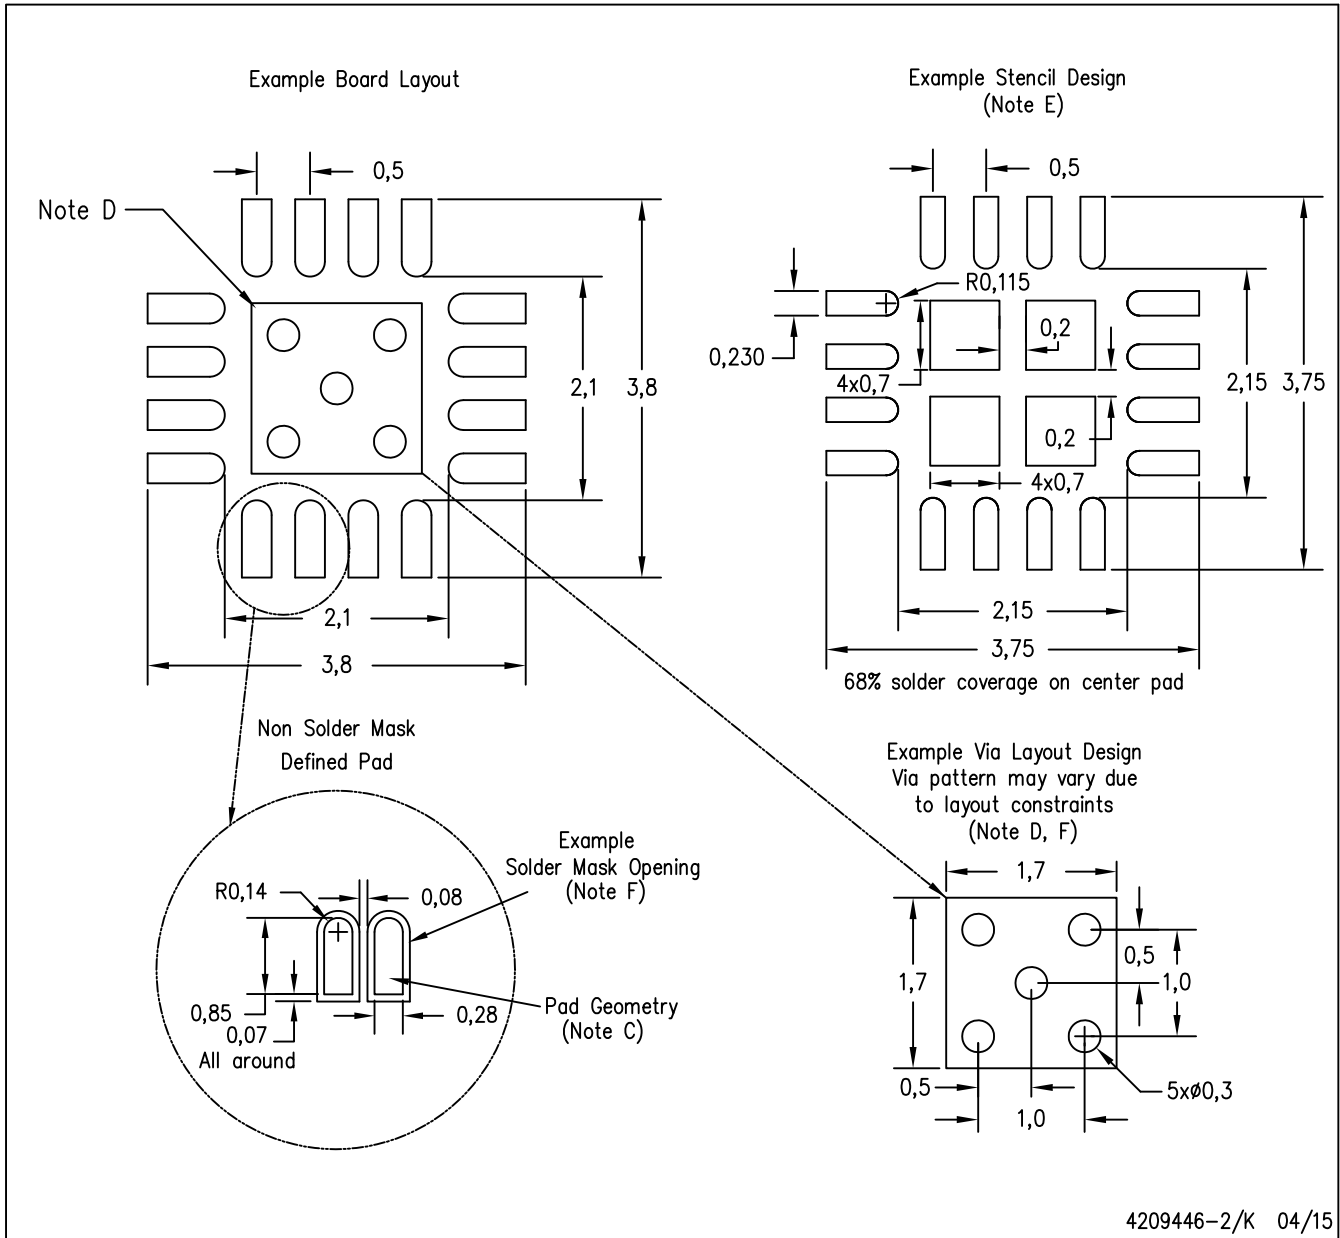

- NOTES:
- A. All linear dimensions are in millimeters.
  - B. This drawing is subject to change without notice.
  - C. Publication IPC-7351 is recommended for alternate designs.
  - D. This package is designed to be soldered to a thermal pad on the board. Refer to Application Note, Quad Flat-Pack Packages, Texas Instruments Literature No. SLUA271, and also the Product Data Sheets for specific thermal information, via requirements, and recommended board layout. These documents are available at [www.ti.com](http://www.ti.com) <<http://www.ti.com>>.
  - E. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC 7525 for stencil design considerations.
  - F. Customers should contact their board fabrication site for minimum solder mask web tolerances between signal pads.

## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale (<https://www.ti.com/legal/termsofsale.html>) or other applicable terms available either on [ti.com](https://www.ti.com) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2021, Texas Instruments Incorporated