

# Sensor M8 A/B/D Code

## Product Specification



## 1. Scope / 概論

A leading professional solutions provider of waterproof connectors (overmolded with cable, receptacle, field installable) in the industry, Amphenol LTW always fulfills any requirements with high functionality and reliability products; even it is a very special requirement. And it is highly recommended to be applied to harsh environment.

Amphenol LTW (ALTW) 是防水連接器計設及生產的領導者,主要包含線端,板端及現場組裝式連接器以滿足各種使用求及特殊要求,產品具有高效能及高可靠性,非常適合在各種惡劣的環境條件下提供安裝及使用。

This product specification sheet describes the product application in the markets such as Renewable Energy, Industrial Automation, LED Lighting, Marine, Broadband Wireless Access, Smart Grid, Heavy Equipment, Medical, Electrical Vehicle....etc.

本規範主要描述了 Amphenol LTW(ALTW)產品的應用要求。本產品廣泛應用於可再生能源,工業自動化,LED,船舶,寬帶無線接入,智能電網,建築機械/重型車輛,醫療設備等,電動車行業....

## 2. Applicable Documents / 參考文件

### 2.1 Industry Document / 業界標準

Amphenol LTW (ALTW) 設計及生產的產品符合各項世界標準,包括 IEC, EIA, MIL, NMEA....

## 3. Specification / 規格

### 3.1 Material / 材質

Parts / 零件	Material / 材質
Connector / 連接器	Thermoplastic / 熱塑性塑膠
Pin / 端子	Copper Alloy / 銅合金
Nut / 螺帽	Thermoplastic / 熱塑性塑膠, Metal / 金屬
Clamp Ring / 夾環	Thermoplastic / 熱塑性塑膠
O-Ring / O 型環	Rubber / 橡膠
Gasket / 墊圈	
Seal / 密封圈	
Shield/Shell / 屏蔽	Metal / 金屬

3.2 Rating / 操作評級

Voltage 電壓	Rated voltage - Rated impulse voltage			
	Name	CODE	Pin No.	Voltage
	M8	A	3	50V AC / 60V DC
		A	4	50V AC / 60V DC
		D	4	50V AC / 63V DC
		B	5	30V AC/DC
		A	6	30V AC/DC
		A	8	30V AC/DC
		A	12	30V AC/DC
Current 電流				
	Name	CODE	Pin No.	Current Rating
	M8	A	3	3A & 4A
		A	4	3A & 4A
		D	4	3A & 4A
		B	5	3A
		A	6	1.5A
		A	8	1.5A
Operating Temperature 操作溫度	Overmolded With Cable / Receptacle With Wires : -25°C~85°C (攝氏-25 度~85 度) Receptacle / Field Installable : -40°C~105°C (攝氏-40 度~105 度)			
IP 防水等級	Overmolded With Cable : IPX7 (Mated, 1M /30min) Receptacle / Receptacle With Wires : IPX7 (Unmated) Field Installable : IPX7 (Mated)			

## 4. Test Requirement/測試要求

### 4.1 Appearance/外觀

Item / 項目	Test Condition / 測試條件	Requirement / 條件需求
Examination of product 外觀檢查	IEC 60512, Test 1a Visual inspection No physical damage 檢查外觀是否有損壞	No defect would impair normal operation 沒有缺陷會影響正常操作

### 4.2 Electrical/電氣

Item / 項目	Test Condition / 測試條件	Requirement / 條件需求
Dielectric Withstanding Voltage 耐電壓試驗	IEC 60512, Test 4a, Method A Standard atmospheric conditions, Mated connectors 標準大氣條件,對接連接器	See table A-1
Contact Resistance 接觸阻抗	IEC 60512, Test 2a Standard atmospheric conditions connecting points 標準大氣壓力下測試接觸點	<ul style="list-style-type: none"> <li>• 10 mΩ max.</li> <li>• 10 mΩ 最大</li> </ul>
Insulation Resistance 絕緣阻抗	IEC 60512, Test 3a, Method A Standard atmospheric conditions Test voltage 500 V ± 15 V d.c. 標準大氣壓力下使用 500 V ± 15 V d.c.測試	<ul style="list-style-type: none"> <li>• 10<sup>8</sup> mΩ min.</li> <li>• 10<sup>8</sup> mΩ 最小</li> </ul>
Temperature Rise 溫升試驗	UL1977 section 16.1, Mated connector carry the maximum rated current (table) continuously for 4 hour and measure the temperature rise of contact.UL1977 第 16.1 節，配合連接器連續輸入最大額定電流（附件）4 小時，測量接觸溫升。	<ul style="list-style-type: none"> <li>• Temperature rise <math>\Delta t</math> is no more than Relative Thermal Index of the insulating material</li> <li>• 溫升<math>\Delta t</math> 不大於絕緣材料的相對熱指數</li> </ul>
	UL 2238 section 25, Mated connector carry the maximum rated current (table) continuously for 4 hour and measure the temperature rise of contact. 連接器對接後，額定電流(附件)持續輸入 4 小時，測量接觸點溫升。	<ul style="list-style-type: none"> <li>• UL : The temperature do not exceed the RTI of insulating material.</li> <li>• CUL : Temperature rise <math>\Delta t</math> is no more than 30 °C , also for CUL ( CSA C22.2 No. 182.3,Clause 6.5 )</li> <li>• UL: 溫度不超過絕緣材料的 RTI</li> <li>• CUL: 溫度升高 <math>\Delta t</math> 不超過 30°C</li> </ul>

Table A-1

		Voltage proof		kV r.m.s.	
No. of ways		Between contacts		Between contacts and metal-housing	
		Fixed connectors	Free connectors	Fixed connectors	Free connectors
A	3	1.0	1.0	0.85	0.85
A	4	1.0	1.0	0.85	0.85
A	6	0.65	0.65	0.65	0.65
A	8	0.65	0.65	0.65	0.65
B	5	0.65	0.65	0.65	0.65
D	4	0.84	0.84	0.84	0.84

## 4.3 Mechanical/機械

Item / 項目	Test Condition / 測試條件	Requirement / 條件需求
Durability 耐久性	IEC 60512, Test 9a  Standard atmospheric conditions, Max. speed of operations = 10 mm/s, Rest:30s,unmated 最大插拔速率10mm/s, 分離狀態下停留30s	<ul style="list-style-type: none"> <li>No physical damage</li> <li>100 cycles for gold plating</li> <li>50 cycles for silver plating</li> <li>20 cycles for tin plating</li> <li>無物理損害</li> <li>鍍金需至少滿足 100 次插拔</li> <li>鍍銀需至少滿足 50 次插拔</li> <li>鍍錫需至少滿足 20 次插拔</li> </ul>
Insertion Force and Withdrawal force Test 插拔力	IEC 60512, Test 13b  Standard atmospheric conditions, Max. speed of operations = 10 mm/s, 標準大氣壓下測試, 最大插拔速度為10mm/s	成品對插, 無對鎖動作 <ul style="list-style-type: none"> <li>Total insertion force 3~8Pin: 30N maximum</li> <li>Total withdrawal force 3~8Pin: 23N maximum</li> <li>插入力: 3~8Pin: 30N 最大</li> <li>拔出力: 3~8Pin: 23N 最大</li> </ul>
Vibration 震動試驗	IEC 60512, Test 6d  10~500Hz, and 0.35mm or 50m/s <sup>2</sup> , sweep cycle: 10 cycle on each of the 3 axes 頻率: 10~500Hz, 掃描周期: 每軸向做 10 個循環測試, 3 個軸向均需測	<ul style="list-style-type: none"> <li>No physical damages</li> <li>No electrical discontinuity more than 1μ second.</li> <li>無物理損害</li> <li>電氣訊斷不超過 1 μ second</li> </ul>
Mechanical Shock 物理沖擊	IEC 60512-6-3, test 6c acceleration 500 m/s <sup>2</sup> 加速度 500m/s <sup>2</sup>	<ul style="list-style-type: none"> <li>No physical damages</li> <li>No electrical discontinuity more than 1 μ second.</li> <li>無物理損害</li> <li>電氣訊斷不超過 1 μ second</li> </ul>

#### 4.4 Environmental/環境

Item / 項目	Test Condition / 測試條件	Requirement / 條件需求
Waterproof Test 防水測試	<p>IEC 60529, IPX5</p> <p>Test nozzle Ø6.3 mm, Water flow rate 12.5L/min, distance 2.5 m to 3 m,duration 3 minutes.</p> <p>噴嘴Ø6.3mm，水流速 12.5L / min，距離 2.5m 至 3m，持續時間 3 分鐘。</p> <p>IEC 60529,IPX6</p> <p>Test nozzle Ø12.5mm, Water flow rate 100L/min, distance 2.5 m to 3 m,duration 3 minutes.</p> <p>噴嘴Ø12.5mm，水流速 100L / min，距離 2.5 m 至 3 m，持續時間 3 分鐘。</p> <p>IEC 60529, IPX7</p> <p>Should be immersed in water at depth of at least 1 m for 30 mintues.</p> <p>浸入深度至少 1 米的水中 30 分鐘。</p> <p>IEC 60529, IPX8</p> <p>should be immersed in water at depth of at least 1 m for 24 hours.</p> <p>浸入深度至少 1 米的水中 24 小時。</p> <p>IEC 60529, IPX9</p> <p>Protected against high pressure and temperature water jets</p> <p>防止高壓高溫的水柱噴射</p> <p>DIN 40050-9, IPX9K</p> <p>protection against high pressure/steam jet cleaning</p> <p>防止高壓/蒸汽噴射清潔</p>	<ul style="list-style-type: none"> <li>• No physical damages</li> <li>• Visual inspection inside no water</li> <li>• Insulation resistance: &gt;100MΩ</li> <li>• 無物理損壞</li> <li>• 目視內部無水侵入</li> <li>• 絕緣電阻：&gt;100MΩ</li> </ul>
Rapid change of temperature 溫度變化	<p>IEC 60512-11d</p> <p>- 25 °C to 85 °C,</p> <p>t = 30 min, 5 cycles</p> <p>- 25 °C to 85 °C,</p> <p>時間 30 min, 5 個循環</p>	<ul style="list-style-type: none"> <li>• No physical damages</li> <li>• 無物理損壞</li> </ul>
Salt Spray 鹽水噴霧試驗	<p>IEC 60068-2-60</p> <p>5% salt solution for 48 hours</p> <p>5%鹽水溶液持續 48 小時</p>	<p>No physical damages and meets sequenced tests.</p> <p>無物理損壞</p>

5. Product Qualification Test Sequence/測試群組及順序

	Test or Examination	Test Group							
		A	B	C	D	E	F	G	
Examination of product	Visual Examination	1,9	1,9	1,7	1,7	1,3	1,9	1,3	
Electrical 電氣	Contact Resistance	2,6	2,6		2,6				
	insulation Resistance	3,7	3,7	2,6			3,7		
	Dielectric Withstanding Voltage	4,8	4,8	3,5			2,8		
	Temperature Rise Test					2			
Mechanical 機械	Insertion Force and Withdrawal force Test				3,5				
	Durability				4				
	Vibration Test	5							
	Mechanical Shock		5						
Environmental 環境	Rapid change of temperature			4			5		
	Salt Spray							2	
	Waterproof Test						4,6		



## 6. Others/其他


### 6.1 Torque/扭力

Panel Nut / 鎖板 (板端)	5~8 kgf.cm
Mating Nut (Overmolded With Cable/Field Installable) / 對插 (線端/組裝式)	4~6 kgf.cm
Clamp Ring / 接管 (組裝式)	3~4 kgf.cm
Sealing Nut / 尾蓋 (組裝式)	6~8 kgf.cm
Screw of the Screw-in type / 鎖芯線螺絲 (組裝式)	3~4 kgf.cm

### 6.2 Reflow recommended profile for SMT product.

IPC_JEDEC J-STD-020C		
Recommended Soldering Profiles		
Classification of Reflow Profiles		
Profile Feature	Sn - Pb Eutectic Assembly	Lead (Pb)-Free Assembly (e.g. SnAgCu)
Average ramp-up rate (T(Smax.) to TP)	3 °C/s maximum	
<b>Preheat</b>		
• Temperature minimum (TS(min.))	100°C	150°C
• Temperature maximum (TS(max.))	150°C	200°C
• Time (TS(min.) to TS(max.)) (tS)	60 s to 120 s	60 s to 180 s
<b>Time maintained above</b>		
• Temperature minimum (TL)	183°C	217
• Time (TL)	60 s to 150 s	60 s to 150 s
Minimum peak temperature (TP(min.))	215°C	235°C
Recommended peak temperature (TP)	235°C	250°C
Maximum peak temperature (TP(max.))	260°C	260°C
Time within 5°C of actual peak temperature (tP)	10 s to 40 s	20 s to 40 s
Ramp-down rate	6°C/s maximum	6°C/s maximum
Time 25°C to peak temperature	6 min maximum	8 min maximum

Reflow Soldering Profiles

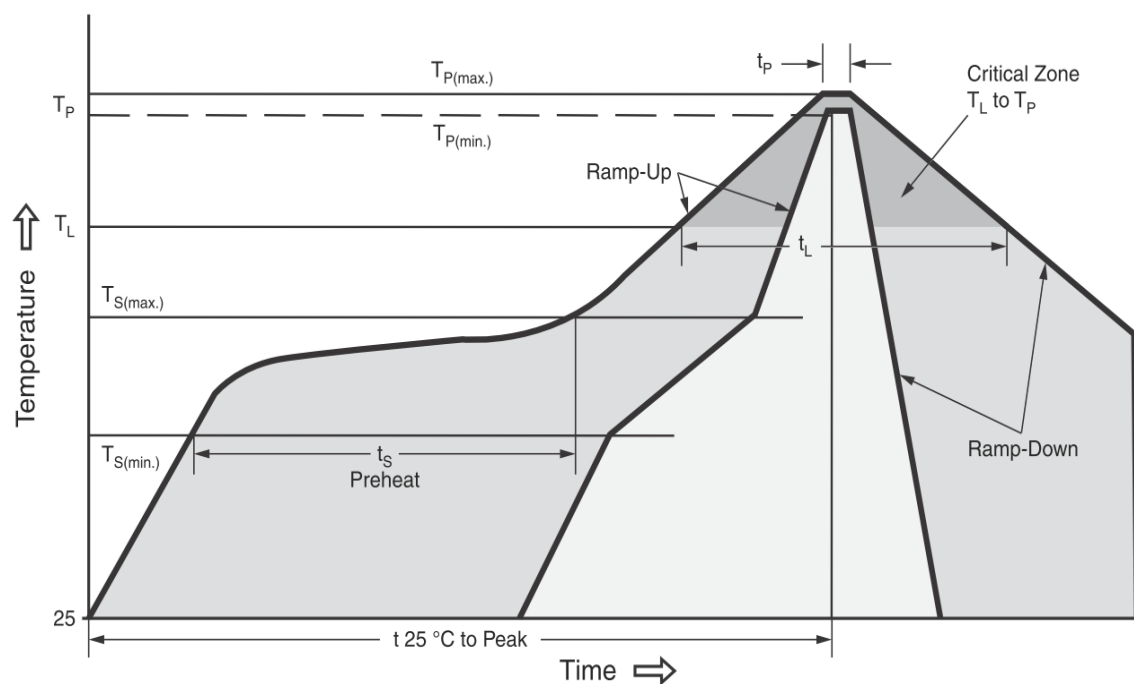

7. Quality Assurance Provisions/品質保證

Unless otherwise specified, in the contract or purchase order, we will be responsible for the quality of the part as it is delivered to client. We will be responsible for having controlled processes to ensure product is in total compliance with this specification. Failing lots shall be subject to return or other corrective action.

除非在合同或採購訂單中另有規定者外，我們將對交付給客戶的部件質量負責。我們將負責控制流程，以確保產品完全符合規格。未通過的批次應退回或採取其他糾正措施。

Re-qualification Testing：重新資格測試

If changes significantly affecting form, fit or function are made to the product or manufacturing process, product assurance shall coordinate requalification testing, consisting of all or part of the original testing sequence as determined by development/product, quality and reliability engineering.

如果對產品或製造過程產生顯著影響的形狀，配合或功能的變化，產品保證應協調重新認證測試，包括由開發/產品，質量和可靠性工程確定的全部或部分的原始測試順序。


Our products perform per the specification and criteria described in this document; any usage outside and/or deviating from the specification and criteria described in this document, and/or any alteration, modification, transformation, and application not mentioned in this document must be checked and agreed with ALTW in prior. Failure to check and get our agreement, ALTW will bear no responsibility for any consequence that might arise. It is strongly advised to always check with ALTW for any product application not mentioned in this document and/or applications that need clarifications.

本公司產品之規格及標準，皆依本說明書之說明。對於任何超出或背離本說明書規格範圍之產品使用，或對說明書為提及的任何修改、變更，變造，應用，皆應取得 ALTW 事前的認可，否則 ALTW 對之不負擔任何責任。若對於本說明書說明規格未有規定的事項，或使用上有疑義者，強烈建議先取得 ALTW 之確認及說明。


8. Revision/版本

Document Name		Sensor-M8		
Revision	ECN NO.	Description	Date	Sign
A		Initial Release	2021/05/14	Neo Tsai 蔡於潤


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-910192	2009/01/07	Ivan Lin	Change rev. to ECN note
C	LEN-030191	2010/03/24	Li Xiu Zhi	Change View
D	C200518	2020/04/25	Peng	$\triangle$ D XI







$\triangle$ B PCB Layout



Recommended Panel Cut-Out

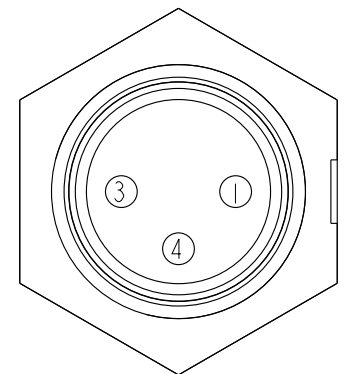

Pin Assignments  
Front View

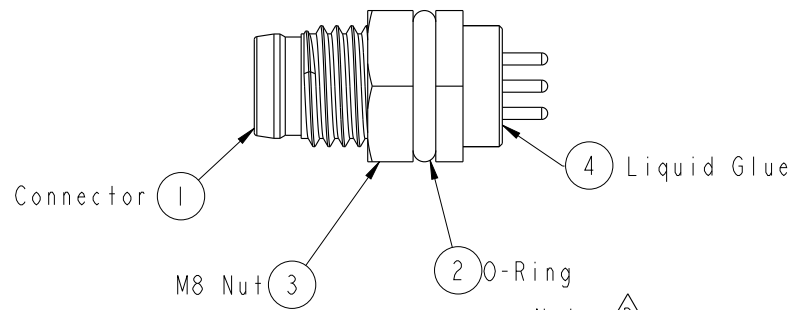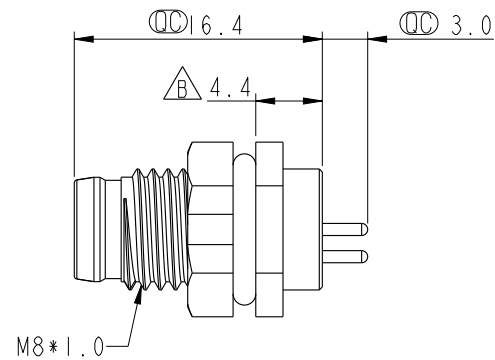

- Note:  $\triangle$
- \*  $\text{QC}$  Important Dimension To Check.
  - \* Waterproof Rate: IP67
  - \* Housing: Nylon+GF, Black
  - \* Male Pin: Copper Alloy, Gold Plated
  - \* M8 Nut: Nylon+GF, Black
  - \* O-Ring: EPDM, Black
  - \* Panel Thickness For Snap-in Type Max 3.0mm
  - \* Panel Thickness For Screw Type Max 1.9mm

UNIT:mm				TITLE		ITEM NO		DRAWN BY		DATE	
TOLERANCE		.X ±0.25		Panel Screw 3P M Conn M Pin		8P-03PMMP-SF7001		Li Xiu Zhi		2010-03-24	
.XX ±0.1		SCALE		2:1		DWG NO		CHECKED BY		DATE	
.XXX ±0.05		SIZE		A4		8P-03PMMP-SF7001		Tina		2010-03-24	
ANGLES ±1°		REV.		D		CUSTOMER		APPROVED BY		DATE	
		WC-REV.		A.4		ALTW		Can		2010-03-24	
				$\text{QC}$ : Inspection item							

**Amphenol LTW**  
安費諾亮泰企業股份有限公司

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.