


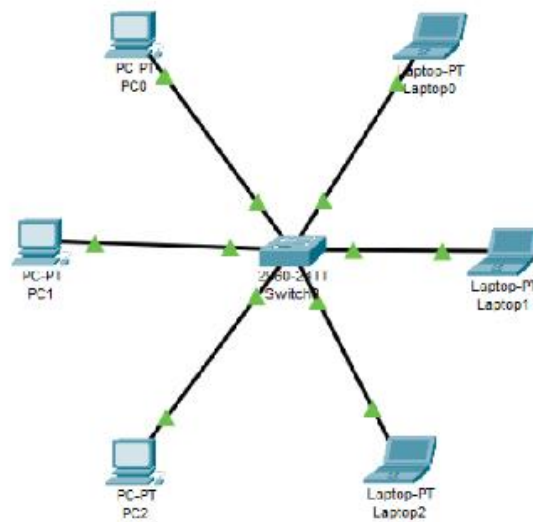

The image shows a network diagram on the left and a CLI window for Switch0 on the right. The diagram shows a central 2960-24TT Switch connected to six devices: PC-PT PC0, Laptop-PT Laptop0, PC-PT PC1, Laptop-PT Laptop1, PC-PT PC2, and Laptop-PT Laptop2. The CLI window displays the configuration commands and the output of the 'show vlan' command.

CLI Window: Switch0

Physical Config **CLI** Attributes

IOS Command Line Interface

```

Switch>
Switch>conf t
Enter configuration commands, one per line. End with CNTL/Z.
Switch(config)#vlan 2
Switch(config-vlan)#name programmer
Switch(config-vlan)#int range fa0/1-3
Switch(config-if-range)#switchport mode access
Switch(config-if-range)#switchport access vlan 2
Switch(config-if-range)#exit
Switch(config)#exit
Switch#
!SYS-S-CONFIG_I: Configured from console by console

Switch#show vlan

```



VLAN	Name	Status	Ports
1	default	active	Fa0/1, Fa0/6, Fa0/6, Fa0/7 Fa0/8, Fa0/9, Fa0/10, Fa0/11 Fa0/12, Fa0/13, Fa0/14, Fa0/15 Fa0/16, Fa0/17, Fa0/18, Fa0/19 Fa0/20, Fa0/21, Fa0/22, Fa0/23 Fa0/24, Uag0/1, Uag0/2
2	programmer	active	Fa0/1, Fa0/2, Fa0/3

VLAN	Type	SAID	MTU	Parent	RingNo	BridgeNo	Stp	BridgeMode	Tranvel	Trama2
1	enet	100001	1500	-	-	-	-	-	0	0
2	enet	100002	1500	-	-	-	-	-	0	0
1002	fdci	101002	1500	-	-	-	-	-	0	0
1003	fdci	101003	1500	-	-	-	-	-	0	0
1004	fdci	101004	1500	-	-	-	1002	-	0	0

--More--

Copy Pa

Top

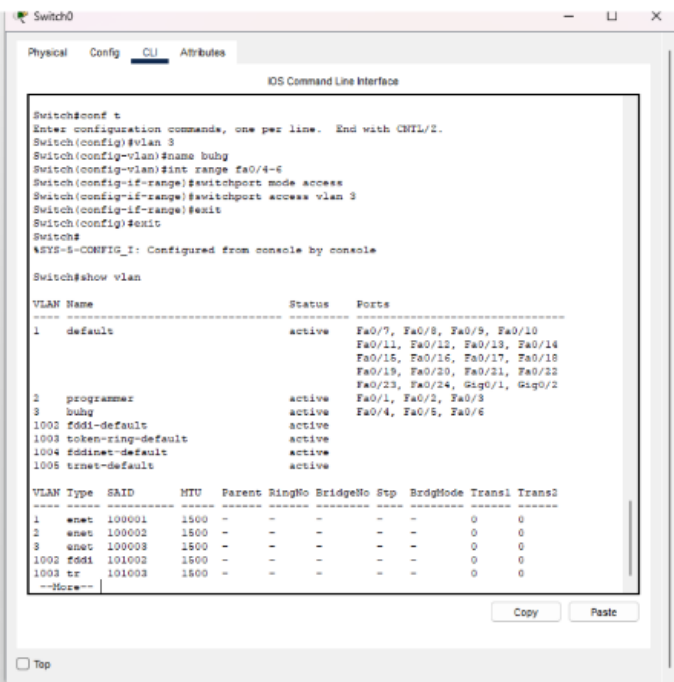

Switch0

Physical Config CLI Attributes

IOS Command Line Interface

```

$LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/9, changed state to up
Switch(config)#vlan 4
Switch(config-vlan)#name directors
Switch(config-vlan)#int range fa0/7-9
Switch(config-if-range)#switchport mode access
Switch(config-if-range)#switchport access vlan 4
Switch(config-if-range)#exit
Switch(config)#exit
Switch#
Switch#show vlan

```

VLAN Name	Status	Ports
1 default	active	Fa0/10, Fa0/11, Fa0/12, Fa0/13, Fa0/14, Fa0/15, Fa0/16, Fa0/17, Fa0/18, Fa0/19, Fa0/20, Fa0/21, Fa0/22, Fa0/23, Fa0/24, Gig0/1, Gig0/2
3 programmer	active	Fa0/1, Fa0/2, Fa0/3
3 hubg	active	Fa0/4, Fa0/5, Fa0/6
4 directors	active	Fa0/7, Fa0/8, Fa0/9
1003 fddi-default	active	
1003 token-ring-default	active	
1004 fddinet-default	active	
1005 trnet-default	active	

VLAN Type	SAID	MTU	Parent	Ring0	Bridge0	Stp	BridgMode	Trans1	Trans2
1 enet	100001	1500	-	-	-	-	-	0	0
2 enet	100002	1600	-	-	-	-	-	0	0
3 enet	100003	1600	-	-	-	-	-	0	0
4 enet	100004	1600	-	-	-	-	-	0	0

Copy Paste

Simulation Panel

Event List

Vis.	Time(sec)	Last Device
0.000	--	
0.000	--	
0.001	--	PC1
0.002	--	Switch0
0.002	--	Switch0
0.368	--	
0.369	--	Switch0
0.369	--	Switch0
0.369	--	Switch0
0.587	--	
0.588	--	Switch0
0.588	--	Switch0
0.588	--	Switch0
0.588	--	Switch0
1.999	--	
2.000	--	Switch0
2.000	--	Switch0
2.000	--	Switch0
2.003	--	

Reset Simulation Constant Delay Capture 2

Play Controls

Event List Filters - Visible Events

ACL Filter, ARP, BGP, Bluetooth, CAPWAP, CDR, DHCPv6, DNS, DTP, EAPOL, EIGRP, EIGRPv6, FTP, S23, HSRP, HSRPv6, HTTP, HTTPS, ICMP, ICMPv6, ISAKMP, IoT, IoT TCP, LACP, LLDP, Meraki, NDP, NL1, L2W, NTP, OSPF, OSPFv6, RRP, RRPv6, PPP, PPPoE, PTP, RADIUS, REP, RIP, RIPv2, RTP, SCCP, SMTP, SNMP, SSH, SIP, SYSLOG, TACACS, TCP, Telnet, UDP, USB, VTP

Edit Filters Show All/None

Event List Realtime Simulate

Fire	Last Status	Source	Destination	Type	Color	Time(sec)	Periodic	Num	Edit	Delete
	Failed	PC1	Laptop2	ICMP		0.000	N	0	(edit)	(delete)