

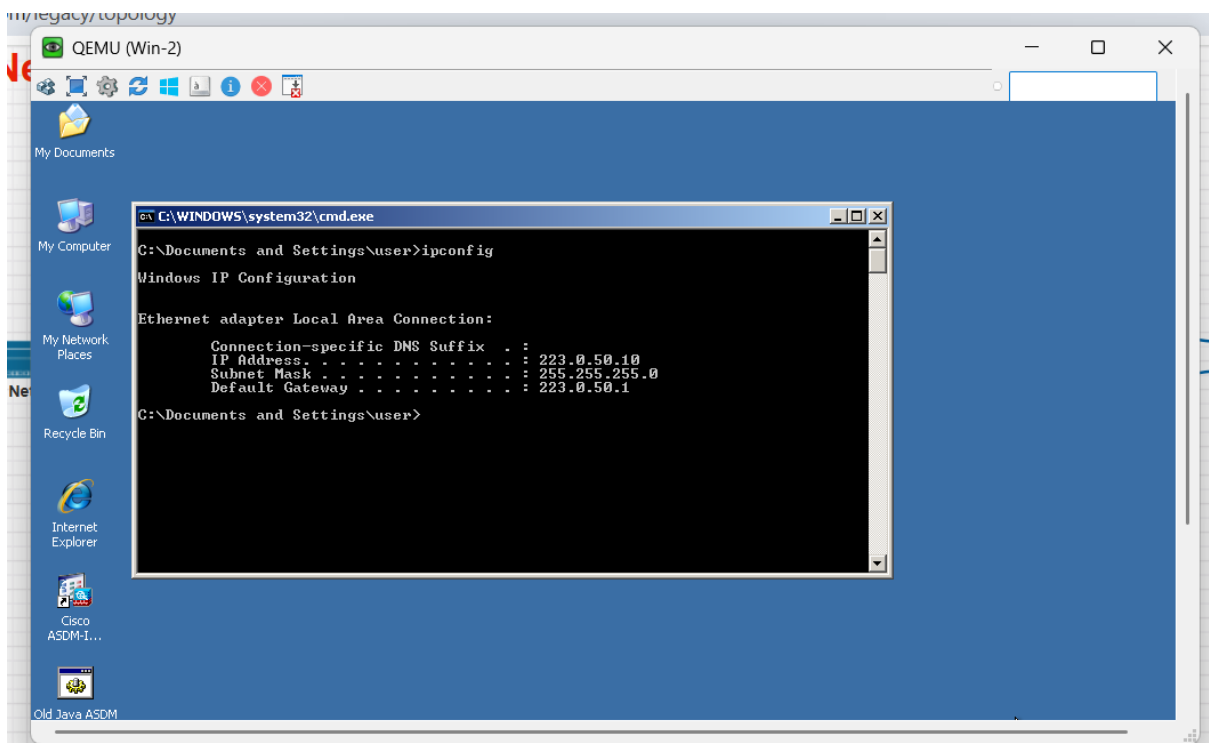
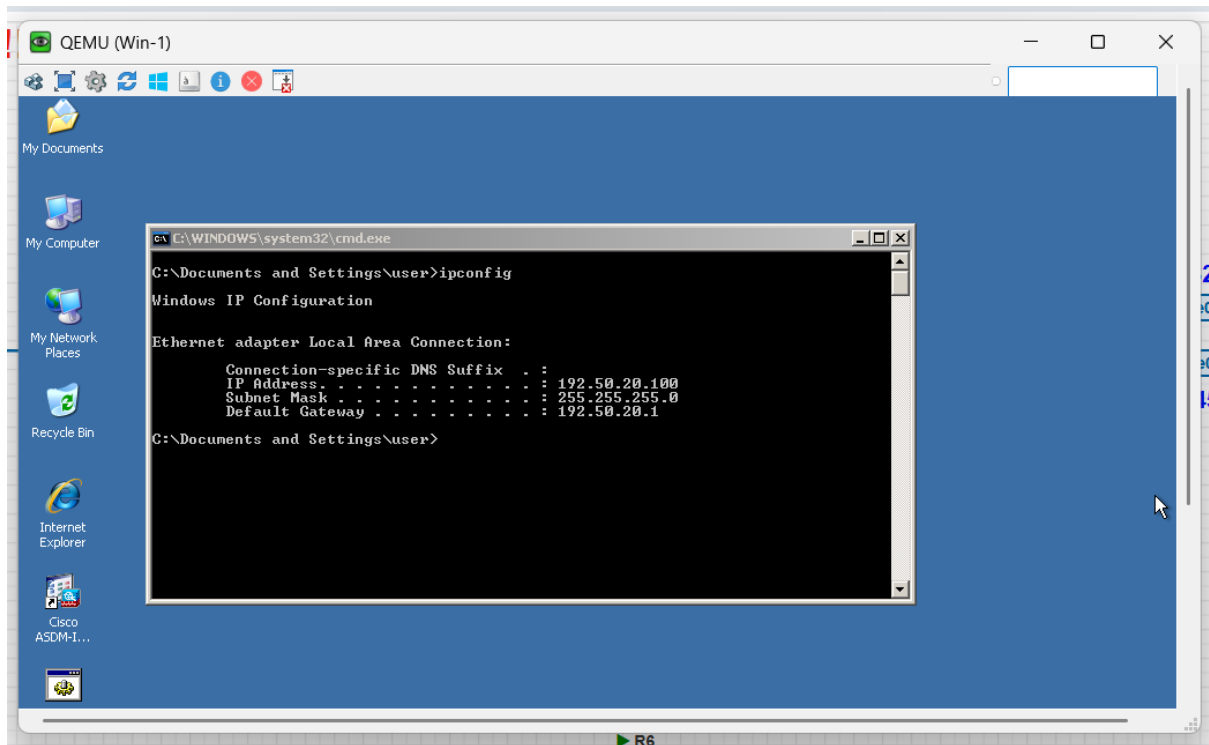


Static Routing Project-2

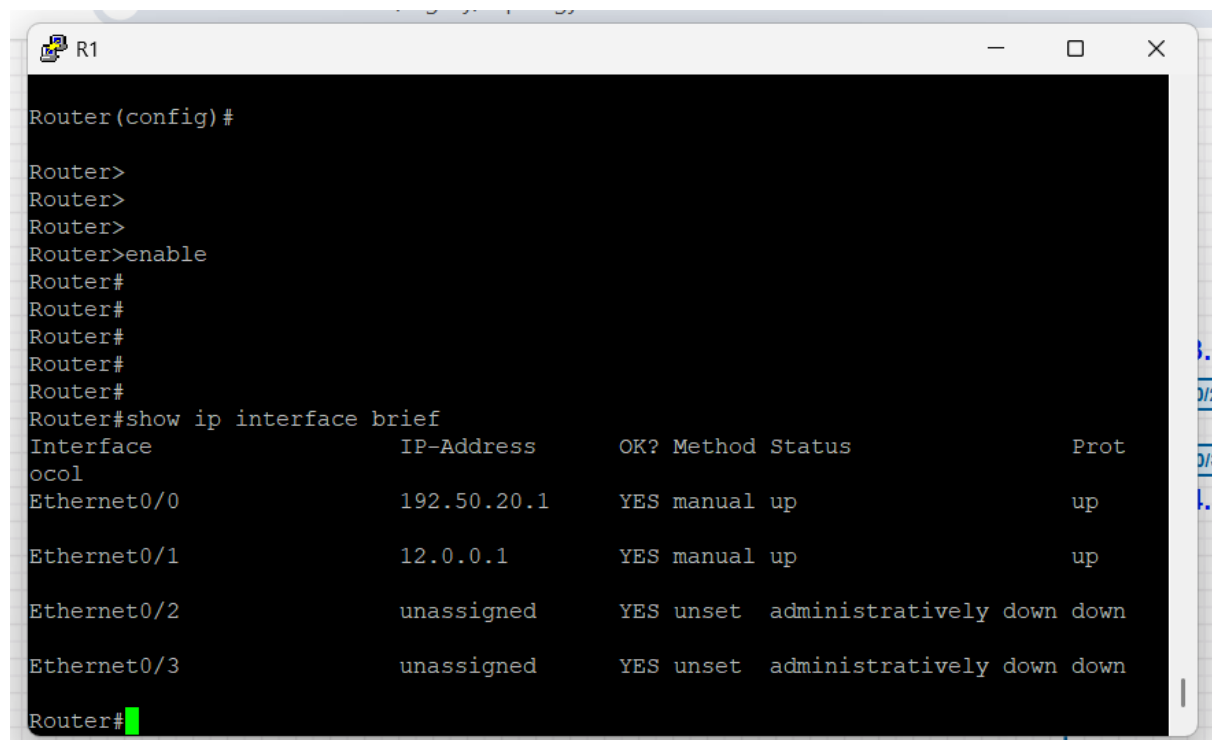

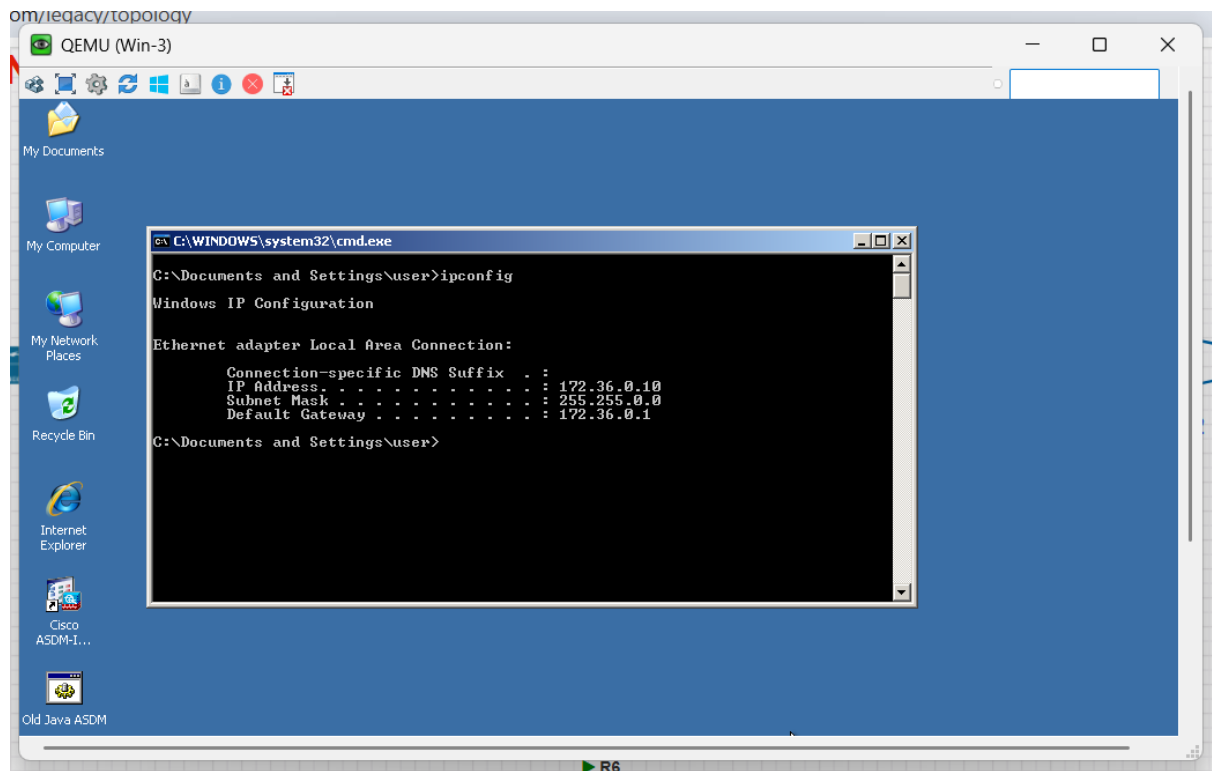

```

R1
i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
ia - IS-IS inter area, * - candidate default, U - per-user static route
o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
a - application route
+ - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

12.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    12.0.0.0/8 is directly connected, Ethernet0/1
L    12.0.0.1/32 is directly connected, Ethernet0/1
S    23.0.0.0/8 [1/0] via 12.0.0.2
S    24.0.0.0/8 [1/0] via 12.0.0.2
S    26.0.0.0/8 [1/0] via 12.0.0.2
S    32.0.0.0/8 [1/0] via 12.0.0.2
S    45.0.0.0/8 [1/0] via 12.0.0.2
S    172.36.0.0/16 [1/0] via 12.0.0.2
S    192.50.20.0/24 is variably subnetted, 2 subnets, 2 masks
C    192.50.20.0/24 is directly connected, Ethernet0/0
L    192.50.20.1/32 is directly connected, Ethernet0/0
S    223.0.50.0/24 [1/0] via 12.0.0.2
Router#
Router#
Router#

```

23.2

```

R2
26.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    26.0.0.0/8 is directly connected, Ethernet0/1
L    26.0.0.1/32 is directly connected, Ethernet0/1
S    32.0.0.0/8 [1/0] via 23.0.0.2
S    45.0.0.0/8 [1/0] via 23.0.0.2
S    172.36.0.0/16 [1/0] via 24.0.0.2
    [1/0] via 23.0.0.2
S    192.50.20.0/24 [1/0] via 12.0.0.1
S    223.0.50.0/24 [1/0] via 26.0.0.2
0. Router#
Router#show ip interface brief
Interface          IP-Address      OK? Method Status      Prot
ocol
Ethernet0/0        12.0.0.2        YES manual up          up
Ethernet0/1        26.0.0.1        YES manual up          up
Ethernet0/2        23.0.0.1        YES manual up          up
Ethernet0/3        24.0.0.1        YES manual up          up
Router#
Router#
Router#

```

(e0/0) .1

23.2

```
R2
+ - replicated route, % - next hop override, p - overrides from PfR
Gateway of last resort is not set

12.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    12.0.0.0/8 is directly connected, Ethernet0/0
L    12.0.0.2/32 is directly connected, Ethernet0/0
C    23.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
L    23.0.0.0/8 is directly connected, Ethernet0/2
L    23.0.0.1/32 is directly connected, Ethernet0/2
C    24.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    24.0.0.0/8 is directly connected, Ethernet0/3
L    24.0.0.1/32 is directly connected, Ethernet0/3
C    26.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
L    26.0.0.0/8 is directly connected, Ethernet0/1
L    26.0.0.1/32 is directly connected, Ethernet0/1
S    32.0.0.0/8 [1/0] via 23.0.0.2
S    45.0.0.0/8 [1/0] via 23.0.0.2
S    172.36.0.0/16 [1/0] via 24.0.0.2
                        [1/0] via 23.0.0.2
S    192.50.20.0/24 [1/0] via 12.0.0.1
S    223.0.50.0/24 [1/0] via 26.0.0.2
Router#
Router#
```

(e0/0) 1

26.2

```
R3
R3(config)#ip route 24.0.0.0 255.0.0.0 32.0.0.2
R3(config)#ip route 24.0.0.0 255.0.0.0 23.0.0.1
R3(config)#ip route 45.0.0.0 255.0.0.0 23.0.0.1
R3(config)#exit
R3#wr
*Aug 20 17:09:34.029: %SYS-5-CONFIG_I: Configured from console by console
R3#write memory
Building configuration...
[OK]
R3#

R3#
R3#show ip interface brief
Interface                IP-Address      OK? Method Status    Prot
Local
Ethernet0/0               23.0.0.2        YES manual up        up
Ethernet0/1               32.0.0.1        YES manual up        up
Ethernet0/2               unassigned      YES TFTP  down      down
Ethernet0/3               unassigned      YES TFTP  down      down
R3#
```

(e0/1)

```
R3

i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
ia - IS-IS inter area, * - candidate default, U - per-user static route
o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
a - application route
+ - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

S    12.0.0.0/8 [1/0] via 23.0.0.1
    23.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    23.0.0.0/8 is directly connected, Ethernet0/0
L    23.0.0.2/32 is directly connected, Ethernet0/0
S    24.0.0.0/8 [1/0] via 32.0.0.2
        [1/0] via 23.0.0.1
S    26.0.0.0/8 [1/0] via 23.0.0.1
    32.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    32.0.0.0/8 is directly connected, Ethernet0/1
L    32.0.0.1/32 is directly connected, Ethernet0/1
S    45.0.0.0/8 [1/0] via 32.0.0.2
        [1/0] via 23.0.0.1
S    172.36.0.0/16 [1/0] via 32.0.0.2
S    192.50.20.0/24 [1/0] via 23.0.0.1
S    223.0.50.0/24 [1/0] via 23.0.0.1
R3#
```

```
R4
R4#
*Aug 20 17:31:15.599: %SYS-5-CONFIG_I: Configured from console by console
R4#
R4#
R4#write memory
Building configuration...
[OK]
R4#

R4#
R4#
R4#
R4#show ip interface brief
Interface                IP-Address      OK? Method Status      Prot
ocol
Ethernet0/0               24.0.0.2        YES manual up          up
Ethernet0/1               45.0.0.1        YES manual up          up
Ethernet0/2               unassigned      YES TFTP  down        down
Ethernet0/3               unassigned      YES TFTP  down        down
R4#
```

```
(4) WhatsApp
PINE Lab | Topology
R4
ia - IS-IS inter area, * - candidate default, U - per-user static route
o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
a - application route
+ - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

S    12.0.0.0/8 [1/0] via 24.0.0.1
S    23.0.0.0/8 [1/0] via 45.0.0.2
      [1/0] via 24.0.0.1
      24.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    24.0.0.0/8 is directly connected, Ethernet0/0
L    24.0.0.2/32 is directly connected, Ethernet0/0
S    26.0.0.0/8 [1/0] via 24.0.0.1
S    32.0.0.0/8 [1/0] via 45.0.0.2
      [1/0] via 24.0.0.1
      45.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    45.0.0.0/8 is directly connected, Ethernet0/1
L    45.0.0.1/32 is directly connected, Ethernet0/1
S    172.36.0.0/16 [1/0] via 45.0.0.2
S    192.50.20.0/24 [1/0] via 24.0.0.1
S    223.0.50.0/24 [1/0] via 24.0.0.1
R4#
R4#
```

```
R5
[1/0] via 32.0.0.1
R5#
R5#
R5#
R5#
R5#
R5#
R5#
R5#
R5#
R5#
R5#show ip interface brief
Interface      IP-Address      OK? Method Status      Prot
ocol
Ethernet0/0    172.36.0.1      YES manual up          up
Ethernet0/1    32.0.0.2        YES manual up          up
Ethernet0/2    45.0.0.2        YES manual up          up
Ethernet0/3    unassigned      YES TFTP  down        down
R5#
```

```
R5
Gateway of last resort is not set

S    12.0.0.0/8 [1/0] via 45.0.0.1
      [1/0] via 32.0.0.1
S    23.0.0.0/8 [1/0] via 45.0.0.1
      [1/0] via 32.0.0.1
S    24.0.0.0/8 [1/0] via 45.0.0.1
      [1/0] via 32.0.0.1
S    26.0.0.0/8 [1/0] via 45.0.0.1
      [1/0] via 32.0.0.1
      32.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    32.0.0.0/8 is directly connected, Ethernet0/1
L    32.0.0.2/32 is directly connected, Ethernet0/1
      45.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    45.0.0.0/8 is directly connected, Ethernet0/2
L    45.0.0.2/32 is directly connected, Ethernet0/2
      172.36.0.0/16 is variably subnetted, 2 subnets, 2 masks
C    172.36.0.0/16 is directly connected, Ethernet0/0
L    172.36.0.1/32 is directly connected, Ethernet0/0
S    192.50.20.0/24 [1/0] via 45.0.0.1
      [1/0] via 32.0.0.1
S    223.0.50.0/24 [1/0] via 45.0.0.1
      [1/0] via 32.0.0.1
R5#
```

```

R6#
R6#
R6#
R6#
R6#
R6#
R6#
R6#show ip interface brief
Interface      IP-Address      OK? Method Status      Prot
ocol
Ethernet0/0    223.0.50.1      YES manual up          up
Ethernet0/1    26.0.0.2        YES manual up          up
Ethernet0/2    unassigned      YES TFTP  down        down
Ethernet0/3    unassigned      YES TFTP  down        down
R6#
R6#
R6#
R6#
```

```

R6

E1 - OSPF external type 1, E2 - OSPF external type 2
i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
ia - IS-IS inter area, * - candidate default, U - per-user static route
o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
a - application route
+ - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

S    12.0.0.0/8 [1/0] via 26.0.0.1
S    23.0.0.0/8 [1/0] via 26.0.0.1
S    24.0.0.0/8 [1/0] via 26.0.0.1
     26.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    26.0.0.0/8 is directly connected, Ethernet0/1
L    26.0.0.2/32 is directly connected, Ethernet0/1
S    32.0.0.0/8 [1/0] via 26.0.0.1
S    45.0.0.0/8 [1/0] via 26.0.0.1
S    172.36.0.0/16 [1/0] via 26.0.0.1
S    192.50.20.0/24 [1/0] via 26.0.0.1
     223.0.50.0/24 is variably subnetted, 2 subnets, 2 masks
C    223.0.50.0/24 is directly connected, Ethernet0/0
L    223.0.50.1/32 is directly connected, Ethernet0/0
R6#
R6#
```

