


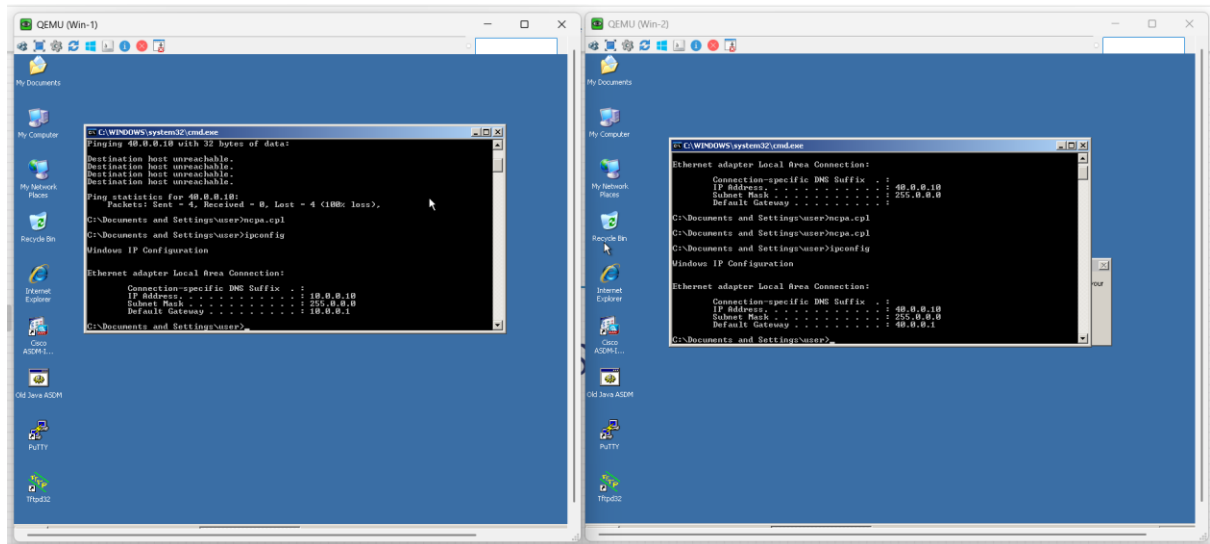
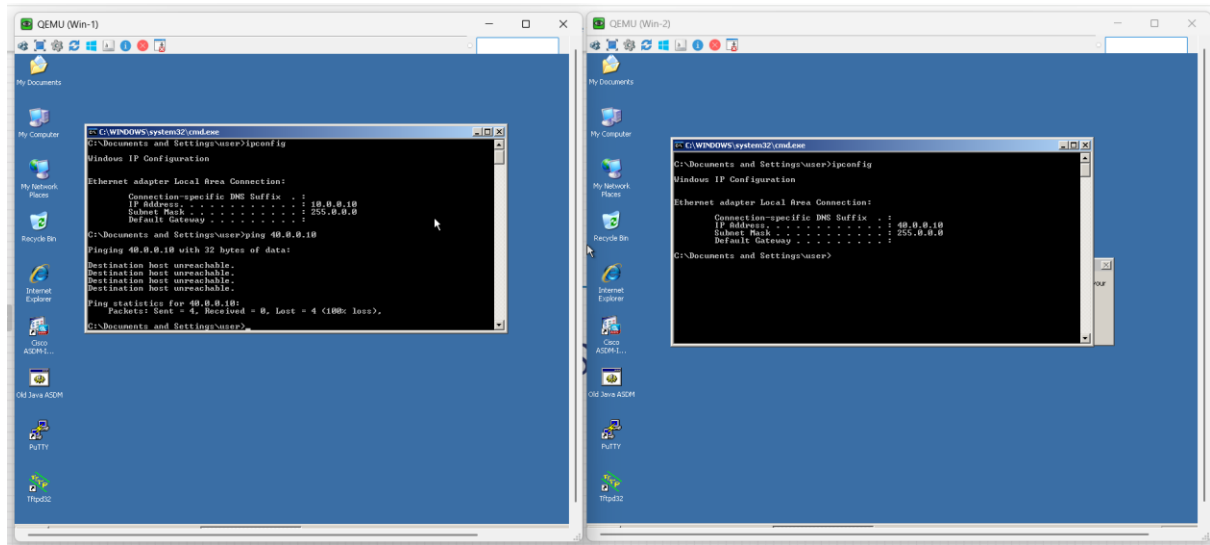


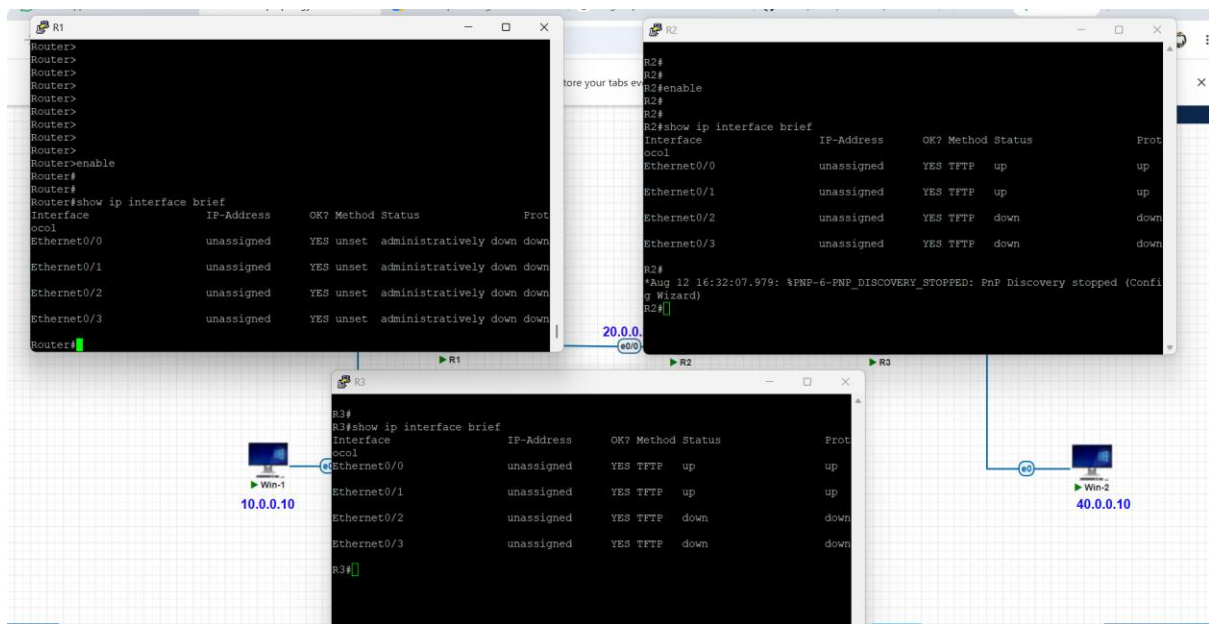

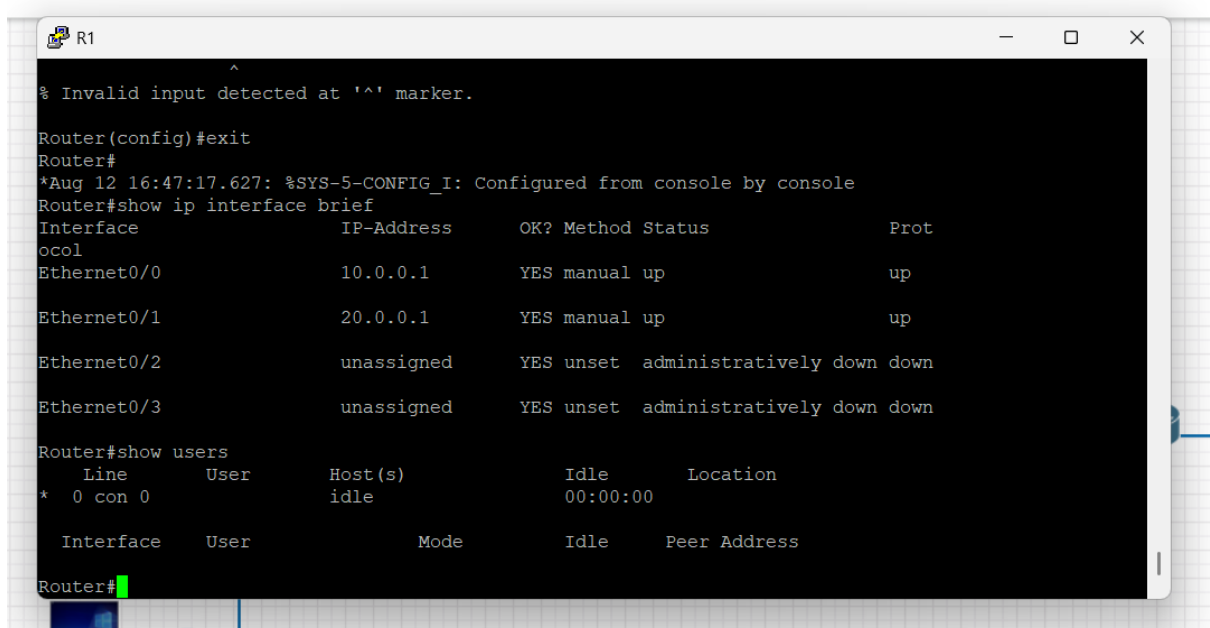

```
R1
Router(config-if)#exit
*Aug 12 16:46:30.227: %LINK-3-UPDOWN: Interface Ethernet0/1, changed state to up
*Aug 12 16:46:31.227: %LINEPROTO-5-UPDOWN: Line protocol on Interface Ethernet0/1, changed state to up
Router(config-if)#exit
Router(config)#show ip interface brief
^
% Invalid input detected at '^' marker.

Router(config)#exit
Router#
*Aug 12 16:47:17.627: %SYS-5-CONFIG_I: Configured from console by console
Router#show ip interface brief
Interface IP-Address OK? Method Status Protocol
Ethernet0/0 10.0.0.1 YES manual up up
Ethernet0/1 20.0.0.1 YES manual up up
Ethernet0/2 unassigned YES unset administratively down down
Ethernet0/3 unassigned YES unset administratively down down
Router#
```

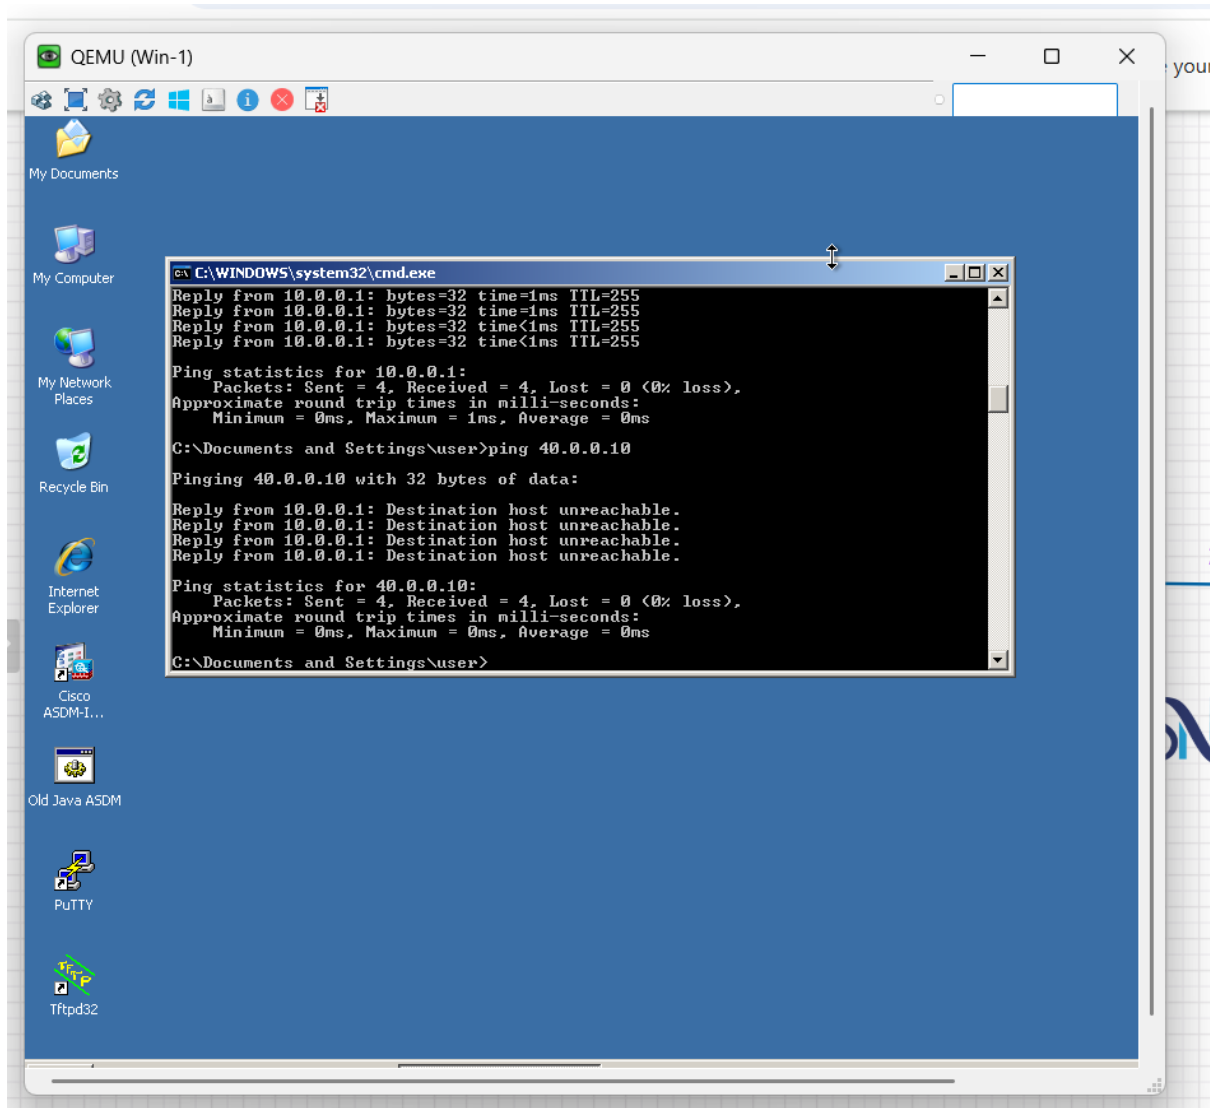

```
R2
R2(config)#exit
R2#
*Aug 12 16:53:49.508: %SYS-5-CONFIG_I: Configured from console by console
R2#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
R2(config)#interface eth0/1
R2(config-if)#ip address 30.0.0.1 255.0.0.0
R2(config-if)#no shutdown
R2(config-if)#exit
R2(config)#exit
R2#
*Aug 12 16:55:02.940: %SYS-5-CONFIG_I: Configured from console by console
R2#show ip interface brief
Interface                IP-Address      OK? Method Status      Prot
Ethernet0/0              20.0.0.2        YES manual up          up
Ethernet0/1              30.0.0.1        YES manual up          up
Ethernet0/2              unassigned      YES TFTP  down        down
Ethernet0/3              unassigned      YES TFTP  down        down
R2#
```

```
R3
R3(config-if)#ip address 30.0.0.2 255.0.0.0
R3(config-if)#no shutdown
R3(config-if)#exit
R3(config)#exit
R3#
*Aug 12 16:58:45.578: %SYS-5-CONFIG_I: Configured from console by console
R3#
R3#
R3#
R3#
R3#
R3#
R3#show ip interface brief
Interface                IP-Address      OK? Method Status      Prot
Ethernet0/0              40.0.0.1        YES manual up          up
Ethernet0/1              30.0.0.2        YES manual up          up
Ethernet0/2              unassigned      YES TFTP  down        down
Ethernet0/3              unassigned      YES TFTP  down        down
R3#
```

```
R1
Router#
Router#
Router#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       ia - IS-IS inter area, * - candidate default, U - per-user static route
       o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
       a - application route
       + - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

10.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    10.0.0.0/8 is directly connected, Ethernet0/0
L    10.0.0.1/32 is directly connected, Ethernet0/0
20.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    20.0.0.0/8 is directly connected, Ethernet0/1
L    20.0.0.1/32 is directly connected, Ethernet0/1
S    30.0.0.0/8 [1/0] via 20.0.0.2
S    40.0.0.0/8 [1/0] via 20.0.0.2
Router#
```

```
R2
R2#
R2#
R2#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       ia - IS-IS inter area, * - candidate default, U - per-user static route
       o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
       a - application route
       + - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

S    10.0.0.0/8 [1/0] via 20.0.0.1
20.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    20.0.0.0/8 is directly connected, Ethernet0/0
L    20.0.0.2/32 is directly connected, Ethernet0/0
30.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    30.0.0.0/8 is directly connected, Ethernet0/1
L    30.0.0.1/32 is directly connected, Ethernet0/1
S    40.0.0.0/8 [1/0] via 30.0.0.2
R2#
```

```
R3
R3#
R3#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       ia - IS-IS inter area, * - candidate default, U - per-user static route
       o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
       a - application route
       + - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

S    10.0.0.0/8 [1/0] via 30.0.0.1
S    20.0.0.0/8 [1/0] via 30.0.0.1
     30.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C     30.0.0.0/8 is directly connected, Ethernet0/1
L     30.0.0.2/32 is directly connected, Ethernet0/1
C    40.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    40.0.0.0/8 is directly connected, Ethernet0/0
L    40.0.0.1/32 is directly connected, Ethernet0/0
R3#
```

