


RIP

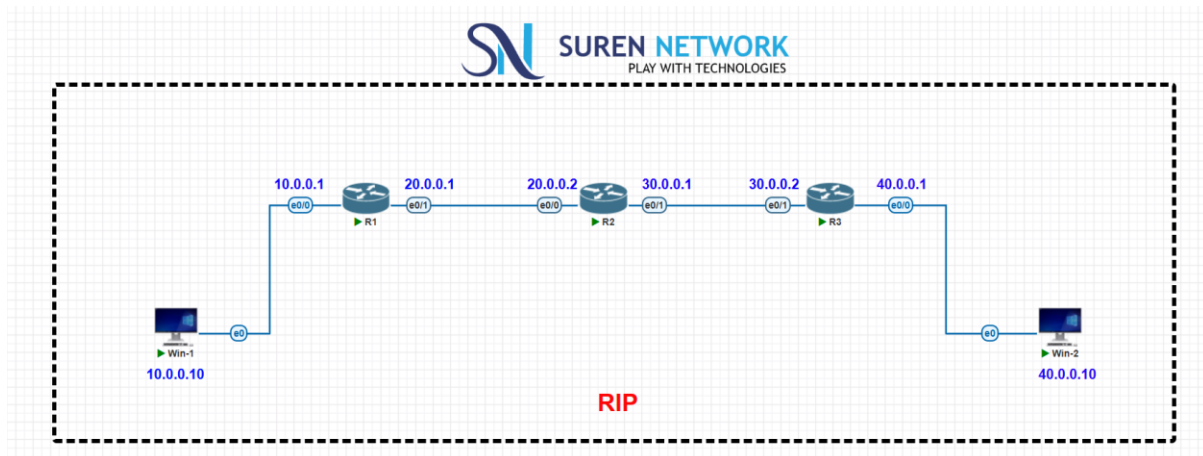

```
R1
R1(config)#
R1(config)#interface eth0/0
R1(config-if)#ip add 10.0.0.1 255.0.0.0
R1(config-if)#no shut
R1(config-if)#exit
R1(config)#
R1(config)#
R1(config)#interface eth0/1
R1(config-if)#ip add 20.0.0.1 255.0.0.0
R1(config-if)#no shut
R1(config-if)#exit
R1(config)#
R1(config)#
*Sep 27 09:53:26.328: %PNP-6-PNP_DISCOVERY_STOPPED: PnP Discovery stopped (Config Wizard)
R1(config)#
R1(config)#
R1(config)#router rip
R1(config-router)#network 10.0.0.0
R1(config-router)#network 20.0.0.0
R1(config-router)#exit
R1(config)#
R1(config)#
R1(config)#
```

```
R2
*Sep 27 09:53:37.047: %PNP-6-PNP_DISCOVERY_STOPPED: PnP Discovery stopped (Config Wizard)
R2(config)#interface eth0/0
R2(config-if)#ip add 20.0.0.2 255.0.0.0
R2(config-if)#no shut
R2(config-if)#exit
R2(config)#
R2(config)#
R2(config)#interface eth0/1
R2(config-if)#ip add 30.0.0.1 255.0.0.0
R2(config-if)#no shut
R2(config-if)#exit
R2(config)#
R2(config)#
R2(config)#
R2(config)#
R2(config)#router rip
R2(config-router)#network 20.0.0.0 255.0.0.0
                                     ^
% Invalid input detected at '^' marker.

R2(config-router)#network 20.0.0.0
R2(config-router)#network 30.0.0.0
R2(config-router)#exit
```

```
R3
R3(config-if)#no shut
R3(config-if)#exit
R3(config)#
R3(config)#
R3(config)#exit
R3#
*Sep 27 09:57:52.547: %SYS-5-CONFIG_I: Configured from console by console
R3#
*Sep 27 10:00:06.363: %PNP-6-PNP_DISCOVERY_STOPPED: PnP Discovery stopped (Config Wizard)
R3#
R3#
R3#config terminal
Enter configuration commands, one per line. End with CNTL/Z.
R3(config)#
R3(config)#
R3(config)#
R3(config)#
R3(config)#
R3(config)#router rip
R3(config-router)#network 30.0.0.0
R3(config-router)#network 40.0.0.0
R3(config-router)#exit
R3(config)#
```

