


EIGRP

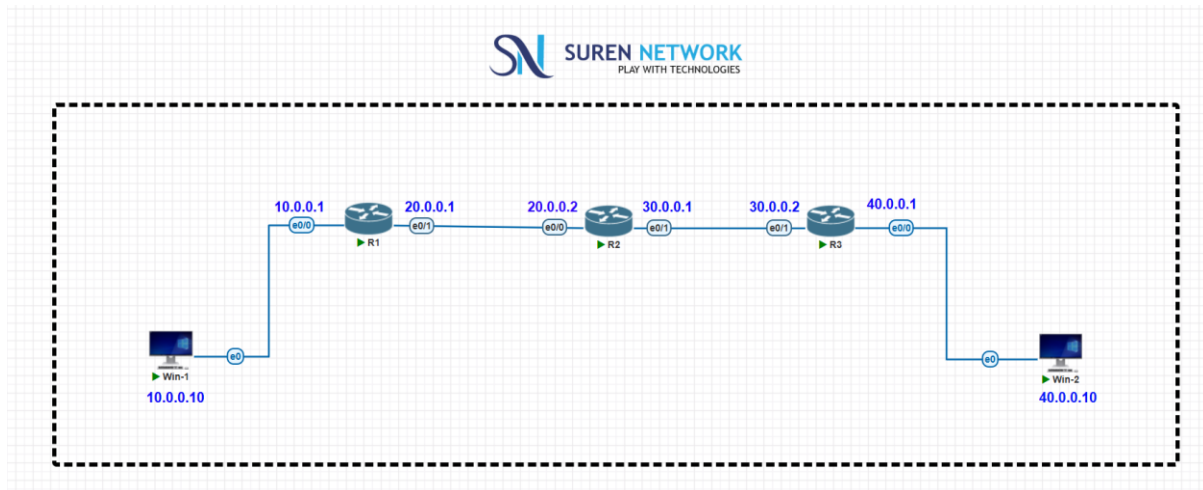

```
R1#
R1#
R1#show ip interface brief
Interface              IP-Address      OK? Method Status  Prot
ocol
Ethernet0/0            10.0.0.1        YES TFTP  up      up
Ethernet0/1            20.0.0.1        YES TFTP  up      up
Ethernet0/2            unassigned      YES TFTP  down    down
Ethernet0/3            unassigned      YES TFTP  down    down

R1#
R1#
R1#
R1#show ip eigrp neighbor
EIGRP-IPv4 Neighbors for AS(10)
H   Address          Interface        Hold Uptime    SRTT   RTO   Q
Seq                                     (sec)          (ms)      Cnt
Num
0   20.0.0.2          Et0/1            10 00:06:01    1     100   0
8
```

```

R1
8
R1#show ip eigrp topology
EIGRP-IPv4 Topology Table for AS(10)/ID(20.0.0.1)
Codes: P - Passive, A - Active, U - Update, Q - Query, R - Reply,
       r - reply Status, s - sia Status

P 10.0.0.0/8, 1 successors, FD is 281600
   via Connected, Ethernet0/0
P 30.0.0.0/8, 1 successors, FD is 307200
   via 20.0.0.2 (307200/281600), Ethernet0/1
P 40.0.0.0/8, 1 successors, FD is 332800
   via 20.0.0.2 (332800/307200), Ethernet0/1
P 20.0.0.0/8, 1 successors, FD is 281600
   via Connected, Ethernet0/1

R1#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       ia - IS-IS inter area, * - candidate default, U - per-user static route
       o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
       a - application route

```

```

R1
via Connected, Ethernet0/1

R1#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       ia - IS-IS inter area, * - candidate default, U - per-user static route
       o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
       a - application route
       + - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

10.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    10.0.0.0/8 is directly connected, Ethernet0/0
L    10.0.0.1/32 is directly connected, Ethernet0/0
20.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    20.0.0.0/8 is directly connected, Ethernet0/1
L    20.0.0.1/32 is directly connected, Ethernet0/1
D    30.0.0.0/8 [90/307200] via 20.0.0.2, 00:08:53, Ethernet0/1
D    40.0.0.0/8 [90/332800] via 20.0.0.2, 00:06:52, Ethernet0/1
R1#

```

```
R2#
R2#
R2#
R2#
R2#
R2#
R2#
R2#
R2#
R2#
R2#
R2#
R2#
R2#
R2#
R2#
R2#show ip eigrp neighbor
EIGRP-IPv4 Neighbors for AS(10)
H   Address                Interface          Hold Uptime    SRTT   RTO   Q
Seq                                     (sec)          (ms)         Cnt
Num
1   30.0.0.2                 Et0/1             12 00:18:24    5    100   0
4
0   20.0.0.1                 Et0/0             14 00:20:22  1023   5000   0
4
R2#
```

```
R2#show ip eigrp topology
EIGRP-IPv4 Topology Table for AS(10)/ID(30.0.0.1)
Codes: P - Passive, A - Active, U - Update, Q - Query, R - Reply,
       r - reply Status, s - sia Status

P 10.0.0.0/8, 1 successors, FD is 307200
   via 20.0.0.1 (307200/281600), Ethernet0/0
P 30.0.0.0/8, 1 successors, FD is 281600
   via Connected, Ethernet0/1
P 40.0.0.0/8, 1 successors, FD is 307200
   via 30.0.0.2 (307200/281600), Ethernet0/1
P 20.0.0.0/8, 1 successors, FD is 281600
   via Connected, Ethernet0/0

R2#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       ia - IS-IS inter area, * - candidate default, U - per-user static route
       o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
       a - application route
       + - replicated route, % - next hop override, p - overrides from PfR
```

```
R3
*Sep 27 11:20:42.842: %SYS-5-CONFIG_I: Configured from console by console
R3#show ip eigrp nei
R3#show ip eigrp neighbors
EIGRP-IPv4 Neighbors for AS(10)
H   Address                Interface      Hold Uptime    SRTT    RTO  Q
Seq                                     (sec)         (ms)         Cnt
Num
0   30.0.0.1                Et0/1         12 00:22:52    5    100  0
7
R3#show ip eigrp topology
EIGRP-IPv4 Topology Table for AS(10)/ID(40.0.0.1)
Codes: P - Passive, A - Active, U - Update, Q - Query, R - Reply,
       r - reply Status, s - sia Status

P 10.0.0.0/8, 1 successors, FD is 332800
    via 30.0.0.1 (332800/307200), Ethernet0/1
P 30.0.0.0/8, 1 successors, FD is 281600
    via Connected, Ethernet0/1
P 40.0.0.0/8, 1 successors, FD is 281600
    via Connected, Ethernet0/0
P 20.0.0.0/8, 1 successors, FD is 307200
    via 30.0.0.1 (307200/281600), Ethernet0/1
```

```
via 30.0.0.1 (307200/281600), Ethernet0/1
R3#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       ia - IS-IS inter area, * - candidate default, U - per-user static route
       o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
       a - application route
       + - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

D    10.0.0.0/8 [90/332800] via 30.0.0.1, 00:23:23, Ethernet0/1
D    20.0.0.0/8 [90/307200] via 30.0.0.1, 00:23:23, Ethernet0/1
    30.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    30.0.0.0/8 is directly connected, Ethernet0/1
L    30.0.0.2/32 is directly connected, Ethernet0/1
    40.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    40.0.0.0/8 is directly connected, Ethernet0/0
L    40.0.0.1/32 is directly connected, Ethernet0/0
R3#
```

