
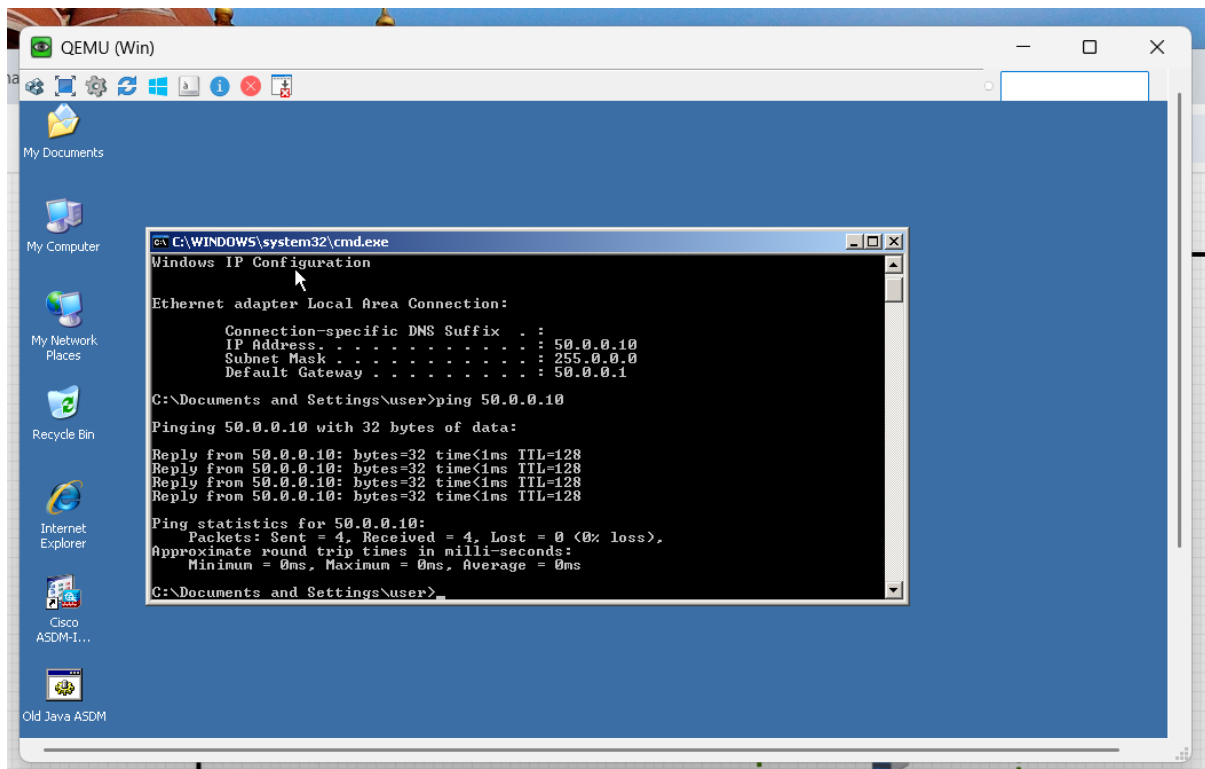


Server & services

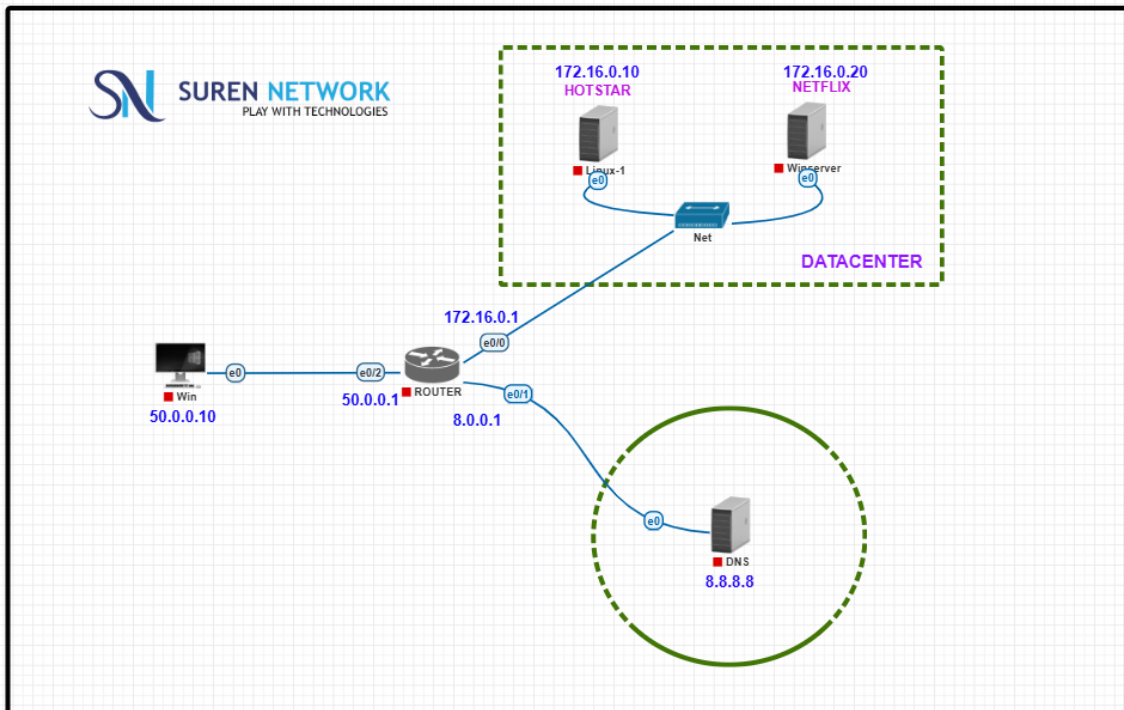

```
ROUTER#
ROUTER#
ROUTER#
ROUTER#
ROUTER#show ip interface brief
Interface                IP-Address      OK? Method Status      Prot
Ethernet0/0              172.16.0.1      YES manual up          up
Ethernet0/1              8.0.0.1         YES manual up          up
Ethernet0/2              50.0.0.1        YES manual up          up
Ethernet0/3              unassigned      YES TFTP  down        down
ROUTER#
```

```
QEMU (Linux-1)
64 bytes from 172.16.0.10: seq=1 ttl=64 time=0.151 ms
64 bytes from 172.16.0.10: seq=2 ttl=64 time=0.137 ms
64 bytes from 172.16.0.10: seq=3 ttl=64 time=0.134 ms

--- 172.16.0.10 ping statistics ---
4 packets transmitted, 4 packets received, 0% packet loss
round-trip min/avg/max = 0.134/0.159/0.214 ms
# ifconfig
eth0      Link encap:Ethernet  HWaddr 50:93:4C:01:AD:00
          inet addr:172.16.0.10  Bcast:172.16.255.255  Mask:255.255.0.0
          UP BROADCAST RUNNING MULTICAST  MTU:1500  Metric:1
          RX packets:221 errors:0 dropped:0 overruns:0 frame:0
          TX packets:985 errors:0 dropped:0 overruns:0 carrier:0
          collisions:0 txqueuelen:1000
          RX bytes:29356 (28.6 KiB)  TX bytes:299090 (292.0 KiB)

lo        Link encap:Local Loopback
          inet addr:127.0.0.1  Mask:255.0.0.0
          UP LOOPBACK RUNNING  MTU:16436  Metric:1
          RX packets:24 errors:0 dropped:0 overruns:0 frame:0
          TX packets:24 errors:0 dropped:0 overruns:0 carrier:0
          collisions:0 txqueuelen:0
          RX bytes:2016 (1.9 KiB)  TX bytes:2016 (1.9 KiB)
```

```
QEMU (Linux-1)

inet addr:127.0.0.1 Mask:255.0.0.0
UP LOOPBACK RUNNING MTU:16436 Metric:1
RX packets:24 errors:0 dropped:0 overruns:0 frame:0
TX packets:24 errors:0 dropped:0 overruns:0 carrier:0
collisions:0 txqueuelen:0
RX bytes:2016 (1.9 KiB) TX bytes:2016 (1.9 KiB)

# ping 172.16.0.10
PING 172.16.0.10 (172.16.0.10): 56 data bytes
64 bytes from 172.16.0.10: seq=0 ttl=64 time=0.177 ms
64 bytes from 172.16.0.10: seq=1 ttl=64 time=0.166 ms
64 bytes from 172.16.0.10: seq=2 ttl=64 time=0.221 ms
64 bytes from 172.16.0.10: seq=3 ttl=64 time=0.228 ms
64 bytes from 172.16.0.10: seq=4 ttl=64 time=0.151 ms
64 bytes from 172.16.0.10: seq=5 ttl=64 time=0.206 ms
64 bytes from 172.16.0.10: seq=6 ttl=64 time=0.197 ms
64 bytes from 172.16.0.10: seq=7 ttl=64 time=0.177 ms
64 bytes from 172.16.0.10: seq=8 ttl=64 time=0.140 ms
64 bytes from 172.16.0.10: seq=9 ttl=64 time=0.164 ms
64 bytes from 172.16.0.10: seq=10 ttl=64 time=0.138 ms

--- 172.16.0.10 ping statistics ---
11 packets transmitted, 11 packets received, 0% packet loss
round-trip min/avg/max = 0.138/0.178/0.228 ms
```

```
QEMU (Winservr)

C:\Windows\System32\cmd.exe
Windows IP Configuration

Ethernet adapter Ethernet:

Connection-specific DNS Suffix . : 
Link-local IPv6 Address . . . . . : fe80::9dcc:1a66:96d1:6cb3%3
IPv4 Address. . . . . : 172.16.0.20
Subnet Mask . . . . . : 255.255.0.0
Default Gateway . . . . . : 172.16.0.1

Tunnel adapter isatap.{2523F545-554E-44BA-9326-684149241DC5}:

Media State . . . . . : Media disconnected
Connection-specific DNS Suffix . : 

C:\Windows\system32>ping 172.16.0.20

Pinging 172.16.0.20 with 32 bytes of data:
Reply from 172.16.0.20: bytes=32 time<1ms TTL=128
Reply from 172.16.0.20: bytes=32 time<1ms TTL=128
Reply from 172.16.0.20: bytes=32 time<1ms TTL=128
Reply from 172.16.0.20: bytes=32 time<1ms TTL=128

Ping statistics for 172.16.0.20:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\Windows\system32>
```

