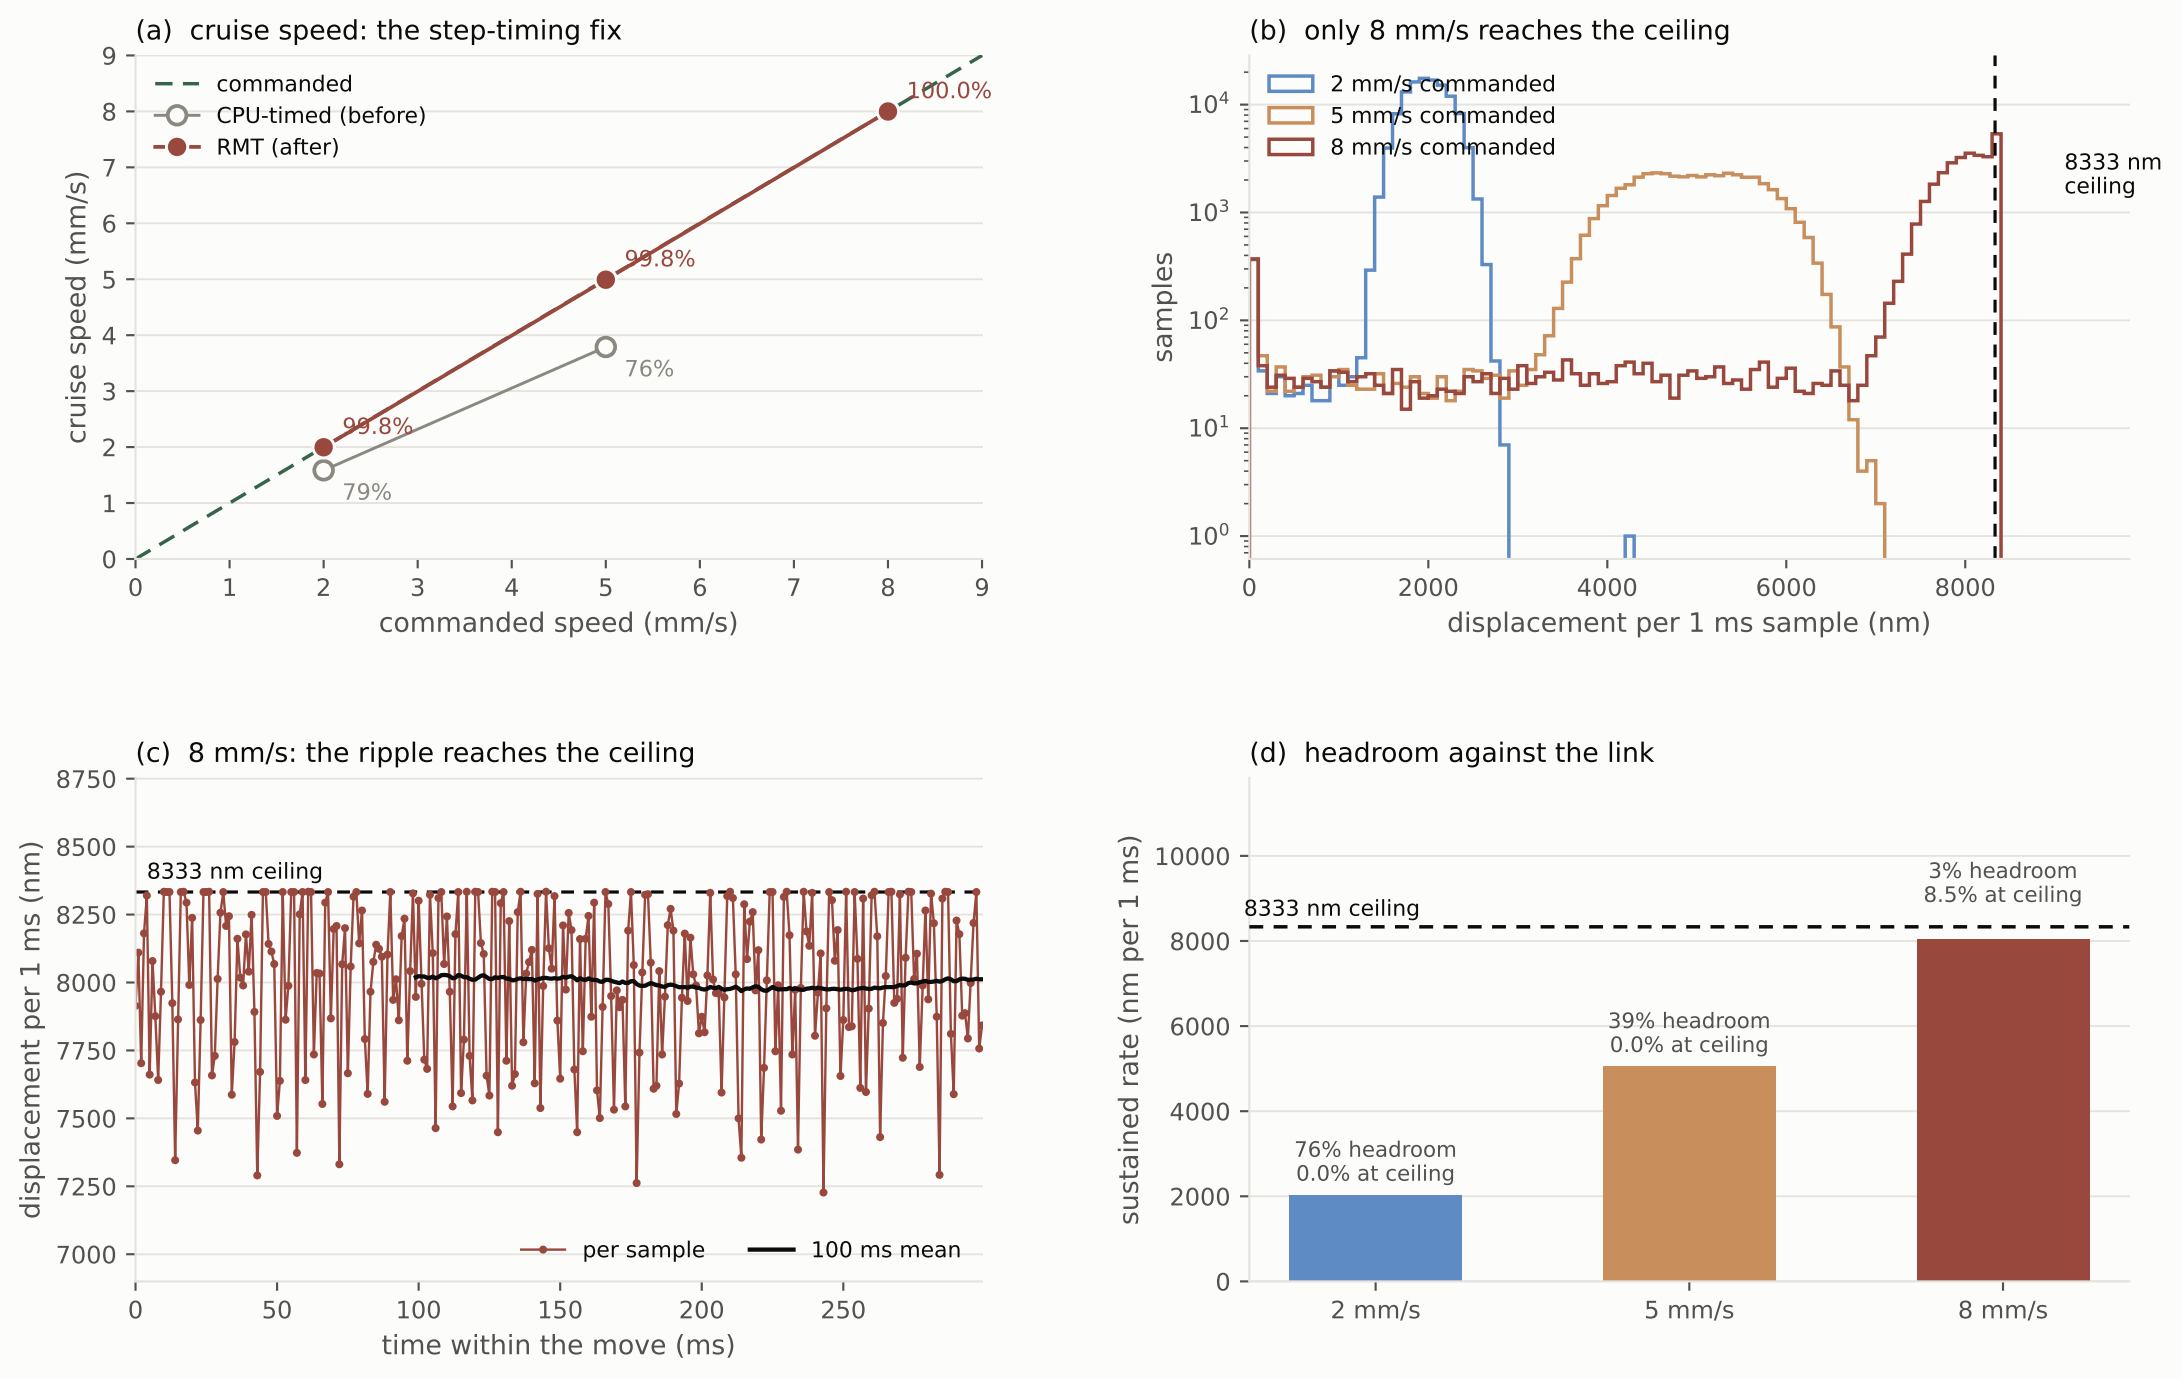
(a) cruise speed: the step-timing fix
commanded
CPU-timed (before)
RMT (after)
100.0%
99.8%
99.8%
76%
79%
cruise speed (mm/s)
commanded speed (mm/s)
(b) only 8 mm/s reaches the ceiling
2 mm/s commanded
5 mm/s commanded
8 mm/s commanded
8333 nm ceiling
samples
displacement per 1 ms sample (nm)
(c) 8 mm/s: the ripple reaches the ceiling
8333 nm ceiling
per sample
100 ms mean
displacement per 1 ms (nm)
time within the move (ms)
(d) headroom against the link
8333 nm ceiling
3% headroom
8.5% at ceiling
39% headroom
0.0% at ceiling
76% headroom
0.0% at ceiling
sustained rate (nm per 1 ms)
2 mm/s
5 mm/s
8 mm/s