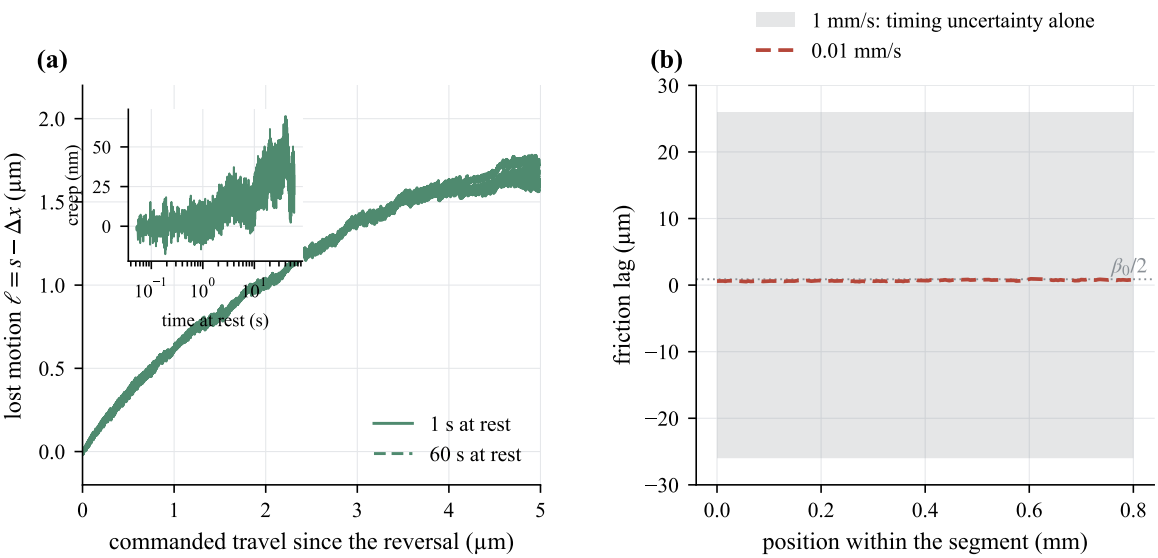

(a)
lost motion $\ell = s - \Delta x$ (μm)
commanded travel since the reversal (μm)
creep (mm)
time at rest (s)
1 s at rest
60 s at rest
(b)
1 mm/s: timing uncertainty alone
0.01 mm/s
friction lag (μm)
position within the segment (mm)
$\beta_0/2$