

Minimum induced drag of superelliptical closed lifting systems with a loaded central body

Harshwardhan Parganiha
[School / affiliation, City, India] [email]

July 2026

Abstract

Closed (“box”) wings have been known since Prandtl to reduce induced drag relative to planar wings of equal span, but practical ring-wing aircraft concepts raise two questions the classical literature does not answer together: how do smoothly curved closed traces compare with the rectangular box at equal height-to-span ratio, and what does it cost to make a central cabin body carry lift inside the ring? Using a Trefftz-plane minimum-induced-drag formulation, discretised with piecewise-constant circulation panels and solved as an equality-constrained quadratic program, this study (i) validates against three classical results (planar wing $e = 1$, Prandtl’s box wing $e \approx 1.46$ at $h/b = 0.2$, circular ring $e = 2$); (ii) shows that the optimal span efficiency of an elliptical ring follows $e = 1 + h/b$ to within 8×10^{-4} across the full range, suggesting an exact law; (iii) maps the superellipse family $|y/a|^p + |z/c|^p = 1$ between ellipse and box, finding that a $p = 4$ “squircle” captures roughly three quarters of the box-wing benefit and $p = 6$ captures 85%; and (iv) quantifies the penalty of loading a central body, which is smallest when the body hugs either arc of the ring and largest at mid-height. A design point combining these findings—a $p = 4$ superelliptical ring of $h/b = 0.5$ with a low-set cabin carrying 15% of total lift—achieves $e = 1.61$, a 38% induced-drag reduction relative to an ideal planar wing.

1 Introduction

Induced drag—the drag due to lift—accounts for roughly a third of the cruise drag of a typical transport aircraft and close to half of its drag at climb. Munk [1] showed that for a planar wing the minimum induced drag is achieved by an elliptical lift distribution, giving the familiar

$$D_i = \frac{L^2}{\pi q b^2 e}, \quad (1)$$

with span efficiency $e = 1$. Nonplanar and closed lifting systems can exceed $e = 1$: Prandtl [2] identified the rectangular “box wing” as the *best wing system*, with an efficiency that grows with the height-to-span ratio h/b (approximately $e \approx 1.46$ at $h/b = 0.2$), and Cone [3] systematically studied nonplanar systems, including annular wings. The subject remains active in the joined-wing and PrandtlPlane literature [4, 5].

Ring-wing *aircraft* concepts, however, differ from the idealised closed traces studied classically in two ways. First, for structural, manufacturing, and aesthetic reasons a practical ring is smoothly curved rather than rectangular; the efficiency of intermediate shapes between the ellipse and the box does not appear to have been mapped. Second, such concepts typically place the cabin as a lifting body *inside* the ring, joined to it fore and aft; in the Trefftz plane this appears as a detached

central lifting element, and the induced-drag cost of requiring it to carry a share of the total lift has, to the author’s knowledge, not been quantified.

This paper addresses both questions with a single validated numerical tool. The contributions are:

1. a numerically supported conjecture that the optimal span efficiency of an elliptical closed trace is exactly $e = 1 + h/b$;
2. the efficiency map of the superellipse family $|y/a|^p + |z/c|^p = 1$ between ellipse ($p = 2$) and box ($p \rightarrow \infty$), showing rapid saturation of the benefit with p ;
3. the induced-drag penalty of a loaded central body as a function of its lift share and of its vertical position, yielding a simple design rule: blend the body into an arc of the ring, do not suspend it at mid-height;
4. a combined design point demonstrating $e = 1.61$ with realistic cabin loading.

2 Method

2.1 Trefftz-plane formulation

Far downstream of a steady lifting system the wake tends to a two-dimensional vortex sheet whose trace C in the transverse (Trefftz) plane determines the induced drag entirely [1]. For a circulation distribution $\Gamma(s)$ along the trace (arc length s), lift and induced drag are

$$L = \rho V \int_C \Gamma \, dy, \quad D_i = \frac{\rho}{2} \int_C \Gamma w_n \, ds, \quad (2)$$

where w_n is the sheet-normal component of the velocity induced in the Trefftz plane by the trailing vorticity $-d\Gamma/ds$. Minimising D_i at fixed L defines the optimal loading and, through Eq. (1) with b the overall span of the system, the span efficiency e reported throughout. Because e is a ratio of the same quadratic functionals for every geometry, it is independent of the choices $\rho = V = 1$ made here.

2.2 Discretisation

The trace is divided into n panels carrying piecewise-constant circulations Γ_i . Each panel sheds two-dimensional point vortices of strength $-\Gamma_i$ and $+\Gamma_i$ at its endpoints; at an edge shared by two panels these superpose to the physical shed strength $\Gamma_i - \Gamma_{i+1}$, while free ends of open components automatically carry the full tip vortex. Control points lie at panel midpoints. Substituting into Eq. (2) gives

$$D_i = \mathbf{\Gamma}^\top A \mathbf{\Gamma}, \quad L = \mathbf{b}^\top \mathbf{\Gamma}, \quad (3)$$

with A symmetrised and $b_i = \Delta y_i$. Lift-equality constraints (total lift, and optionally the lift of an individual component) are collected in $B^\top \mathbf{\Gamma} = \mathbf{d}$ and the optimum found from the KKT system

$$\begin{pmatrix} 2A & -B \\ B^\top & 0 \end{pmatrix} \begin{pmatrix} \mathbf{\Gamma} \\ \boldsymbol{\lambda} \end{pmatrix} = \begin{pmatrix} \mathbf{0} \\ \mathbf{d} \end{pmatrix}. \quad (4)$$

Closed polygons are resampled to uniform arc length (equal panel sizes avoid corner ill-conditioning of the point-vortex kernel); open traces use cosine spacing. A Tikhonov term of 10^{-12} on the

diagonal of A guards conditioning. Resolutions up to $n = 1536$ are used; convergence is reported in Sec. 3.

Geometries studied: the planar wing; the rectangular box wing of height h ; the elliptical ring ($y = a \cos \theta$, $z = \frac{h}{2}(1 + \sin \theta)$); the superellipse family $|y/a|^p + |z/c|^p = 1$ with $c = h/2$; and rings augmented by a detached central segment (the Trefftz trace of a cabin body joined to the ring fore and aft) of width $0.4\text{--}0.5b$ at height $z = z_f h$.

3 Validation

Three classical results serve as validation targets (Table 1). The planar wing recovers Munk’s $e = 1$ to 0.3% at $n = 400$. The box wing at $h/b = 0.2$ converges to $e = 1.472$, consistent with Prandtl’s approximate value ≈ 1.46 and with later exact treatments [2, 5]. The circular ring converges to the classical $e = 2$ [3] to four decimal places, a stringent test since it involves the full closed-trace kernel. Consistency checks: the superellipse geometry at $p = 2$ reproduces the independent ellipse parameterisation to 1.5×10^{-3} , and an unconstrained central body takes up zero loading, leaving e unchanged, as Munk’s stagger theorem requires.

Table 1: Validation against classical results.

Case	Computed	Classical	Source
Planar wing ($n = 400$)	1.0031	1.0000	Munk [1]
Box wing, $h/b = 0.2$ ($n_{\text{span}} = 64 \dots 512$)	$1.4737 \rightarrow 1.4721$	≈ 1.46	Prandtl [2]
Circular ring ($n = 128 \dots 1024$)	$1.9994 \rightarrow 2.0000$	2.0	Cone [3]

4 Results

4.1 Ellipse versus box, and the $e = 1 + h/b$ law

Figure 1 shows the optimal span efficiency of the box wing and the elliptical ring for h/b from 0.05 to 1. The box wing is superior at every height, consistent with its status as the best wing system: at $h/b = 0.3$ it reaches $e = 1.658$ against the ellipse’s 1.302.

The elliptical results, however, collapse onto a strikingly simple relation. At $n = 1536$ the computed efficiency satisfies

$$e_{\text{ellipse}} = 1 + \frac{h}{b} \quad (5)$$

with a maximum deviation of 7.9×10^{-4} over $h/b \in [0.1, 1]$. The deviation decreases monotonically with h/b , vanishes at the circle (where Eq. (5) gives the exact classical value $e = 2$), and shrinks with grid refinement, indicating a discretisation residual rather than a physical departure. The author is not aware of Eq. (5) being stated in the literature for elliptical closed traces; it is offered here as a numerically supported conjecture, plausibly provable in elliptic coordinates.

4.2 The superellipse family: squaring the ring

Figure 2 maps $e(p)$ for the superellipse family at $h/b = 0.3$ and 0.5. Defining the *benefit capture* $(e - 1)/(e_{\text{box}} - 1)$, the gain saturates rapidly with p : $p = 3$ captures about two thirds of the box benefit, $p = 4$ about three quarters (73% at $h/b = 0.3$, 76% at $h/b = 0.5$), $p = 6$ about 85%,

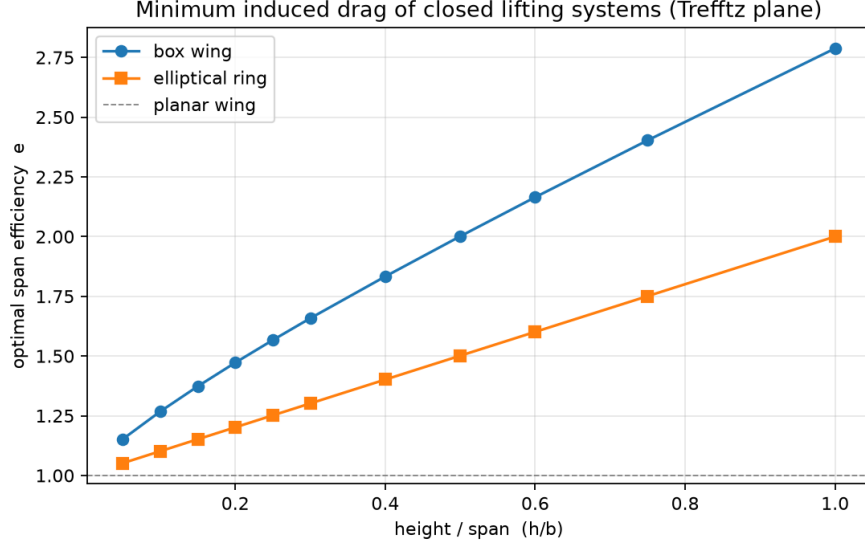


Figure 1: Optimal span efficiency of the box wing and the elliptical ring versus height-to-span ratio. The elliptical ring follows $e = 1 + h/b$ to within 8×10^{-4} .

and $p = 12$ over 92%. The practical implication is that the sharp corners of a true box wing—structurally heavy, prone to interference drag in viscous flow, and difficult to manufacture—are unnecessary: a gently squared ring of $p = 4$ –6 obtains most of the ideal-flow advantage while remaining smooth everywhere.

4.3 Cost of loading the central body

Figure 3 quantifies the penalty of forcing a central body (width $0.5b$, mid-height) to carry a fraction f of the total lift. The optimum assigns the body zero load; the penalty grows quadratically in f and is severe beyond $f \approx 0.15$: at $h/b = 0.3$, efficiency falls from 1.302 ($f = 0$) to 1.143 at $f = 0.2$ and drops below the planar-wing value at $f \approx 0.3$. A closed wing can therefore be squandered entirely by asking its cabin to lift like a wing.

The vertical placement study (Fig. 4) explains why and softens the verdict. With $f = 0.15$ fixed, the penalty is largest at mid-height ($e = 1.145$) and smallest when the body hugs either arc ($e = 1.226$ at $z/h = 0.1$), the curve being symmetric. Near an arc the body’s shed vorticity partially merges with the ring’s own optimal sheet; at mid-gap it is maximally exposed. The design rule is simple: *blend the cabin into an arc of the ring; never suspend it at mid-height*.

4.4 A combined design point

Applying all three findings to a hypothetical transport configuration—a superelliptical ring with $p = 4$, $h/b = 0.5$, and a cabin of width $0.5b$ blended low in the ring at $z/h = 0.15$ carrying 15% of the lift—gives $e = 1.61$, against 1.76 for the same ring unloaded, 1.50 for the plain ellipse, and 2.00 for the ideal box. Relative to an ideal planar wing of equal span, the design point represents a 38% reduction in induced drag with a realistic cabin lift share included. Figure 5 shows the optimal circulation distribution at this design point.

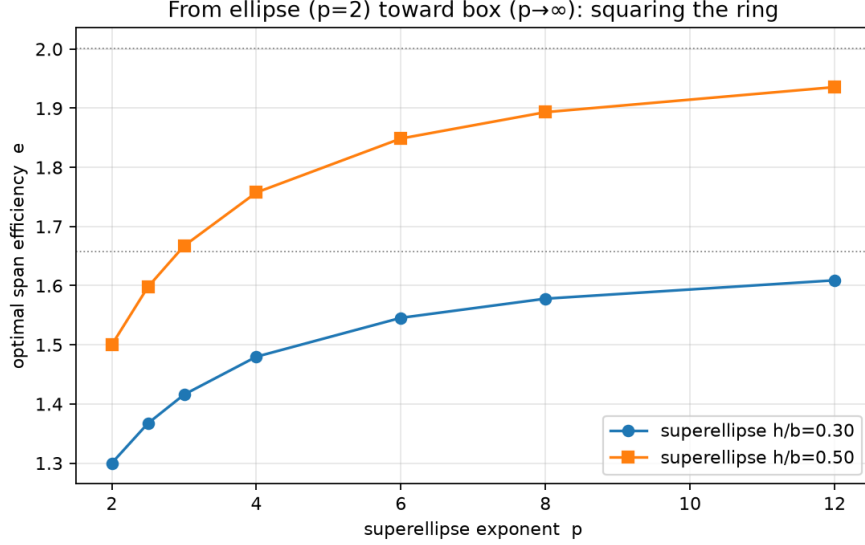


Figure 2: Span efficiency versus superellipse exponent p at two height-to-span ratios. Dotted lines mark the corresponding box-wing values ($p \rightarrow \infty$).

5 Discussion and limitations

The analysis is inviscid, linear, and assumes the optimal (fully relaxed) load distribution on a rigid, non-contracting wake; it therefore bounds what any real configuration can achieve rather than predicting what a particular one will. Viscous interference at wing-body junctions, profile drag of the added wetted area of a closed system, structural weight, stability and trim constraints, and compressibility are all outside its scope. These caveats cut both ways: the box wing’s corner regions are precisely where viscous interference is worst, so the superellipse’s advantage over the box is likely understated in real flow, strengthening the case for smooth closed traces. The $e = 1 + h/b$ relation, if exact, would give designers a closed-form anchor for curved closed systems analogous to Prandtl’s box-wing charts.

Two further limitations deserve emphasis. The span efficiencies reported are ideal-loading values; achieving them requires the twist and chord distribution that realises the optimal circulation, which is a separate (solvable) design problem. And the central-body results model the cabin trace as a flat segment; a cambered lifting body of finite thickness will differ in detail, though the geometric trend—arc-hugging beats mid-gap—follows from the structure of the induced-velocity kernel and should be robust.

6 Conclusion

A validated Trefftz-plane optimiser was used to map the induced-drag performance of closed lifting systems between the two classical extremes. The elliptical ring obeys $e = 1 + h/b$ to within 8×10^{-4} , proposed here as an exact law; the superellipse family shows that a $p = 4$ – 6 “squirle” ring captures 75–85% of the box wing’s benefit without its corners; and loading a central cabin body is cheap only near the ring’s arcs and only up to a lift share of about 10–15%. Together these results reduce ring-wing aircraft design from aesthetic speculation to three quantitative rules, and the combined design point ($e = 1.61$ with cabin loading) shows the concept survives its own constraints. Future

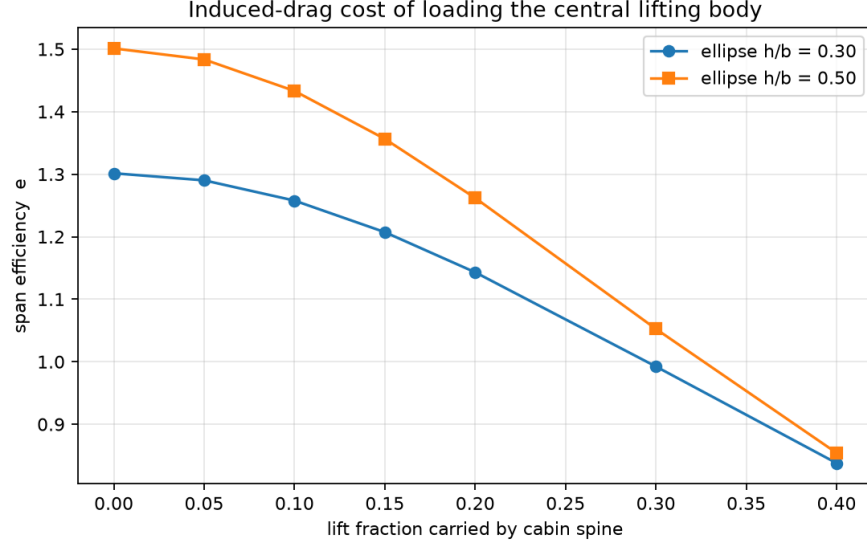


Figure 3: Efficiency versus lift fraction carried by a mid-height central body, for two ring heights.

work: an analytical proof of Eq. (5); a finite-chord vortex-lattice model including trim; and a subscale flight demonstrator to measure achieved (as opposed to ideal) efficiency.

Data and code availability

The solver (~ 200 lines of Python), all run scripts, and all data tables are available at [repository URL / Zenodo DOI].

Acknowledgements and disclosure

[Mentor acknowledgement if applicable.] The numerical implementation and manuscript preparation were assisted by an AI system (Anthropic Claude); all methods, results, and conclusions were reviewed, reproduced, and are fully understood by the author. [Adapt to target venue’s AI policy.]

References

- [1] M. M. Munk, “The Minimum Induced Drag of Aerofoils,” NACA Report No. 121, 1921.
- [2] L. Prandtl, “Induced Drag of Multiplanes,” NACA TN-182, 1924.
- [3] C. D. Cone, Jr., “The Theory of Induced Lift and Minimum Induced Drag of Nonplanar Lifting Systems,” NASA TR R-139, 1962.
- [4] I. Kroo, “Drag Due to Lift: Concepts for Prediction and Reduction,” *Annual Review of Fluid Mechanics*, 33:587–617, 2001.
- [5] A. Frediani and G. Montanari, “Best Wing System: An Exact Solution of the Prandtl’s Problem,” in *Variational Analysis and Aerospace Engineering*, Springer, 2009.

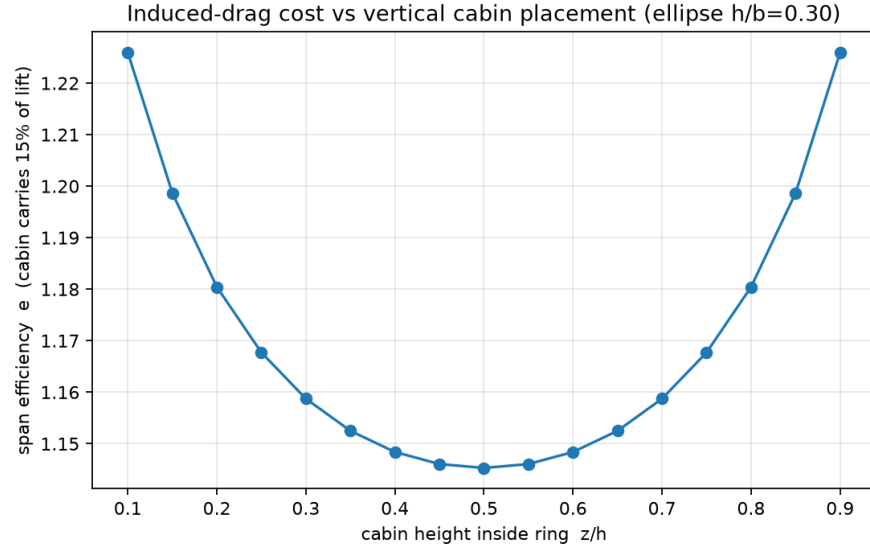


Figure 4: Efficiency versus vertical position of the central body at a fixed 15% lift share (ellipse, $h/b = 0.3$). Mid-height is the worst placement.

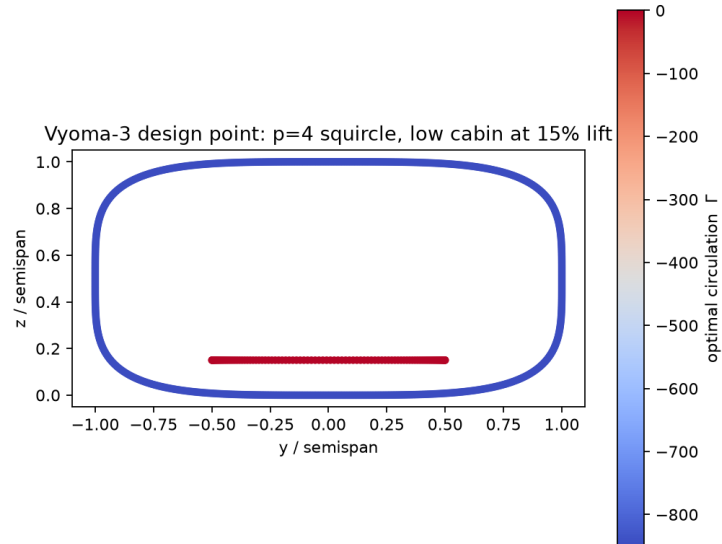


Figure 5: Optimal circulation at the combined design point: $p = 4$ superellipse, $h/b = 0.5$, low-set central body at 15% lift share.