

D

C

B

A

4

3

2

© 2005 TE Connectivity. All Rights Reserved.

P

LTR




B1

REVI

NOTES:

1. ELECTRICAL DATA:
- CONTACT RESISTANCE: 10 mOhm MAX
- INSULATION RESISTANCE: 100 MOhm MIN at 500VDC
- CURRENT RATING: 5 AMPS
- BREAKDOWN VOLTAGE: 500 VAC MIN PER MINUTE
2. ENVIRONMENTAL:
- OPERATING TEMPERATURE: -20°C TO +80°C
- SEALING REQUIREMENTS: IP67
3. PROD SPEC: 108-3641
4. PACKAGING: 107-3334
5. FOR TECHNICAL DATA REFER TO YOUR LOCAL TYCO ELECTRONICS SALES OFFICE
6. ALL DIMENSIONS ARE NOMINAL FOR REFERENCE ONLY UNLESS OTHERWISE STATED

ITEM	DESCRIPTION	
1	SCREW NUT	ZIN
2	CONNECTOR BODY	PC
3	SOCKET CONTACT	BR
4	4 CORE CABLE (CORES 22AWG TO UL2464)	PV
5	'O' RING	VIT

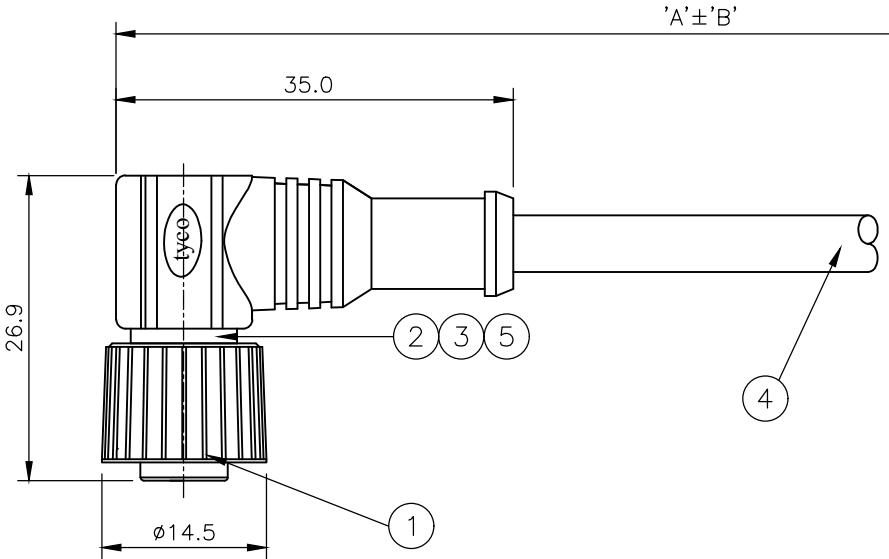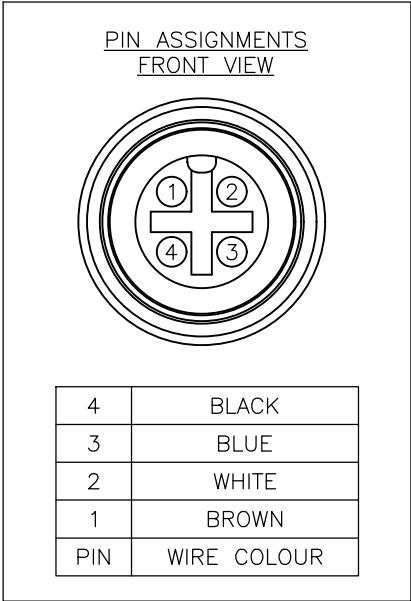

OBSOLETE	10000	500 mm
OBSOLETE	7000	350 mm
	5000	250 mm
OBSOLETE	3000	150 mm
	2000	100 mm
	DIM A	TOL 'B'

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN H M RAGHAVENDRA CHK F.WHEELER-KING APVD F.WHEELER-KING PRODUCT SPEC APPLICATION SPEC WEIGHT CUSTOMER DRAWING
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -	
MATERIAL -	FINISH -	