

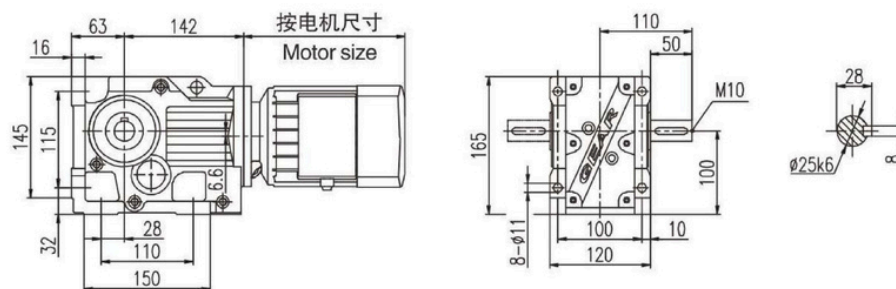



K37




KF37

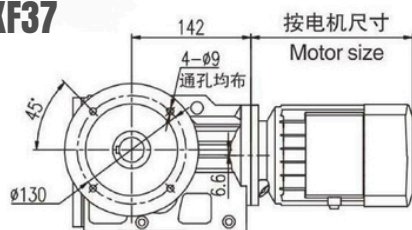


KAF37

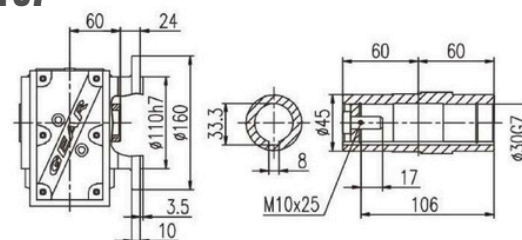


KA37

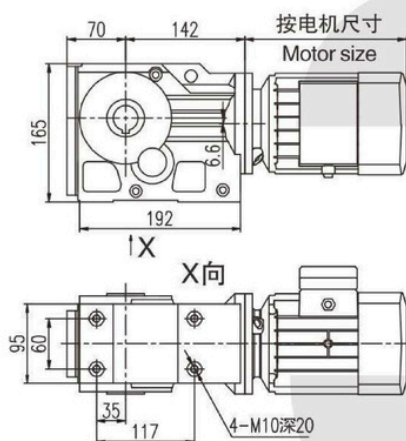


KAZ37

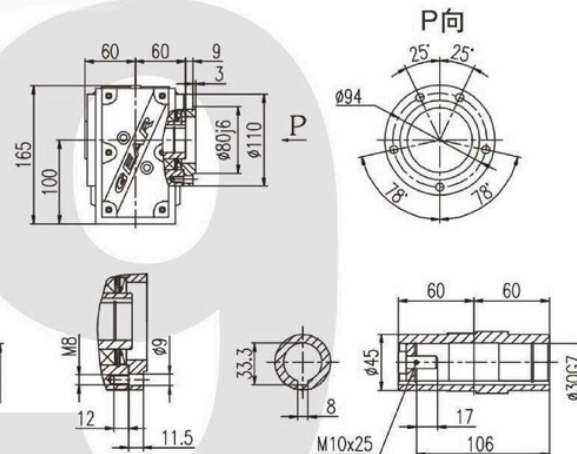


KAT37

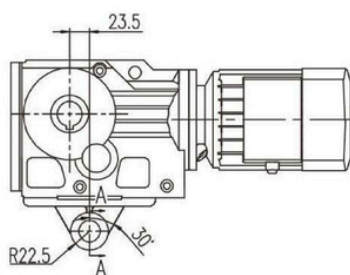


A-A局部




防转臂C面安装



防转臂D面安装




K..S37

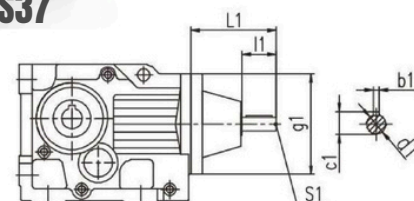

d1	L1	l1	S1	c1	b1	g1
φ16k6	115	40	M5	18	5	φ120
φ19k6	115	40	M6	21.5	6	φ120


K..37R17

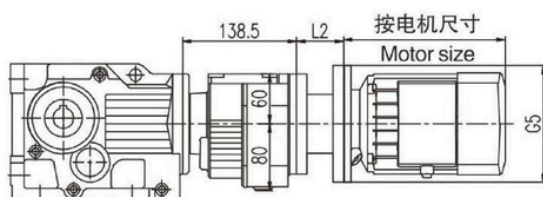

Y2电机座号 Motor size	63
功率/4P Power/(kw)	0.18
L2	68
G5	φ140

K..37

The connected flange is needed when the motor supplied by customer

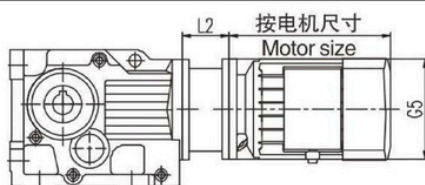

Y2电机座号 Motor size	63	71		80		90		100	
功率/4P Power/(kw)	0.18	0.25	0.37	0.55	0.75	1.1	1.5	2.2	3.0
L2	68	68		68		68		74	
G5	Φ 140	Φ 160		Φ 200		Φ 200		Φ 250	