


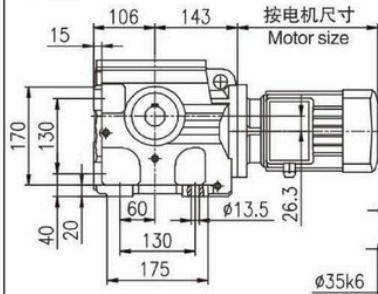




S67




SF67

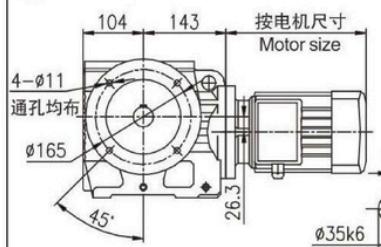

SA67

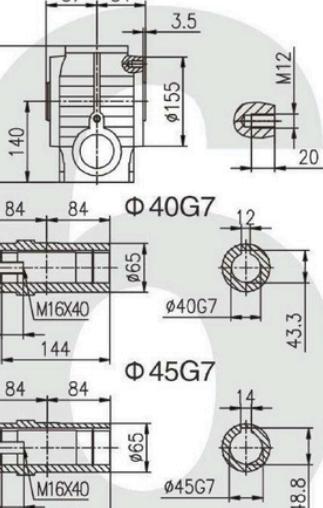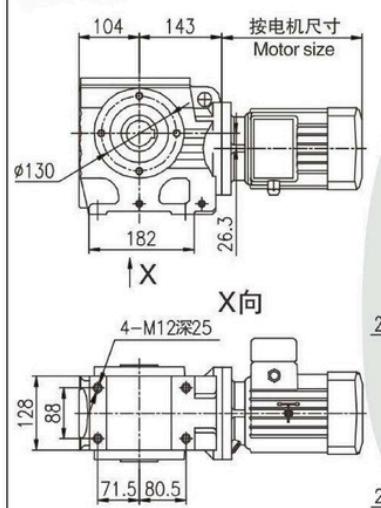


S-67R37

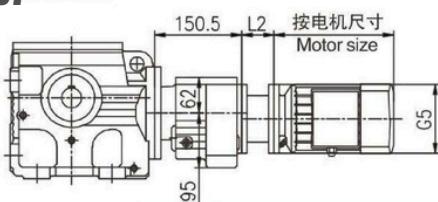



|                      |       |       |      |       |      |
|----------------------|-------|-------|------|-------|------|
| Y2电机座号<br>Motor size | 63    | 71    |      | 80    |      |
| 功率/4P<br>Power(kw)   | 0.18  | 0.25  | 0.37 | 0.55  | 0.75 |
| L2                   | 68    | 68    |      | 68    |      |
| G5                   | Φ 140 | Φ 160 |      | Φ 200 |      |

S..67


The connected flange is needed when the motor supplied by customer

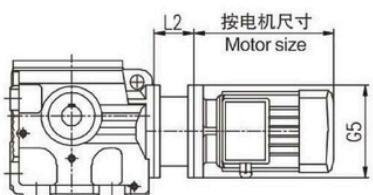


SAF67

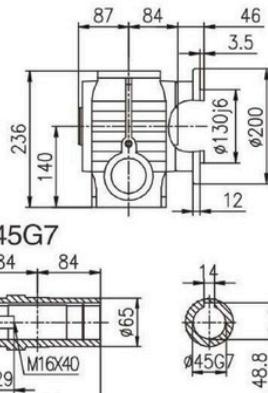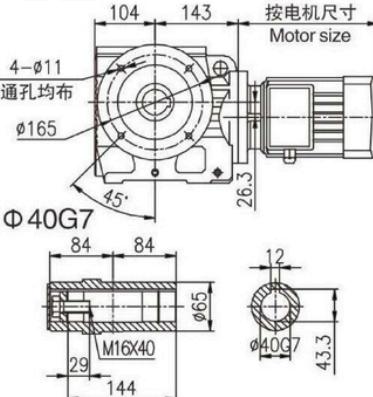


SAT67

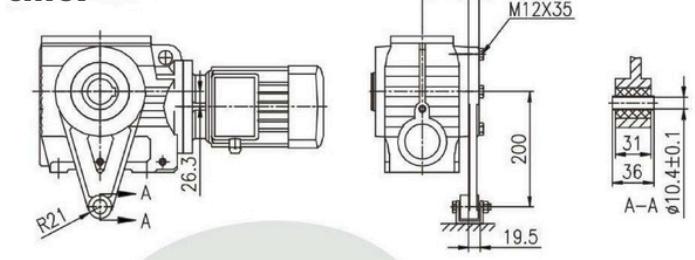

SAZ67

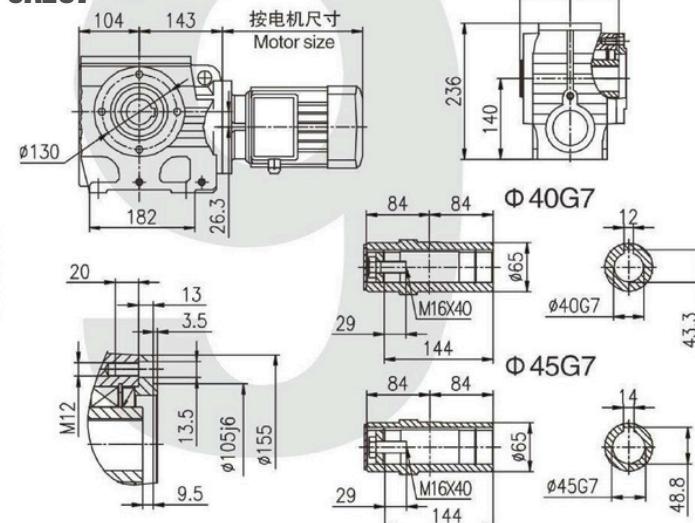

S-S67

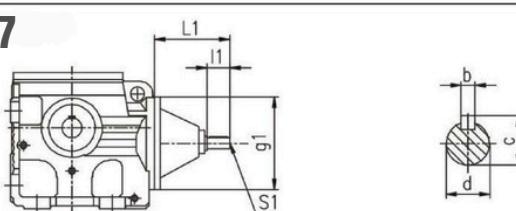

| d      | L1  | l1 | S1 | c    | b | g1    |
|--------|-----|----|----|------|---|-------|
| Φ 19K6 | 120 | 40 | M6 | 21.5 | 6 | Φ 160 |
| Φ 24K6 | 130 | 50 | M8 | 27   | 8 | Φ 160 |

|                      |       |      |       |      |       |     |       |     |       |
|----------------------|-------|------|-------|------|-------|-----|-------|-----|-------|
| Y2电机座号<br>Motor size | 71    |      | 80    |      | 90    |     | 100   |     | 112   |
| 功率/4P<br>Power/(kw)  | 0.25  | 0.37 | 0.55  | 0.75 | 1.1   | 1.5 | 2.2   | 3.0 | 4.0   |
| L2                   | 77    |      | 77    |      | 77    |     | 80    |     | 80    |
| G5                   | Φ 160 |      | Φ 200 |      | Φ 200 |     | Φ 250 |     | Φ 250 |