




## F107

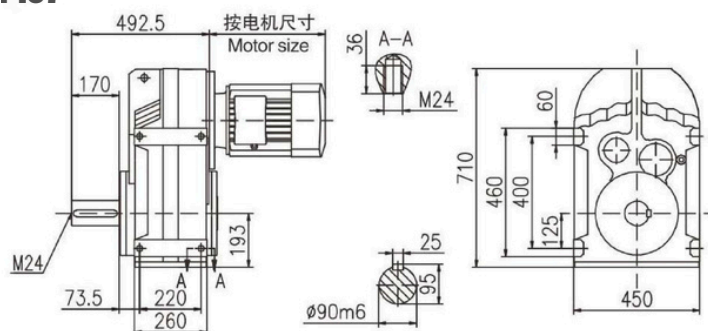


## FAF107

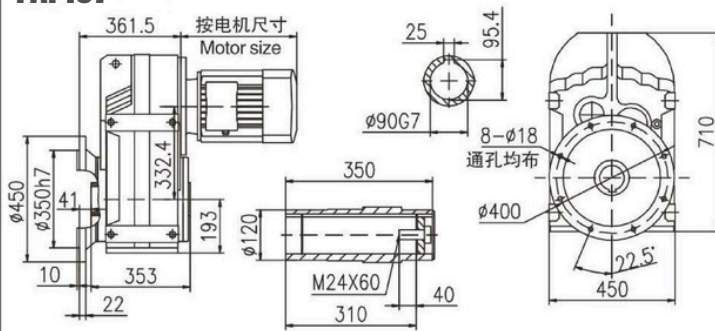


## FA107

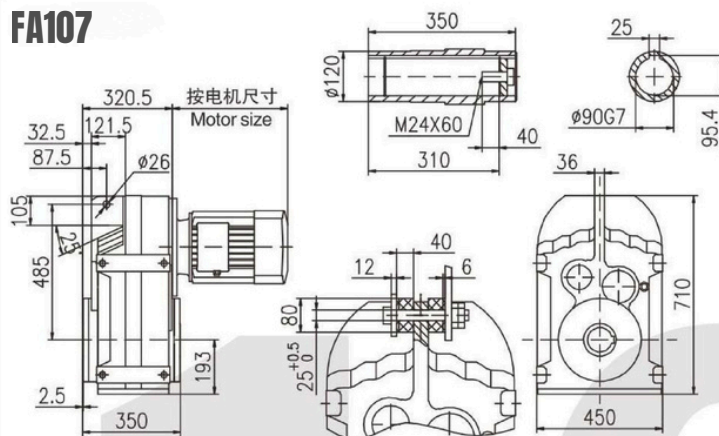


## FAB107

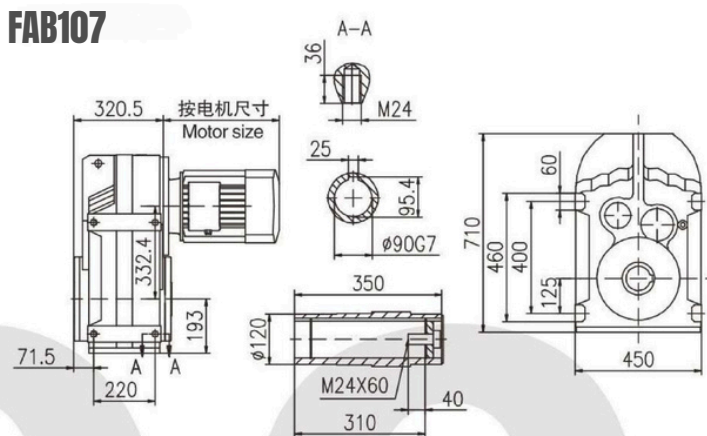


## FAZ107

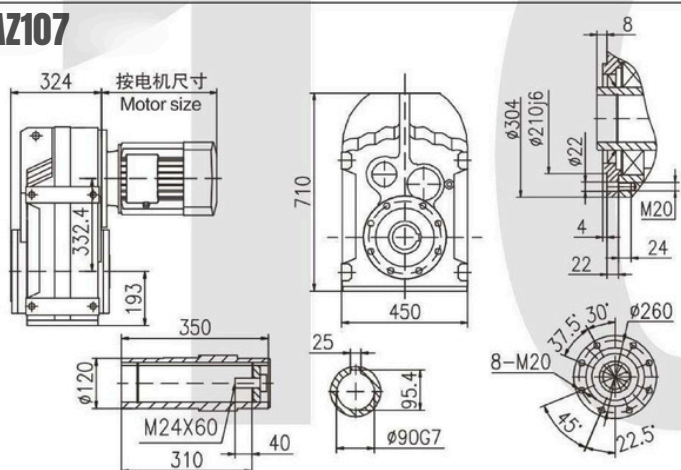

## FF107

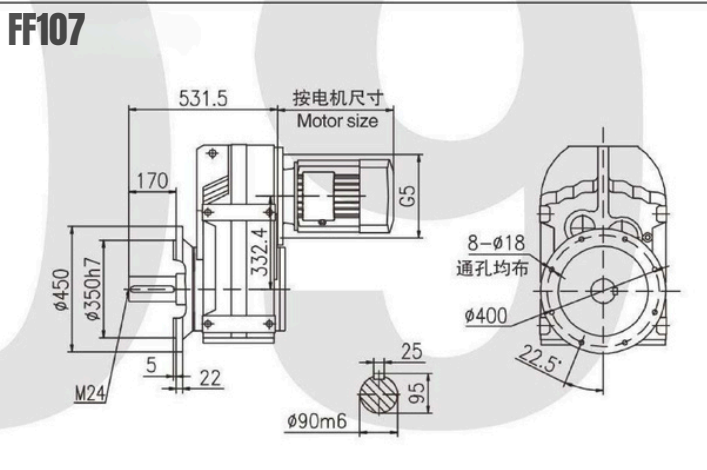


## F..107R77

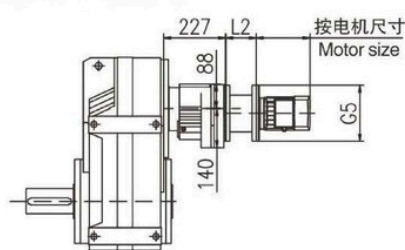

|                      |       |      |       |      |       |     |       |     |       |   |       |
|----------------------|-------|------|-------|------|-------|-----|-------|-----|-------|---|-------|
| Y2电机座号<br>Motor size | 63    |      | 71    |      | 80    |     | 90    |     | 100   |   | 112   |
| 功率/4P<br>Power/(kw)  | 0.18  | 0.25 | 0.37  | 0.55 | 0.75  | 1.1 | 1.5   | 2.2 | 3     | 4 |       |
| L2                   | 86    |      | 86    |      | 86    |     | 86    |     | 86    |   | 86    |
| G5                   | Φ 140 |      | Φ 160 |      | Φ 200 |     | Φ 200 |     | Φ 250 |   | Φ 250 |

## F..107



The connected flange is needed when the motor supplied by customer

|                      |       |     |       |       |     |       |    |       |    |       |       |     |
|----------------------|-------|-----|-------|-------|-----|-------|----|-------|----|-------|-------|-----|
| Y2电机座号<br>Motor size | 100   |     | 112   | 132   |     | 160   |    | 180   |    | 200   |       | 225 |
| 功率/4P<br>Power/(kw)  | 2.2   | 3.0 | 4.0   | 5.5   | 7.5 | 11    | 15 | 18.5  | 22 | 30    | 37    | 45  |
| L2                   | 103   |     | 103   | 103   |     | 125   |    | 125   |    | 125   | 150   |     |
| G5                   | Φ 250 |     | Φ 250 | Φ 300 |     | Φ 350 |    | Φ 350 |    | Φ 400 | Φ 450 |     |

## F..S107

