



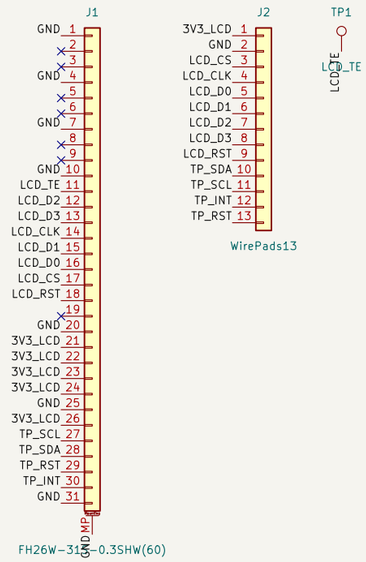



Notes:
- J1 sits on the panel-facing (top) side, positioned like Waveshare's J3 so the panel FPC tail folds behind the glass and reaches it. FPC enters from −X (board left). Max part height on top: 1.0 mm (FPC fold gap ~2.3 mm).
- J2 is 13 bare SMD pads on the bottom side in a ring r=5.5 mm around the board centre (motor hollow shaft).
- Panel 3V3 (3V3_LCD) is switched on board B (LCD_EN). Bulk/HF decoupling here, close to the FPC 3V3 pins.
- LCD_TE is brought to a test pad only.

I2C pull-ups for touch live on board B (to 3V3_LCD). No active parts on this board.
FPC pinout copied from Waveshare ESP32-S3-Touch-AMOLED-1.75 schematic (J3). Panel makes its c
Adapter between the 1.75in CO5300/CST9217 AMOLED (31-pin 0.3 mm FPC) and the 13-wire bundle

GaggiMate Knob

Sheet: /
File: knob-screen.kicad_sch

Title: GaggiMate Knob — board C (screen adapter)

Size: A3	Date: 2026-11-07	**Rev: 1**
KiCad E.D.A. 10.0.6		Id: 1/1