




(a) Controlled off-trajectory perturbations

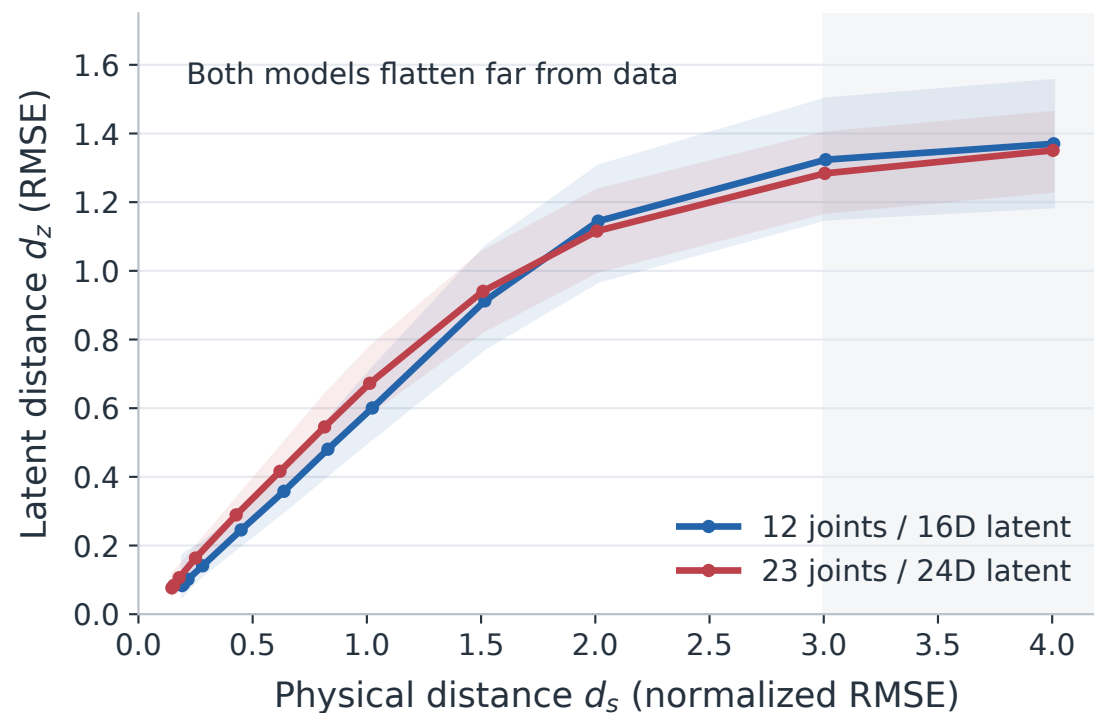

(b) Remaining radial sensitivity

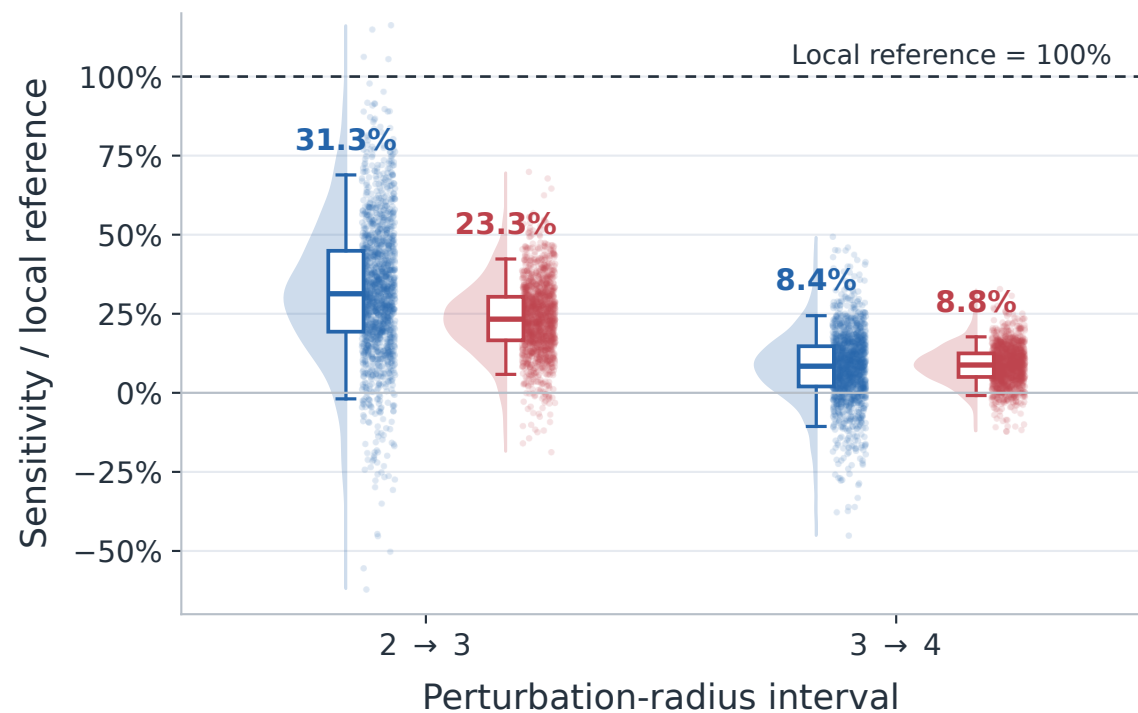

(c) Stochastic rollout: 12 joints / 16D latent

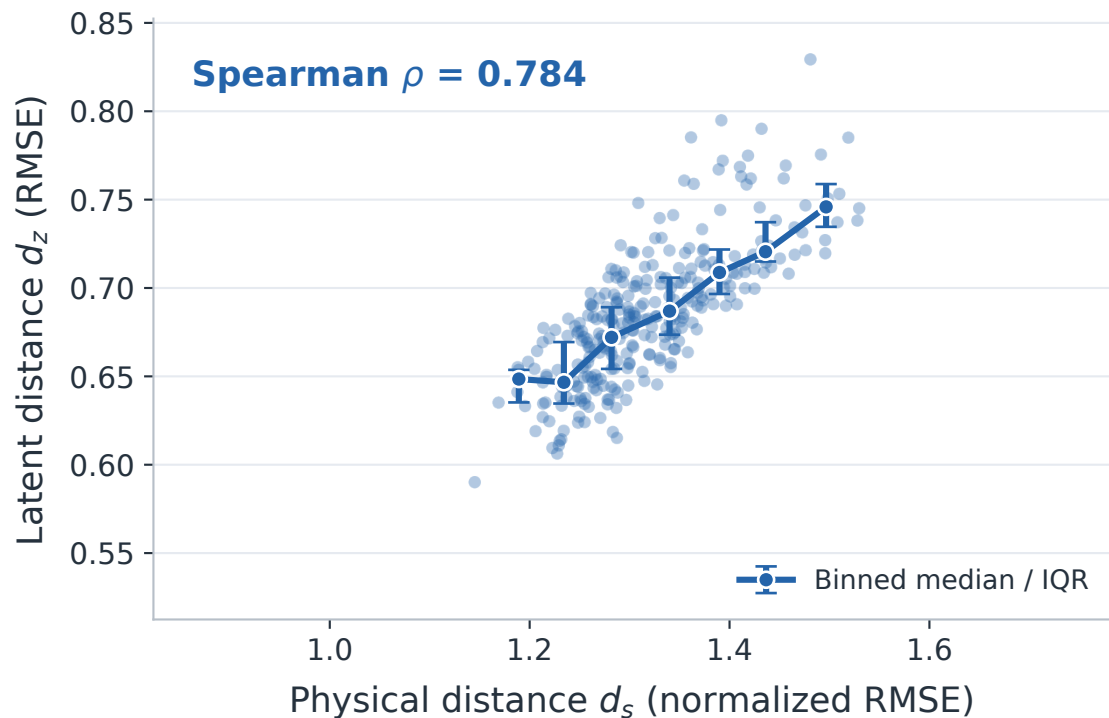

(d) Stochastic rollout: 23 joints / 24D latent

