
CGR-201

Multi-Function USB Lab Instrument

PC-Hosted Oscilloscope, Waveform Generator, Vector Network Analyser & Digital I/O

Syscomp Electronic Design's CGR-201 CircuitGear Mark II is a PC-based instrument with powerful features. It combines a digital storage oscilloscope, standard function generator, arbitrary waveform generator, digital I/O, pulse generator and vector network analyser in one pocket-sized package, powered entirely from a single USB port. All functions can be controlled from a computer running the Windows, Linux, or Mac operating systems, using our open-source software. The CGR-201 oscilloscope features a sampling rate of 40MS/s. The waveform generator can generate standard and arbitrary waveforms at frequencies ranging from 0.05Hz to 10MHz in one sweep, eliminating the need for range selection or mechanical controls. The oscilloscope and waveform generator can be combined to form a vector network analyser using our open-source software. The fully documented command set is also compatible with any programming language that can communicate witha COM port.



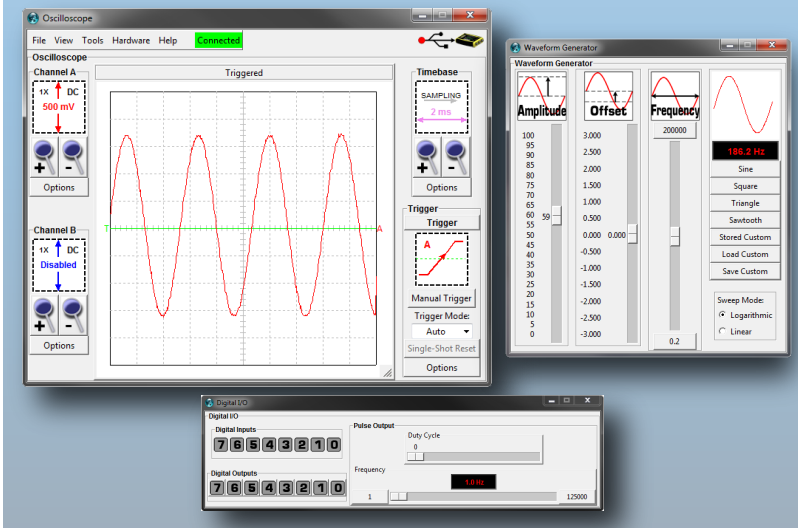

Graphical User Interface

Key Features

- Portable, completely USB powered
- Powerful digital storage oscilloscope
- Standard and arbitrary waveform generator
- Vector Network Analyser
- Digital Inputs and Outputs
- Pulse Generator
- Open-Source Software

Compatibility

- Windows XP/Vista/7/8.X/10
- Linux
- Mac OS X


Typical Applications

- General purpose electronics test
- Education/Electronics labs
- Field technicians/engineers

SYSCOMP
Electronic Design Ltd.

www.syscompdesign.com

CGR-201
Multi-Function USB Lab Instrument

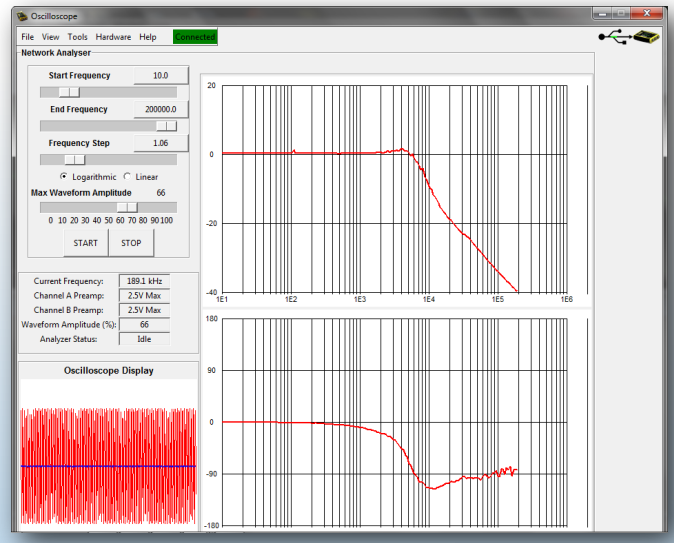

General Specifications	
Interface	1 USB Port
Power Supply	USB Bus Powered
Dimensions	6.25" x 3.5" x 1" [246 x 138 x 40mm]

Oscilloscope	
Number of Channels	2
Maximum Sampling Rate	40MS/s
Bandwidth	5 MHz
Input Voltage Span	7 Ranges in 1:2:5 Sequence
Input Ranges	20 mV/div to 5V/div
Vertical Calibration	Yes, Software
Input A/D	10 bit
Input Impedance	1MΩ||20pF
Timebase Span	50ns/div to 100ms/div
Timebase Ranges	21 Steps in 1:2:5 Sequence
Trigger	Normal, Auto, Single Shot, Ext.
Trigger Polarity	+/-
Trigger Level	Adjustable via on-screen cursor
Pre & Post Trigger Display	Adjustable via on-screen cursor
Readouts	Amplitude and Timebase Cursors
Sample Memory	4k samples/channel
Additonal Modes	X-Y Plot
	Spectrum Analysis
	Waveform Math

Arbitrary Function Generator	
Output Frequency Range	0 - 10MHz
Frequency Resolution	0.05 Hz
Amplitude Control	Hardware
Offset Control	Hardware
Vertical Resolution	8-Bits (Independent of Amplitude)
Ouput Range	+/-3V
Output Impedance	50 Ω
Standard Waveforms	Sine, Square Triangle, Sawtooth, Noise
Arbitrary Waveforms	8-Bit Vertical Resolution [256 Time Points]

Digital I/O	
Output	8 bits, 5 volt, HCMOS
Input	8 bits, 3 or 5 volt, HCMOS
PWM	Variable frequency Variable duty cycle
Trigger	Trigger Input/Output

Bode Plotter	
Type	Vector Network Analyser
Frequency Range	0.1 Hz to 10 MHz
Amplitude Response	Yes
Phase Response	Yes
Oscilloscope Display	Yes

What's Included
CGR-201 USB Instrument
USB Cable
Software Download Instructions

Contact Us
Syscomp Electronic Design Ltd.
sales@syscompdesign.com
(647) 839-0325

www.syscompdesign.com