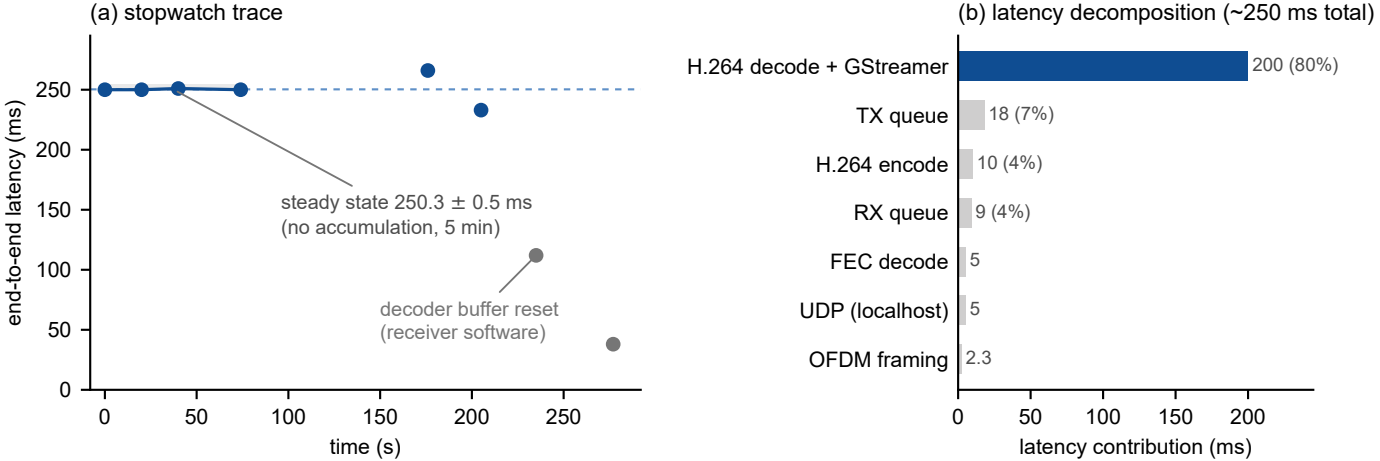
(a) stopwatch trace
end-to-end latency (ms)
0
50
100
150
200
250
time (s)
steady state 250.3 ± 0.5 ms
(no accumulation, 5 min)
decoder buffer reset
(receiver software)
(b) latency decomposition (~250 ms total)
H.264 decode + GStreamer
200 (80%)
TX queue
18 (7%)
H.264 encode
10 (4%)
RX queue
9 (4%)
FEC decode
5
UDP (localhost)
5
OFDM framing
2.3
latency contribution (ms)