
Signal Conversion Board Connect Arduio to SCS15 Robot Servo Mini TTLinker

- TTLinker is a signal conversion board. For exmple Arduino needs to convert its UART signals to the half duplex type and through TTLinker connect to SCServo.
- In a few words 4 wire change to 3 wire.
- Serial communication protocol

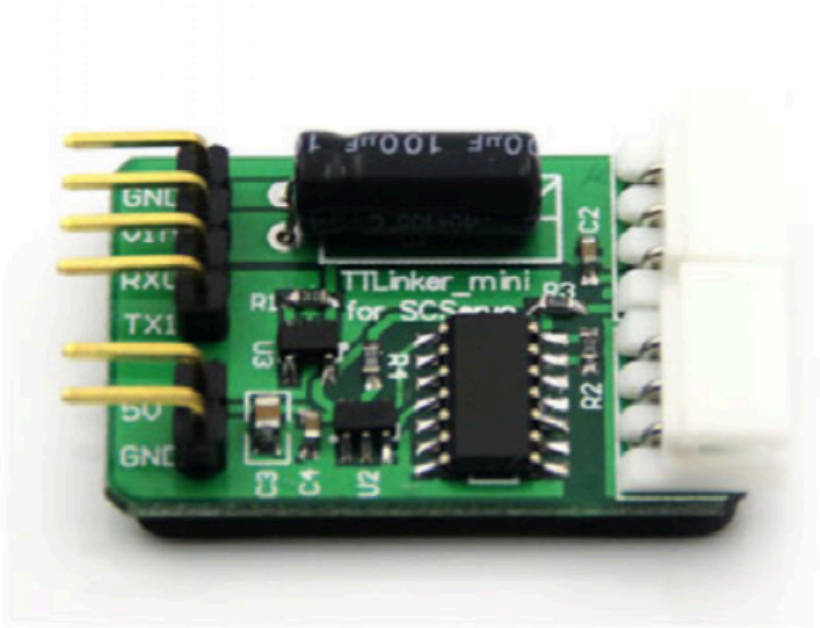

Specification

Weight: 3.5g

Dimension(L*W*H): 35mm * 21mm * 8.3mm

Controller: 74HC126D

Working Voltage

- Allowed Range: 6V~9V
    - Vin DC + 6V~9V
    - GND DC -
- Recommended Voltage: 7.4V (Li-PO 2cell)

Output Voltage

- 5V (max 150mA)

Consumed Current

- When IDLE: 10mA
- External I/O Maximum Current: 150mA

Working Temperature: -5℃~60℃

External I/O Device

- 2pin For 5V Output: 1
- 3pin For SCServo Connector: 2
- 4pin For Arduino or Other Controller UART: 1


Work Mode Protocol Type

- SCS Mode

Communication Speed

- 8400bps~1M bps

TTLinker_mini circuit diagram

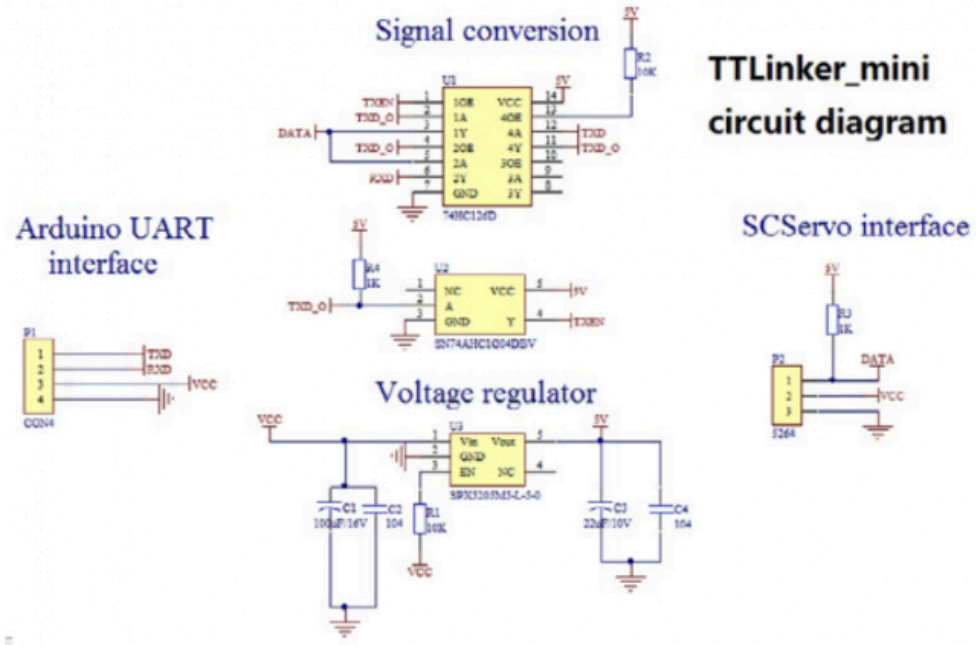

TTLinker_mini Connection between Arduino and SCServo

