Computer Networks and Internet Technology

2021W703033 VO Rechnernetze und Internettechnik
Winter Semester 2021/22

Jan Beutel

universität innsbruck

With materials and inspiration from Jim Kurose, Scott Shenker, Jennifer Rexford, Phil Levis, Adrian Perrig and Laurent Vanbever

Communication Networks and Internet Technology

Recap of last weeks lecture

A body, also in 7-bit U.S. ASCII text

From: Jan Beutel <jan.beutel@uibk.ac.at>
To: Tobias Buehler <buehlert@ethz.ch>
Subject: [RNIT] Exam questions

Body

Hi Tobias,

Here are some interesting questions…

Best,
Jan

An e-mail address is composed of two parts identifying the local mailbox and the domain

jan.beutel @ uibk.ac.at

local mailbox

domain name

actual mail server is identified using a DNS query asking for MX records

This weeks lecture

Wireless – Networking at the Edge

- Wireless links and network characteristics
- WiFi: 802.11 wireless LANs
- Bluetooth
- Cellular networks: 4G and 5G

Wireless and Mobile Networks

- more wireless (mobile) phone subscribers than fixed (wired) phone subscribers (10-to-1 in 2019)!
- more mobile-broadband-connected devices than fixed-broadband-connected devices devices (5-1 in 2019)!
  - 4G/5G cellular networks now embracing Internet protocol stack, including SDN
- two important (but different) challenges
  - **wireless:** communication over wireless link
  - **mobility:** handling the mobile user who changes point of attachment to network

Elements of a wireless network

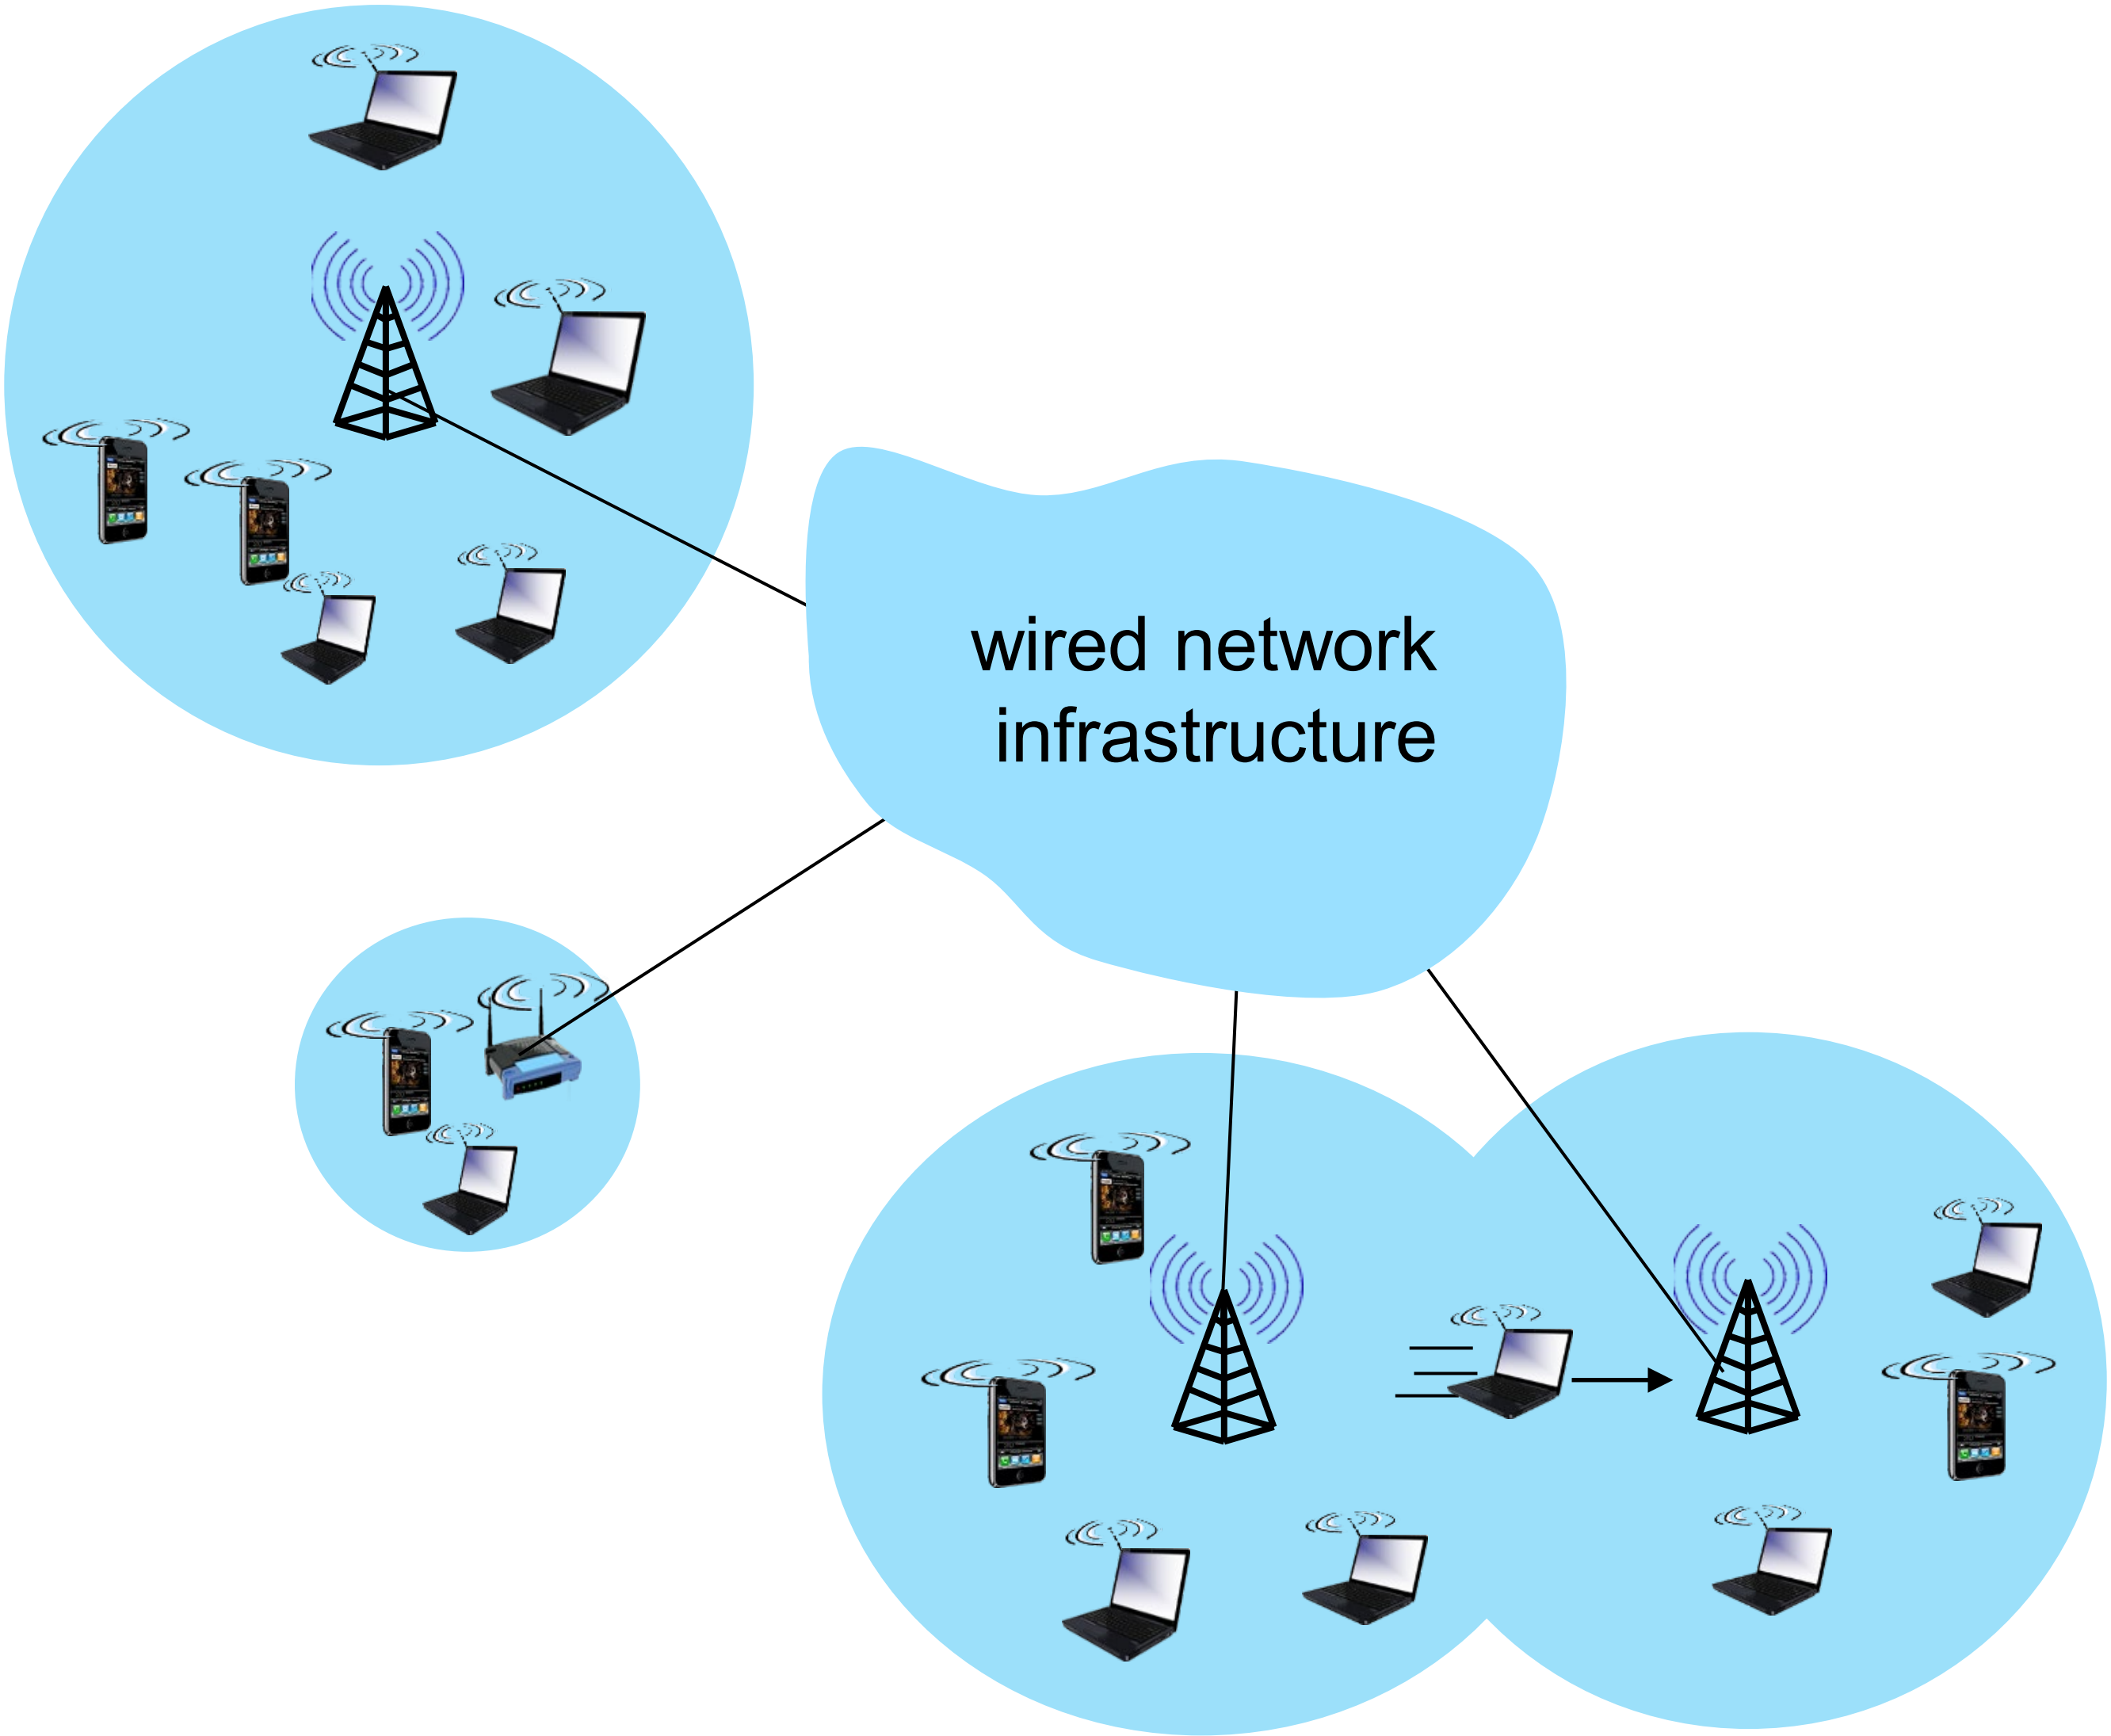

Elements of a wireless network

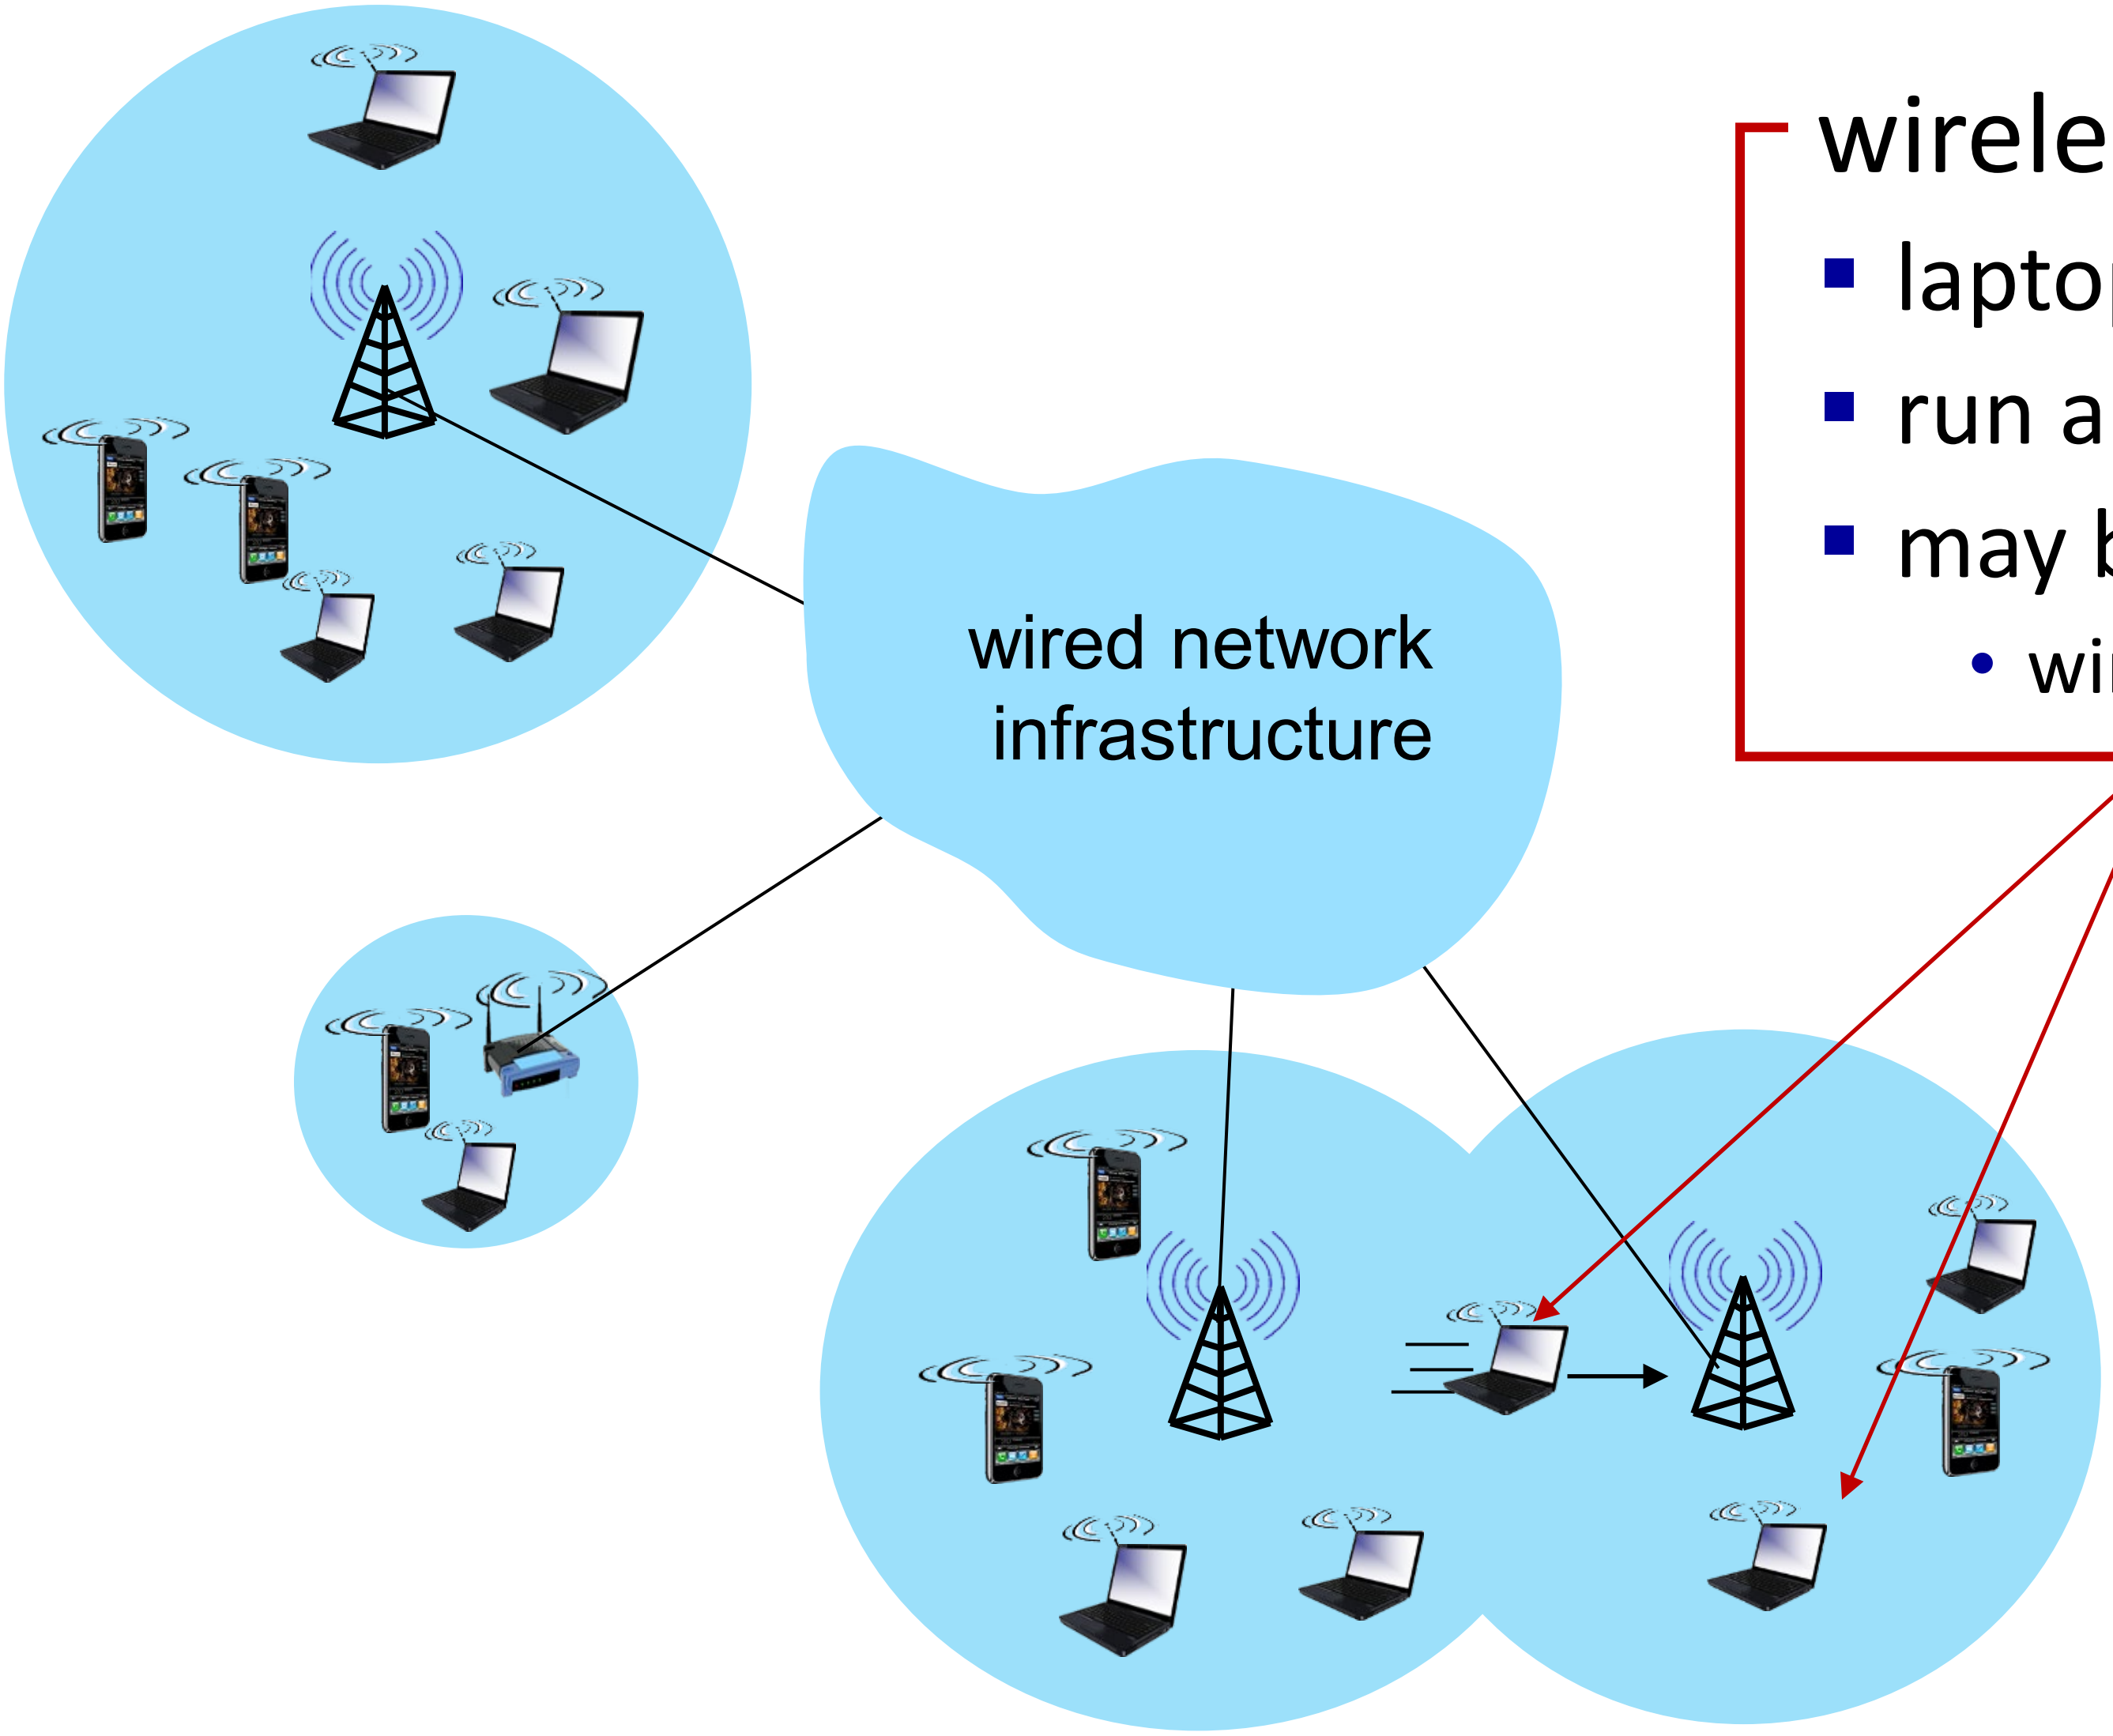

wireless hosts

- laptop, smartphone, IoT
- run applications
- may be stationary (non-mobile) or mobile
  - wireless does *not* always mean mobility!

Elements of a wireless network

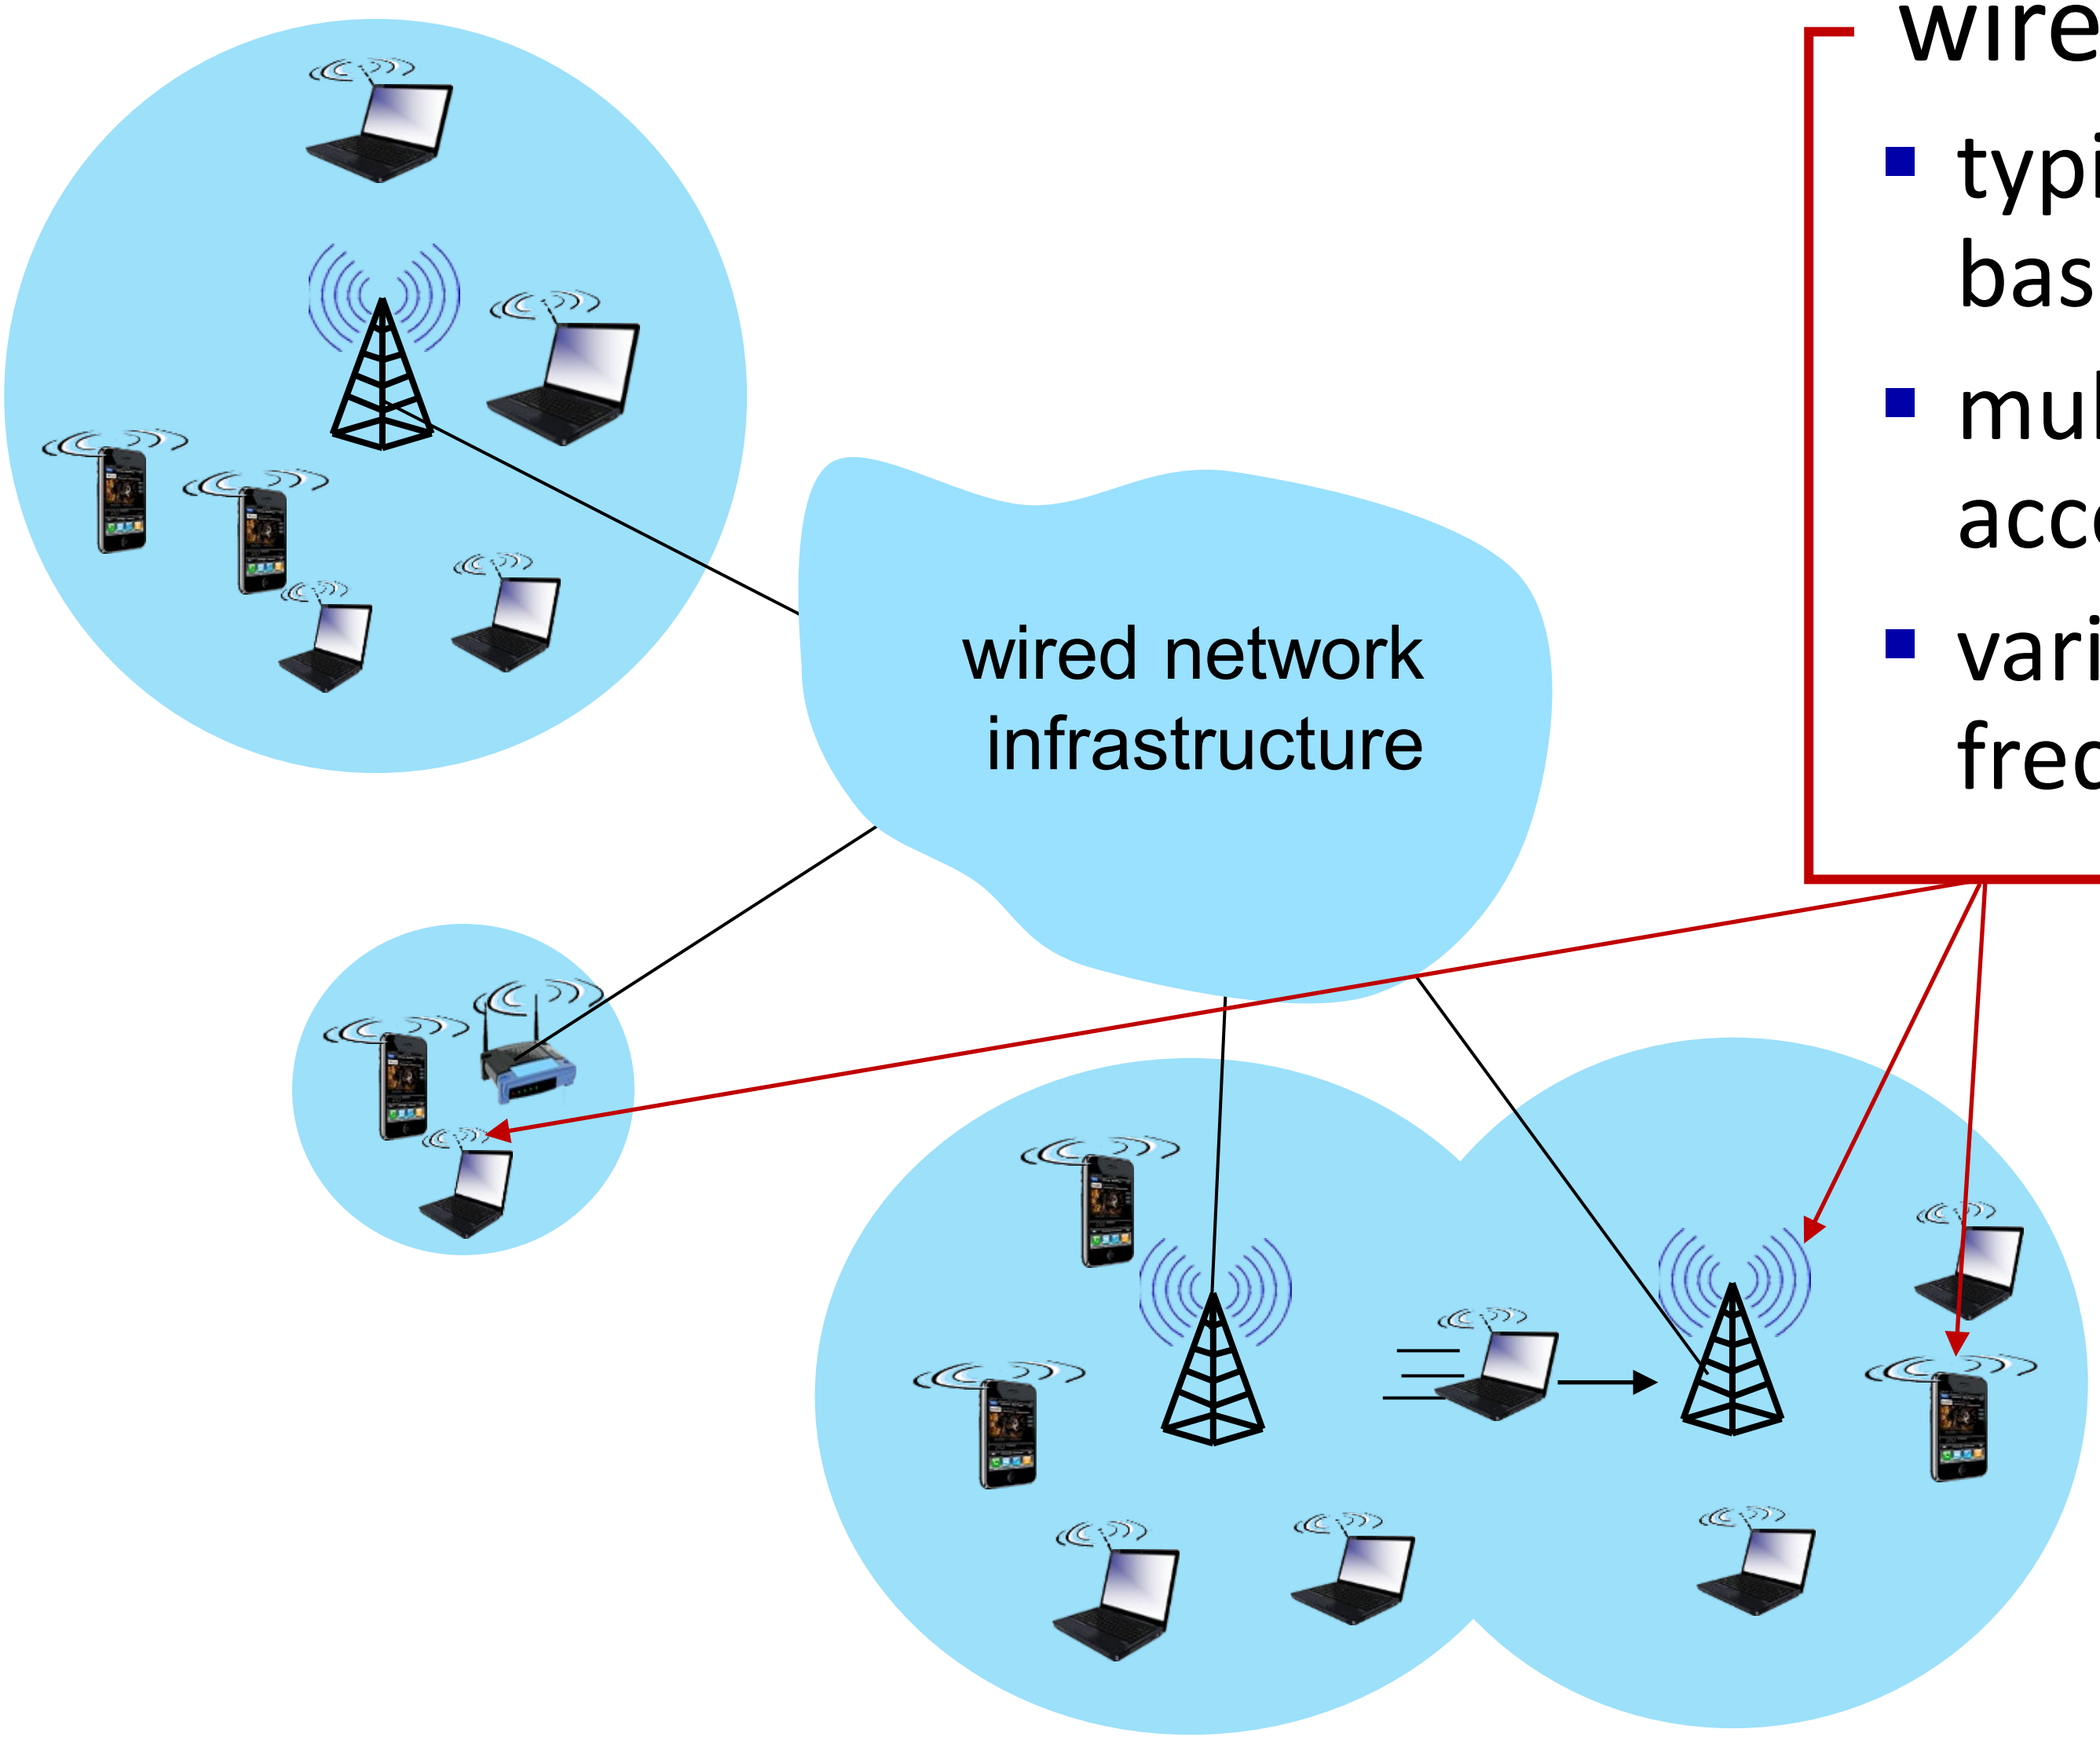

wireless link

- typically used to connect mobile(s) to base station, also used as backbone link
- multiple access protocol coordinates link access
- various transmission rates and distances, frequency bands

Characteristics of selected wireless links

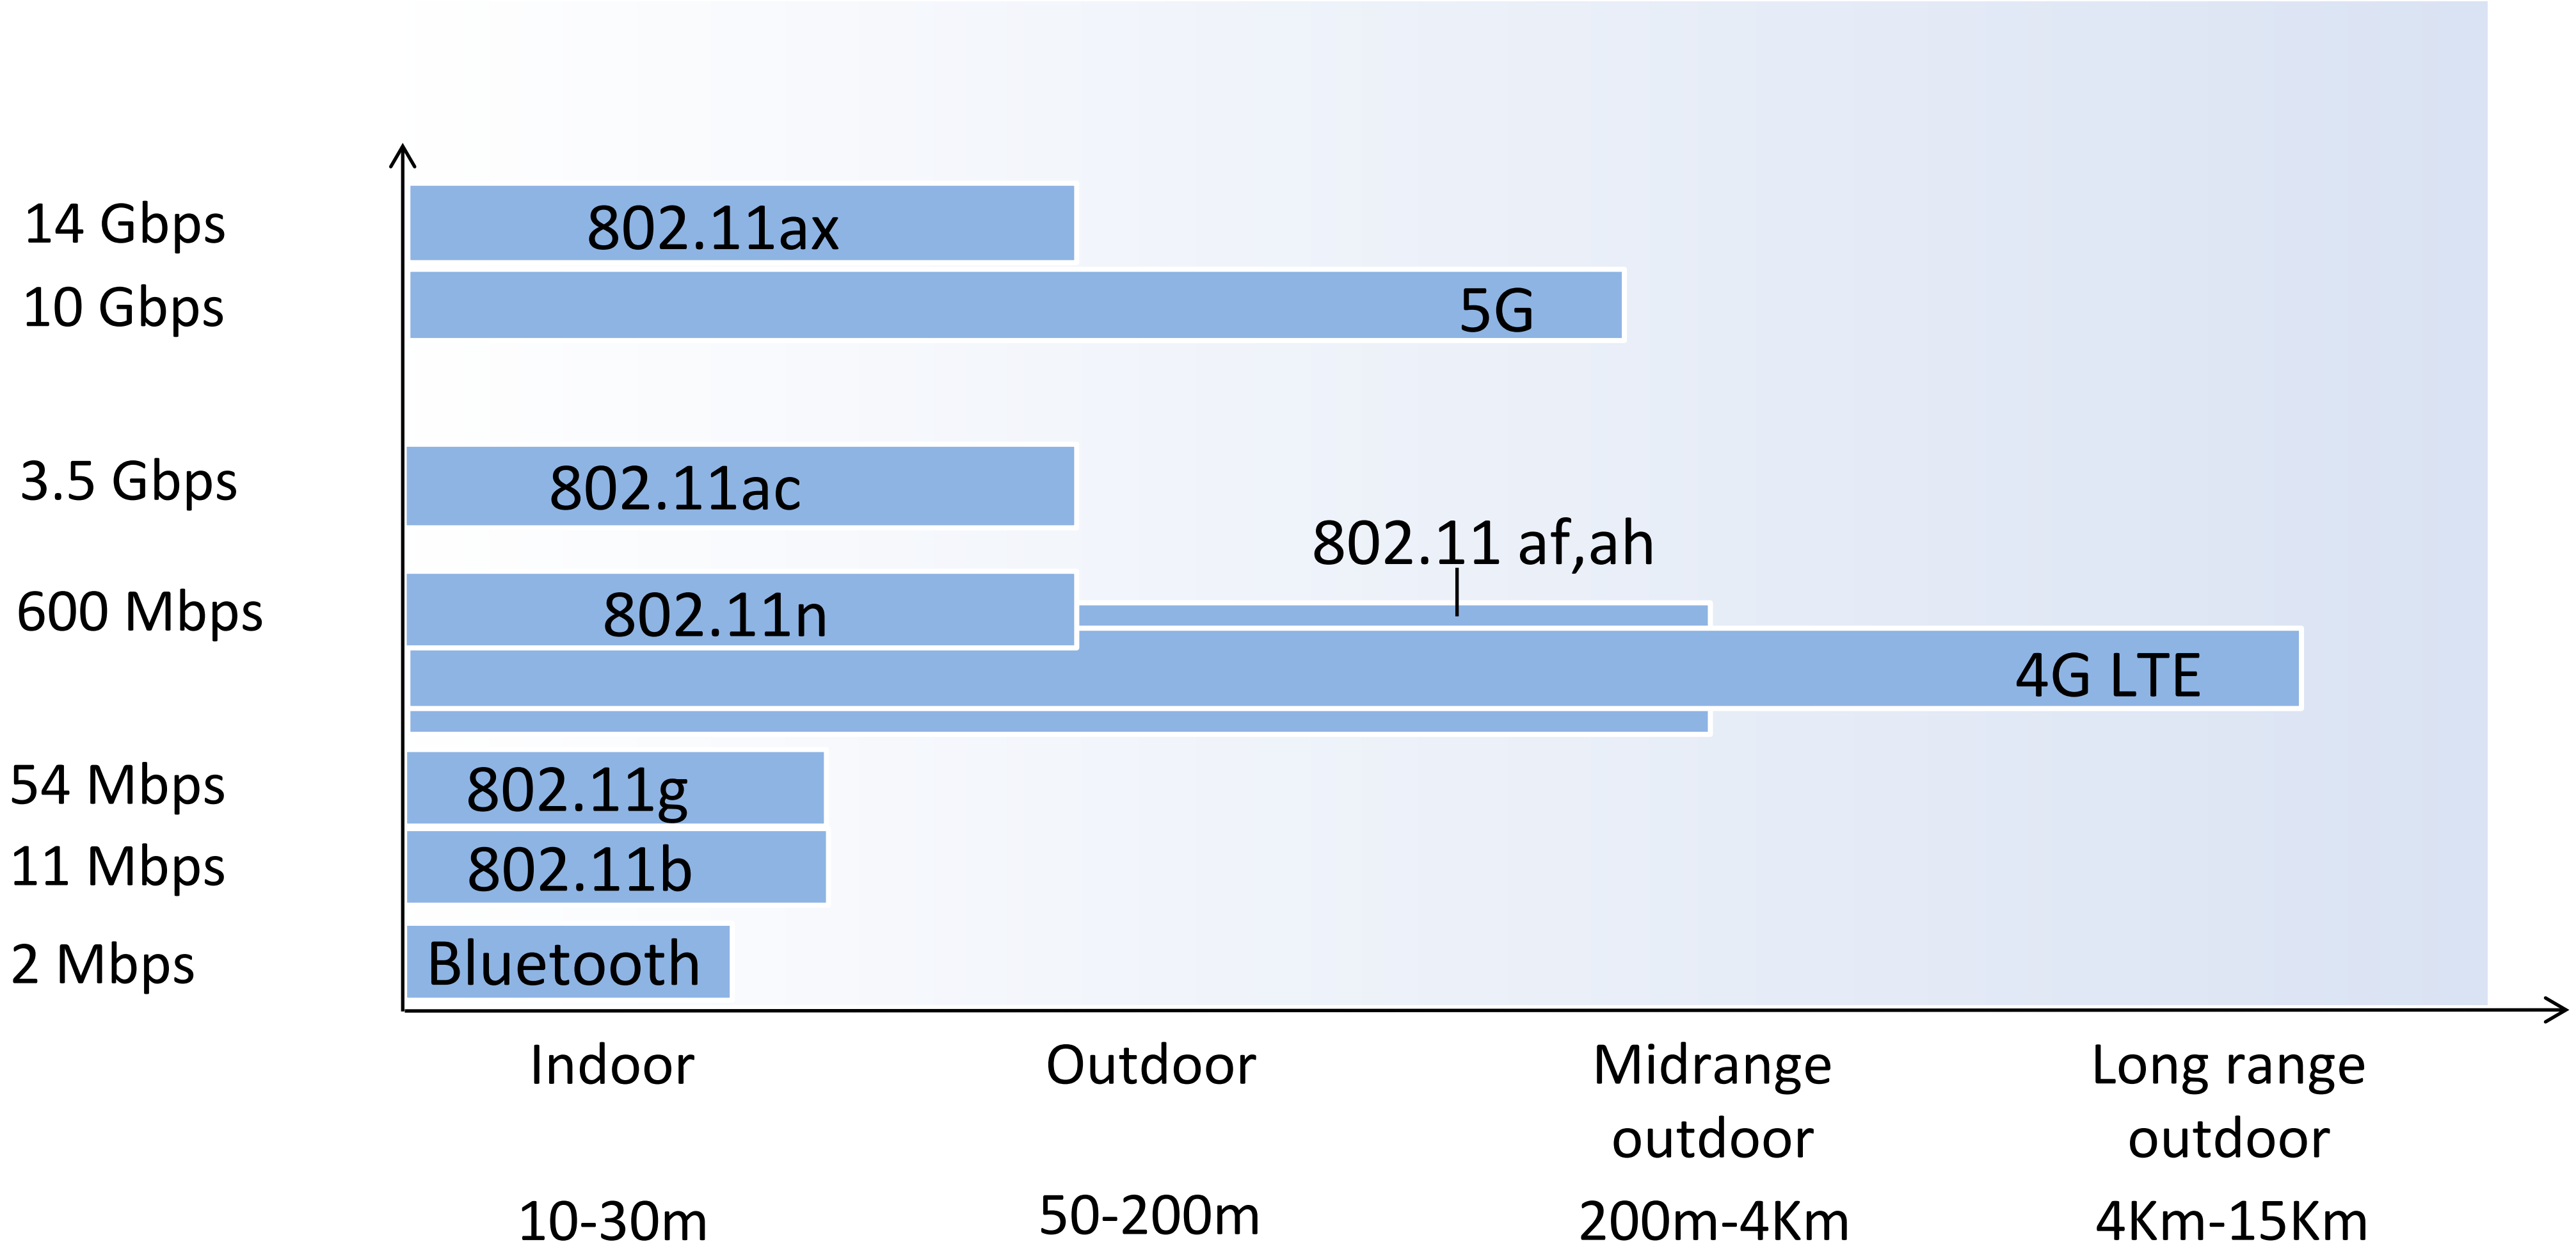

Elements of a wireless network

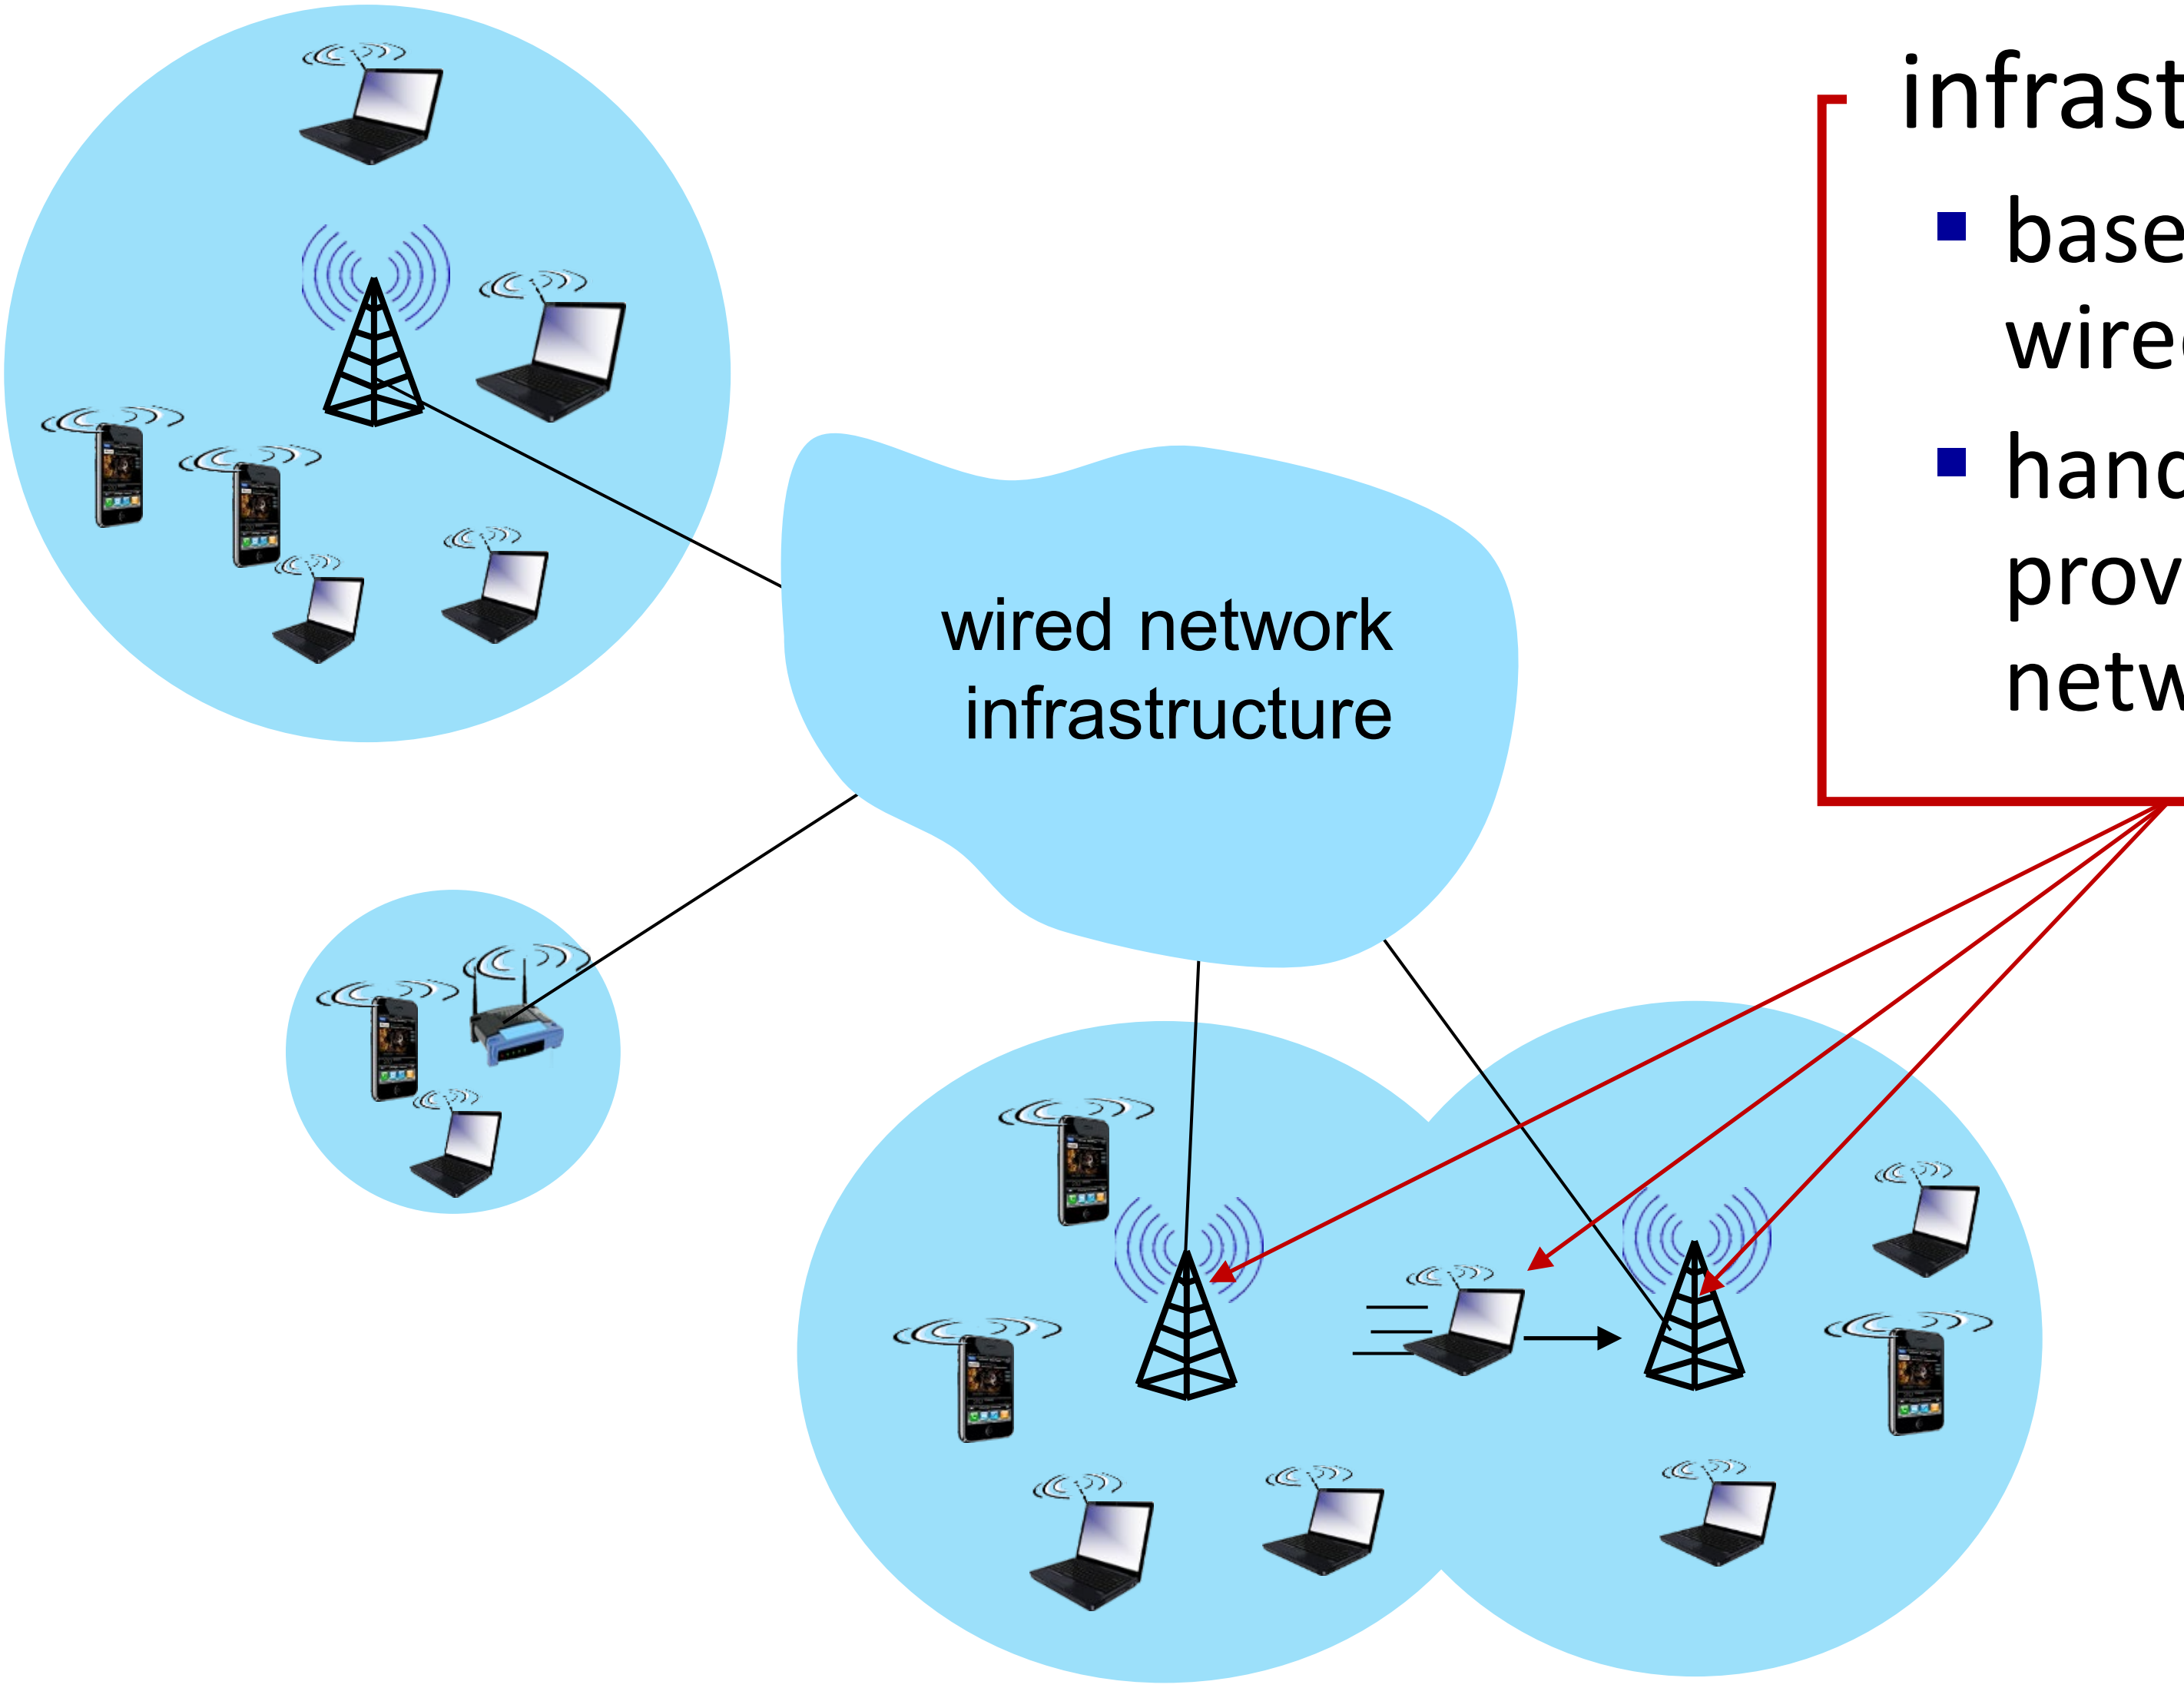

infrastructure mode

- base station connects mobiles into wired network
- handoff: mobile changes base station providing connection into wired network

Elements of a wireless network

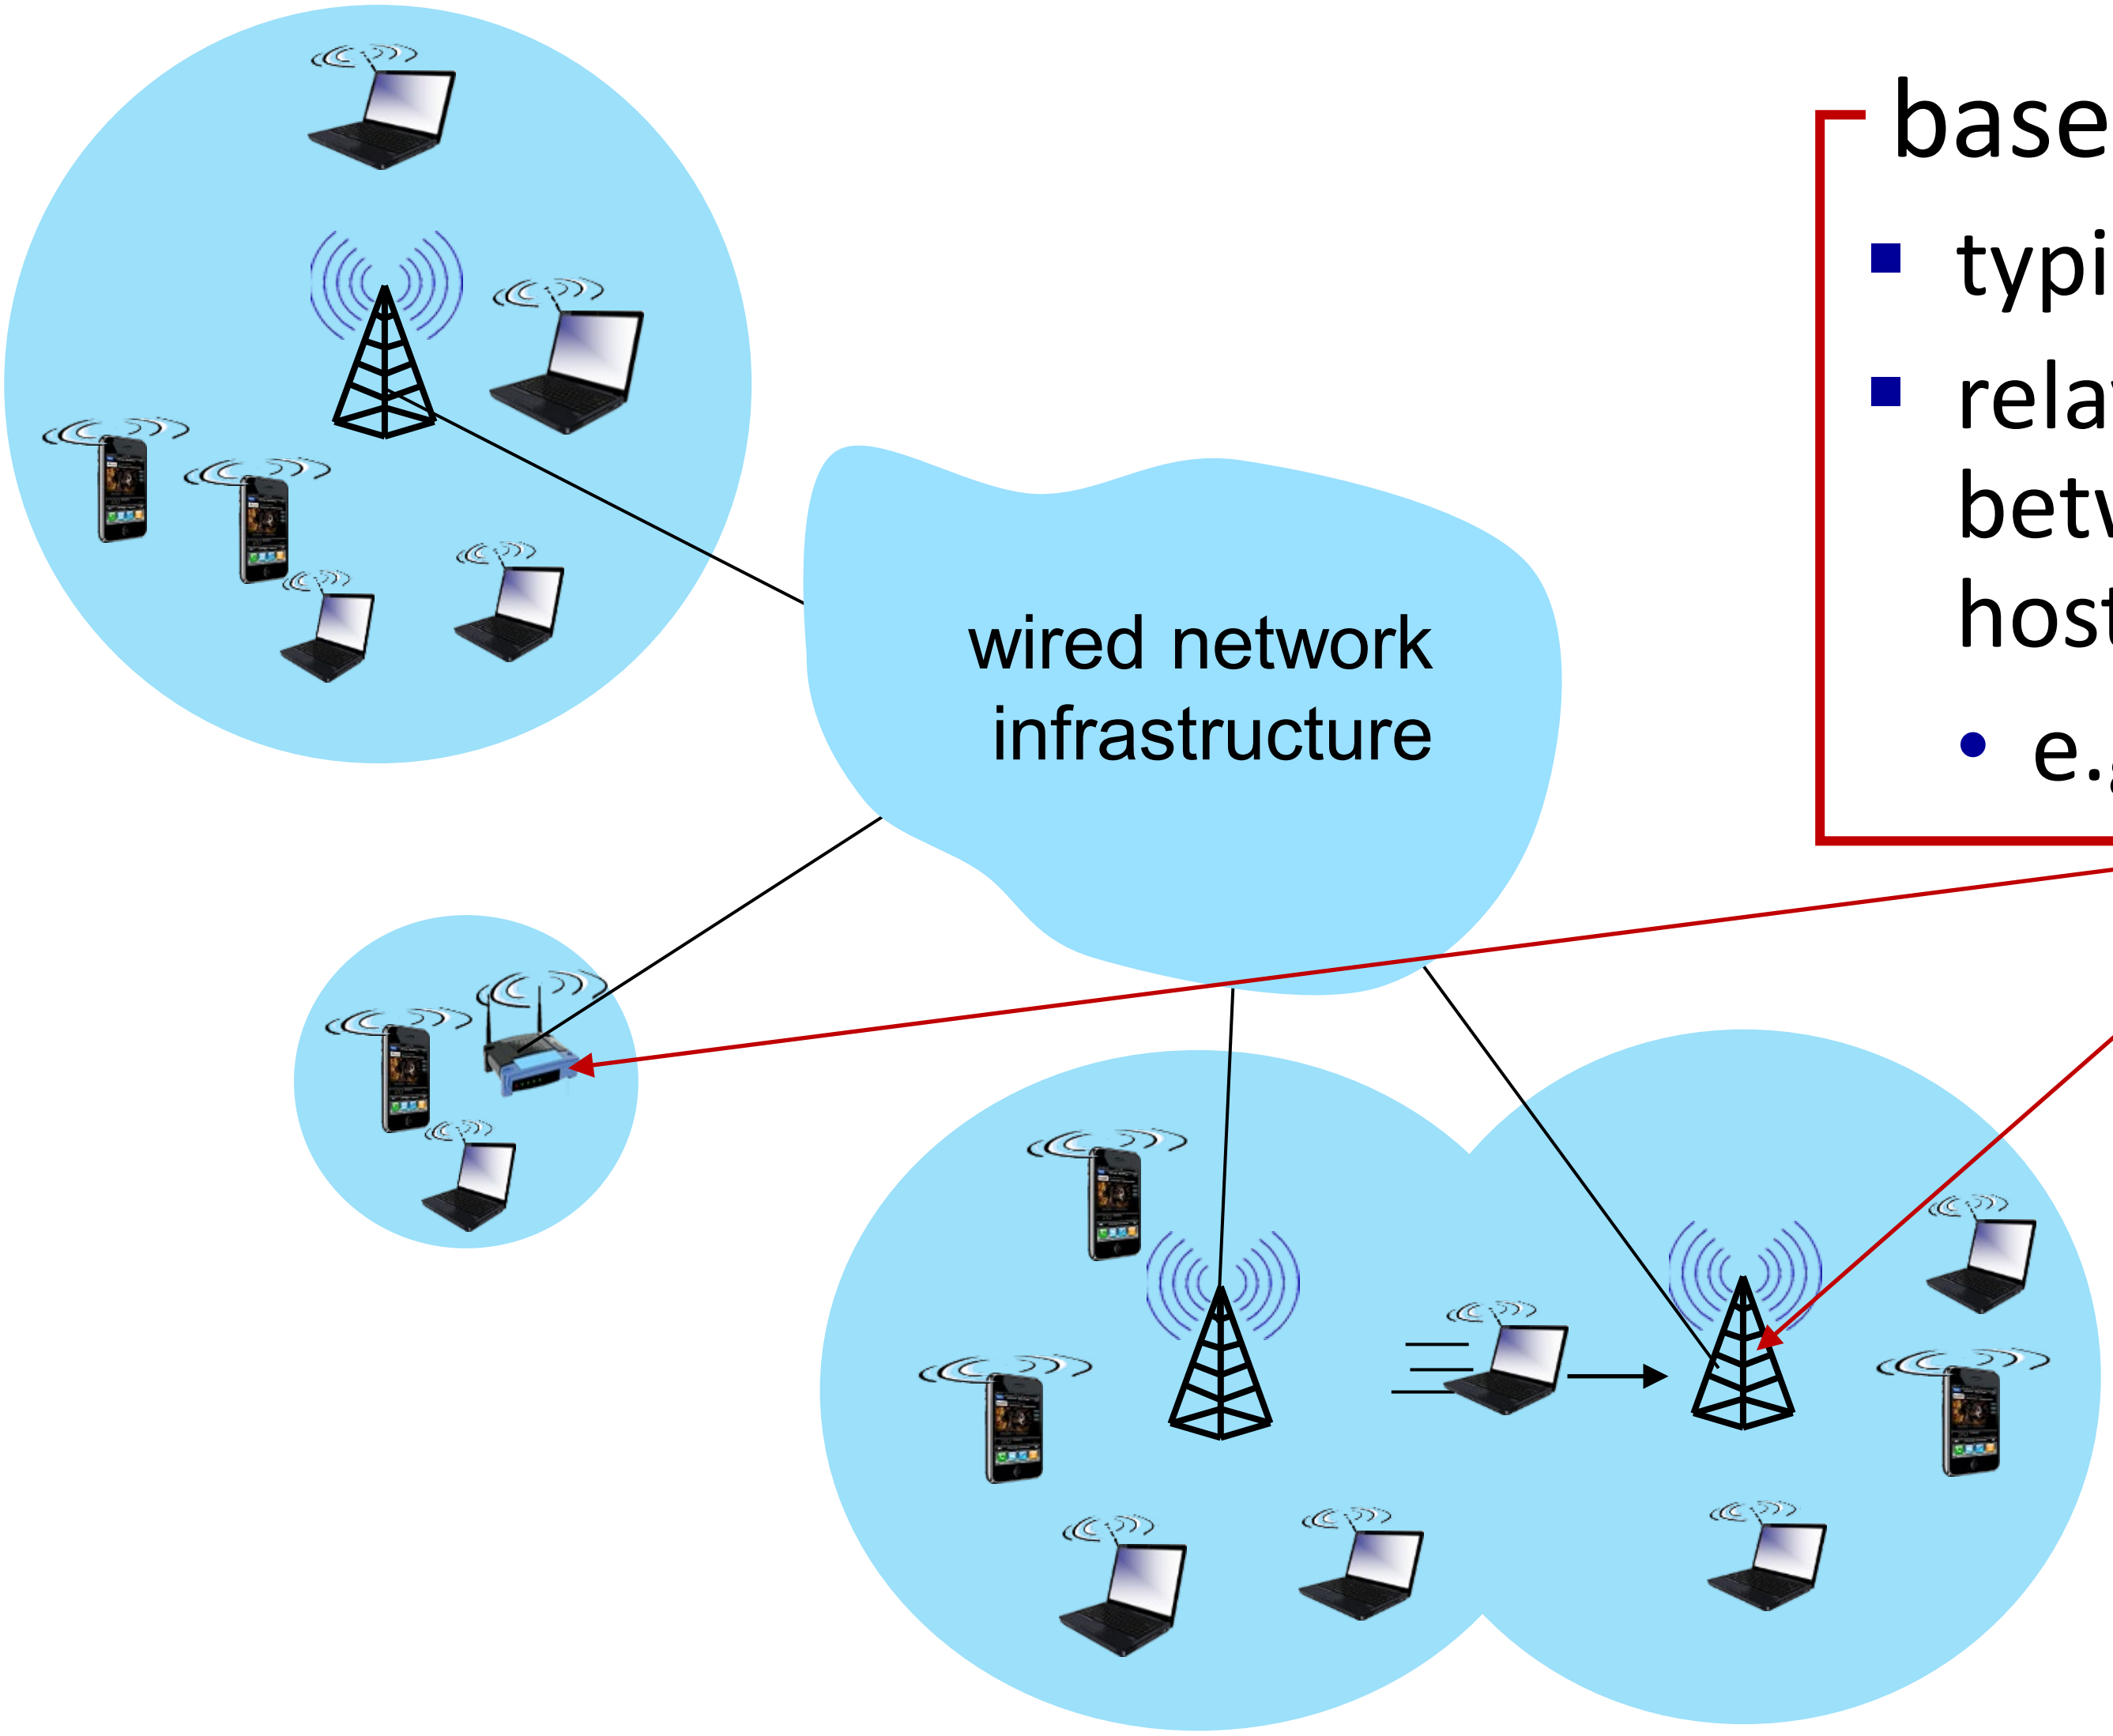

base station 

- typically connected to wired network
- relay - responsible for sending packets between wired network and wireless host(s) in its "area"
  - e.g., cell towers, 802.11 access points

Elements of a wireless network

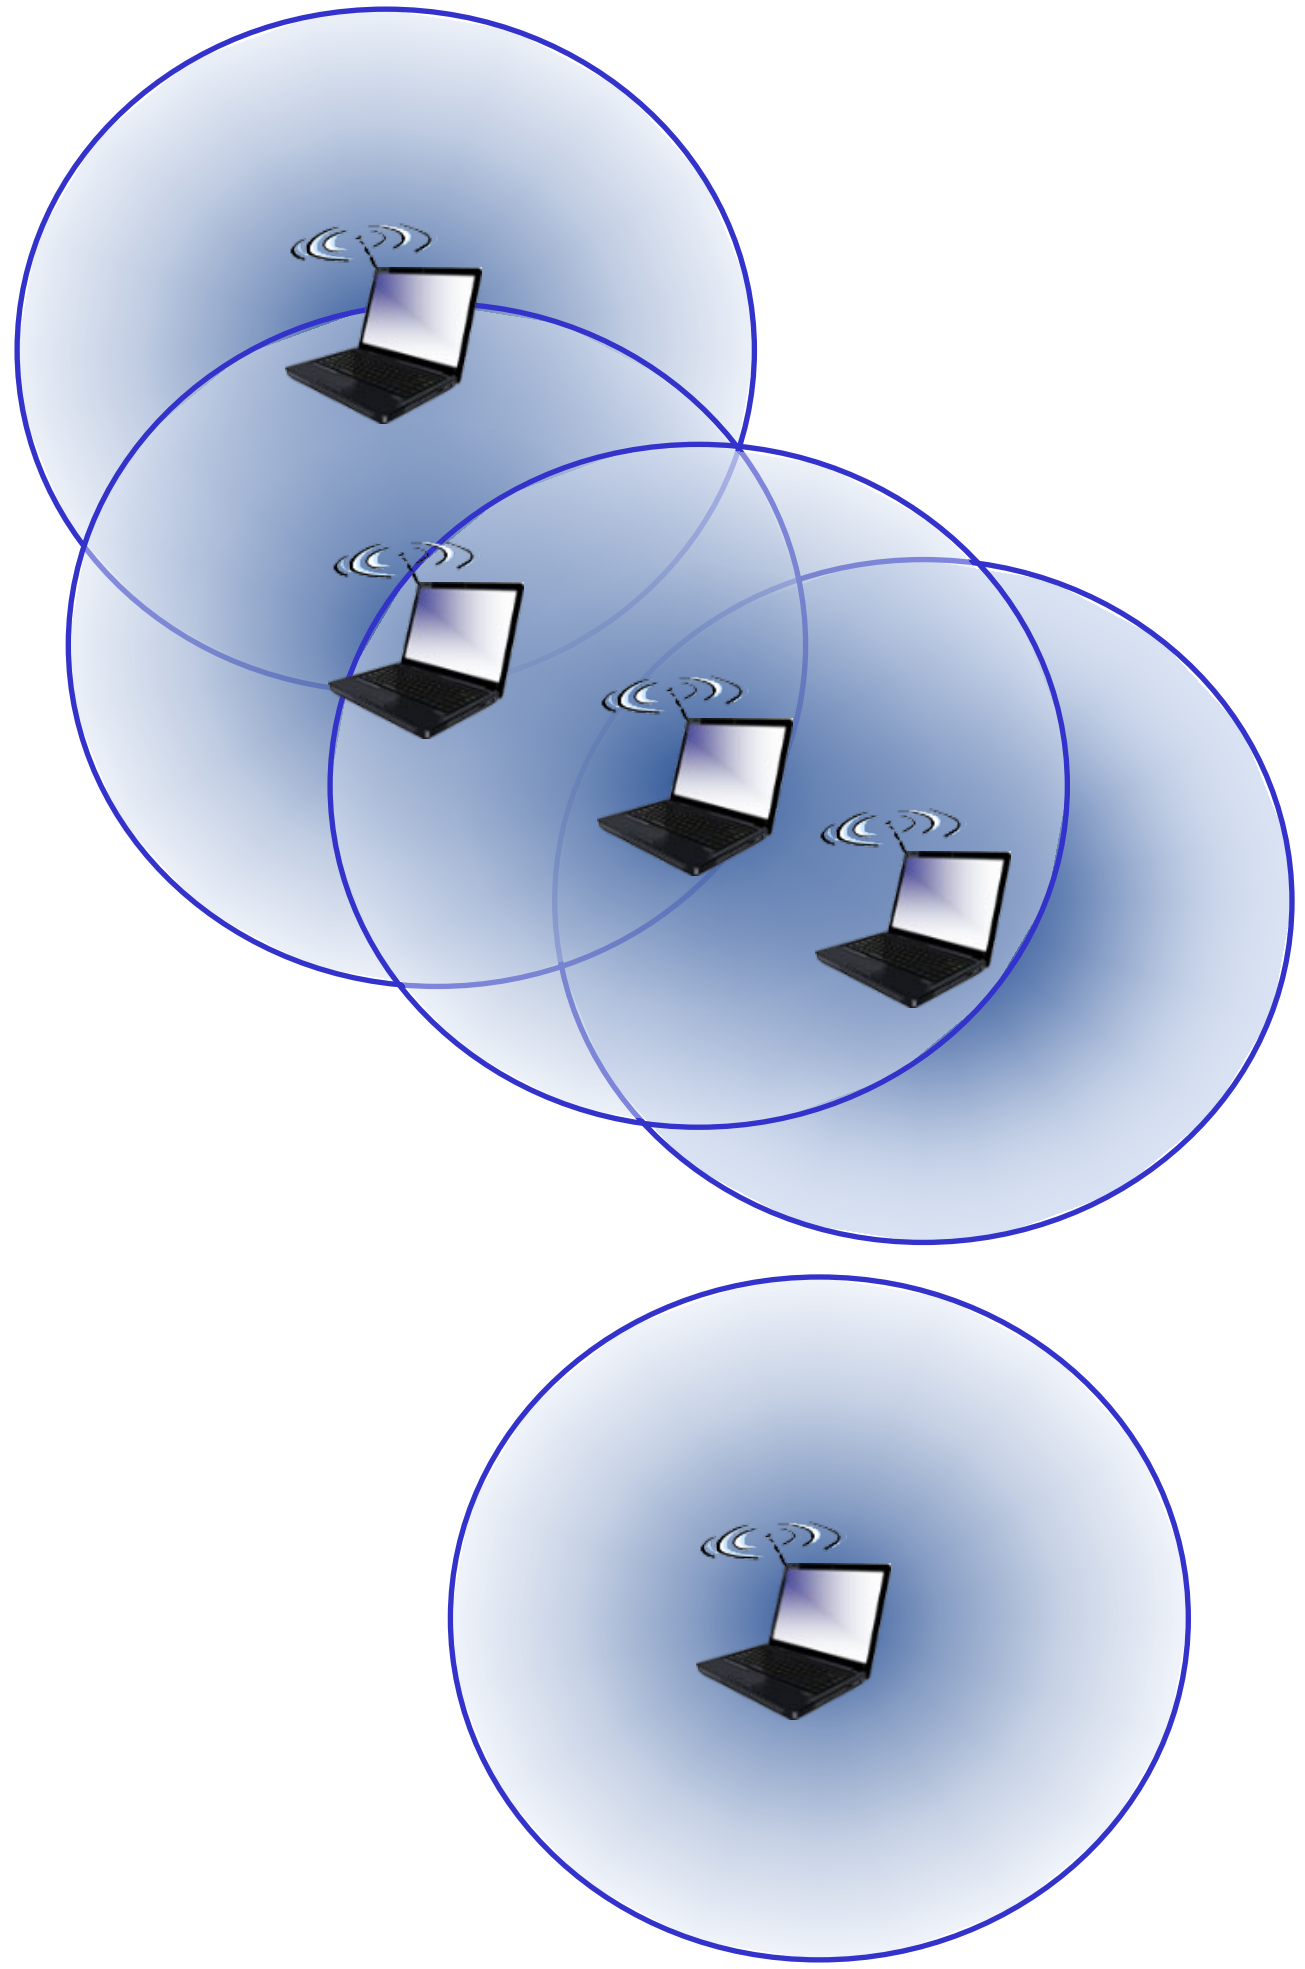

ad hoc mode

- no base stations
- nodes can only transmit to other nodes within link coverage
- nodes organize themselves into a network: route among themselves

Wireless network taxonomy

	single hop	multiple hops
infrastructure (e.g., APs)	host connects to base station (WiFi, cellular) which connects to larger Internet	host may have to relay through several wireless nodes to connect to larger Internet: *mesh net*
no infrastructure	no base station, no connection to larger Internet (Bluetooth, ad hoc nets)	no base station, no connection to larger Internet. May have to relay to reach other a given wireless node MANET, VANET

Wireless link characteristics (1)

- decreased signal strength: radio signal attenuates as it propagates through matter (path loss)
- interference from other sources: wireless network frequencies (e.g., 2.4 GHz) shared by many devices (e.g., WiFi, cellular, motors): interference
- multipath propagation: radio signal reflects off objects ground, arriving at destination at slightly different times

…. make communication across (even a point to point) wireless link much more “difficult”

Wireless link characteristics (2)

- SNR: signal-to-noise ratio
  - larger SNR – easier to extract signal from noise (a "good thing")
- SNR versus BER tradeoffs
  - *given physical layer:* increase power -> increase SNR->decrease BER
  - *given SNR:* choose physical layer that meets BER requirement, giving highest throughput
    - SNR may change with mobility: dynamically adapt physical layer (modulation technique, rate)

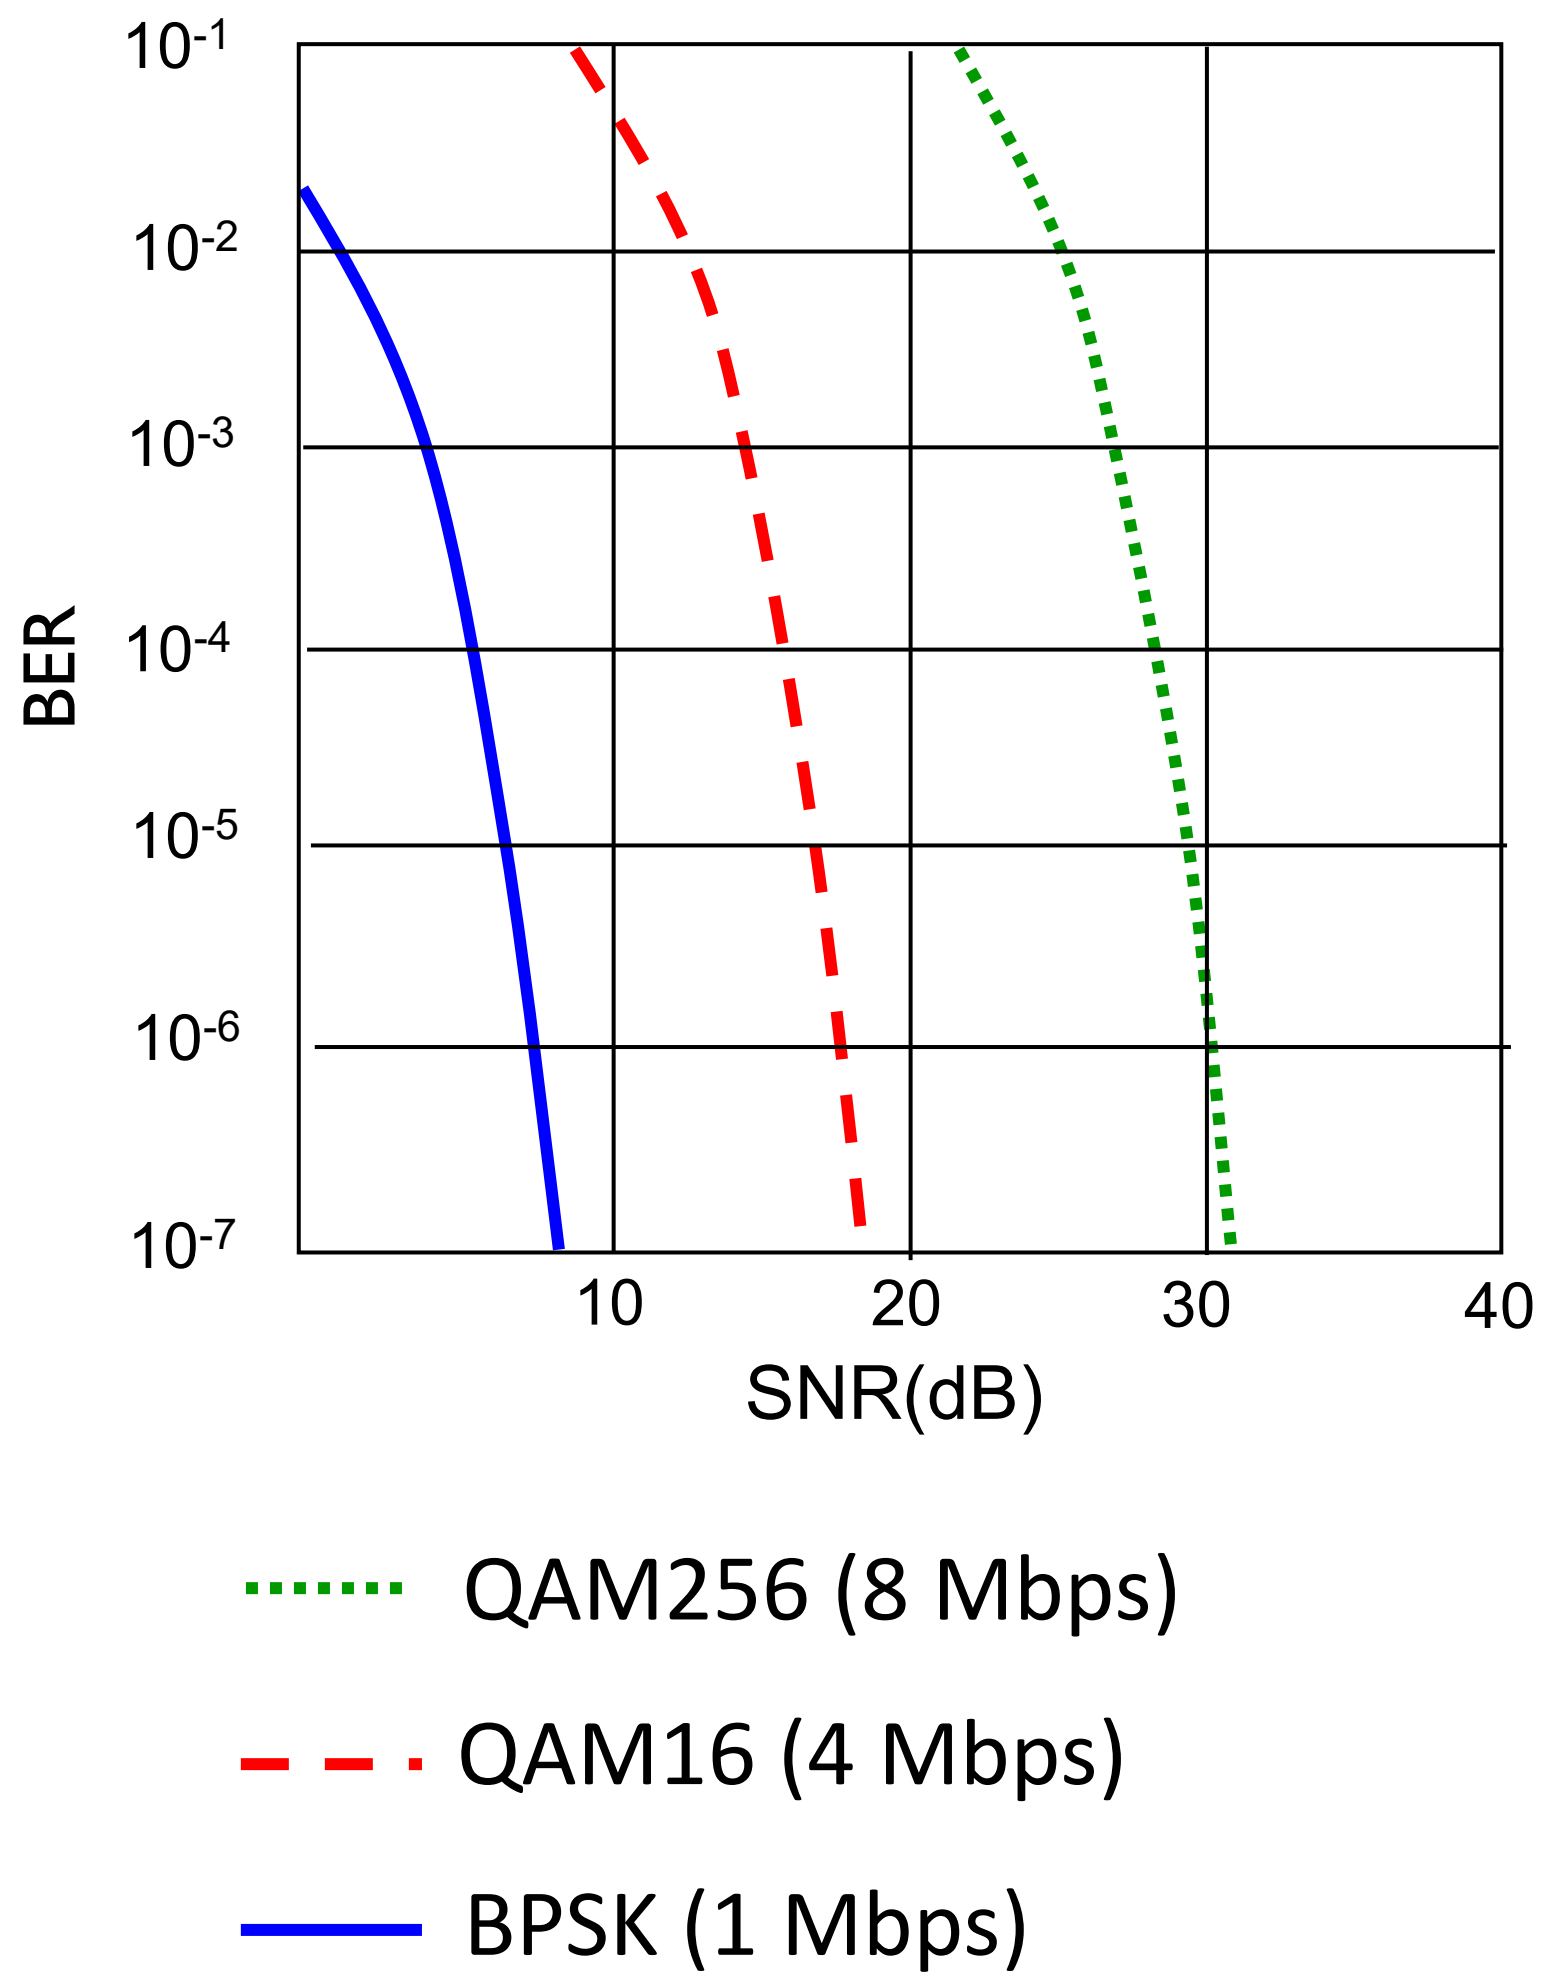

Wireless link characteristics (3)

Multiple wireless senders, receivers create additional problems (beyond multiple access):

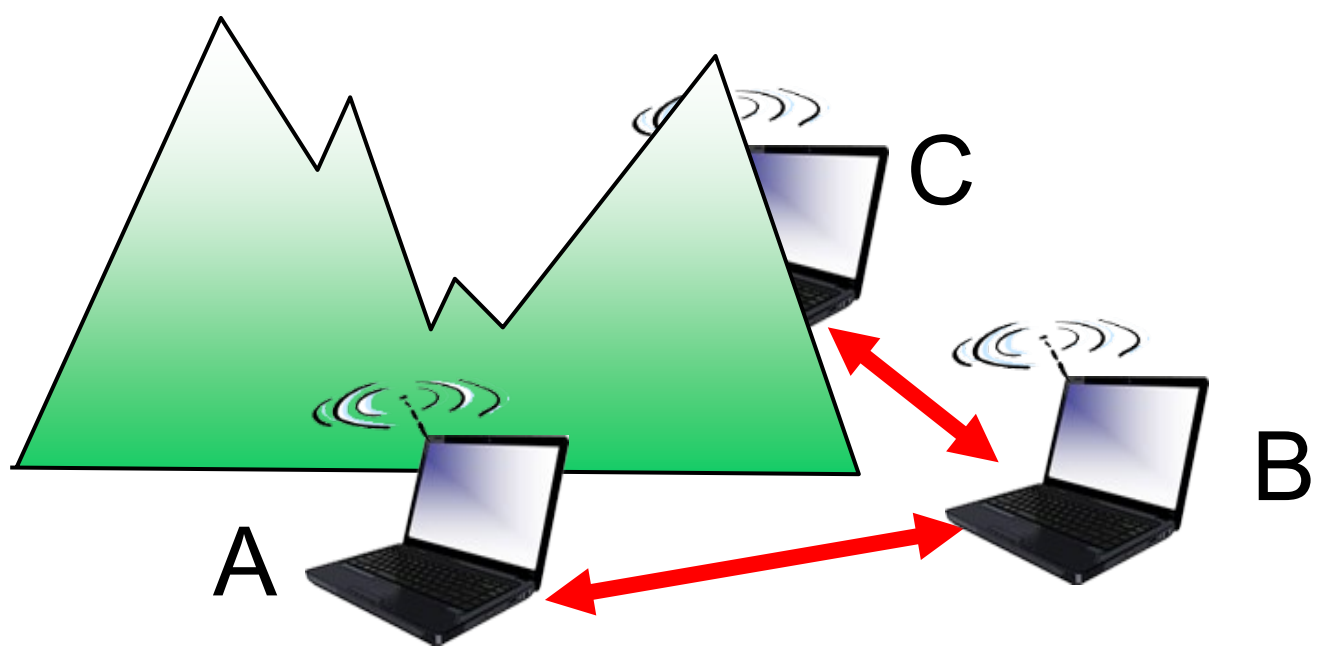

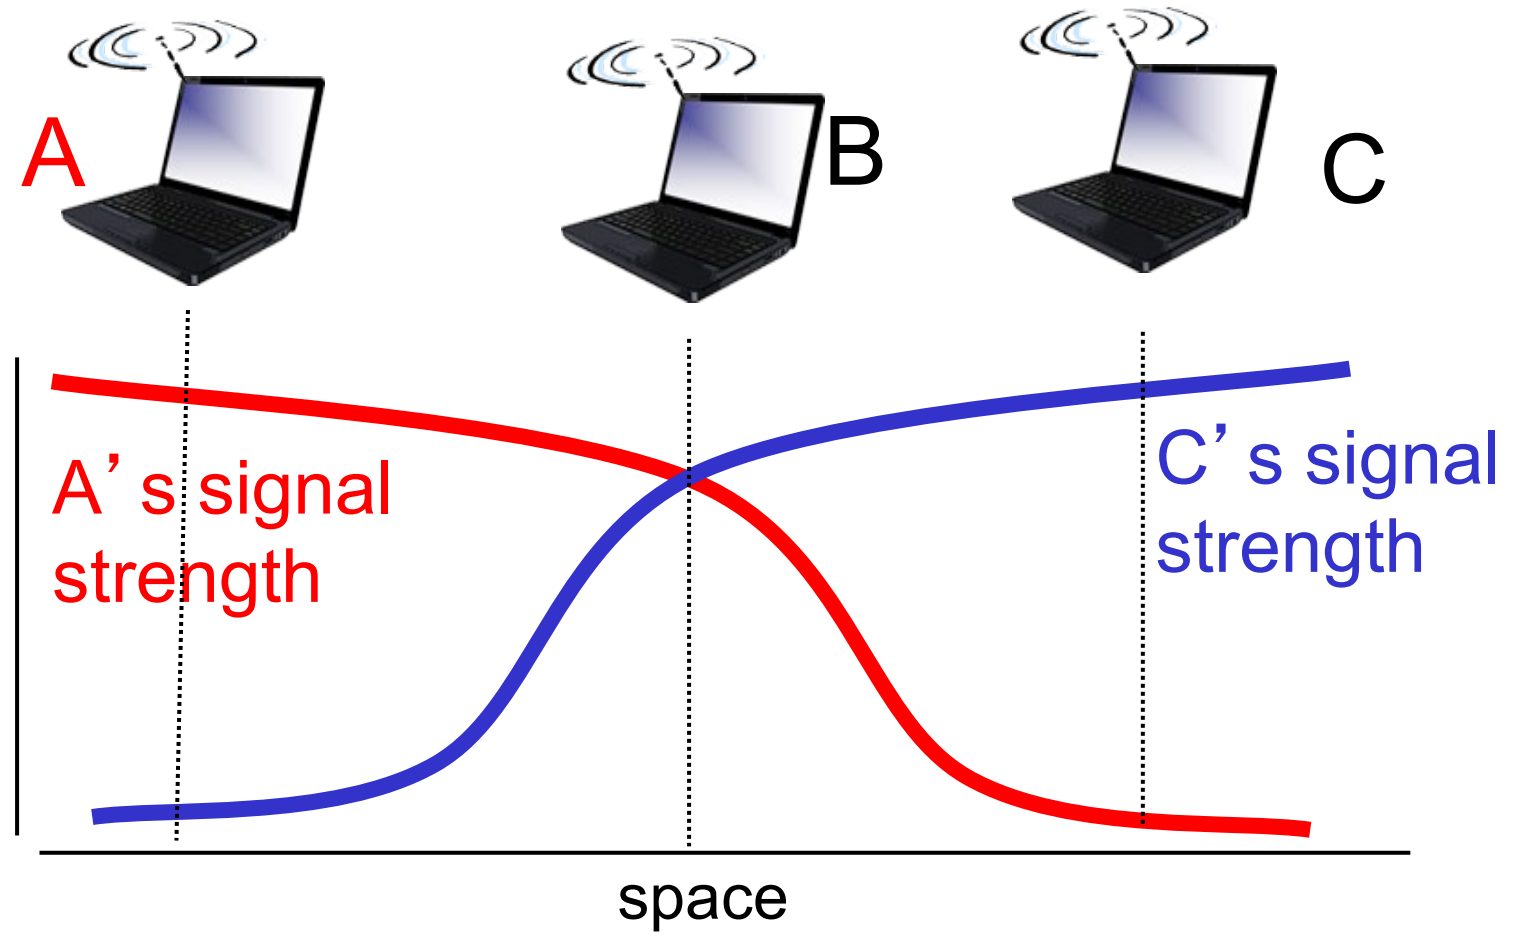

Hidden terminal problem

- B, A hear each other
- B, C hear each other
- A, C can not hear each other means A, C unaware of their interference at B

Signal attenuation:

- B, A hear each other
- B, C hear each other
- A, C can not hear each other interfering at B

You are now in a much bigger room

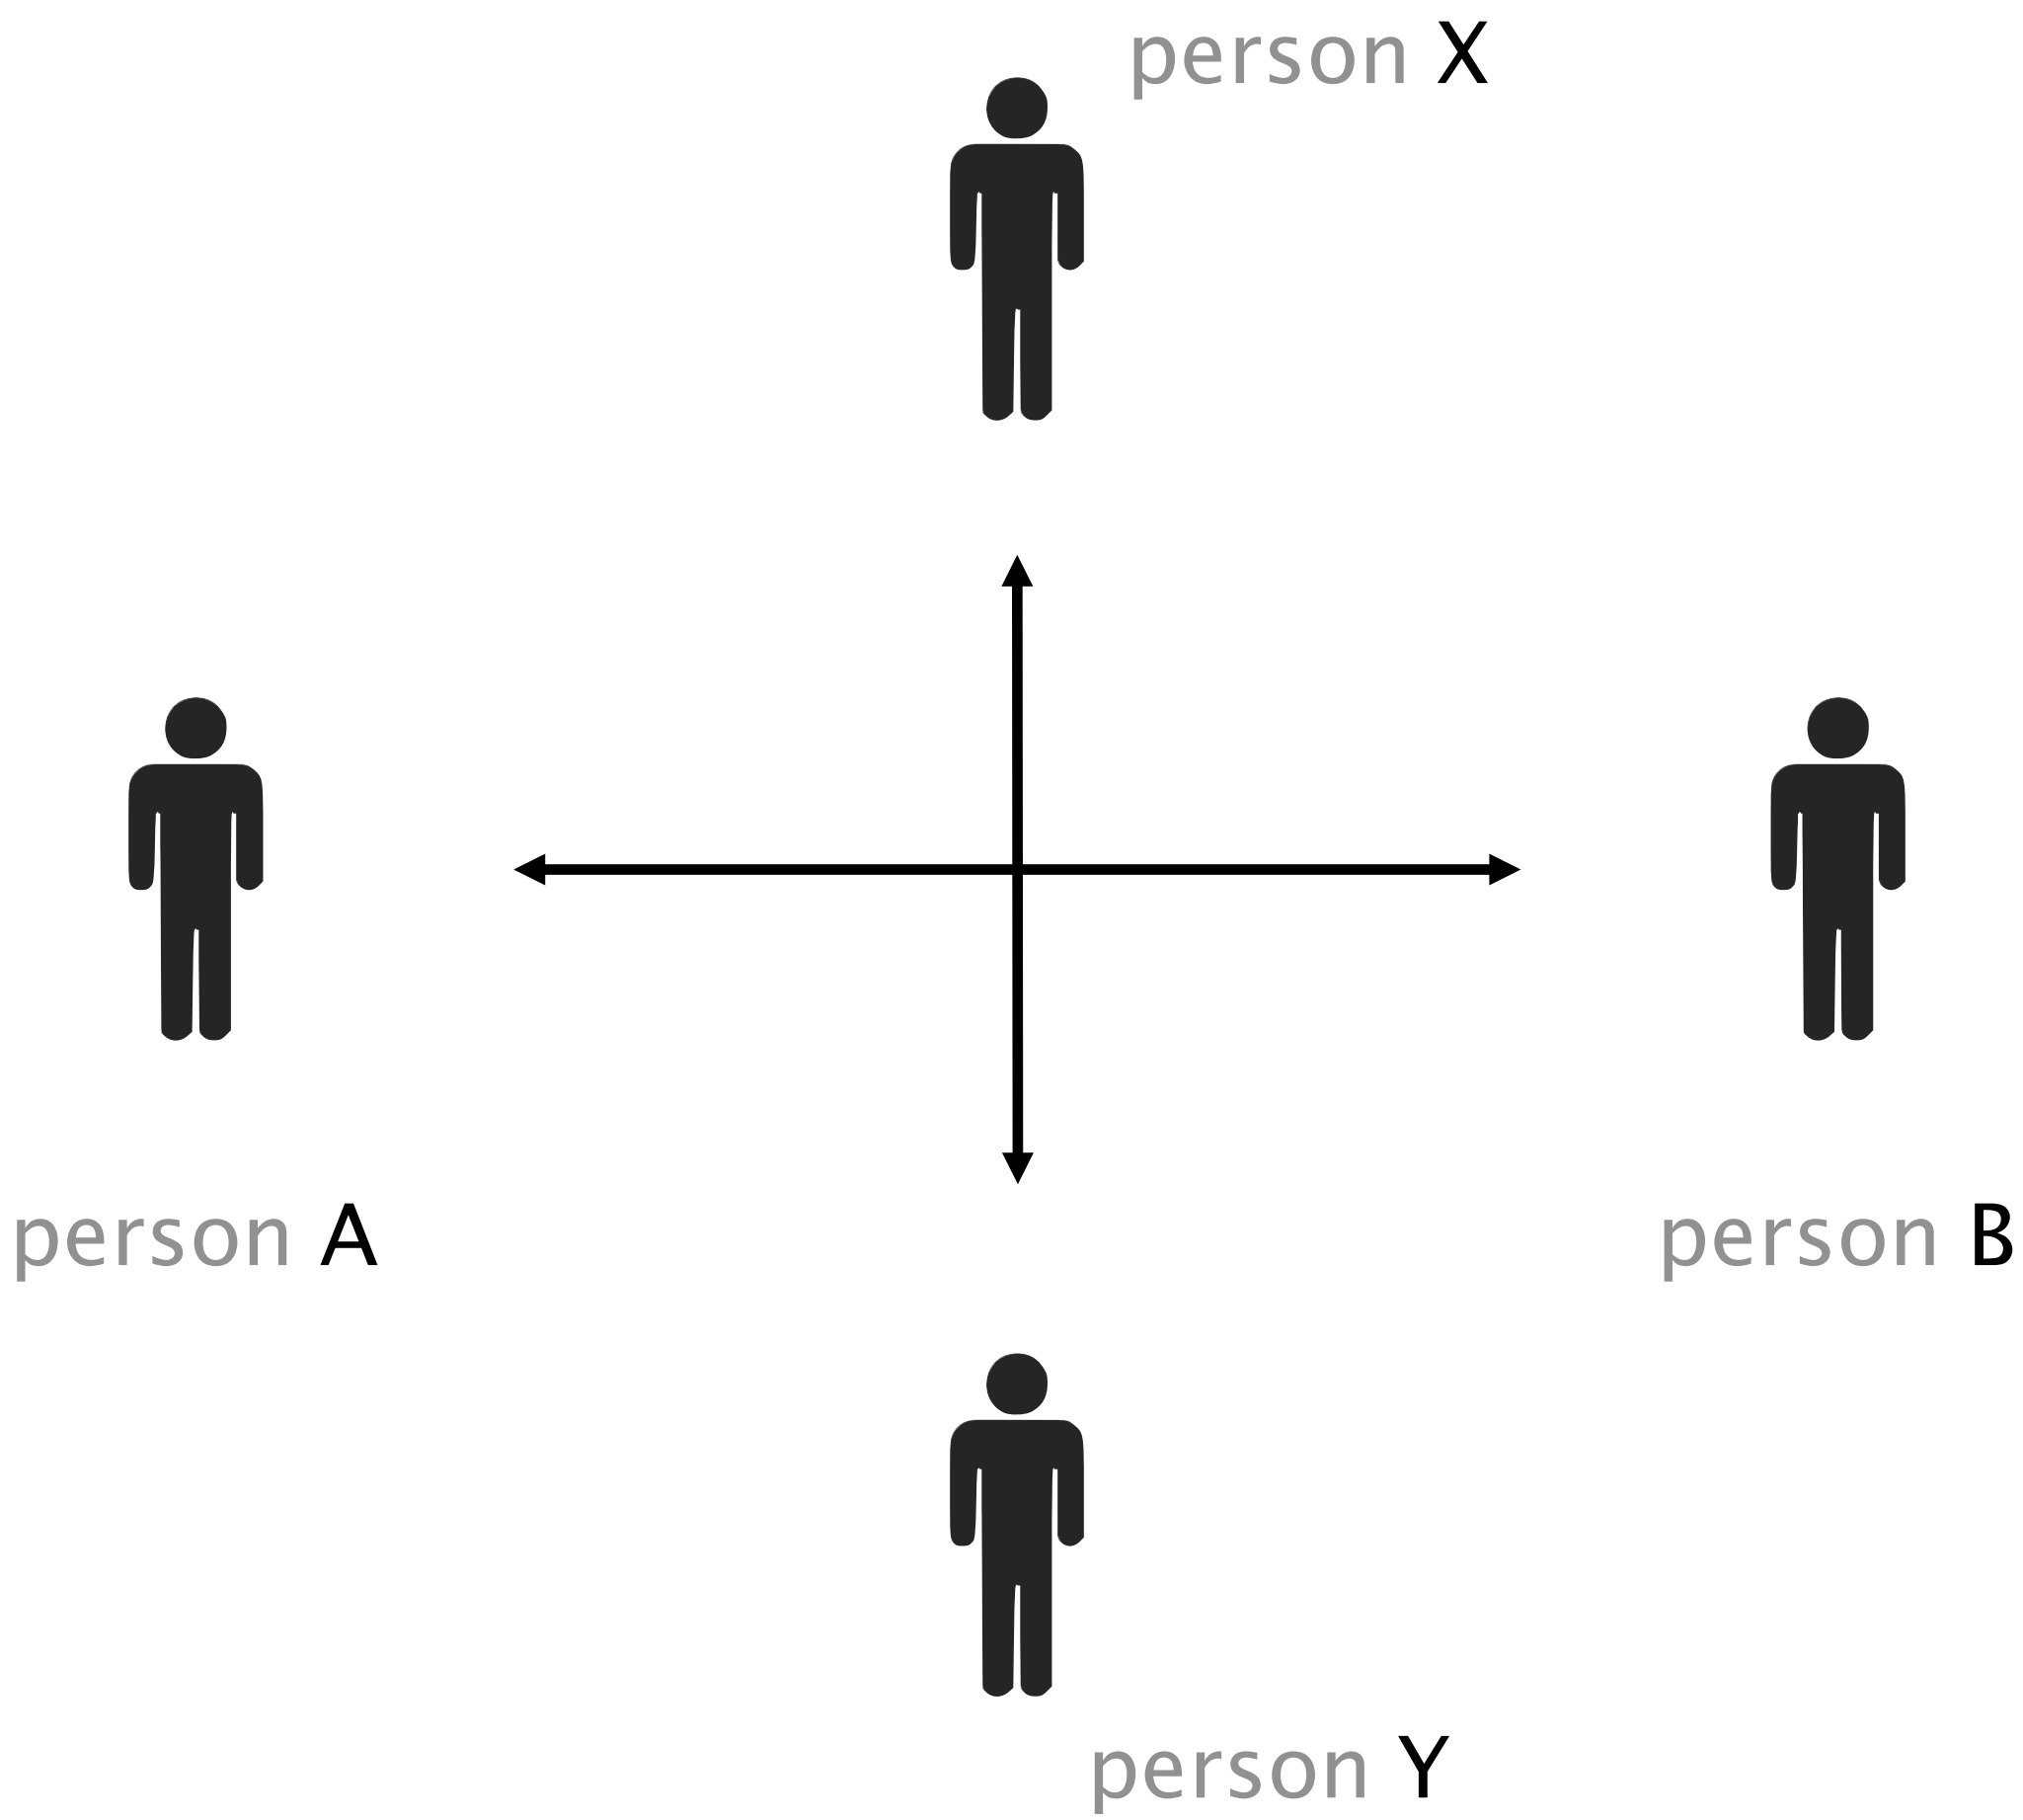

You are now in a much bigger room,

so big you cannot even hear each other

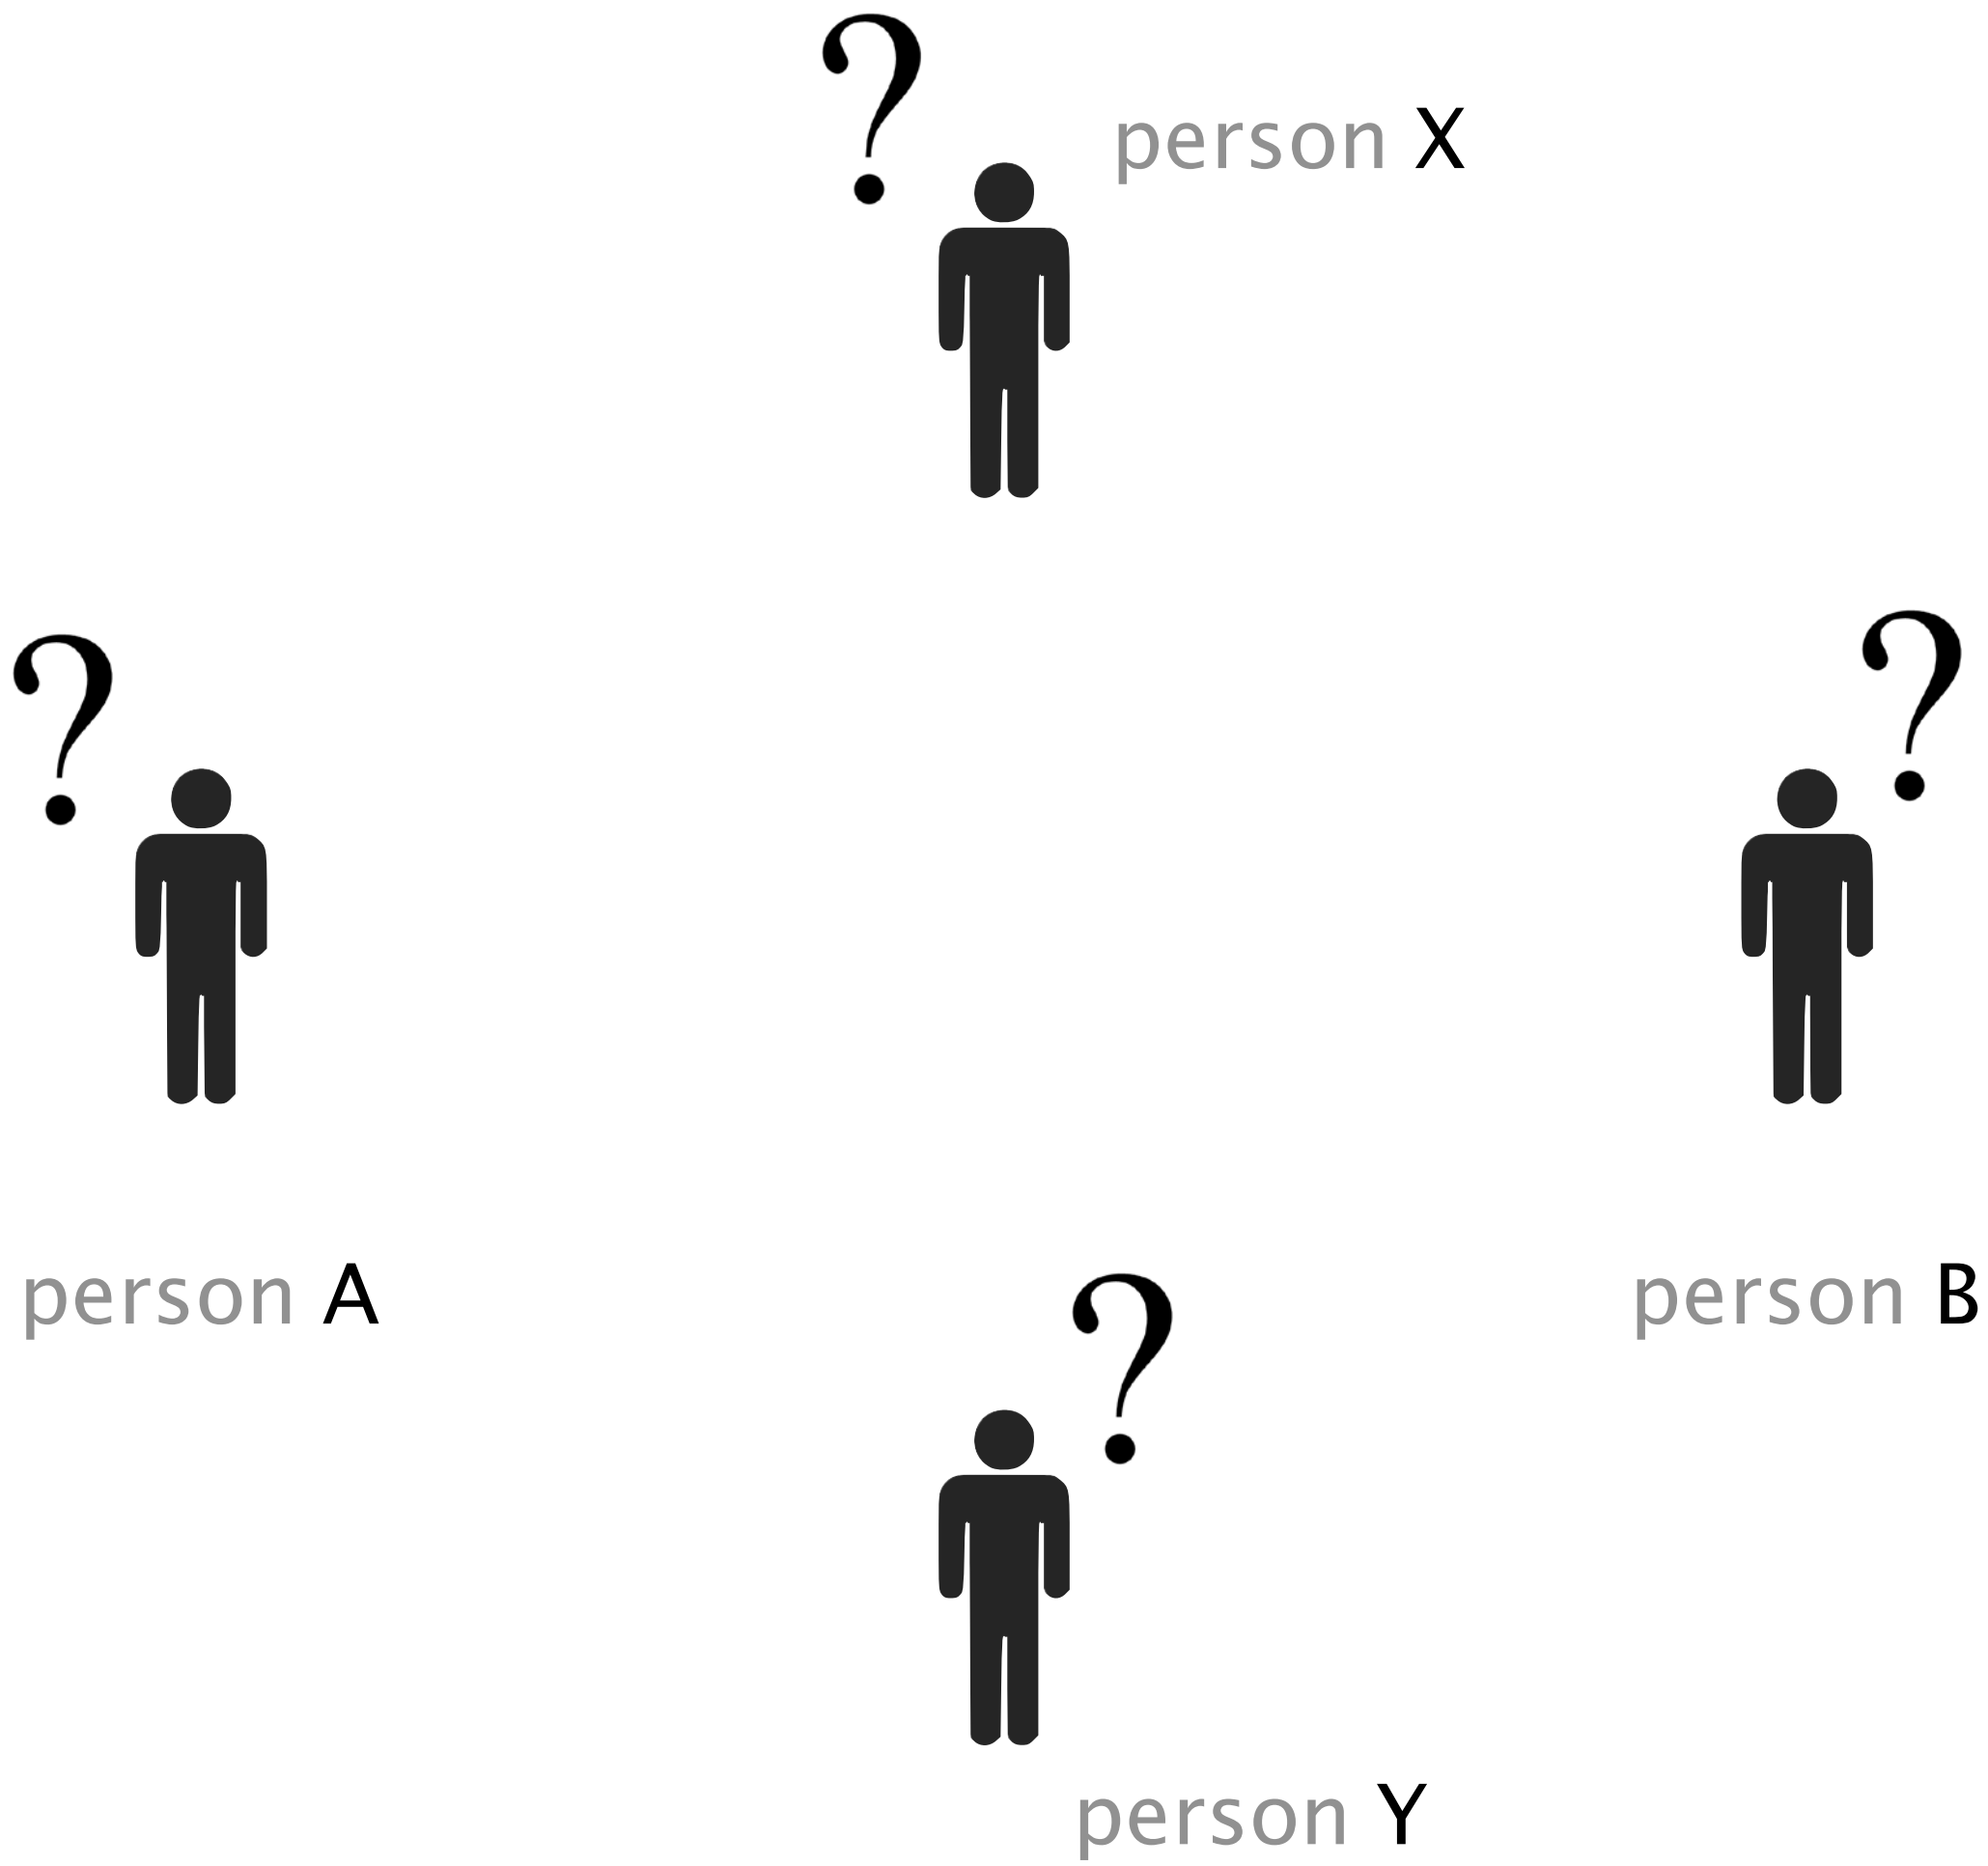

Luckily, everyone can hear and speak to a middle man sitting at the center of the room

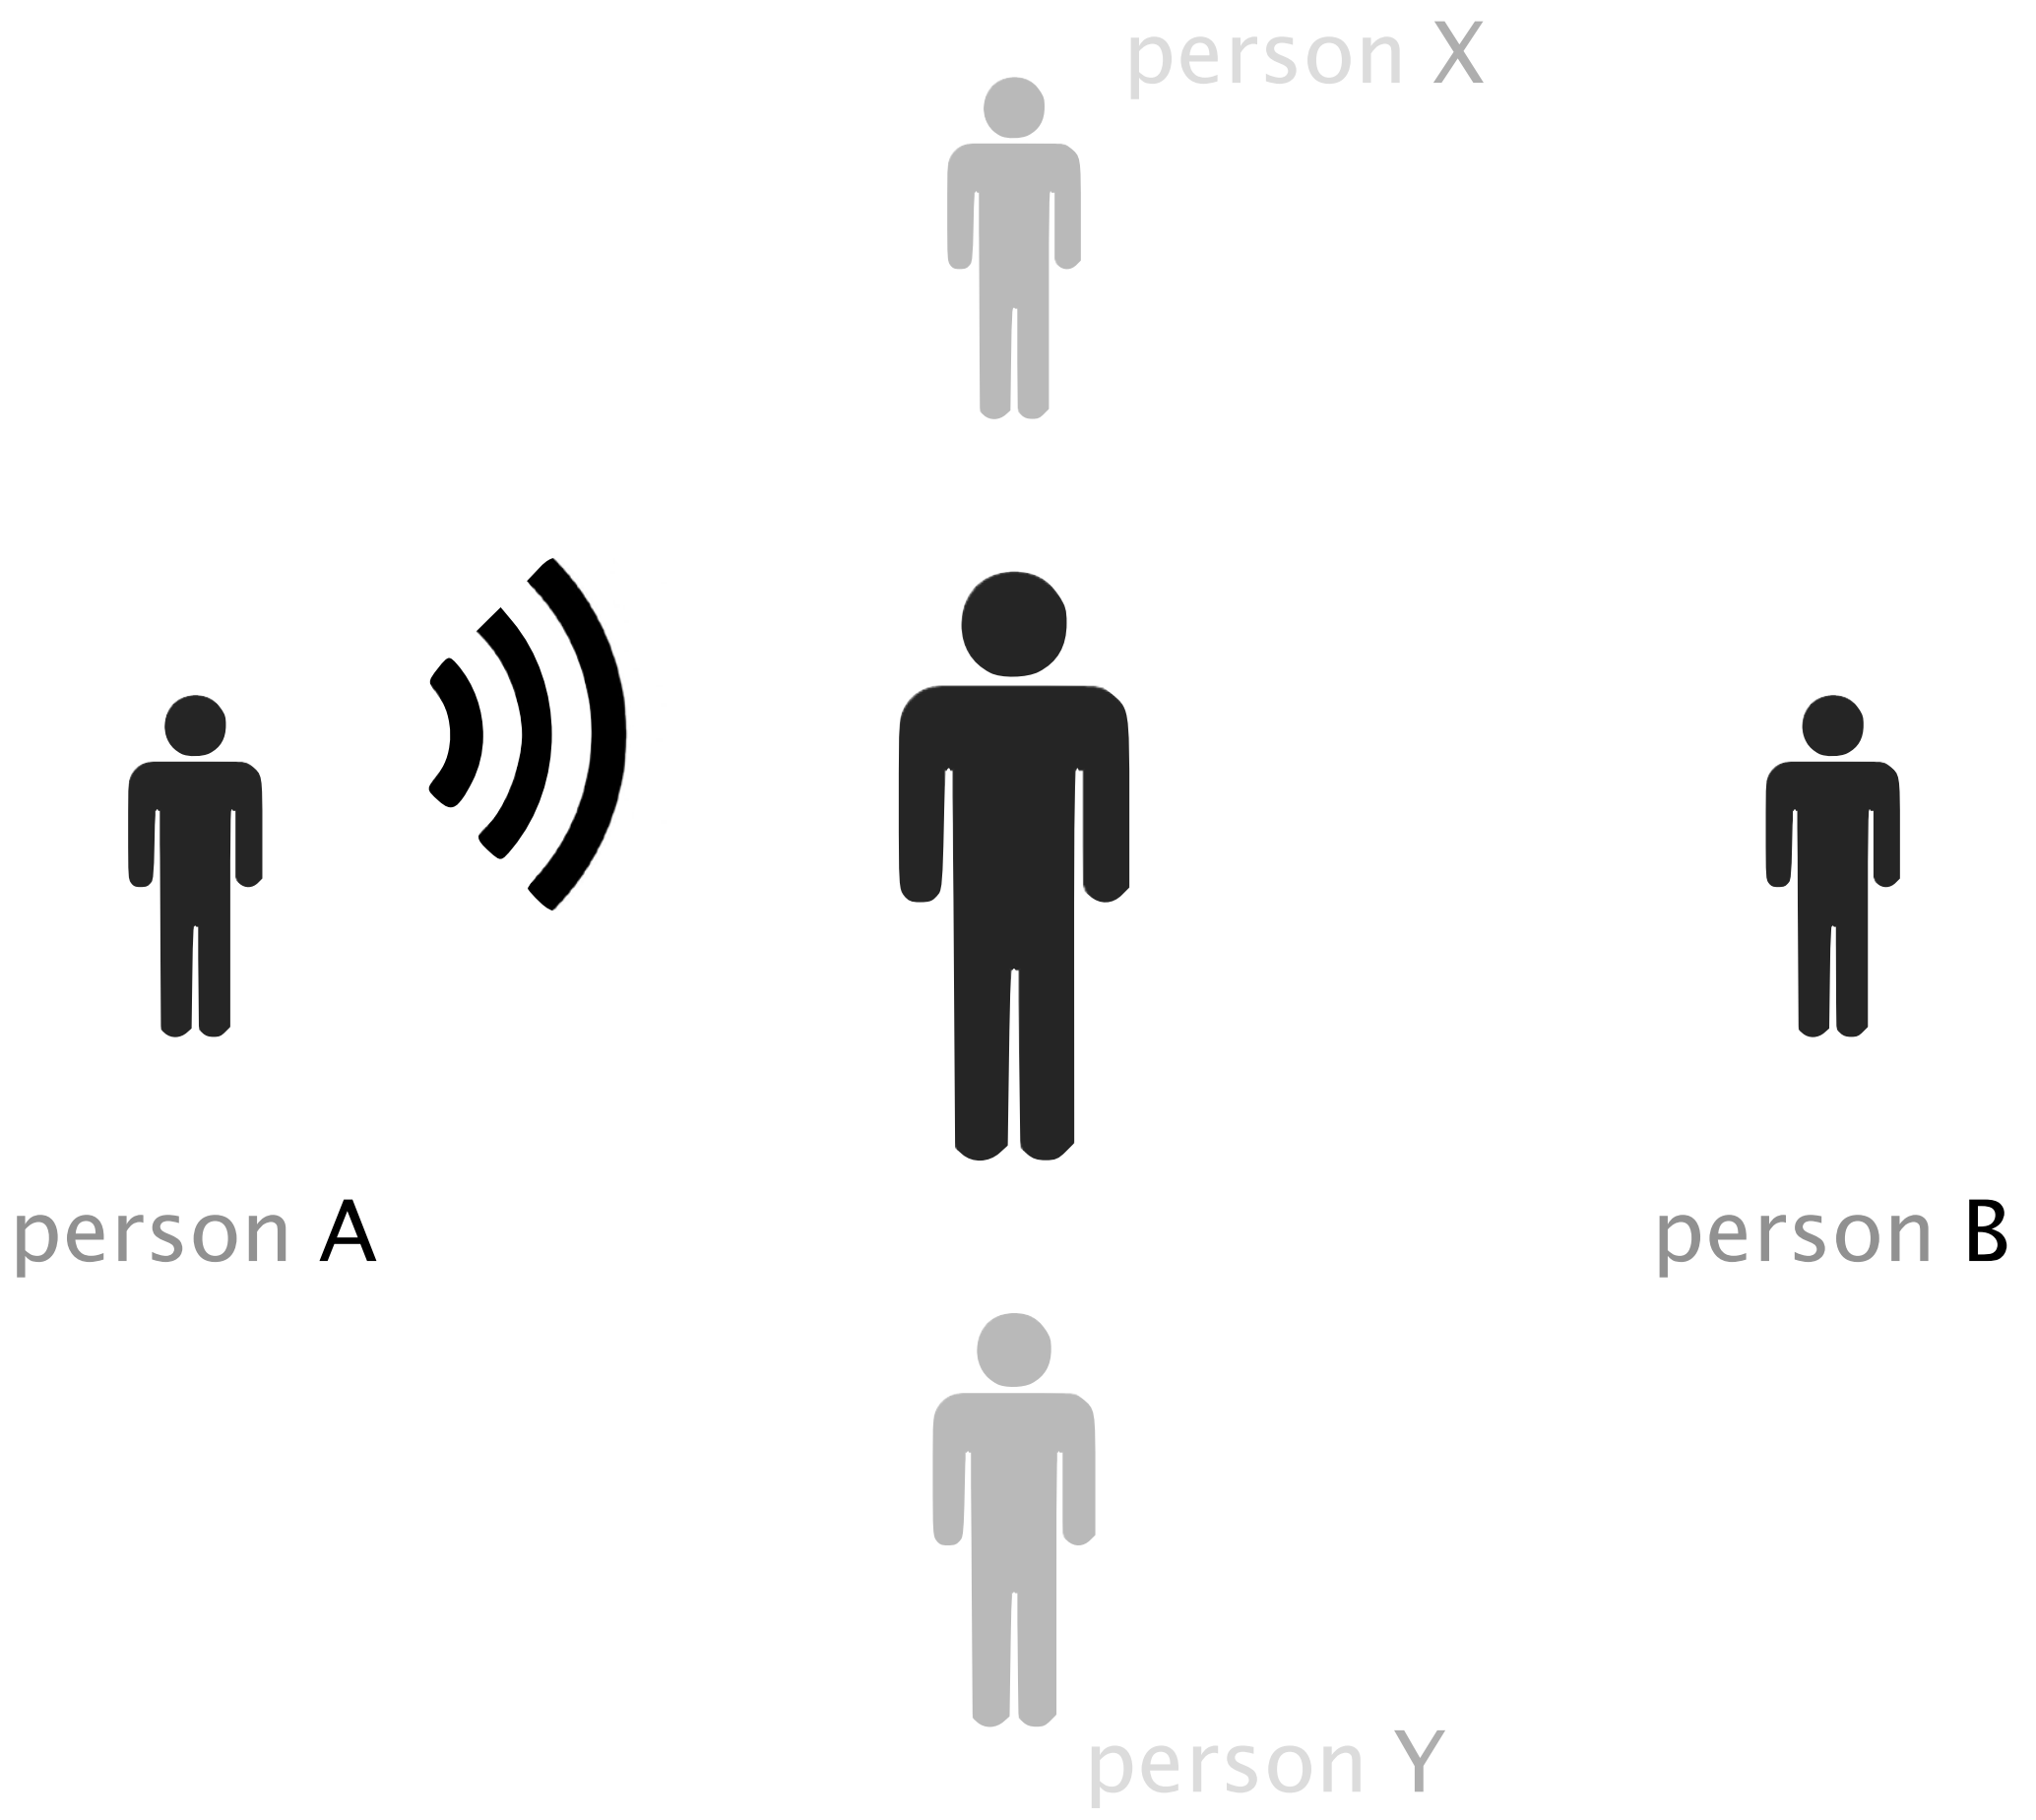

The middle man then relays the information to the actual destination

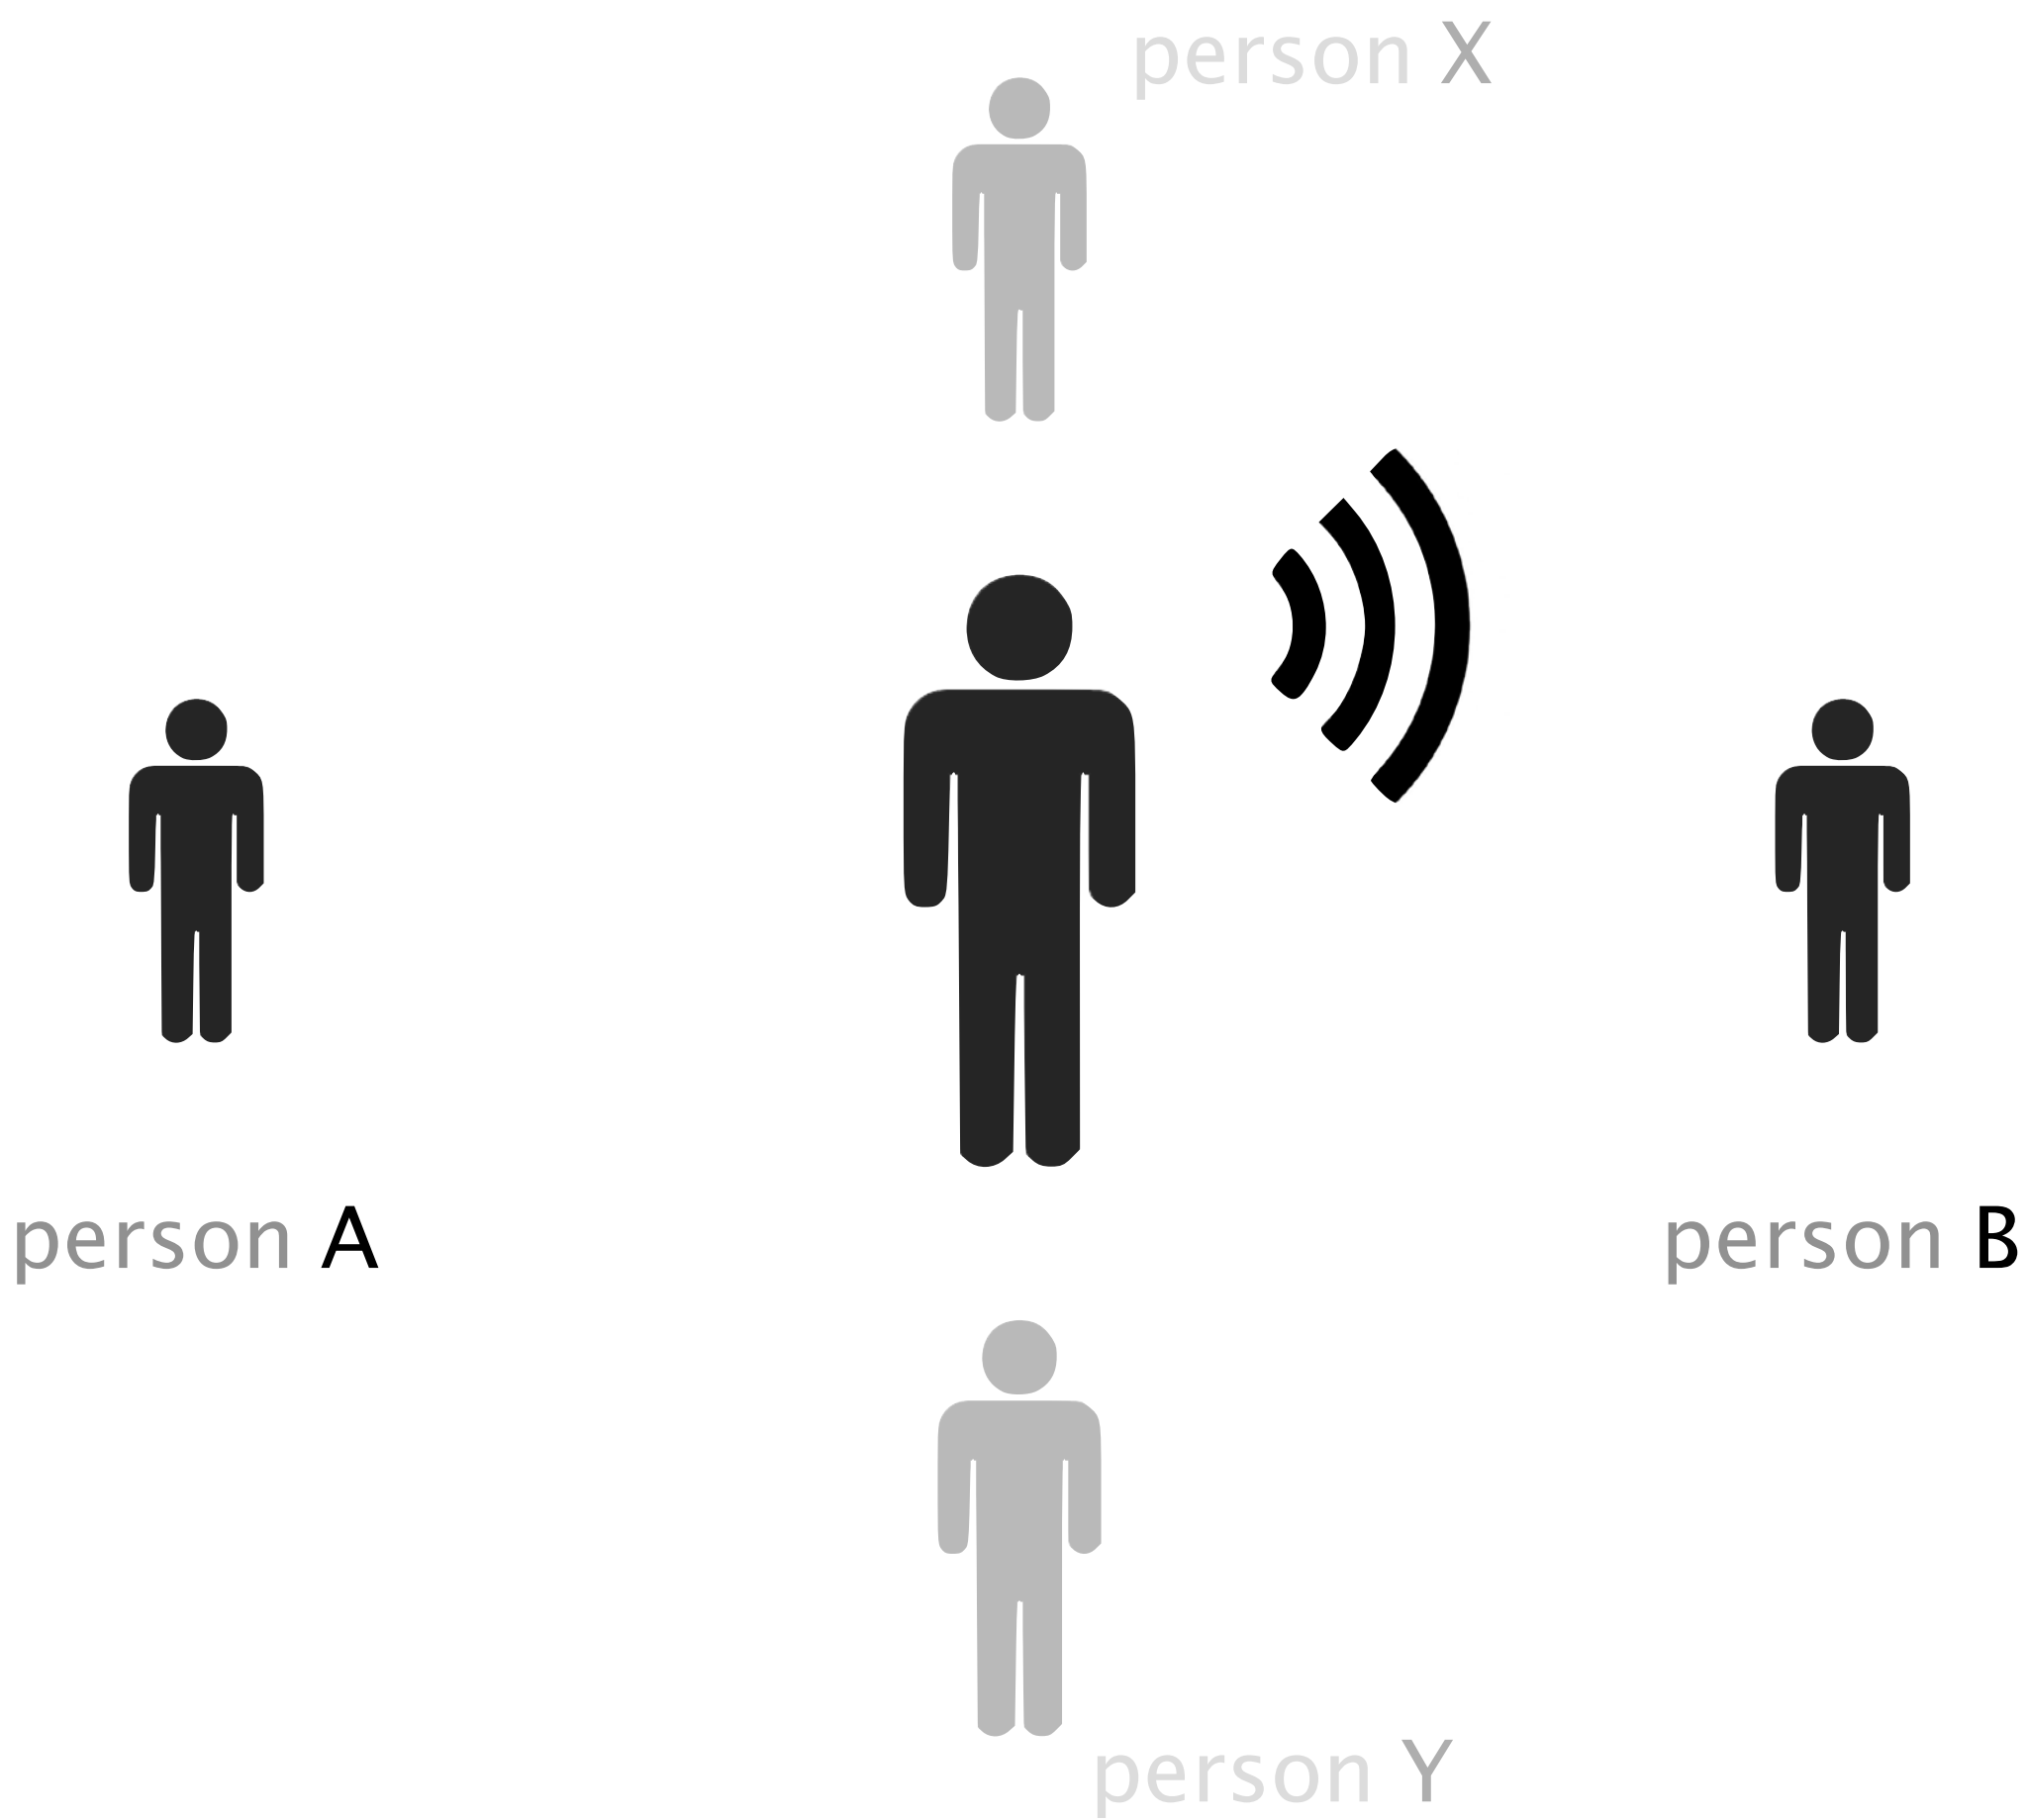

Whenever two people speak at the same time to the relay, or when the relay is speaking, communication is lost

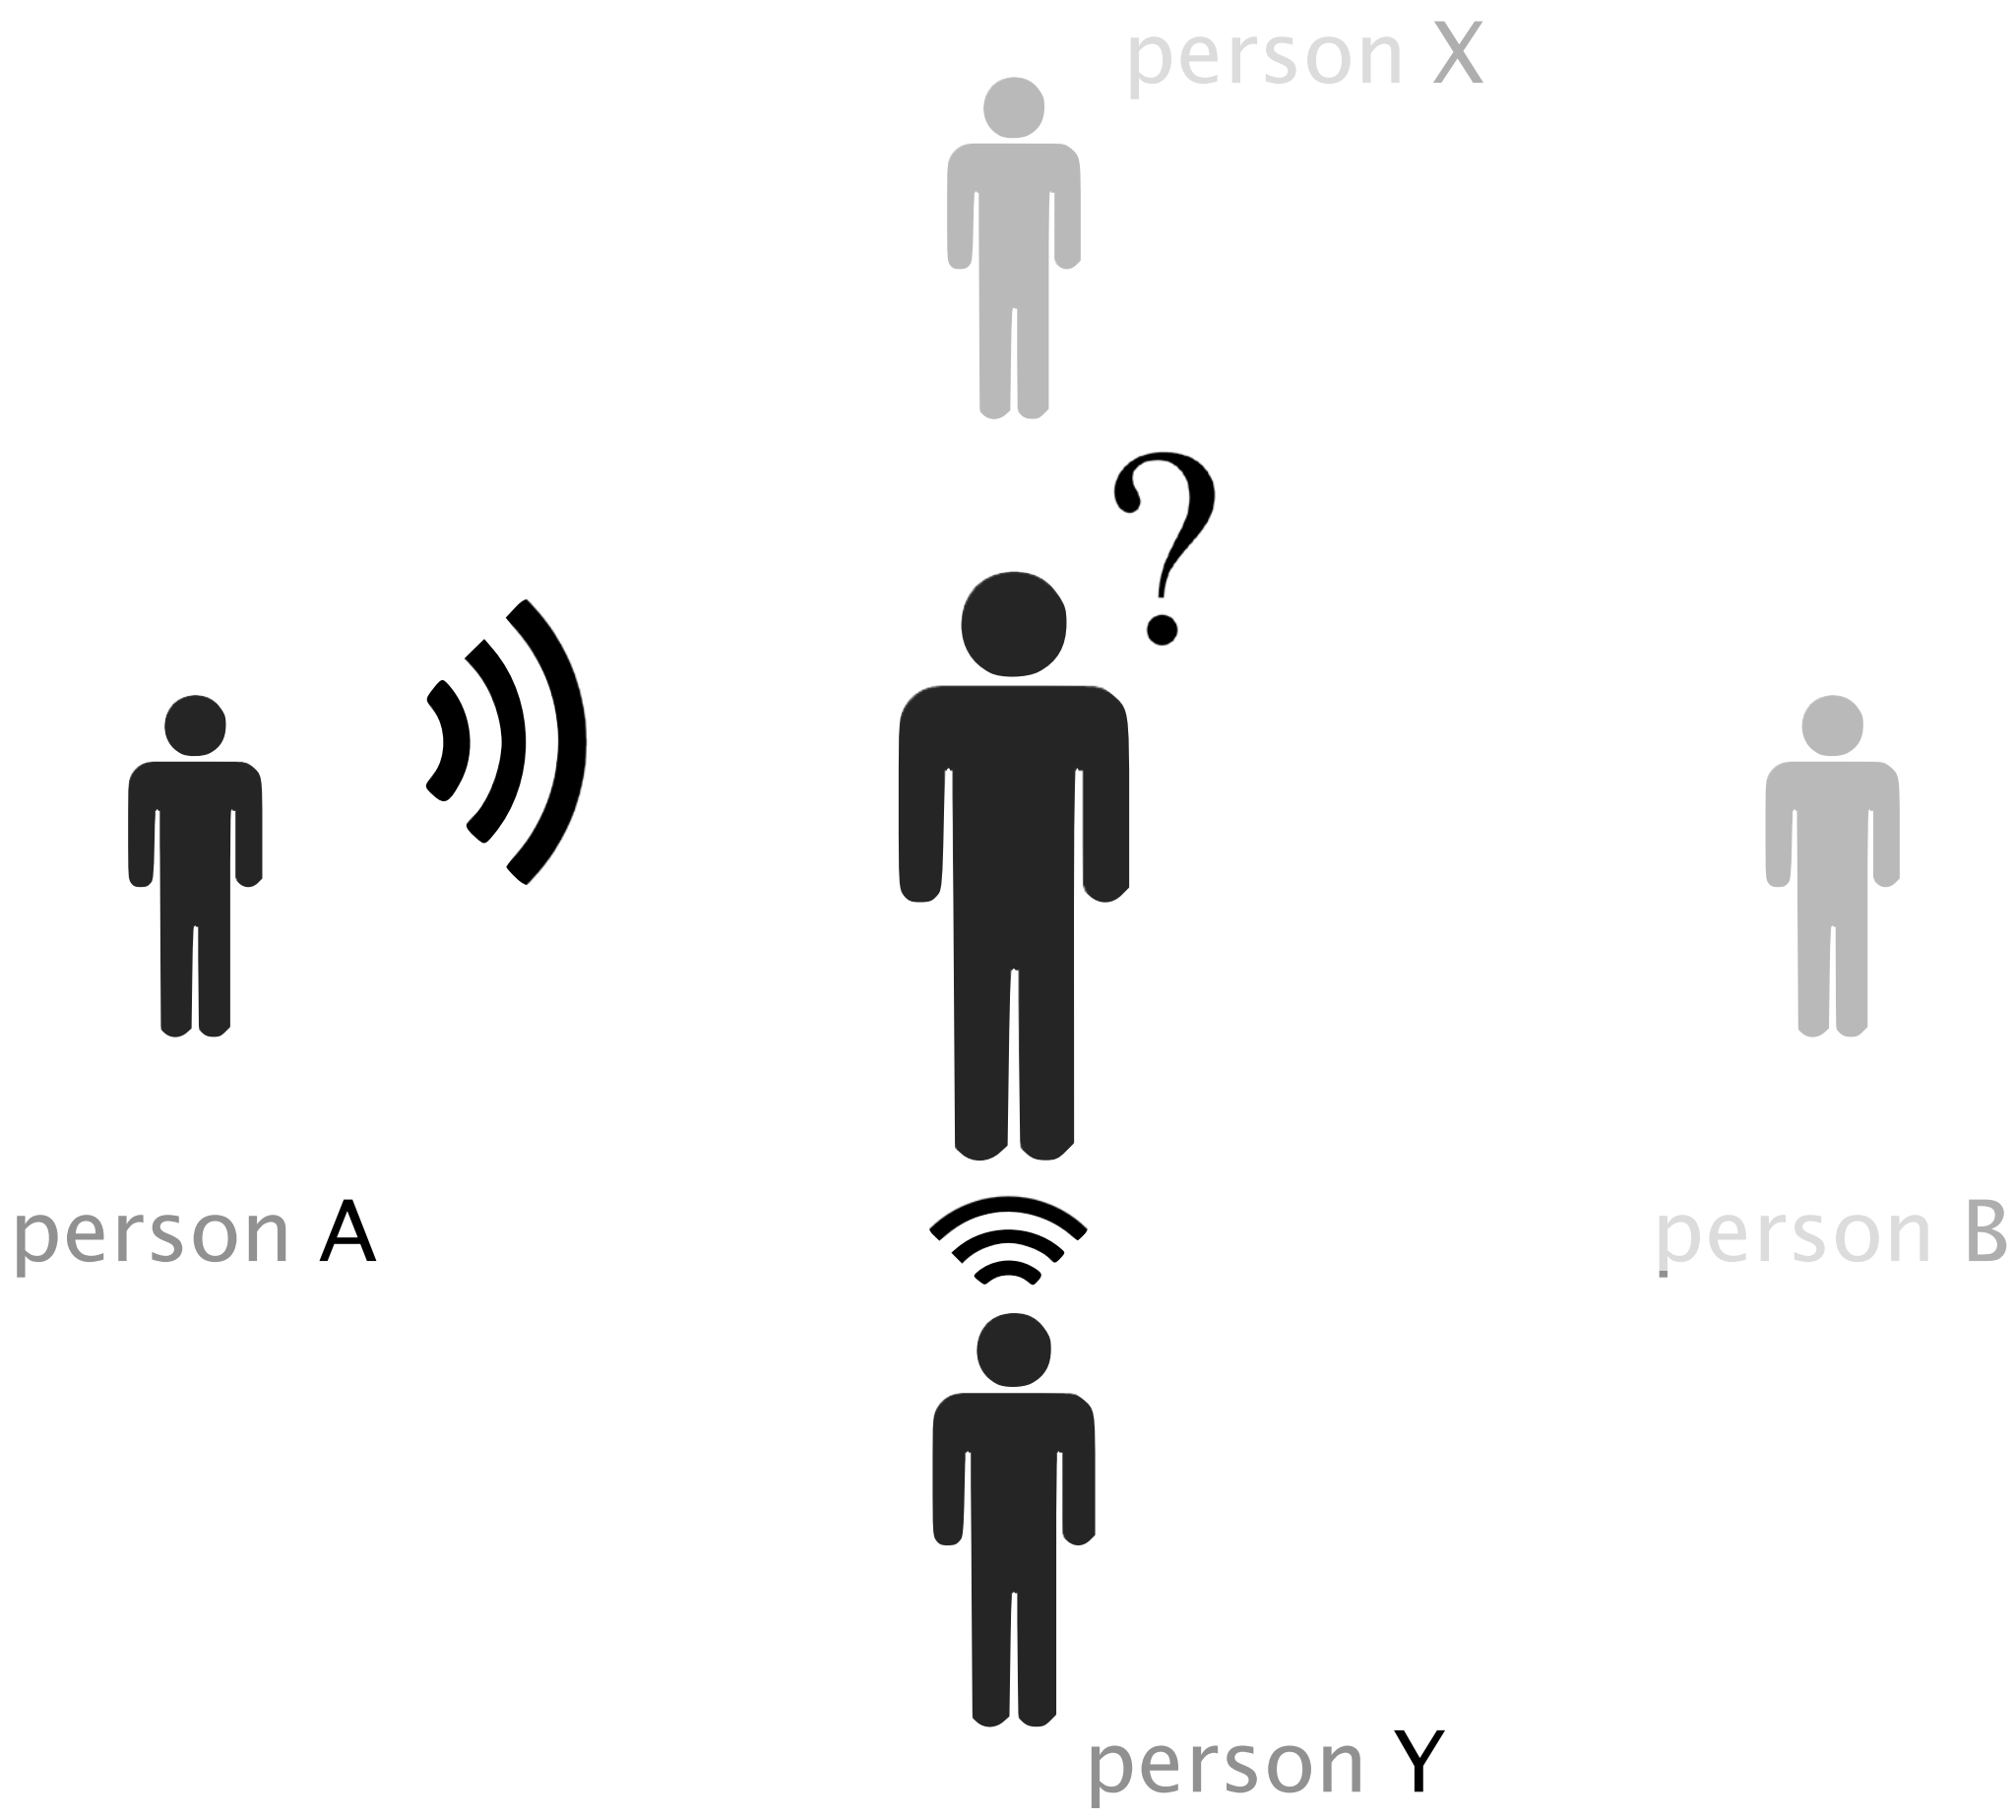

Because of limited range, not all wireless hosts necessarily see each other

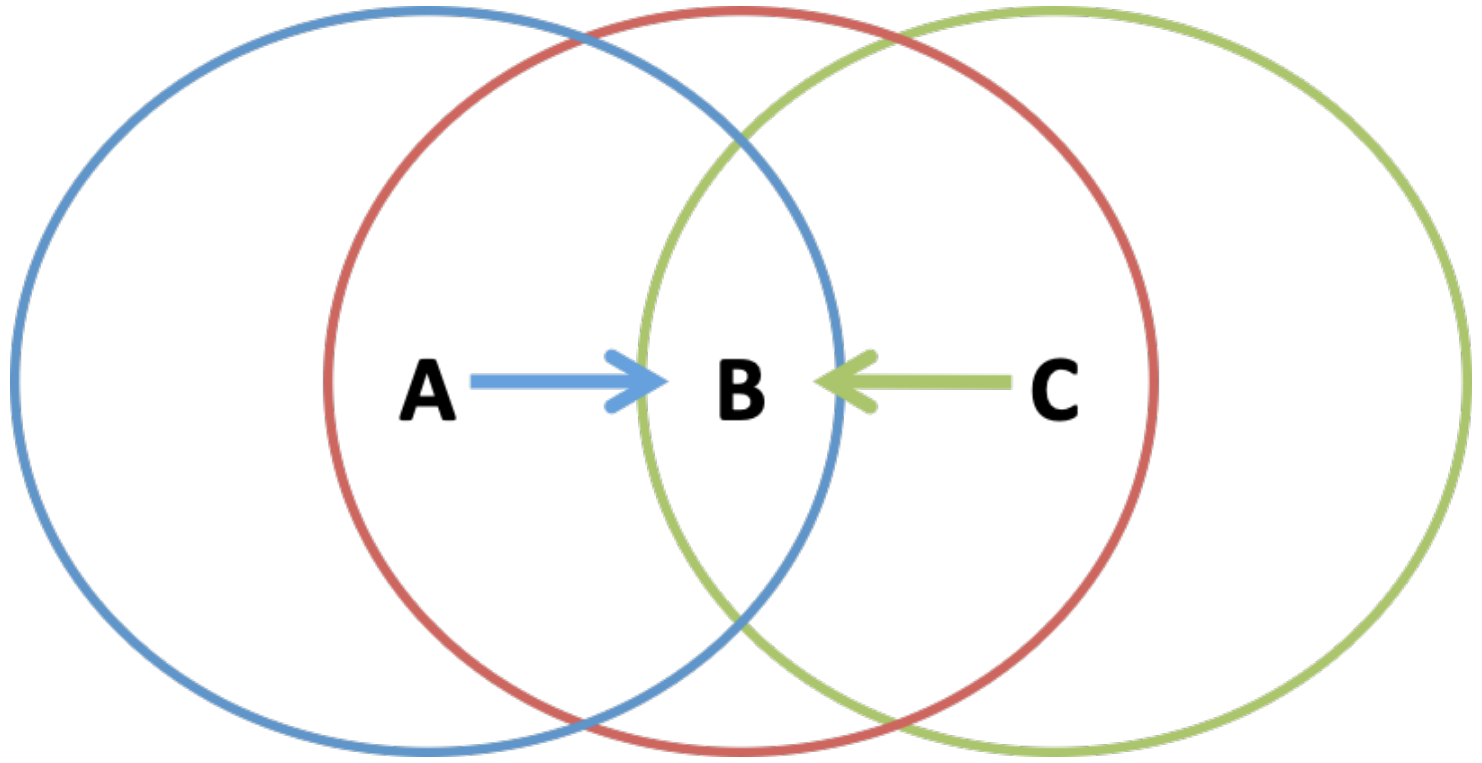

Hidden Terminal Problem

A and C can’t see each other, both send to B

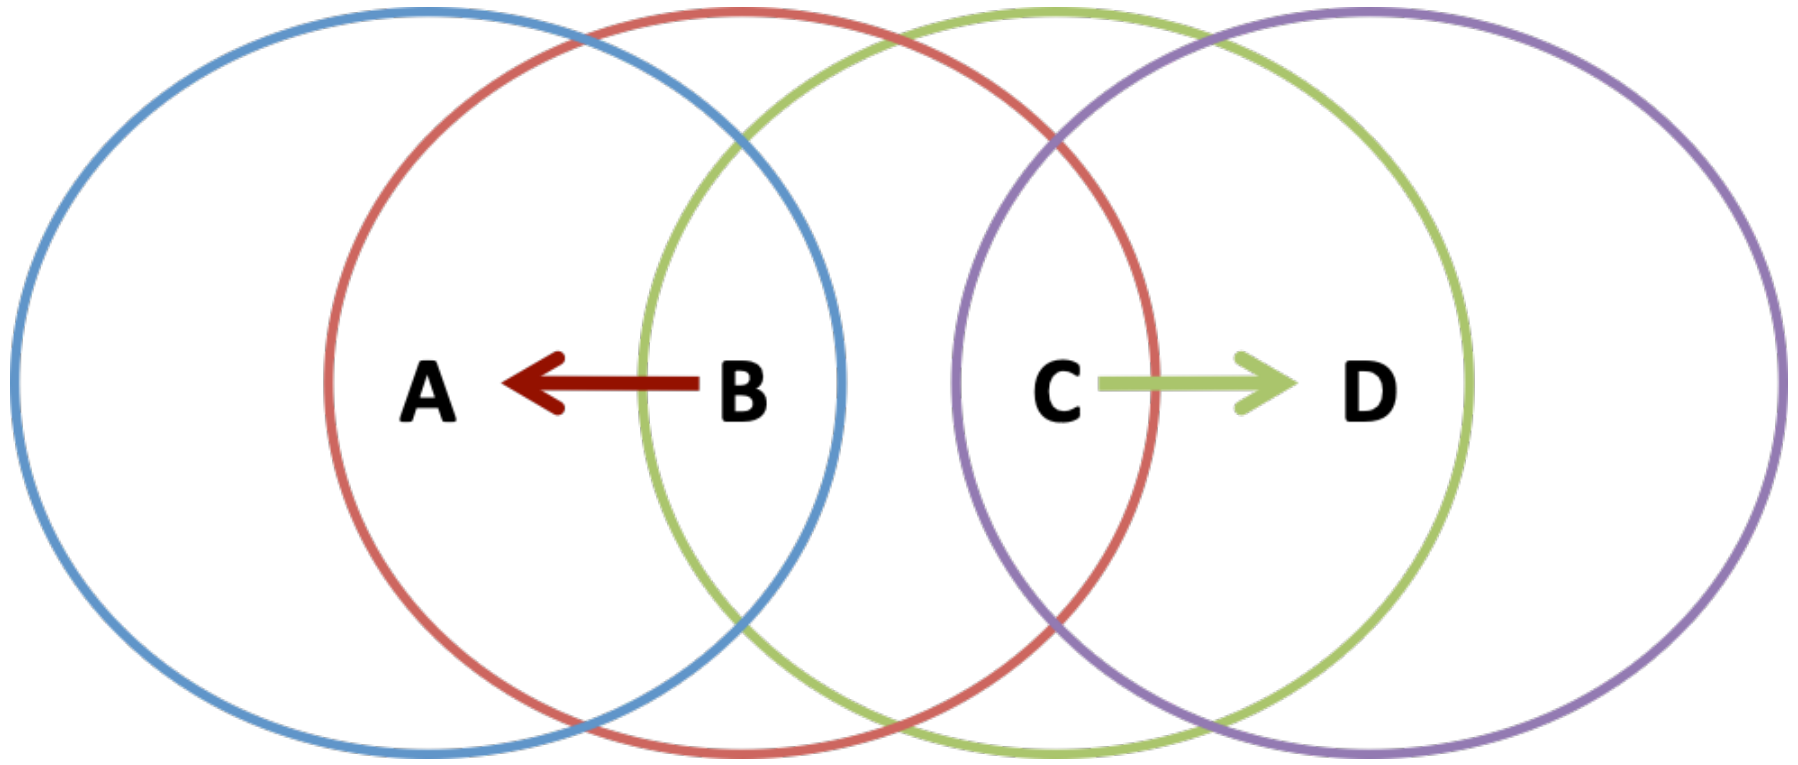

Exposed Terminal Problem

C wants to send to D, listens to the channel, and falsely assumes that it cannot

Some medium are multi-access:

>1 host can communicate at the same time

Some medium are multi-access:

>1 host can communicate at the same time

Problem	Solution
collisions lead to garbled data	distributed algorithm for sharing the channel

When can each node transmit?

Essentially, there are three techniques to deal with Multiple Access Control (MAC)

Divide the channel into pieces

either in time or in frequency



Take turns

pass a token for the right to transmit

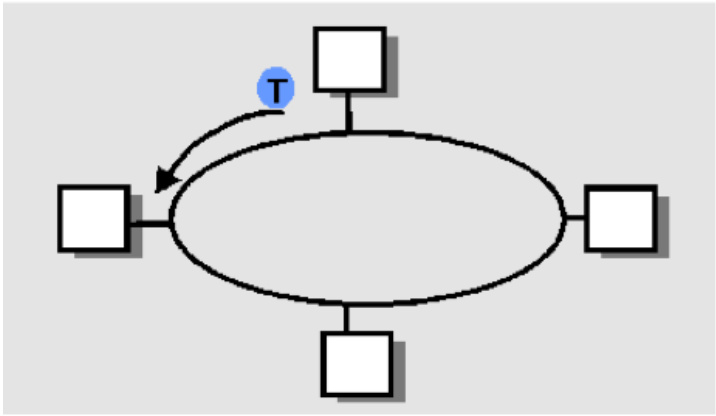

Random access

allow collisions, detect them and then recover

An optimal access protocol does not require synchronization or feedback between members

3 questions

When do you speak?

How do you detect *any* possible collisions?

think worst-case

What do you do when you detect a collision?

what could go wrong?

In practice, multiple access control is provided using Carrier Sense Multiple Access (CSMA)

carrier-sense

listen before speaking, don't interrupt carrier-sense

listen before speaking, don't interrupt

Is that enough to eliminate collisions?

carrier-sense

listen before speaking, don't interrupt

Is that enough to eliminate collisions?

Nope

Two nodes may not hear each other's before sending because of propagation delay

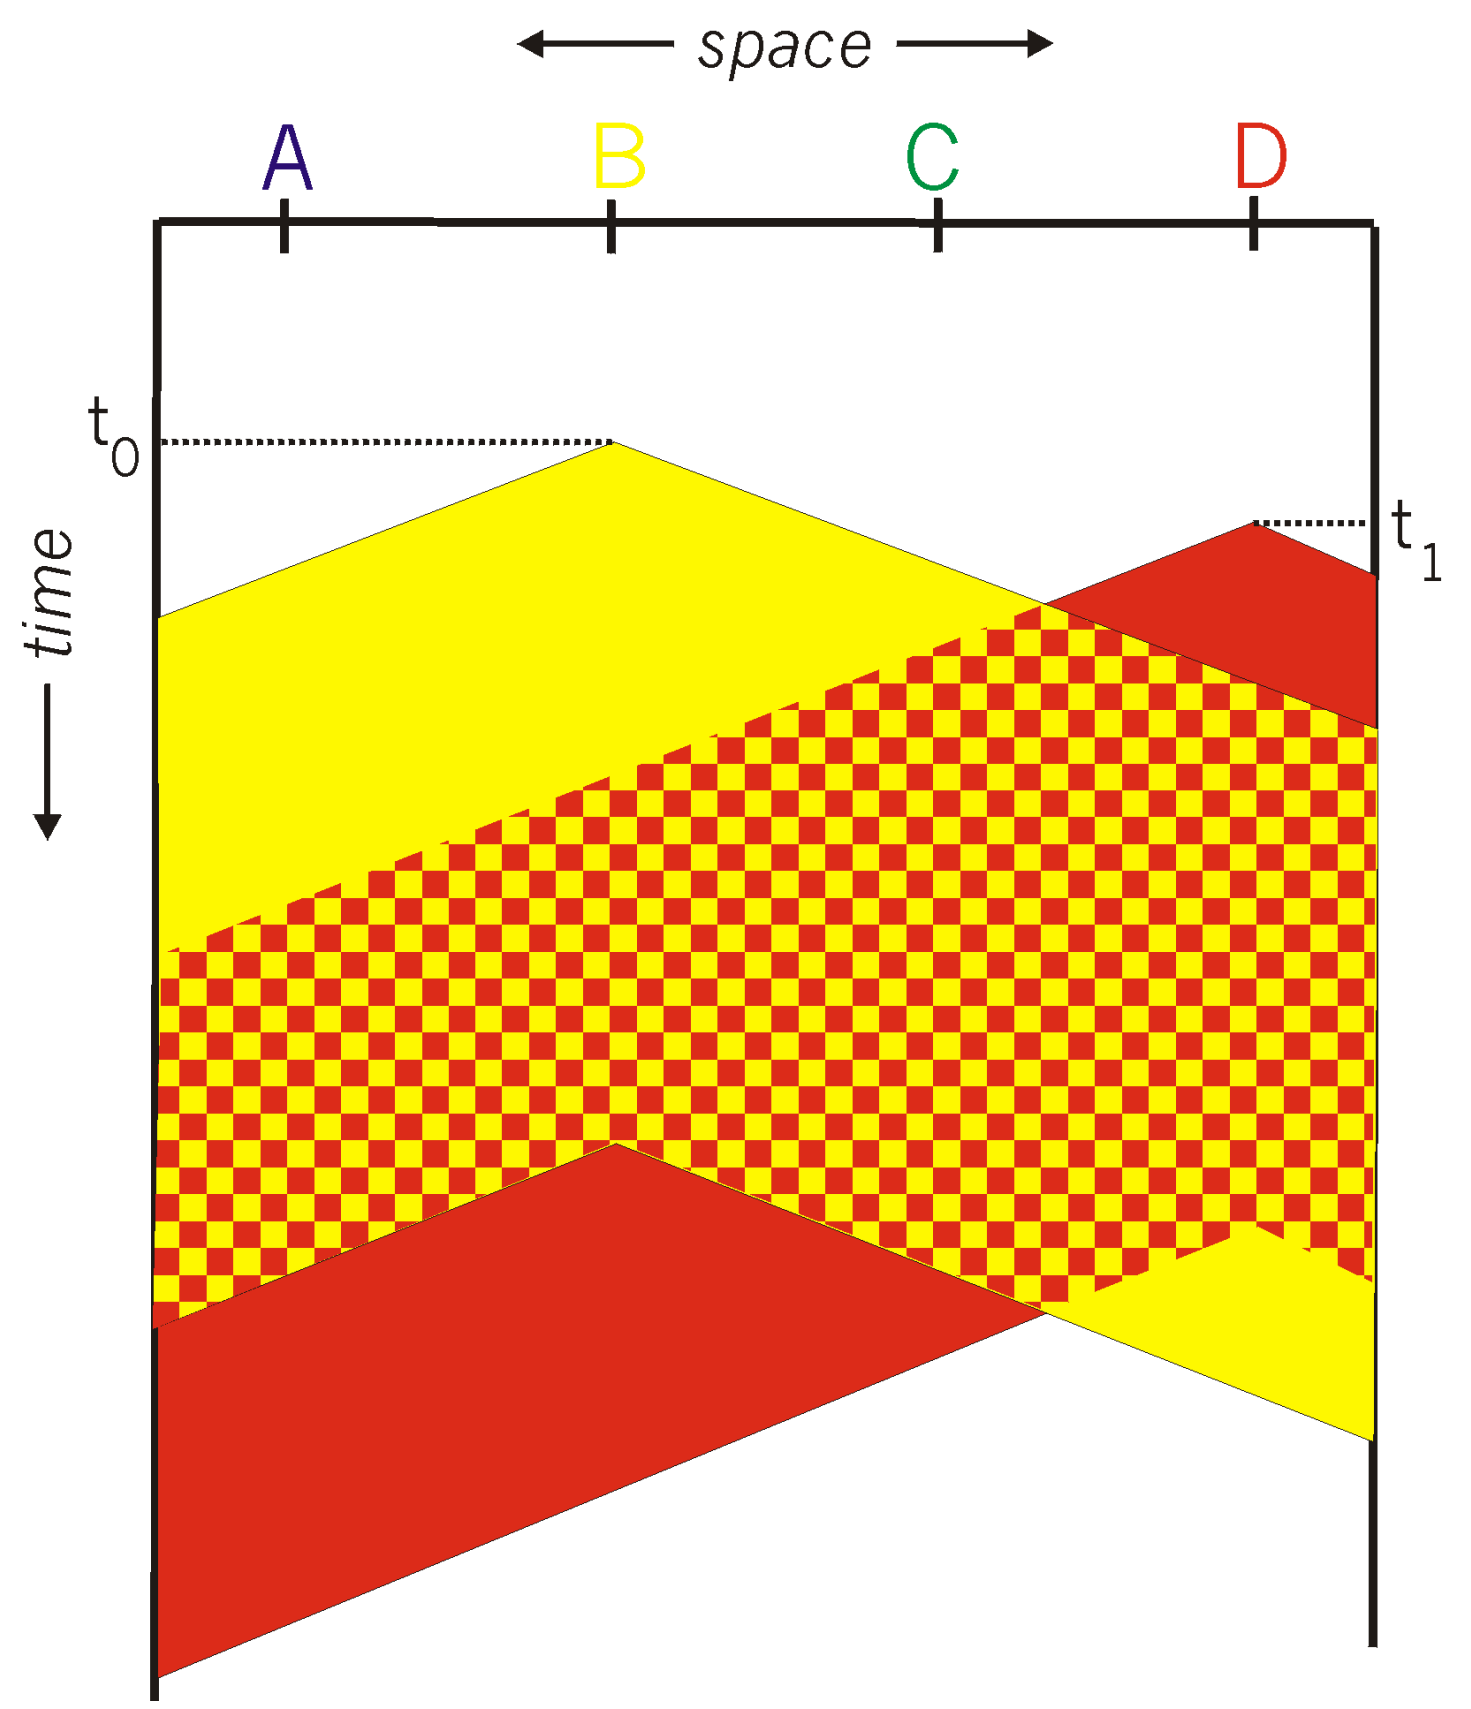

The problem is that

collisions waste a full transmission slot

CMSA/CD Collision Detection

aims at detecting collisions within a short time

carrier-sense

listen before speaking, don't interrupt

collision detection

stop if someone else starts talking

ensure everyone is aware of the collision

B and D can tell that collision occurred:

- abort the transmission
- jam the link

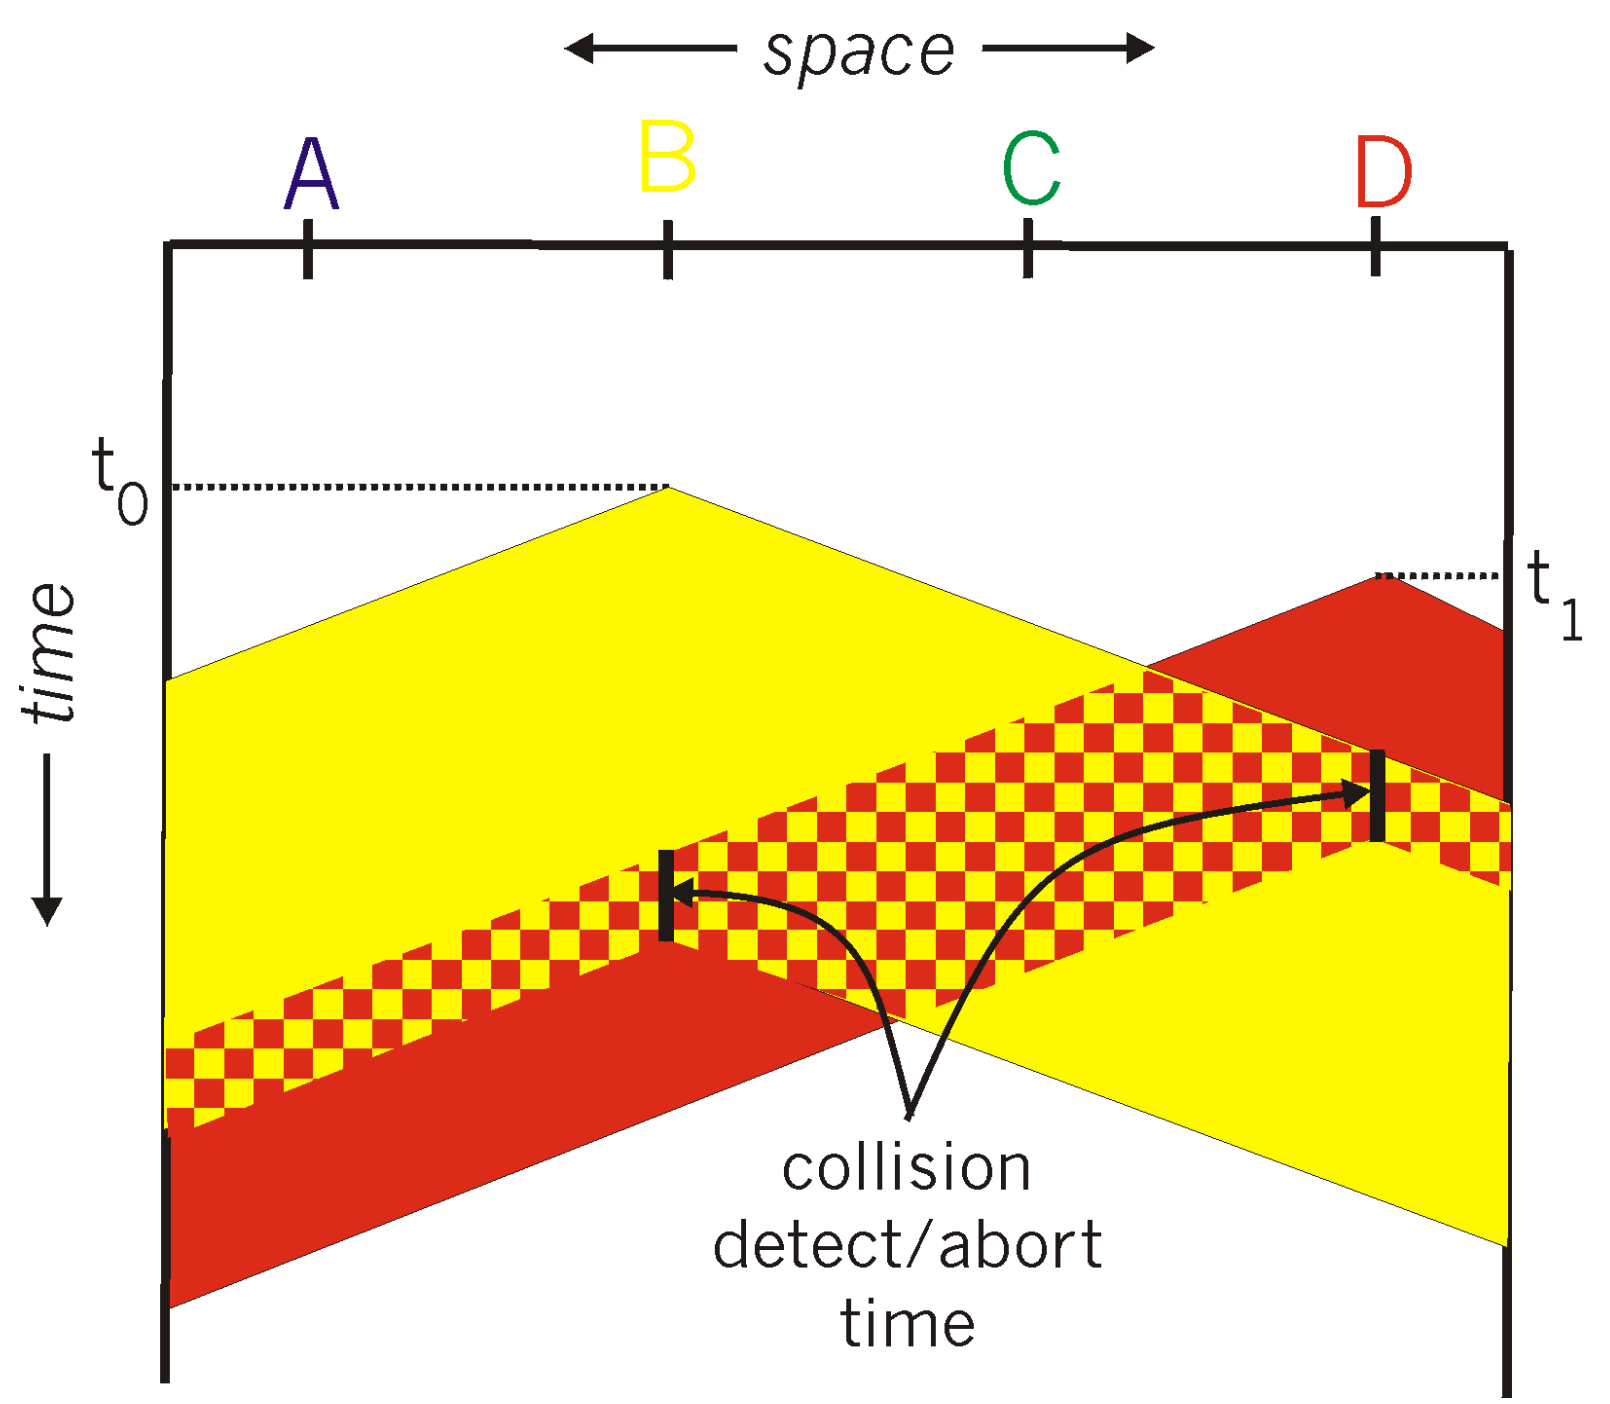

B and D can tell that collision occurred:

- abort the transmission
- jam the link

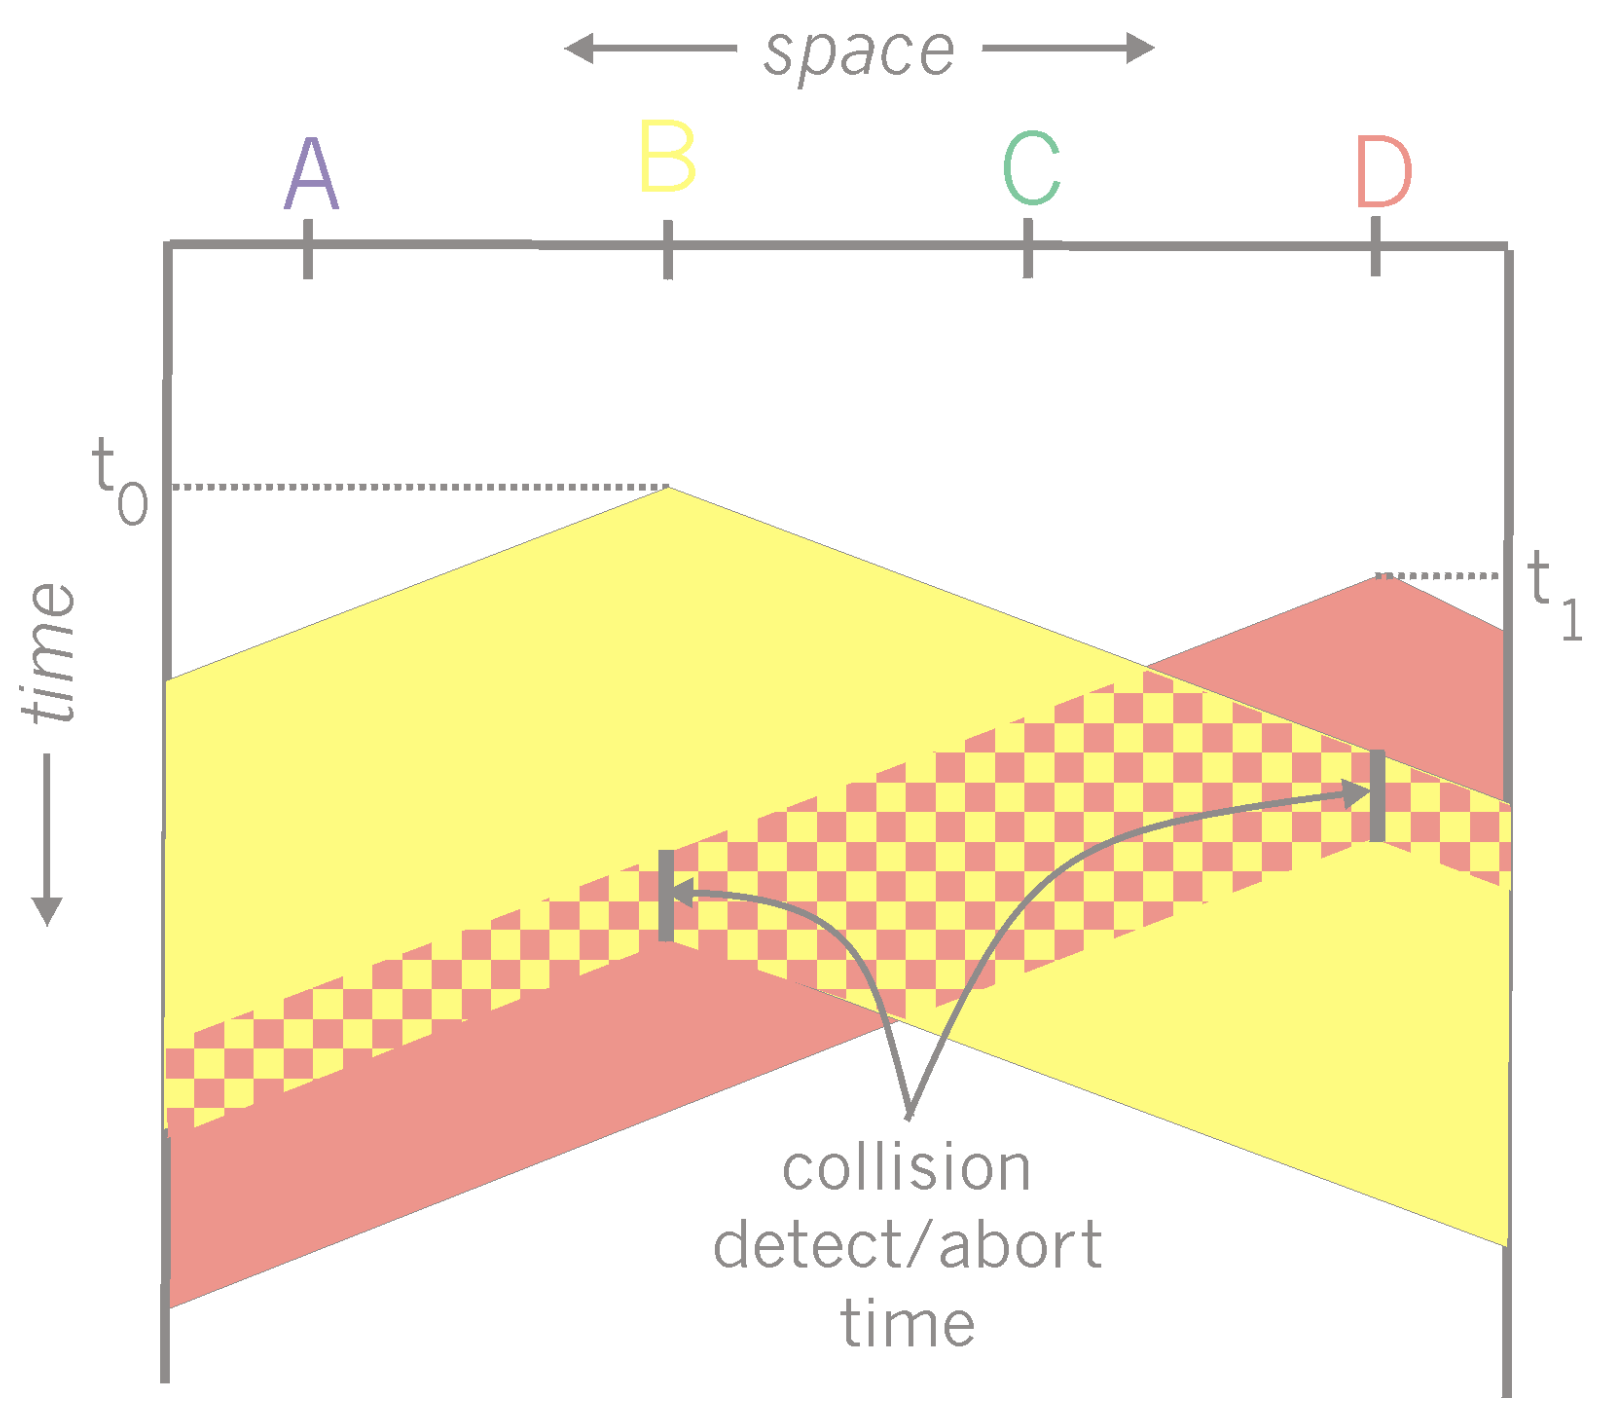

When do B and C retry?

To avoid synchronization problems,
hosts wait a random amount of time before trying again

carrier-sense	*listen* before speaking, don't interrupt
collision detection	*stop* if someone else starts talking ensure everyone is aware of the collision
randomness	*don't talk* again *right away*

CSMA/CD worked well in wired networks, not in wireless networks

wired networks	compare transmitted with received signals
wireless networks	reception shuts off while transmitting
	broadcast is not perfect (limited range) local detection only
	leads to use of Collision Avoidance instead of Collision Detection

IEEE 802.11 Wireless LAN

IEEE 802.11 standard	Year	Max data rate	Range	Frequency
802.11b	1999	11 Mbps	30 m	2.4 Ghz
802.11g	2003	54 Mbps	30m	2.4 Ghz
802.11n (WiFi 4)	2009	600	70m	2.4, 5 Ghz
802.11ac (WiFi 5)	2013	3.47Gpbs	70m	5 Ghz
802.11ax (WiFi 6)	2020 (exp.)	14 Gbps	70m	2.4, 5 Ghz
802.11af	2014	35 – 560 Mbps	1 Km	unused TV bands (54-790 MHz)
802.11ah	2017	347Mbps	1 Km	900 Mhz

- all use CSMA/CA for multiple access, and have base-station and ad-hoc network versions

802.11 LAN architecture

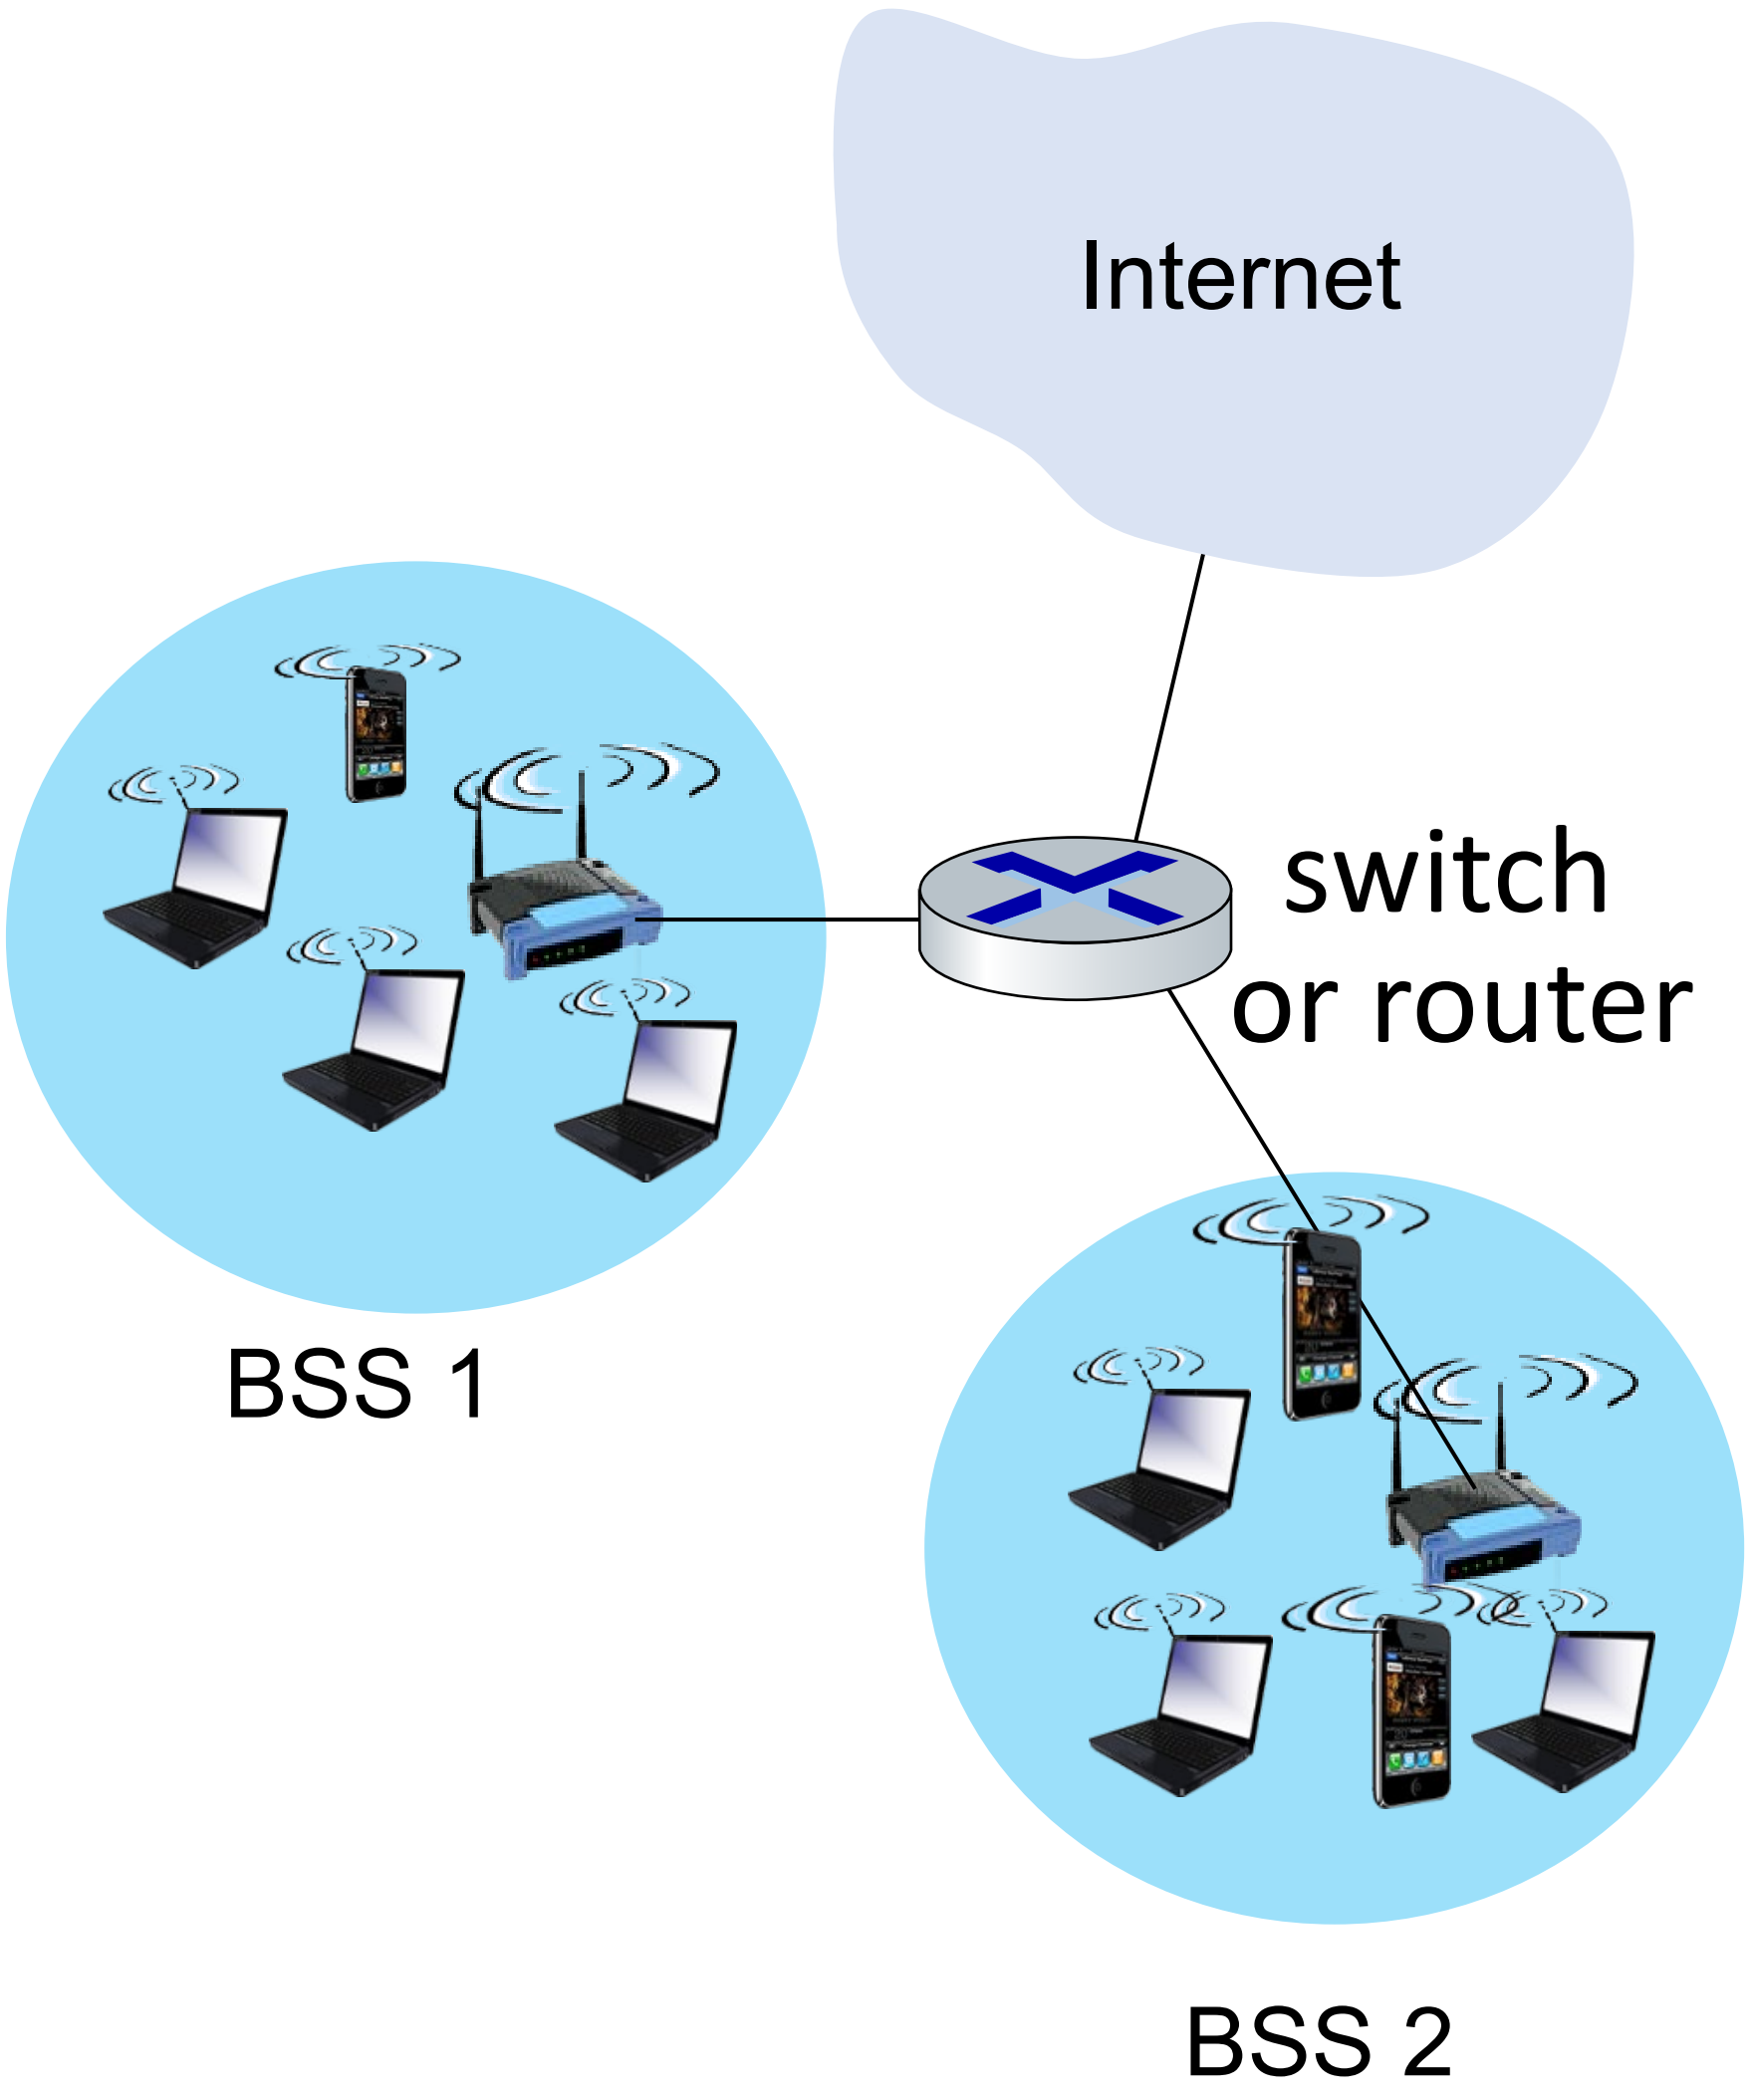

- wireless host communicates with base station
  - base station = access point (AP)
- Basic Service Set (BSS) (aka "cell") in infrastructure mode contains:
  - wireless hosts
  - access point (AP): base station
  - ad hoc mode: hosts only

802.11: Channels, association

- spectrum divided into channels at different frequencies
  - AP admin chooses frequency for AP
  - interference possible: channel can be same as that chosen by neighboring AP!
- arriving host: must associate with an AP
  - scans channels, listening for *beacon frames* containing AP's name (SSID) and MAC address
  - selects AP to associate with
  - then may perform authentication [Chapter 8]
  - then typically run DHCP to get IP address in AP's subnet

802.11: passive/active scanning

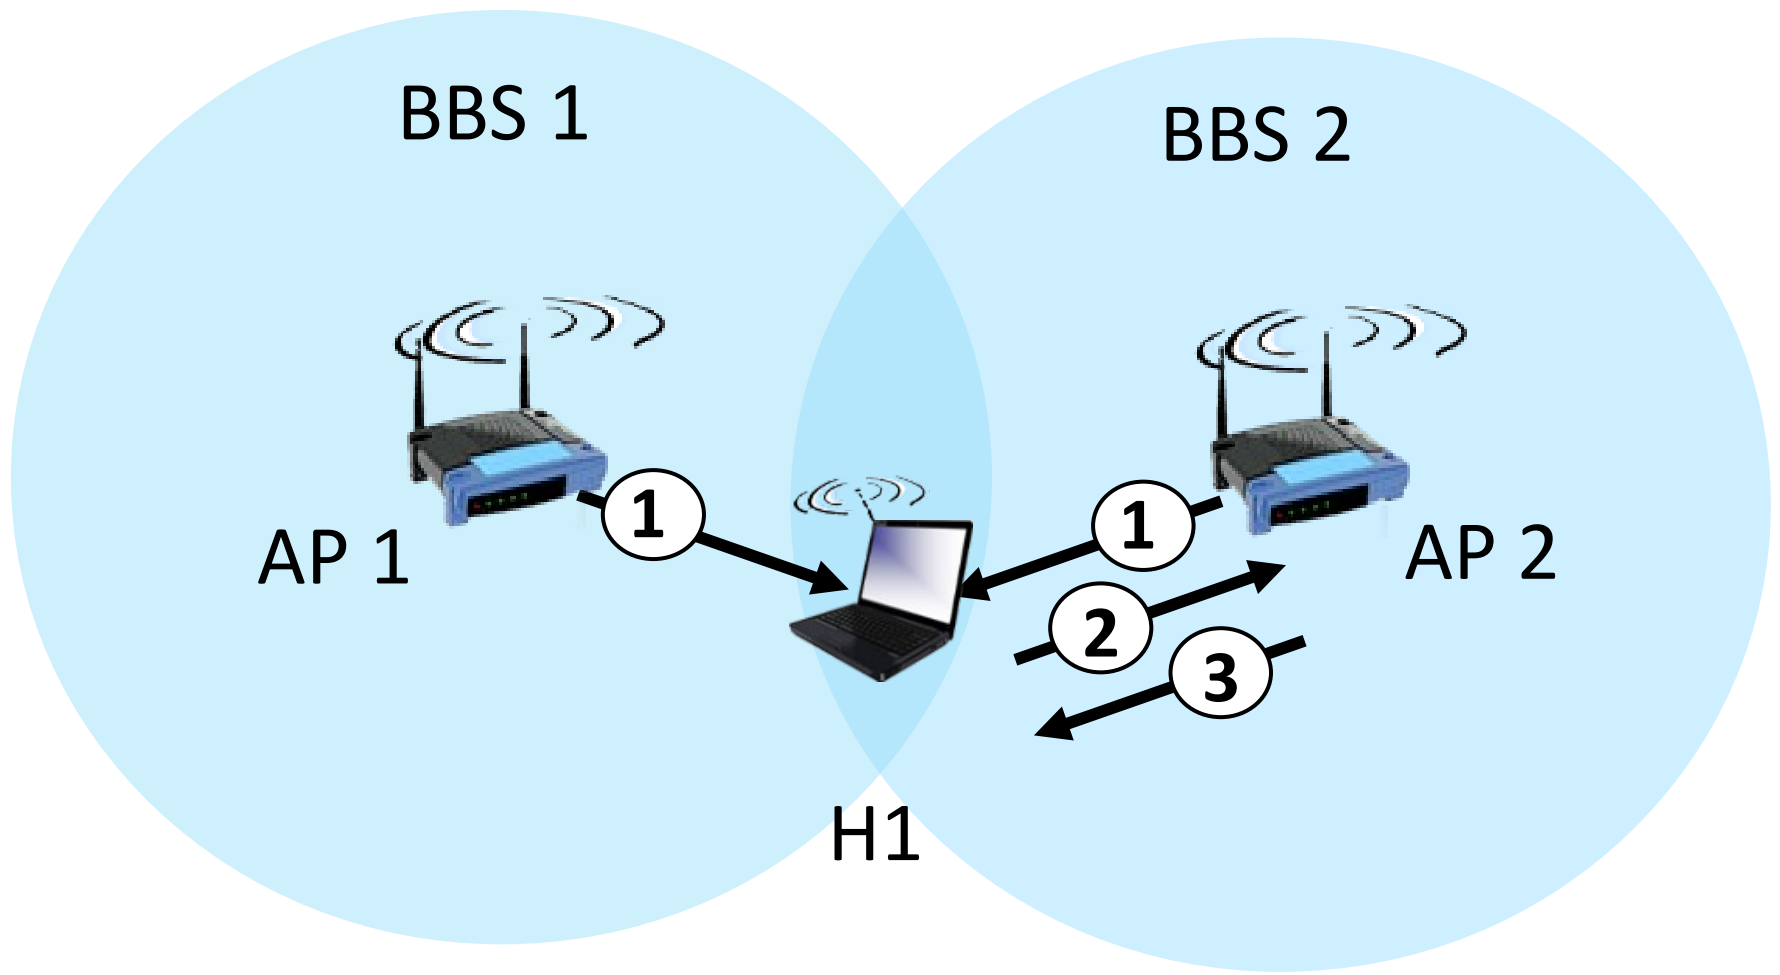

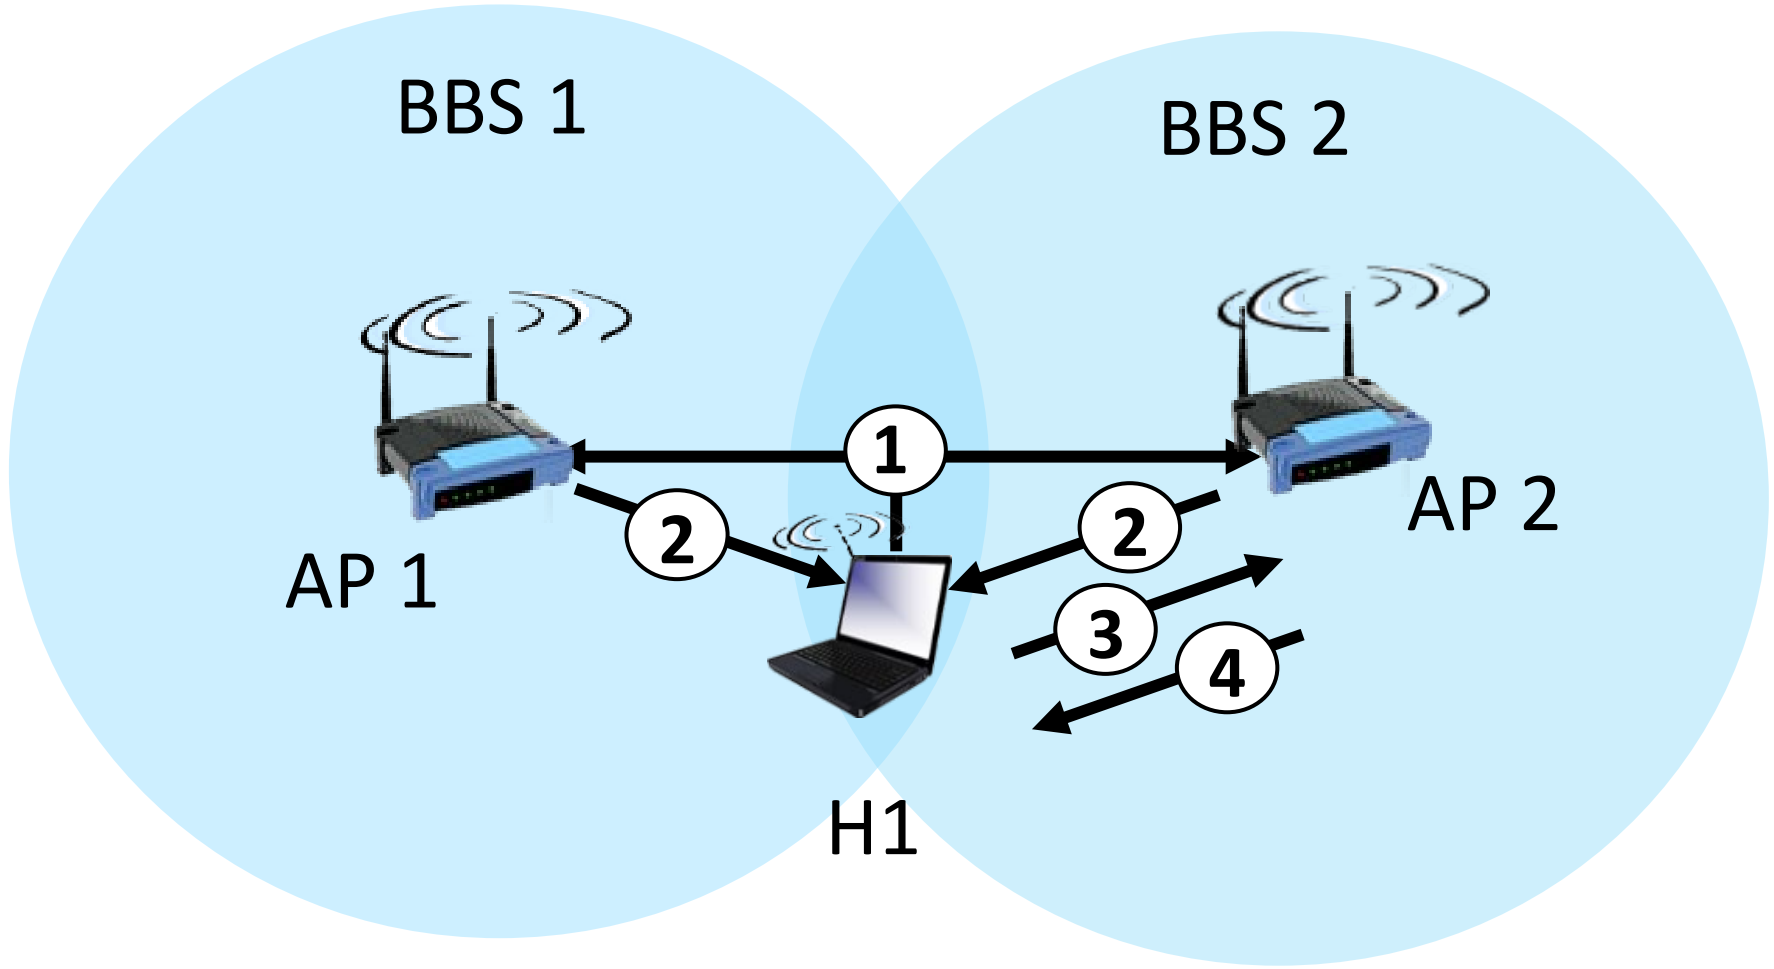

passive scanning:

(1) beacon frames sent from APs
(2) association Request frame sent: H1 to selected AP
(3) association Response frame sent from selected AP to H1

active scanning:

(1) Probe Request frame broadcast from H1
(2) Probe Response frames sent from APs
(3) Association Request frame sent: H1 to selected AP
(4) Association Response frame sent from selected AP to H1

IEEE 802.11: multiple access

- avoid collisions: 2^+ nodes transmitting at same time
- 802.11: CSMA - sense before transmitting
  - don’t collide with detected ongoing transmission by another node
- 802.11: *no* collision detection!
  - difficult to sense collisions: high transmitting signal, weak received signal due to fading
  - can’t sense all collisions in any case: hidden terminal, fading
  - goal: *avoid collisions:* CSMA/CollisionAvoidance

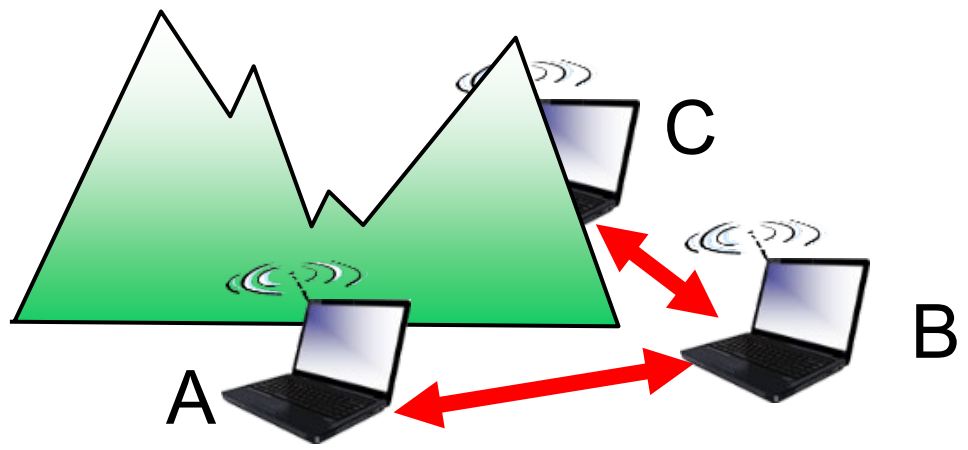

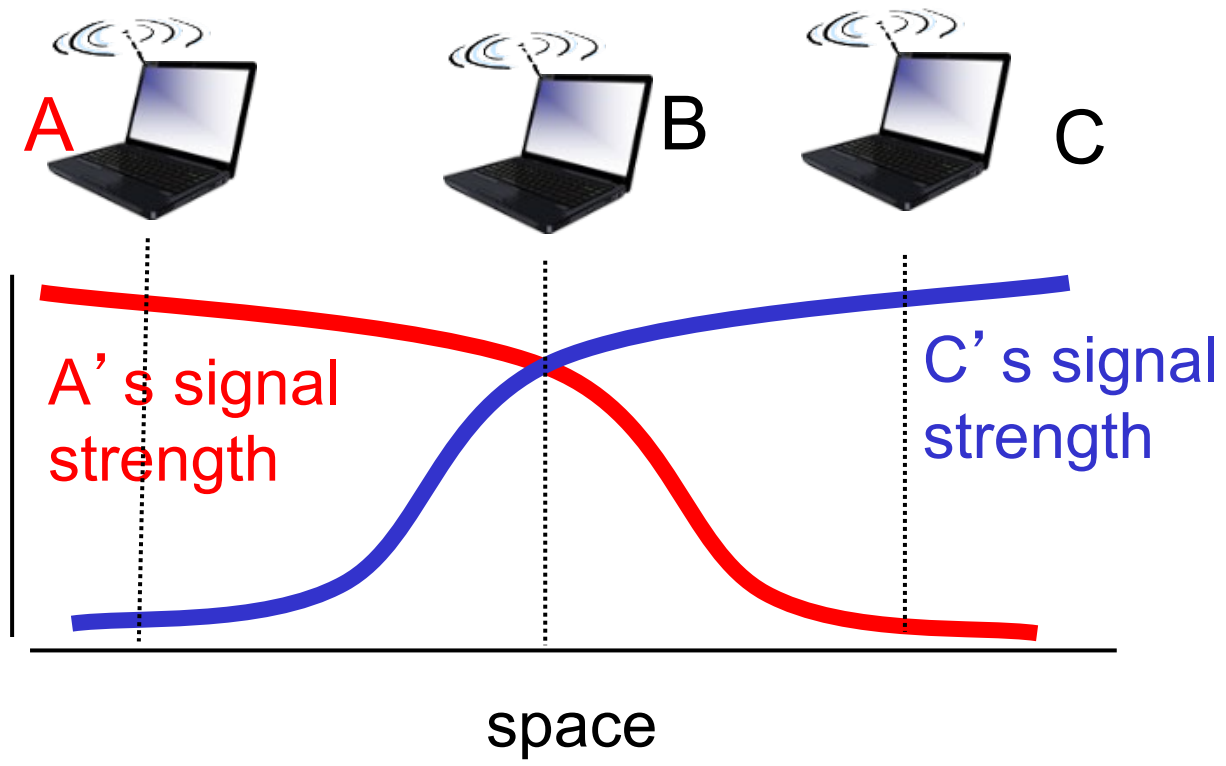

IEEE 802.11 MAC Protocol: CSMA/CA

802.11 sender

1 if sense channel idle for **DIFS** then
 transmit entire frame (no CD)

2 if sense channel busy then
 start random backoff time
 timer counts down while channel idle
 transmit when timer expires
 if no ACK, increase random backoff interval, repeat 2

802.11 receiver

if frame received OK
 return ACK after **SIFS** (ACK needed due to hidden terminal problem)

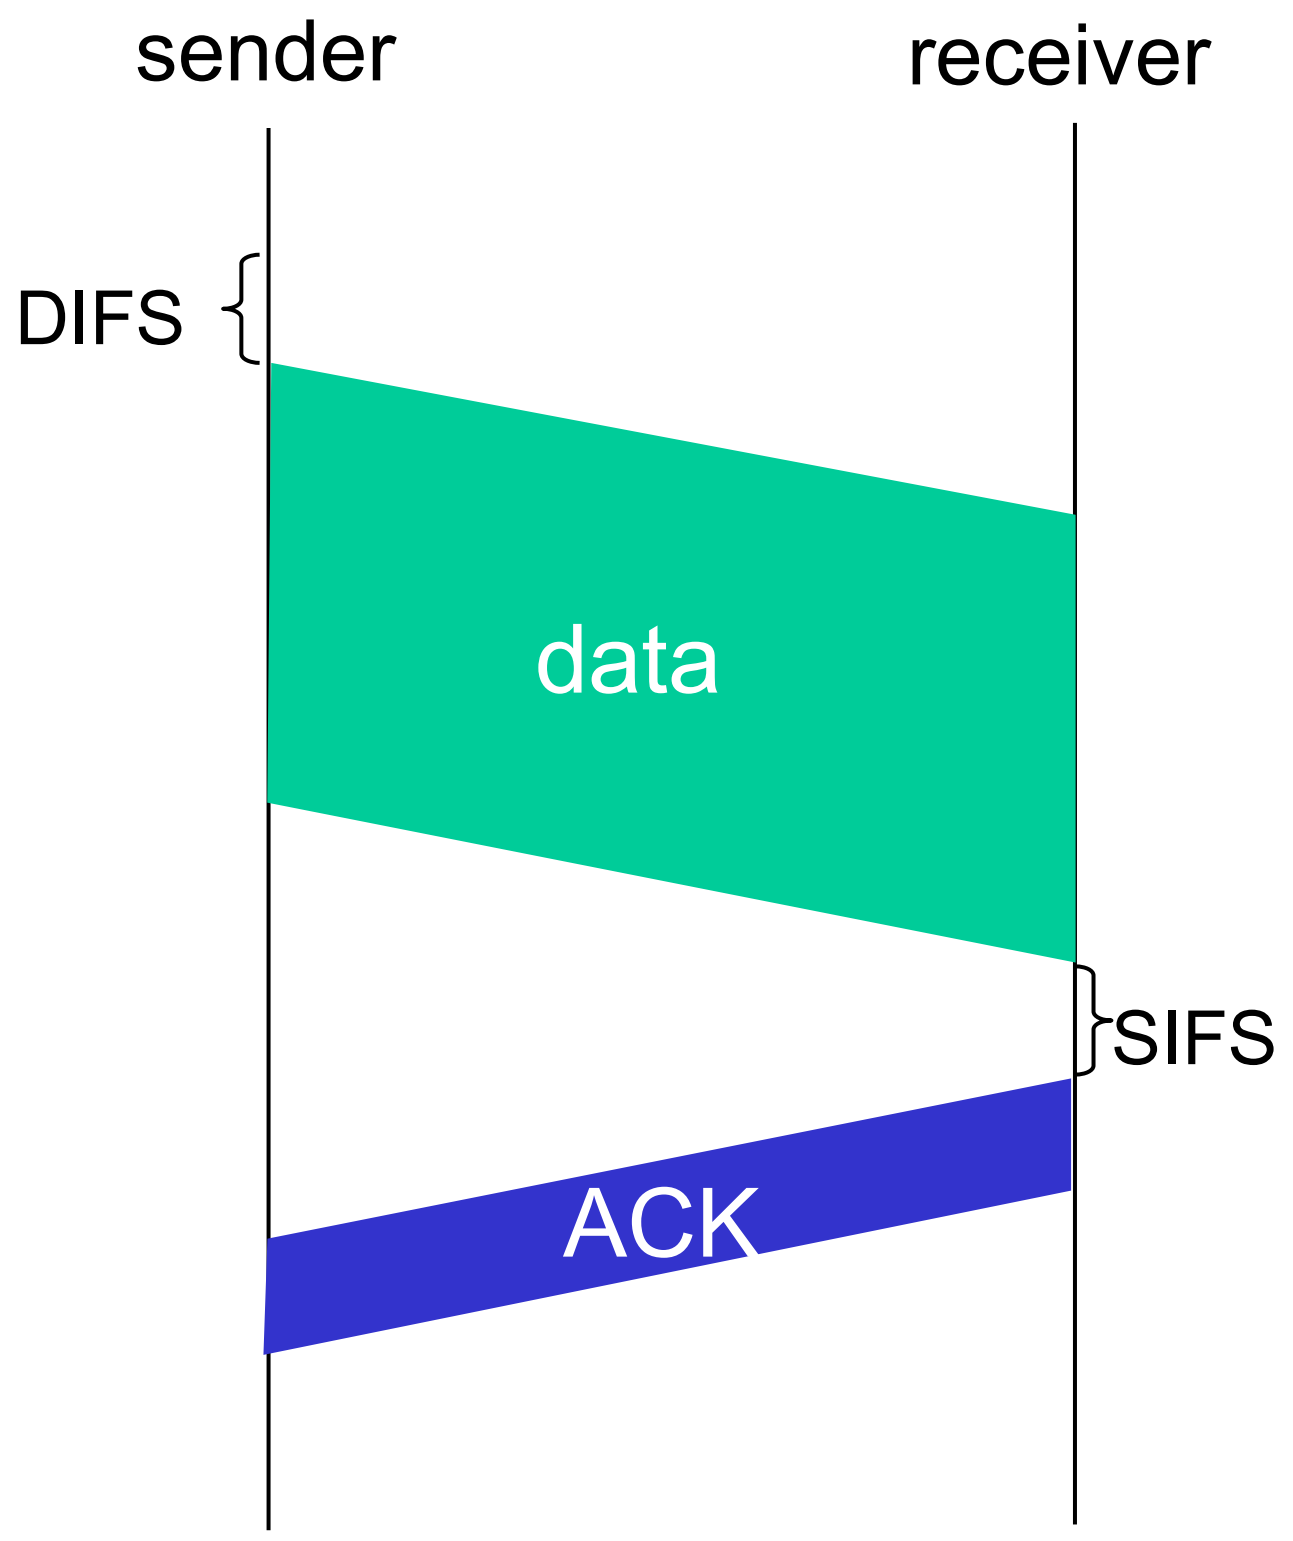

Avoiding collisions (more)

idea: sender "reserves" channel use for data frames using small reservation packets

- sender first transmits *small* request-to-send (RTS) packet to BS using CSMA
  - RTSs may still collide with each other (but they're short)
- BS broadcasts clear-to-send CTS in response to RTS
- CTS heard by all nodes
  - sender transmits data frame
  - other stations defer transmissions

Collision Avoidance: RTS-CTS exchange

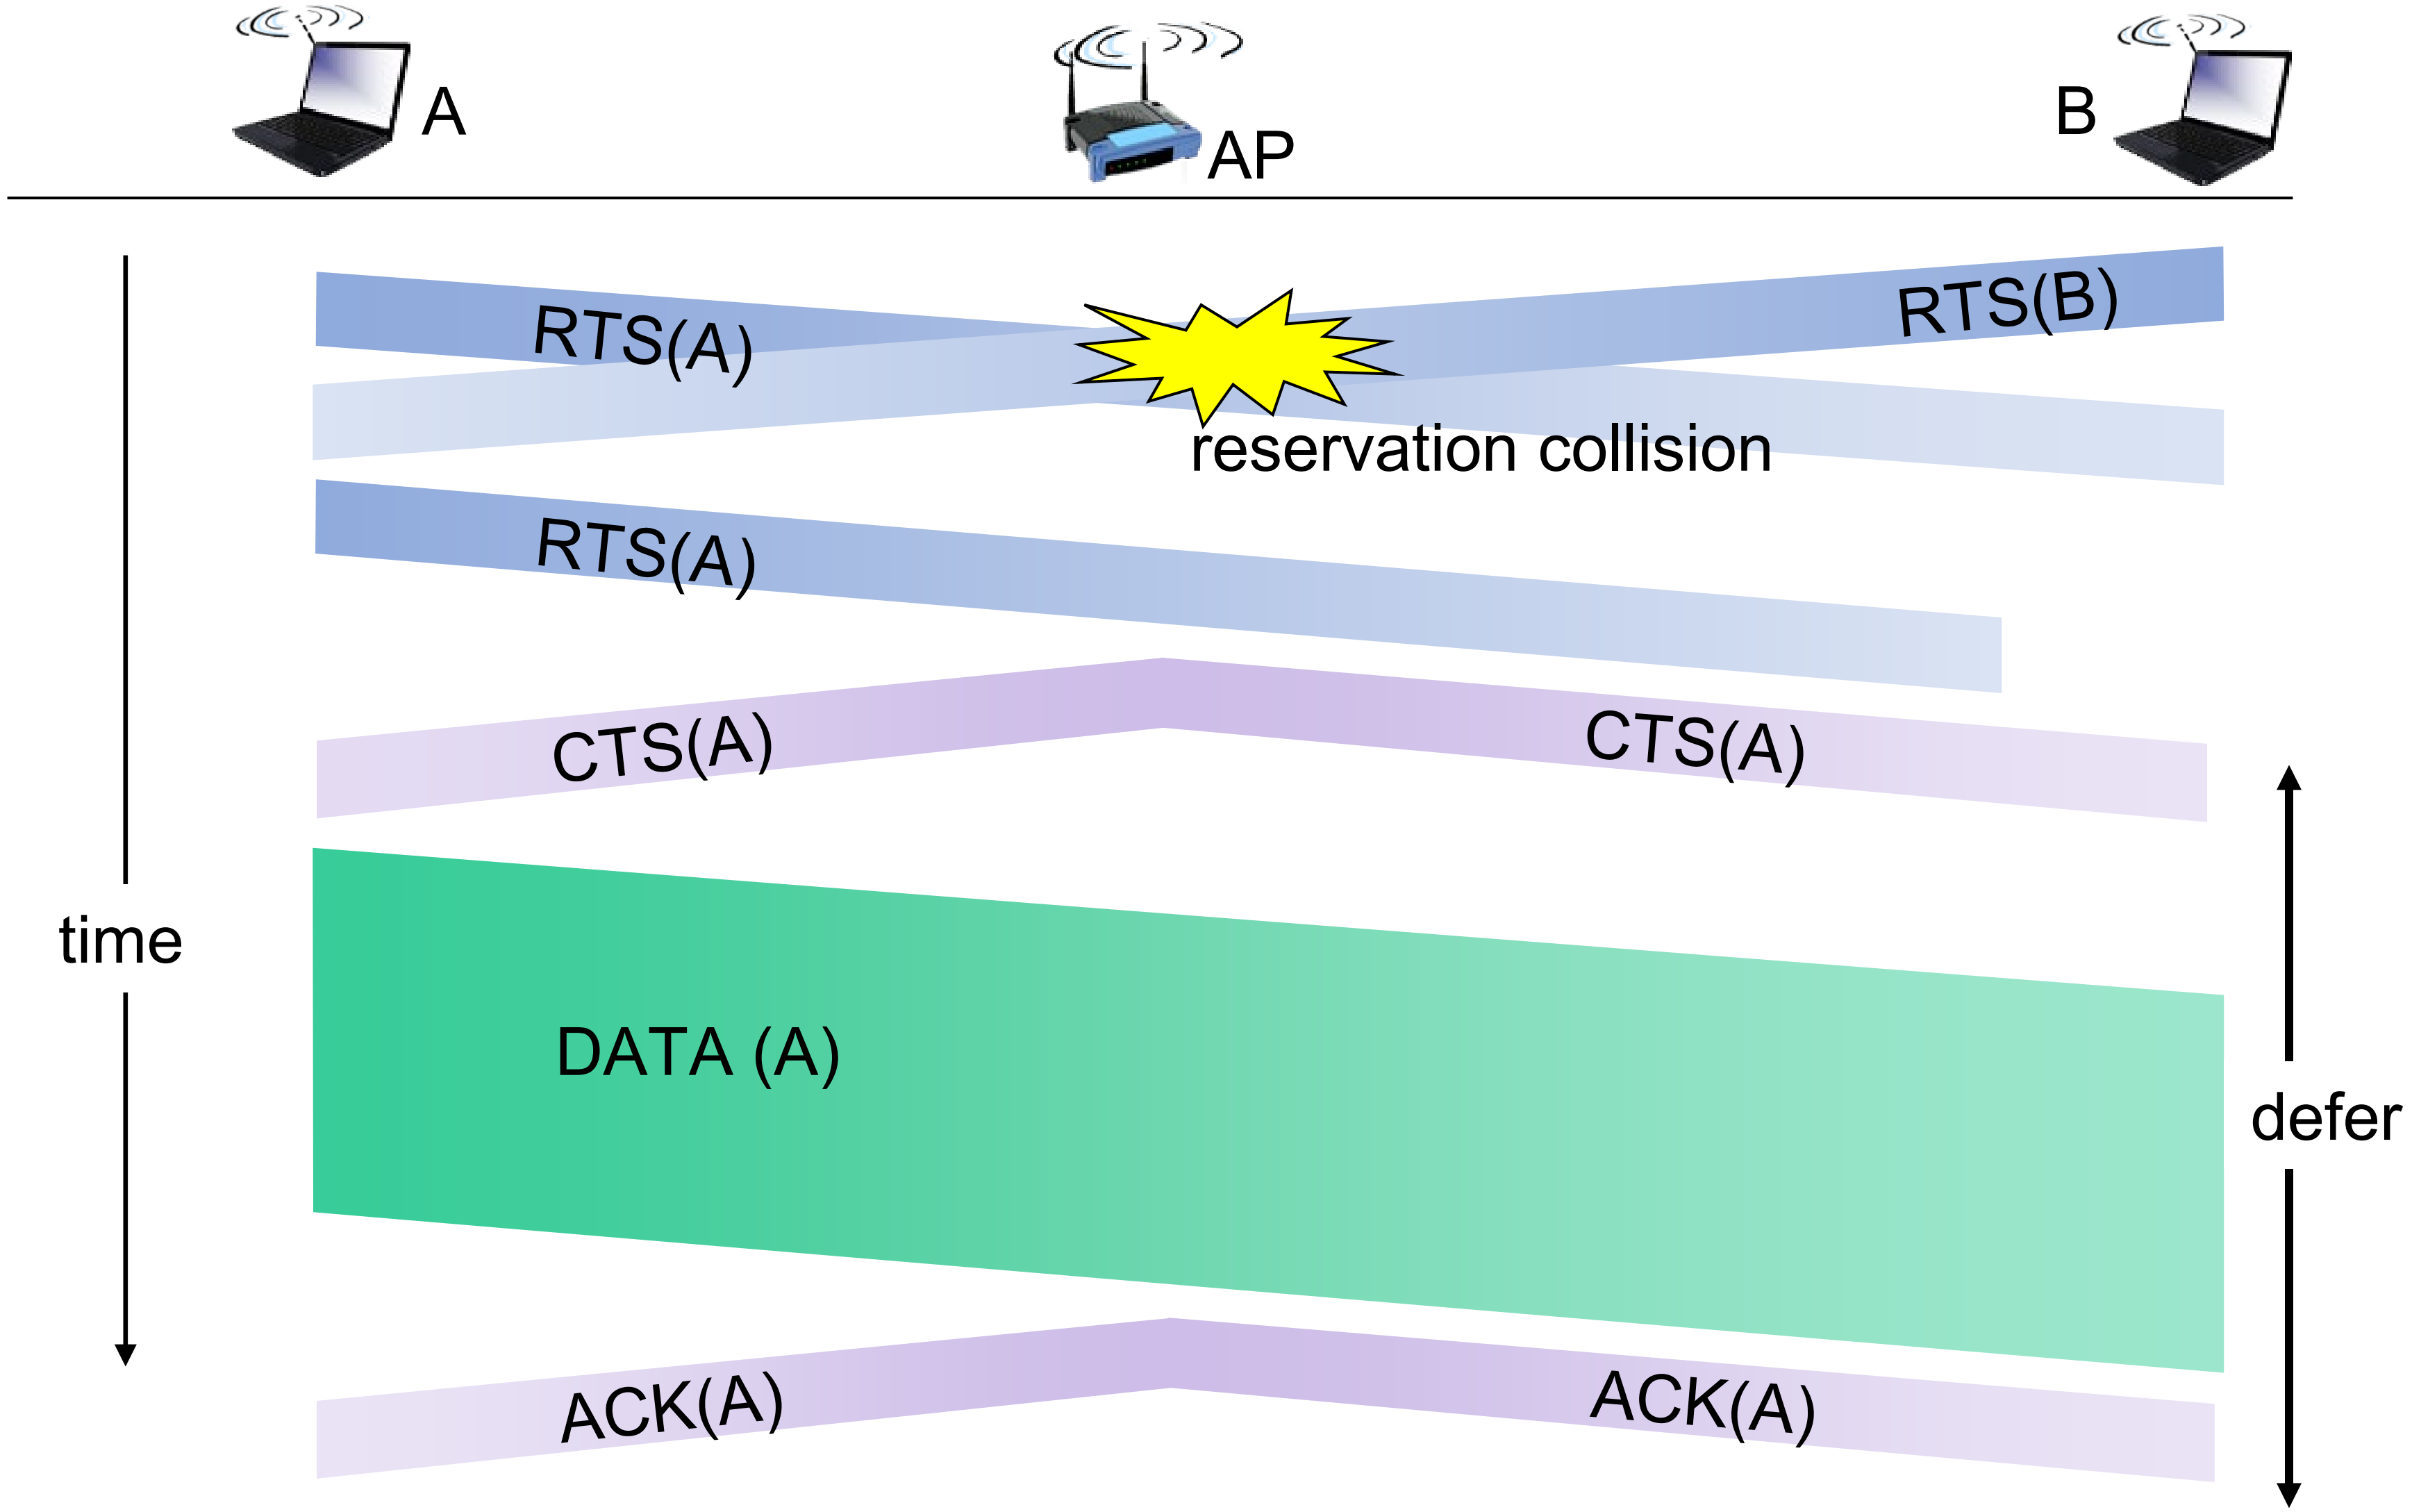

802.11 frame: addressing

2	2	6	6	6	2	6	0 - 2312	4
frame control	duration	address 1	address 2	address 3	seq control	address 4	payload	CRC

Address 1: MAC address of wireless host or AP to receive this frame

Address 2: MAC address of wireless host or AP transmitting this frame

Address 3: MAC address of router interface to which AP is attached

Address 4: used only in ad hoc mode

802.11 frame: addressing

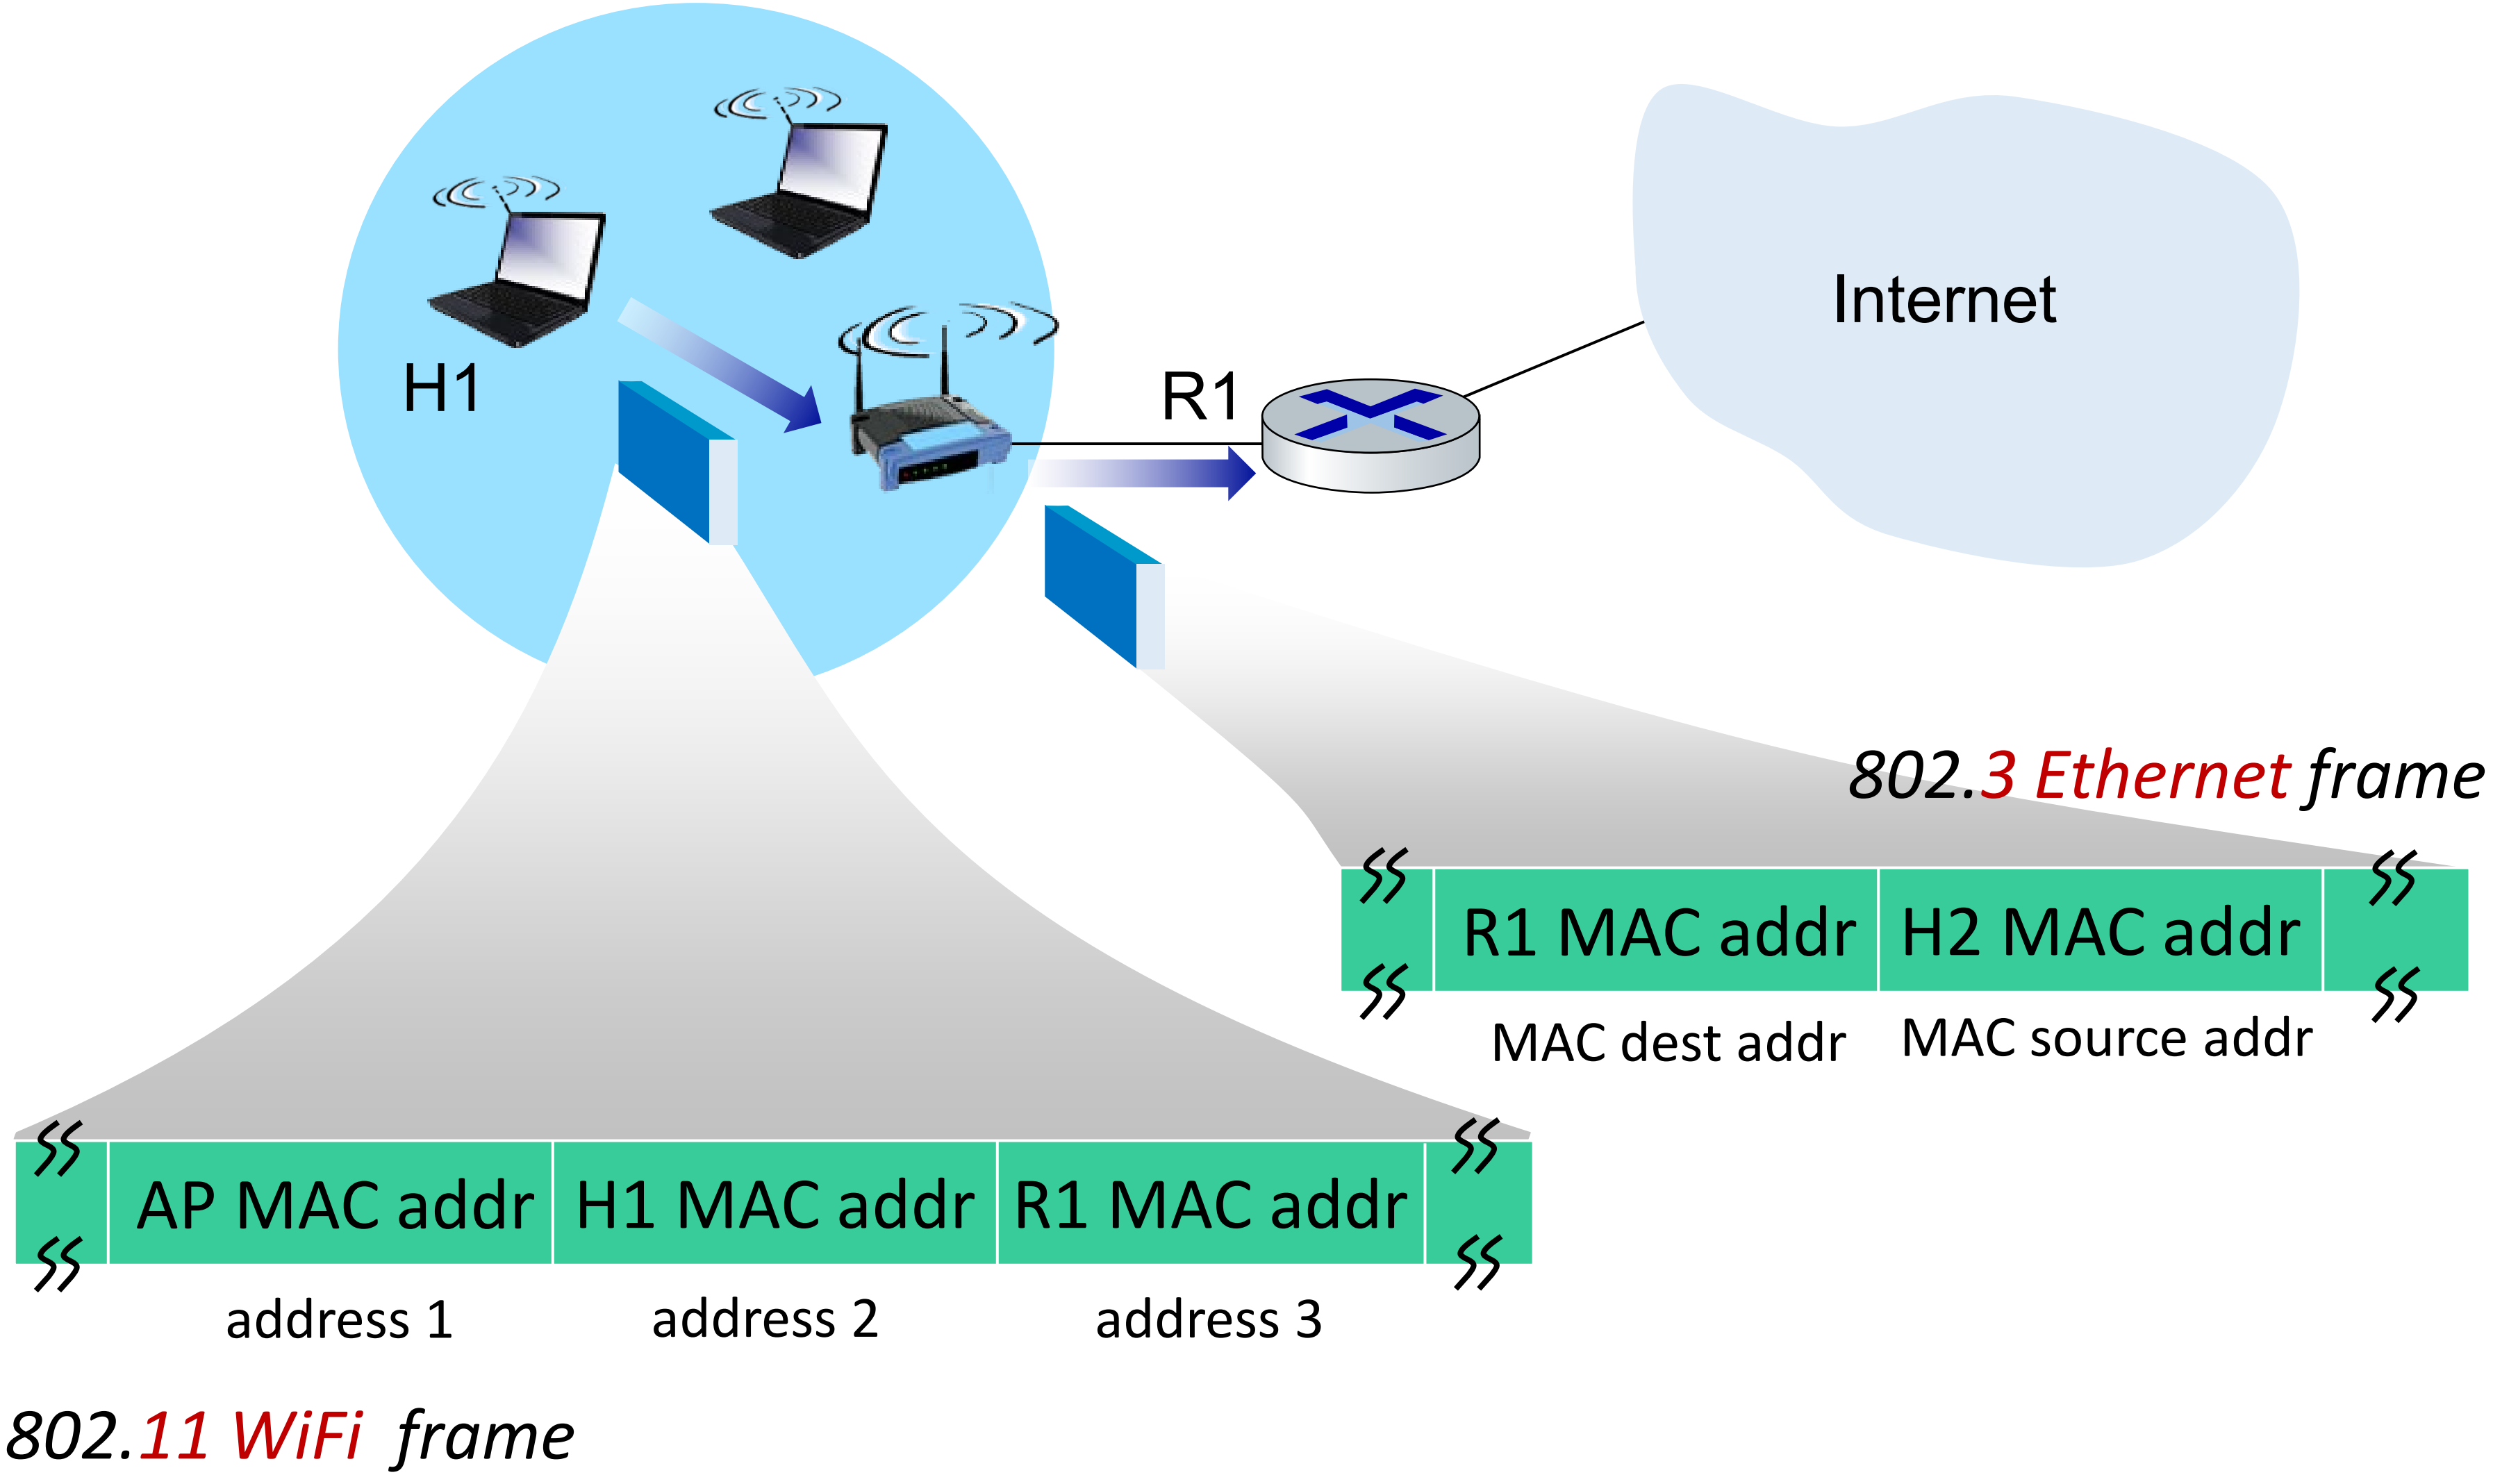

802.11 frame: addressing

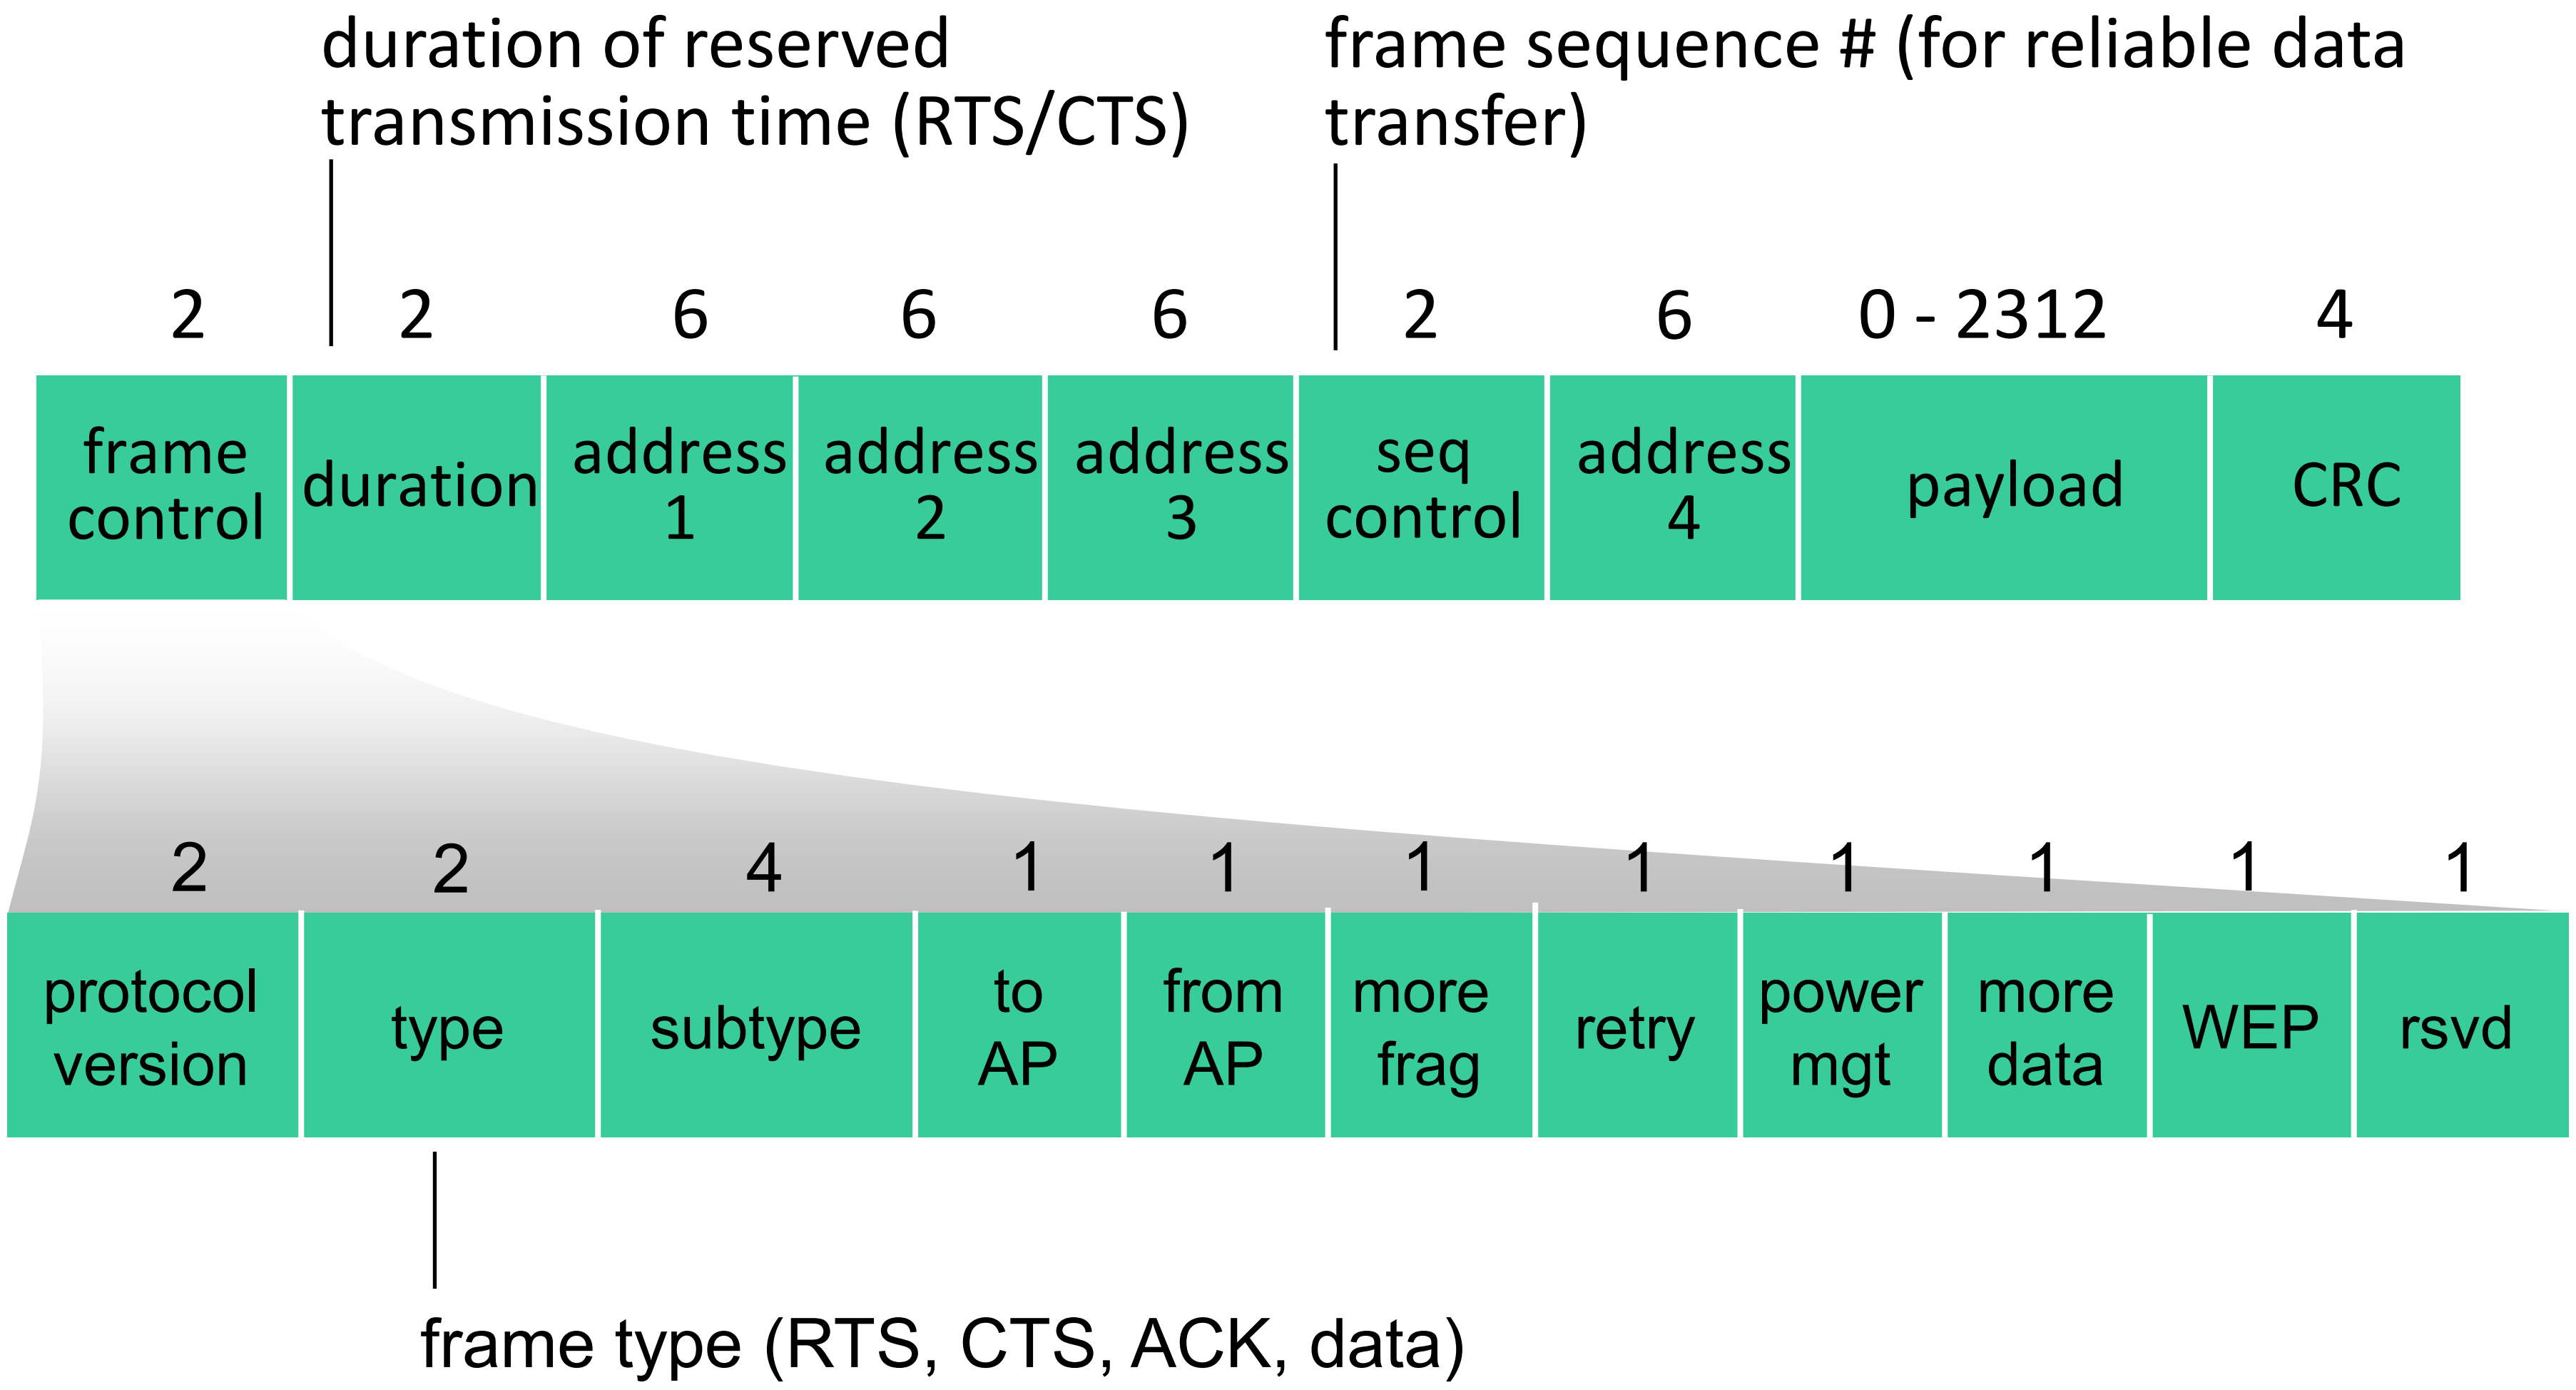

802.11: mobility within same subnet

- H1 remains in same IP subnet: IP address can remain same
- switch: which AP is associated with H1?
  - self-learning (Ch. 6): switch will see frame from H1 and "remember" which switch port can be used to reach H1

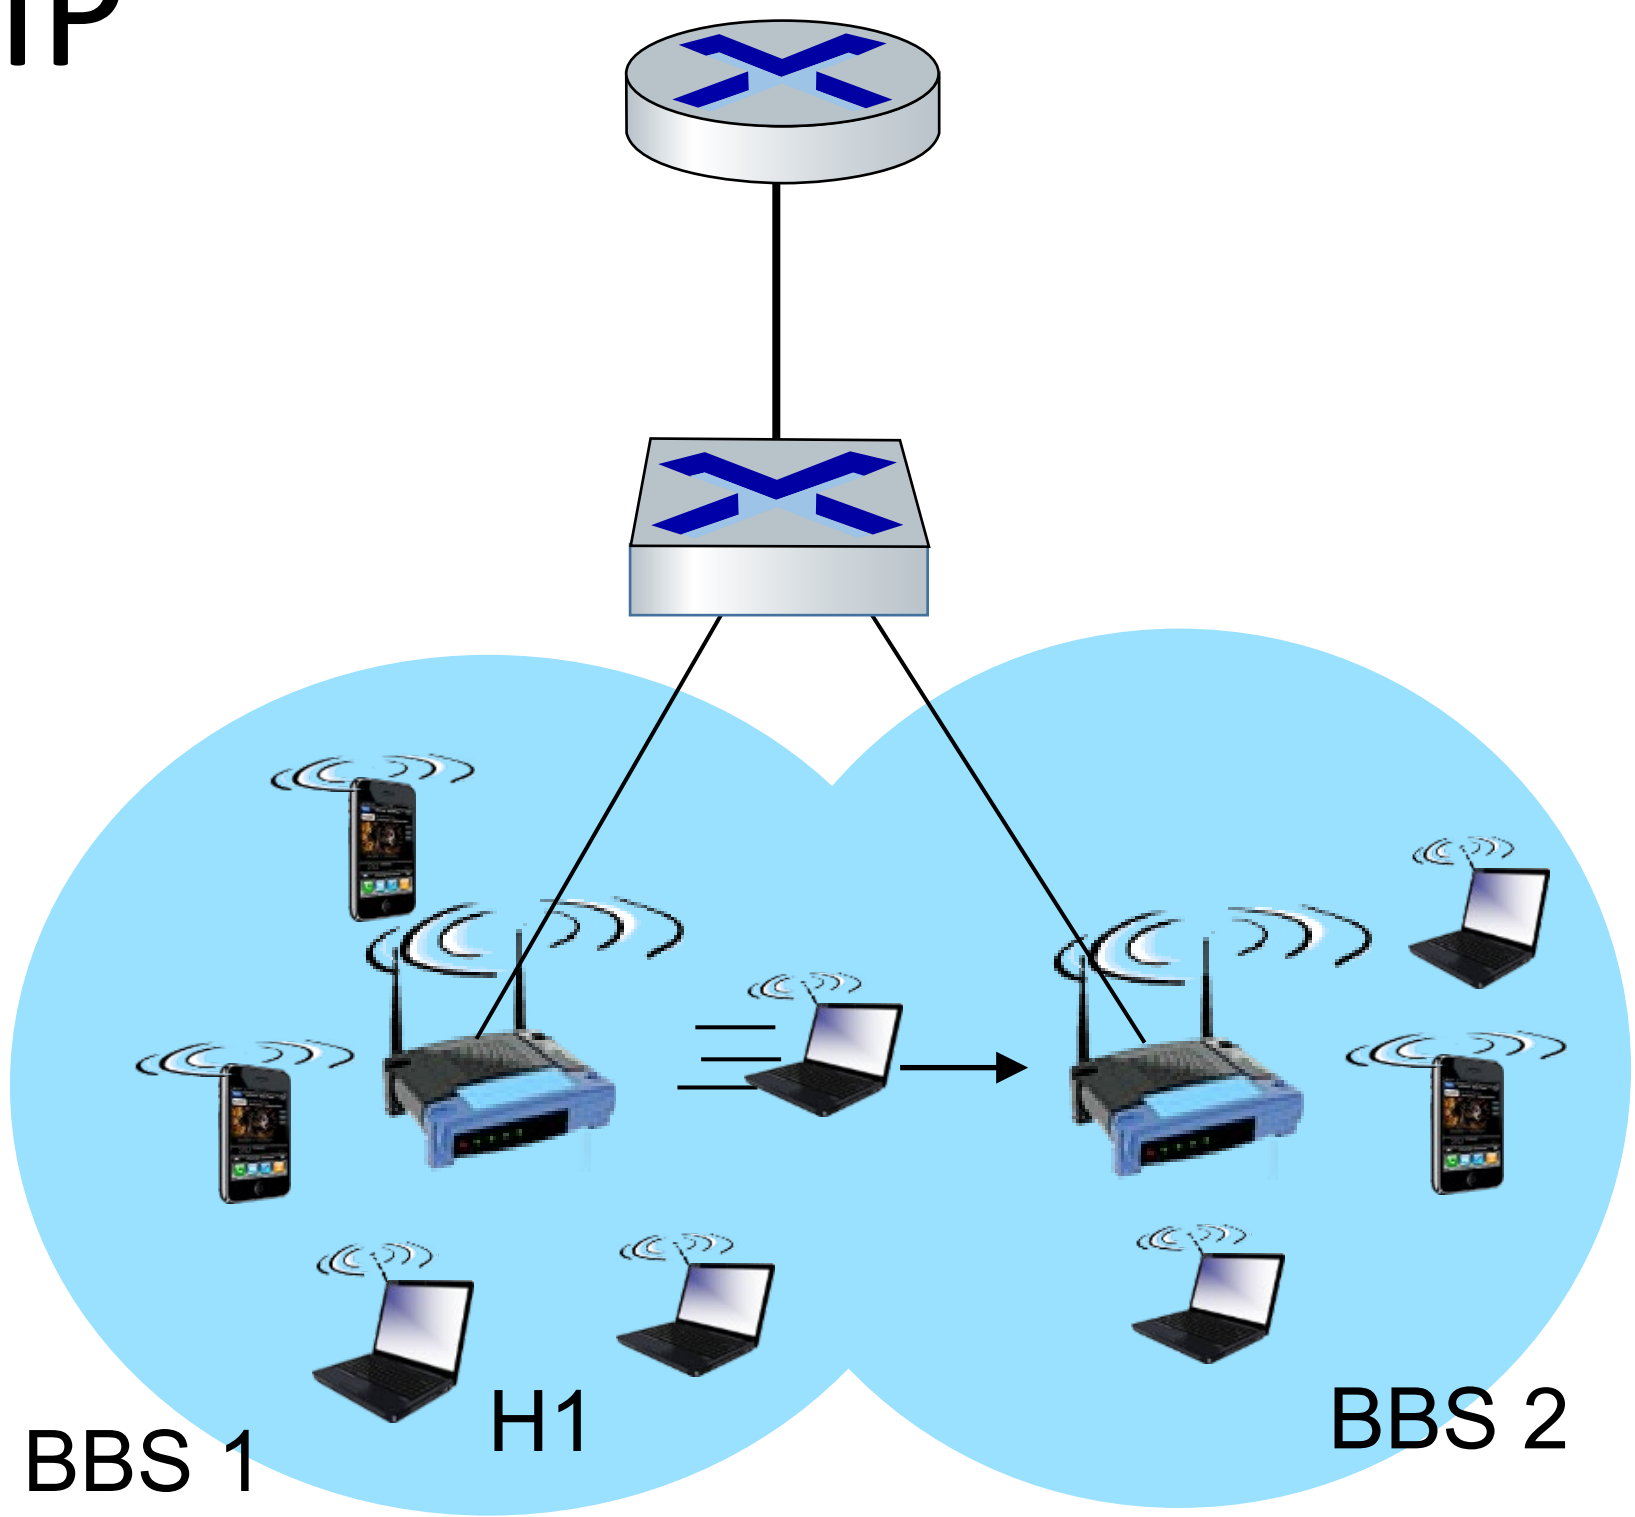

802.11: advanced capabilities

Rate adaptation

- base station, mobile dynamically change transmission rate (physical layer modulation technique) as mobile moves, SNR varies

  1. SNR decreases, BER increase as node moves away from base station

  2. When BER becomes too high, switch to lower transmission rate but with lower BER

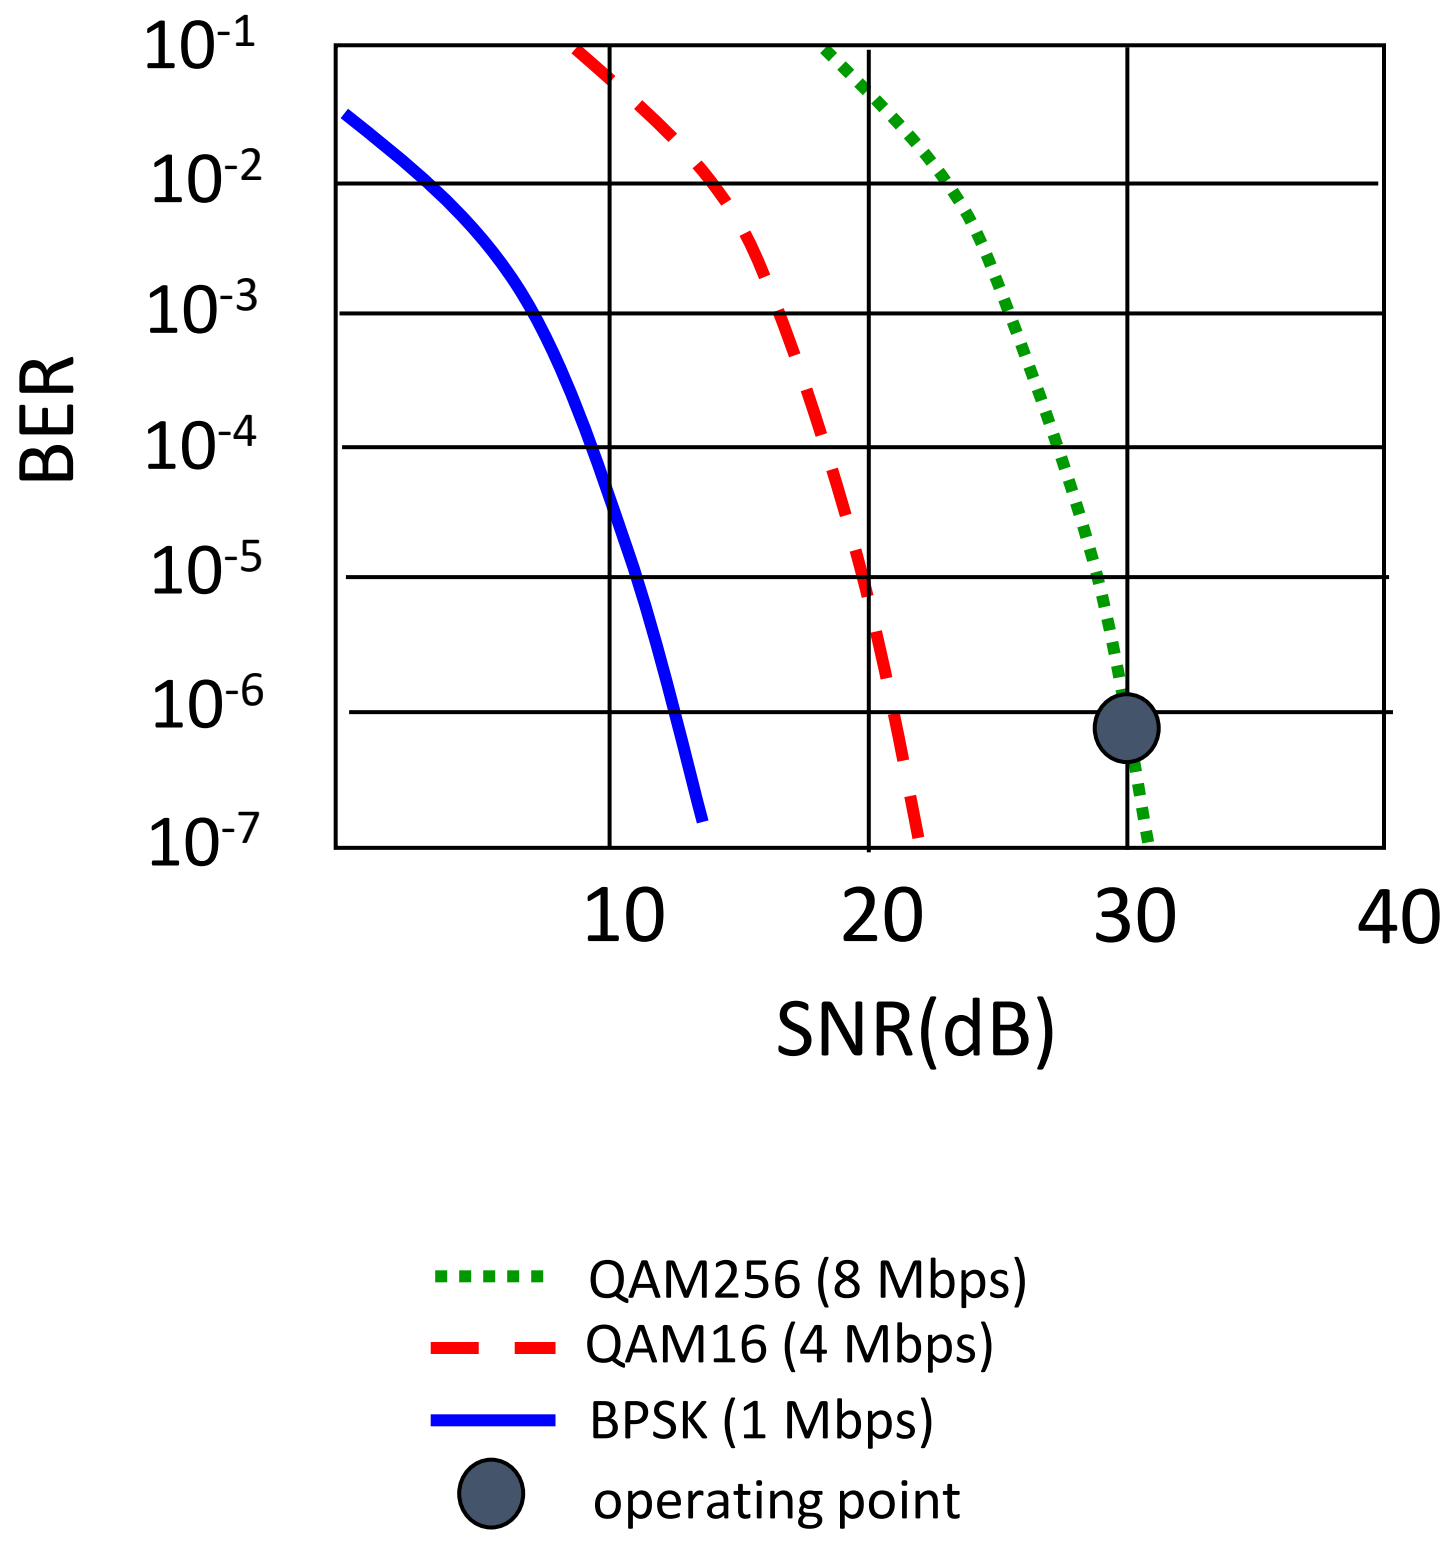

802.11: advanced capabilities

power management

- node-to-AP: “I am going to sleep until next beacon frame”
  - AP knows not to transmit frames to this node
  - node wakes up before next beacon frame
- beacon frame: contains list of mobiles with AP-to-mobile frames waiting to be sent
  - node will stay awake if AP-to-mobile frames to be sent; otherwise sleep again until next beacon frame

Personal area networks: Bluetooth

- less than 10 m diameter
- replacement for cables (mouse, keyboard, headphones)
- ad hoc: no infrastructure
- 2.4-2.5 GHz ISM radio band, up to 3 Mbps
- master controller / clients devices:
  - master polls clients, grants requests for client transmissions

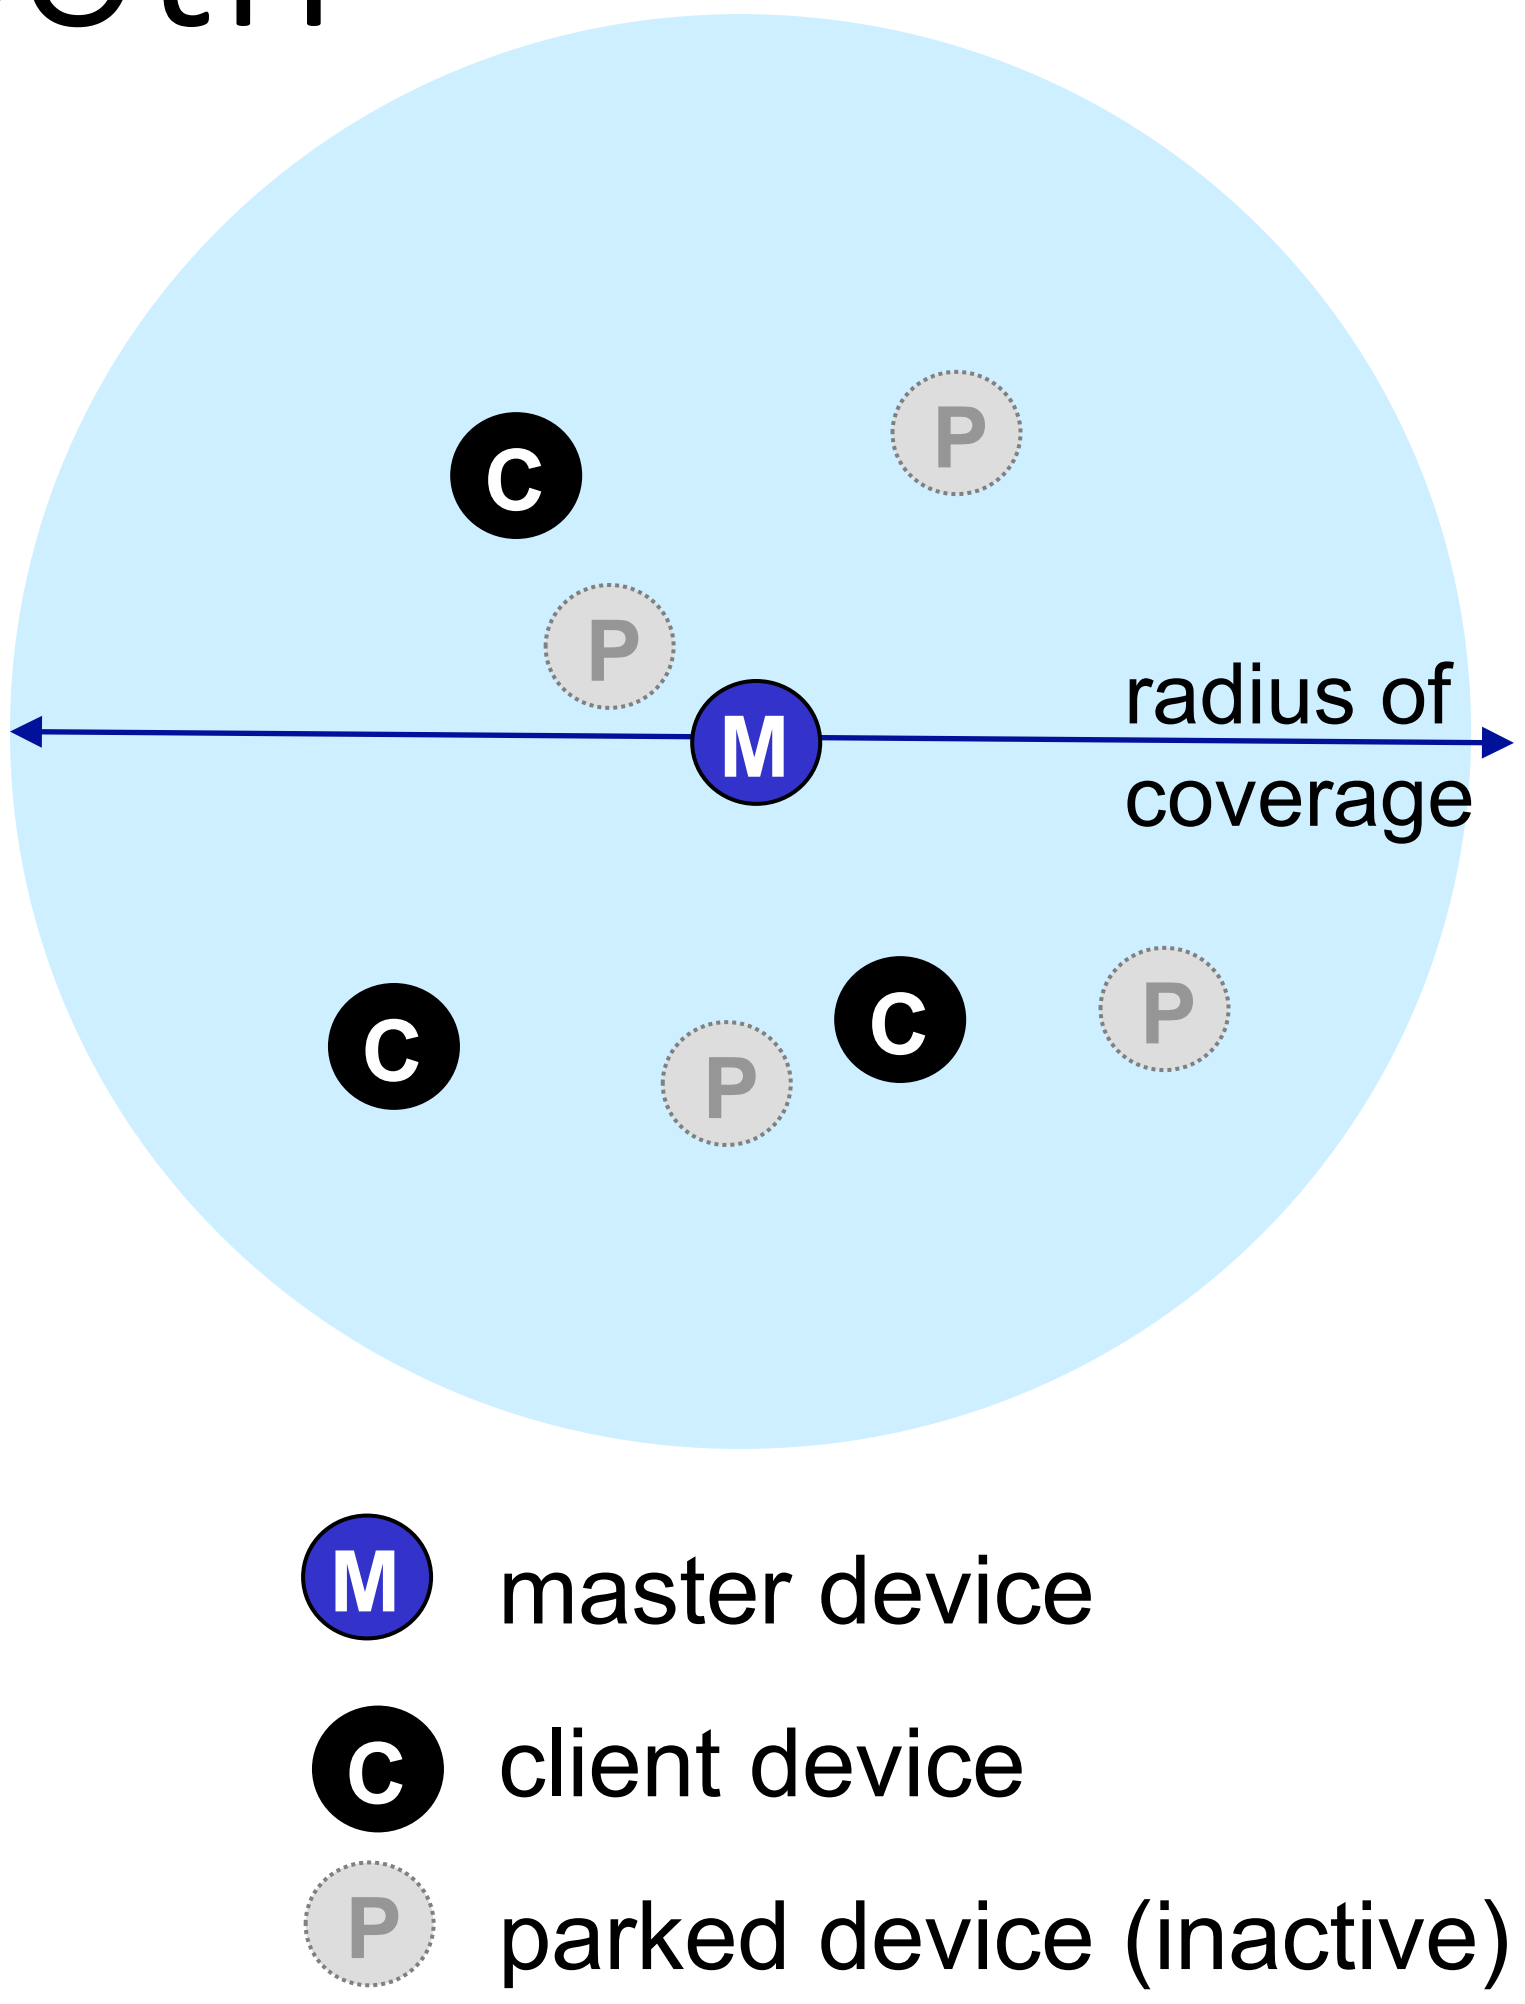

Personal area networks: Bluetooth

- TDM, 625 μsec sec. slot
- FDM: sender uses 79 frequency channels in known, pseudo-random order slot-to-slot (spread spectrum)
  - other devices/equipment not in piconet only interfere in some slots
- parked mode: clients can "go to sleep" (park) and later wakeup (to preserve battery)
- bootstrapping: nodes self-assemble (plug and play) into piconet

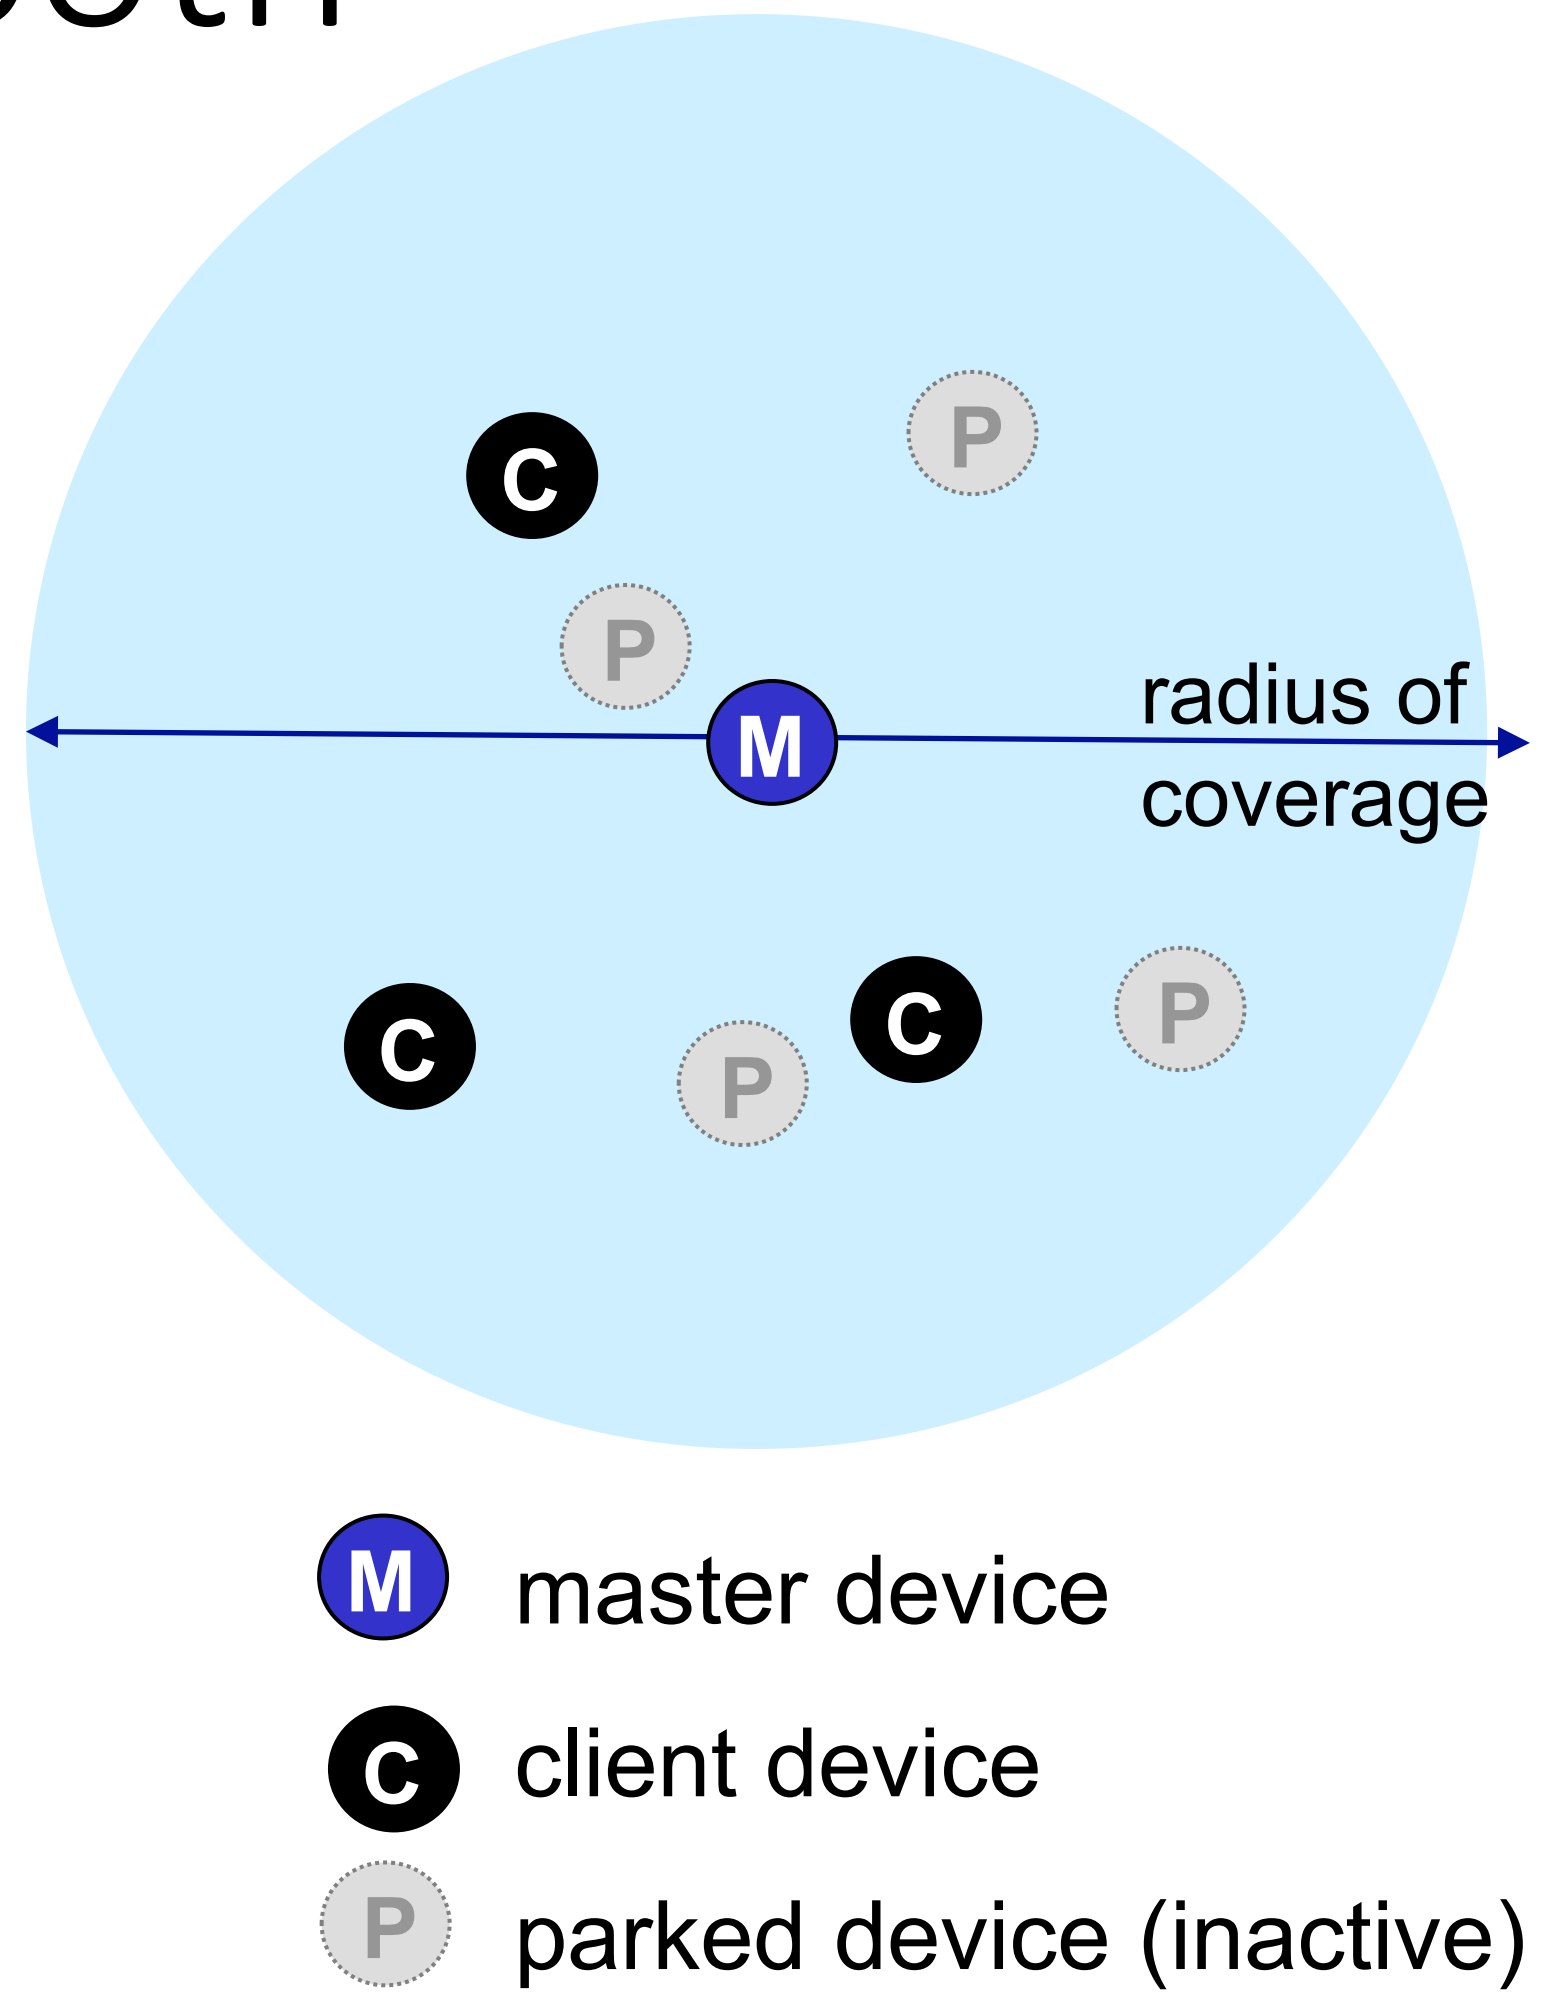

4G/5G cellular networks

similarities to wired Internet

- edge/core distinction, but both below to same carrier
- global cellular network: a network of networks
- widespread use of protocols we've studied: HTTP, DNS, TCP, UDP, IP, NAT, separation of data/control planes, SDN, Ethernet, tunneling
- interconnected to wired Internet

differences from wired Internet

- different wireless link layer
- mobility as a 1^{st} class service
- user "identity" (via SIM card)
- business model: users subscribe to a cellular provider
  - strong notion of "home network" versus roaming on visited nets
  - global access, with authentication infrastructure, and inter-carrier settlements

Elements of 4G LTE architecture

Mobile device:

- smartphone, tablet, laptop, IoT, ... with 4G LTE radio
- 64-bit International Mobile Subscriber Identity (IMSI), stored on SIM (Subscriber Identity Module) card
- LTE jargon: User Equipment (UE)

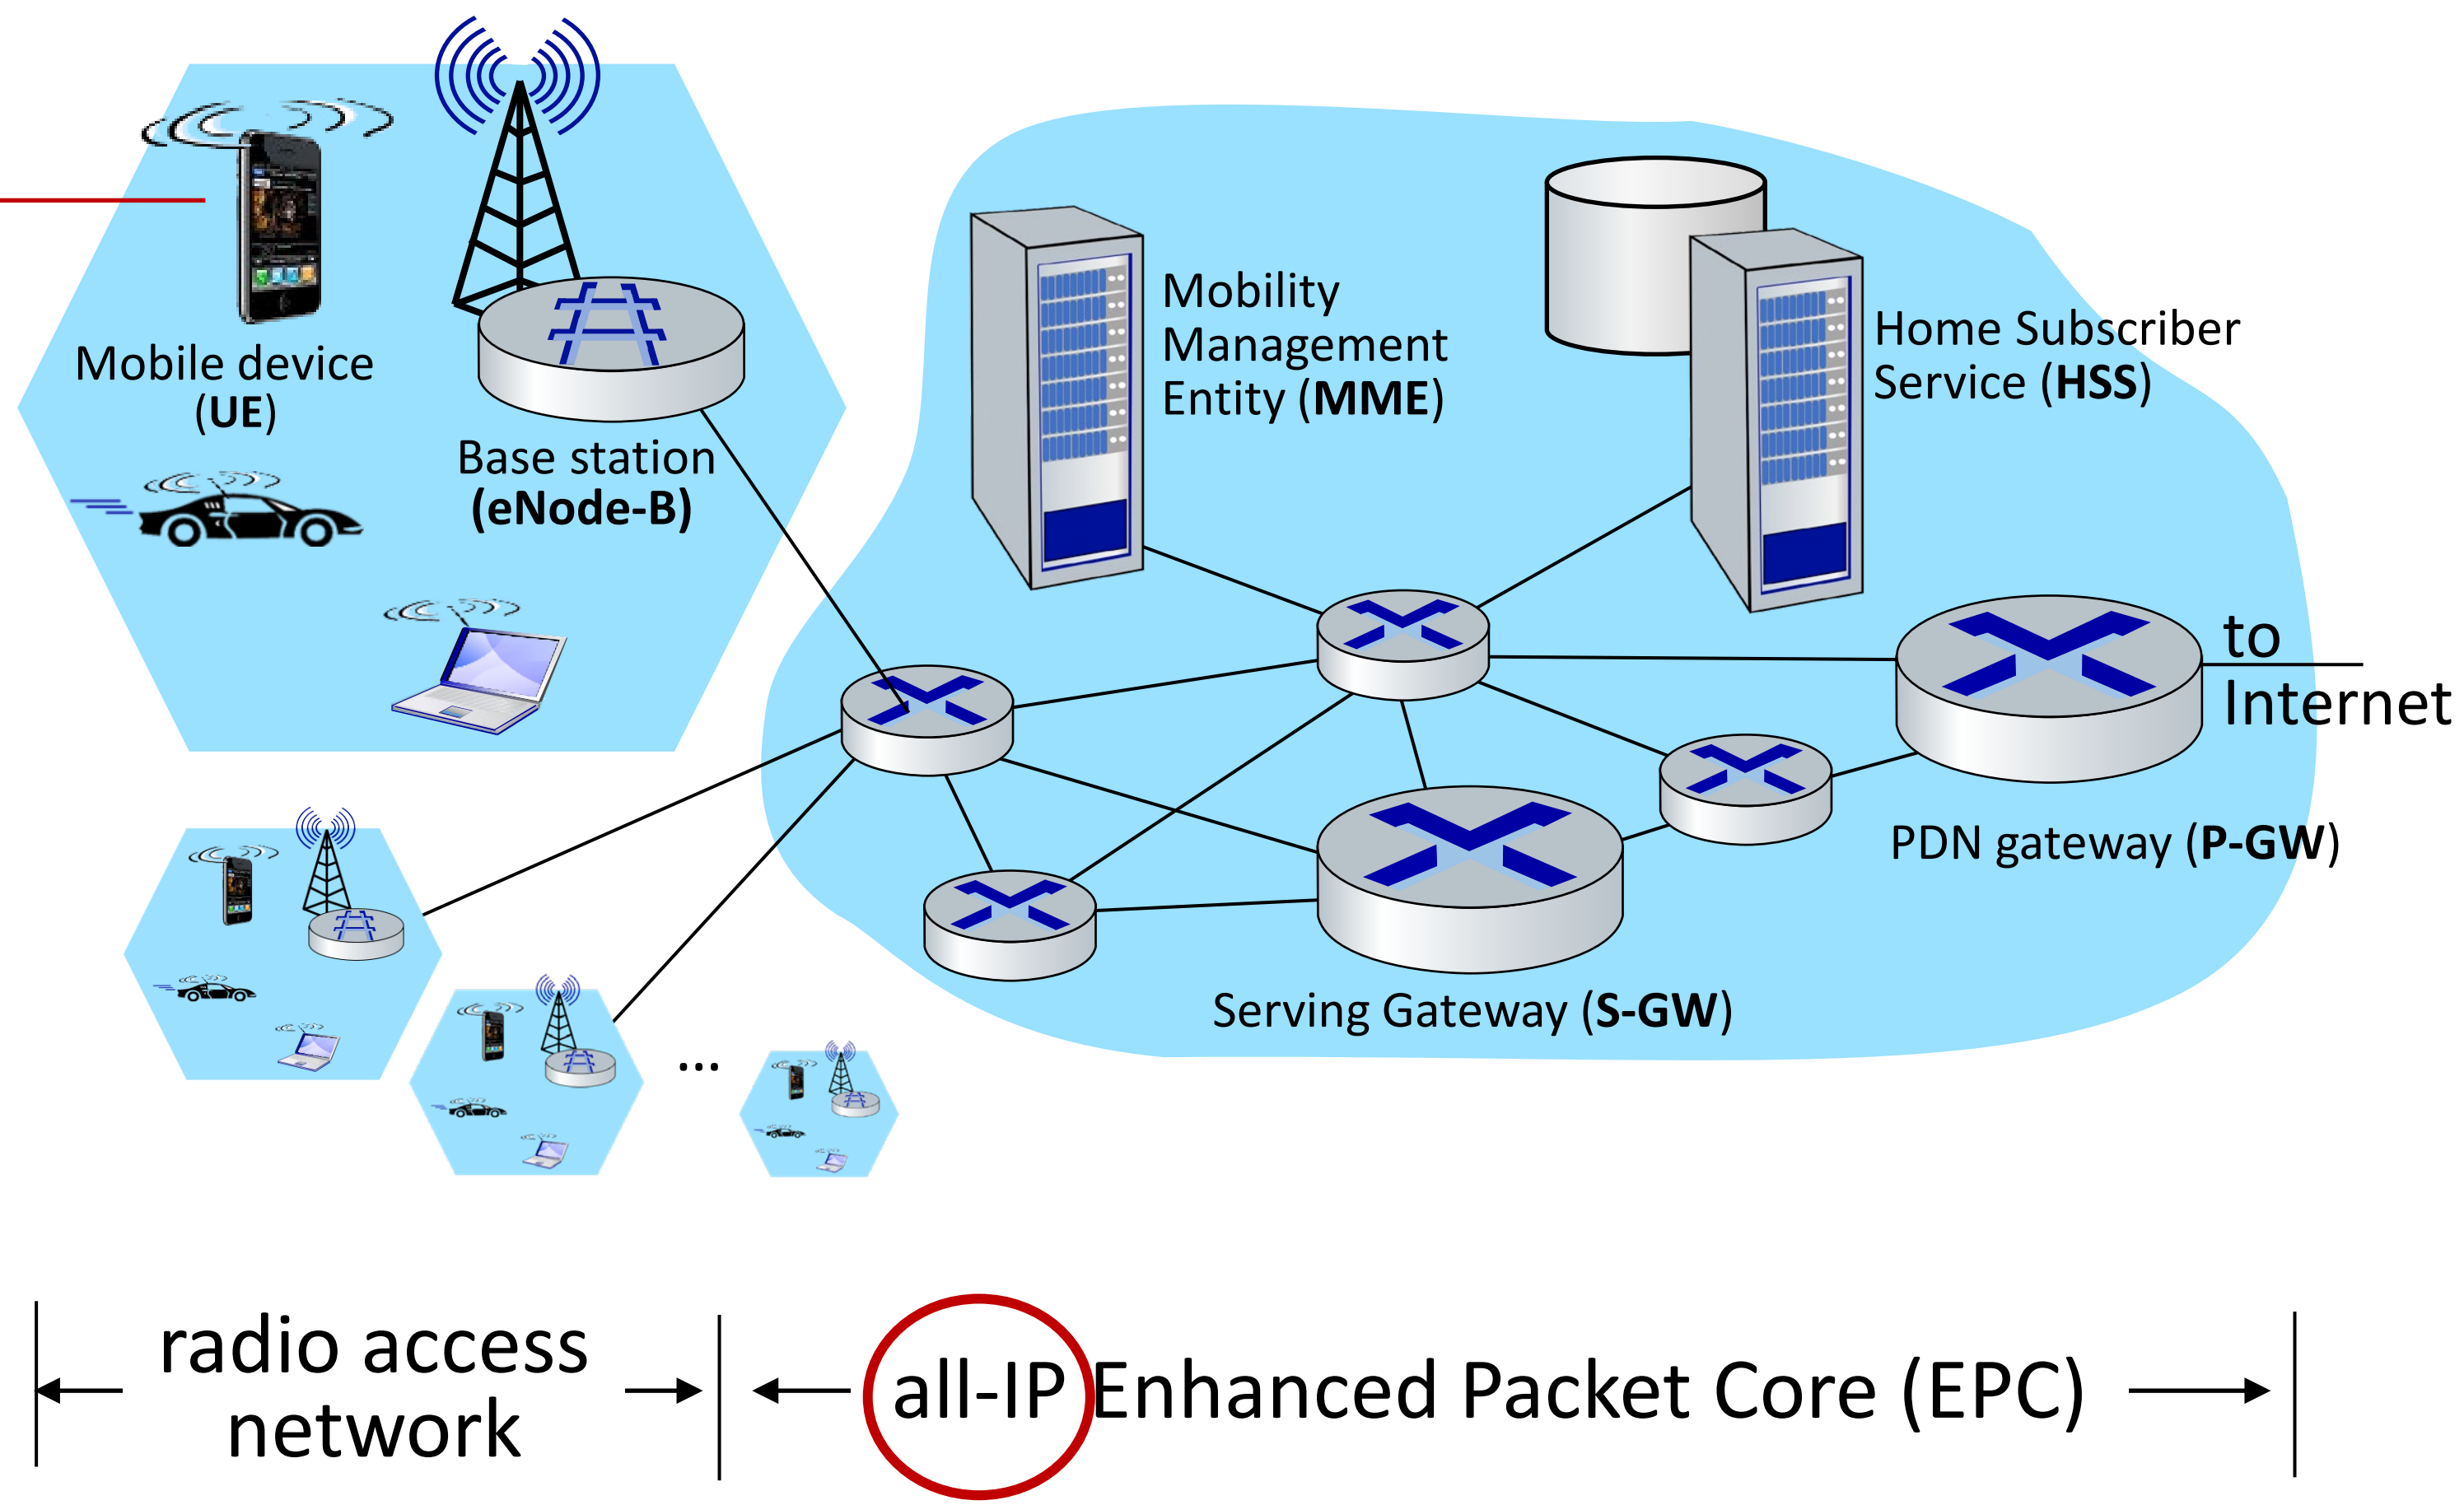

Elements of 4G LTE architecture

Base station:

- at "edge" of carrier's network
- manages wireless radio resources, mobile devices in its coverage area ("cell")
- coordinates device authentication with other elements
- similar to WiFi AP but:
  - active role in user mobility
  - coordinates with nearly base stations to optimize radio use
- LTE jargon: eNode-B

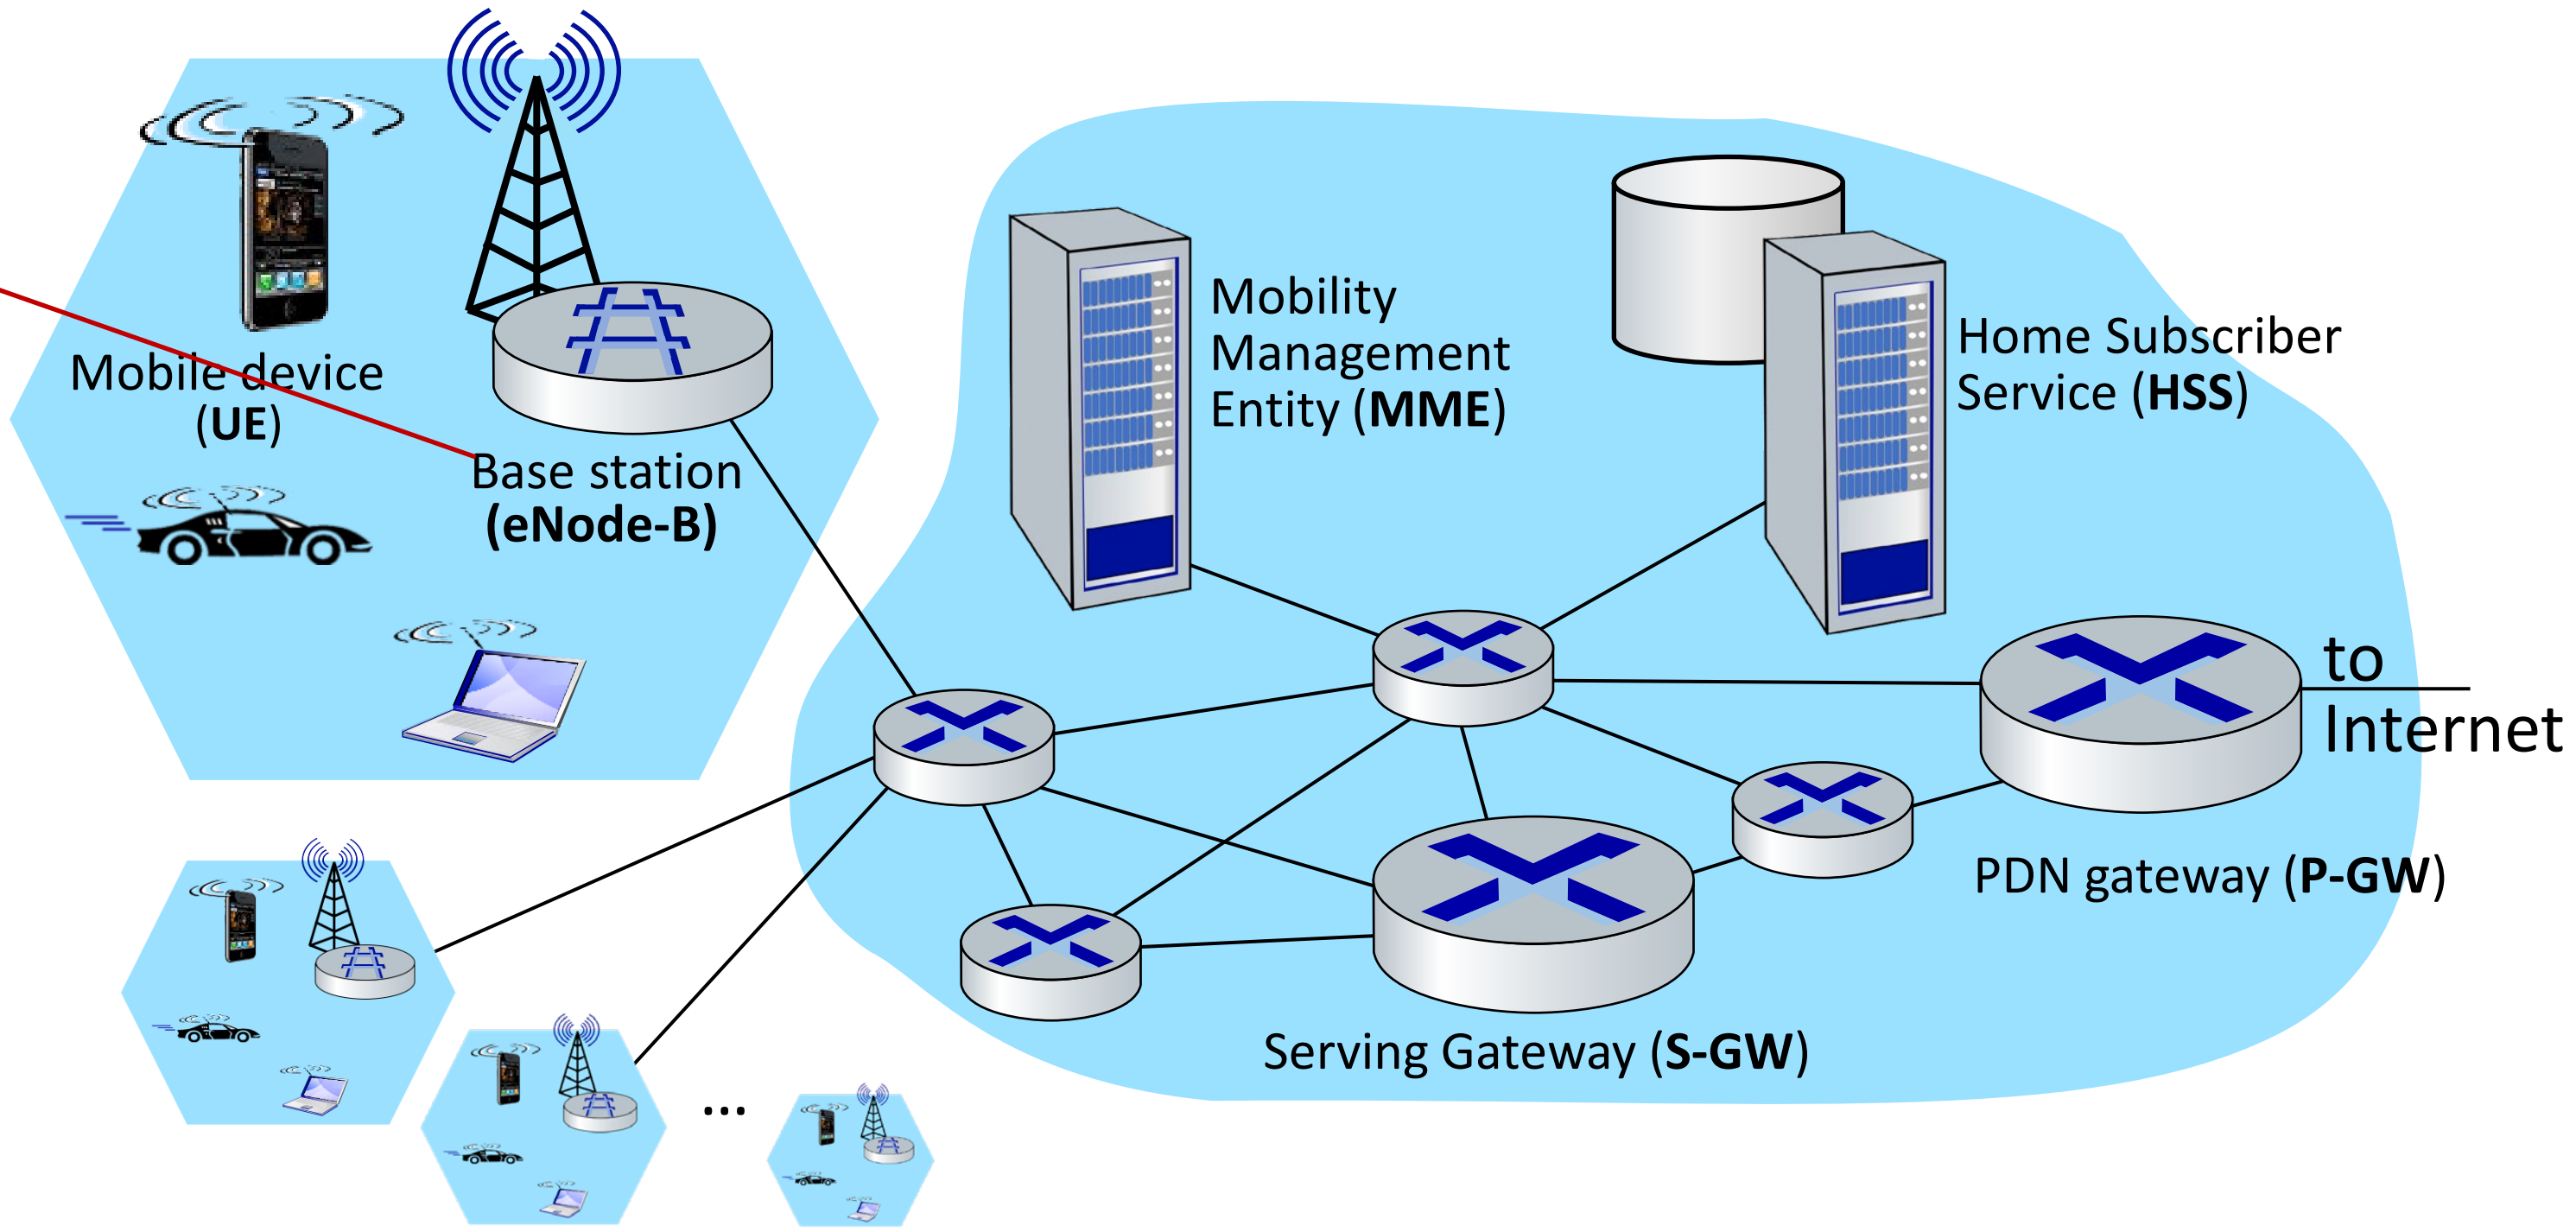

Elements of 4G LTE architecture

Home Subscriber Service

- stores info about mobile devices for which the HSS's network is their "home network"
- works with MME in device authentication

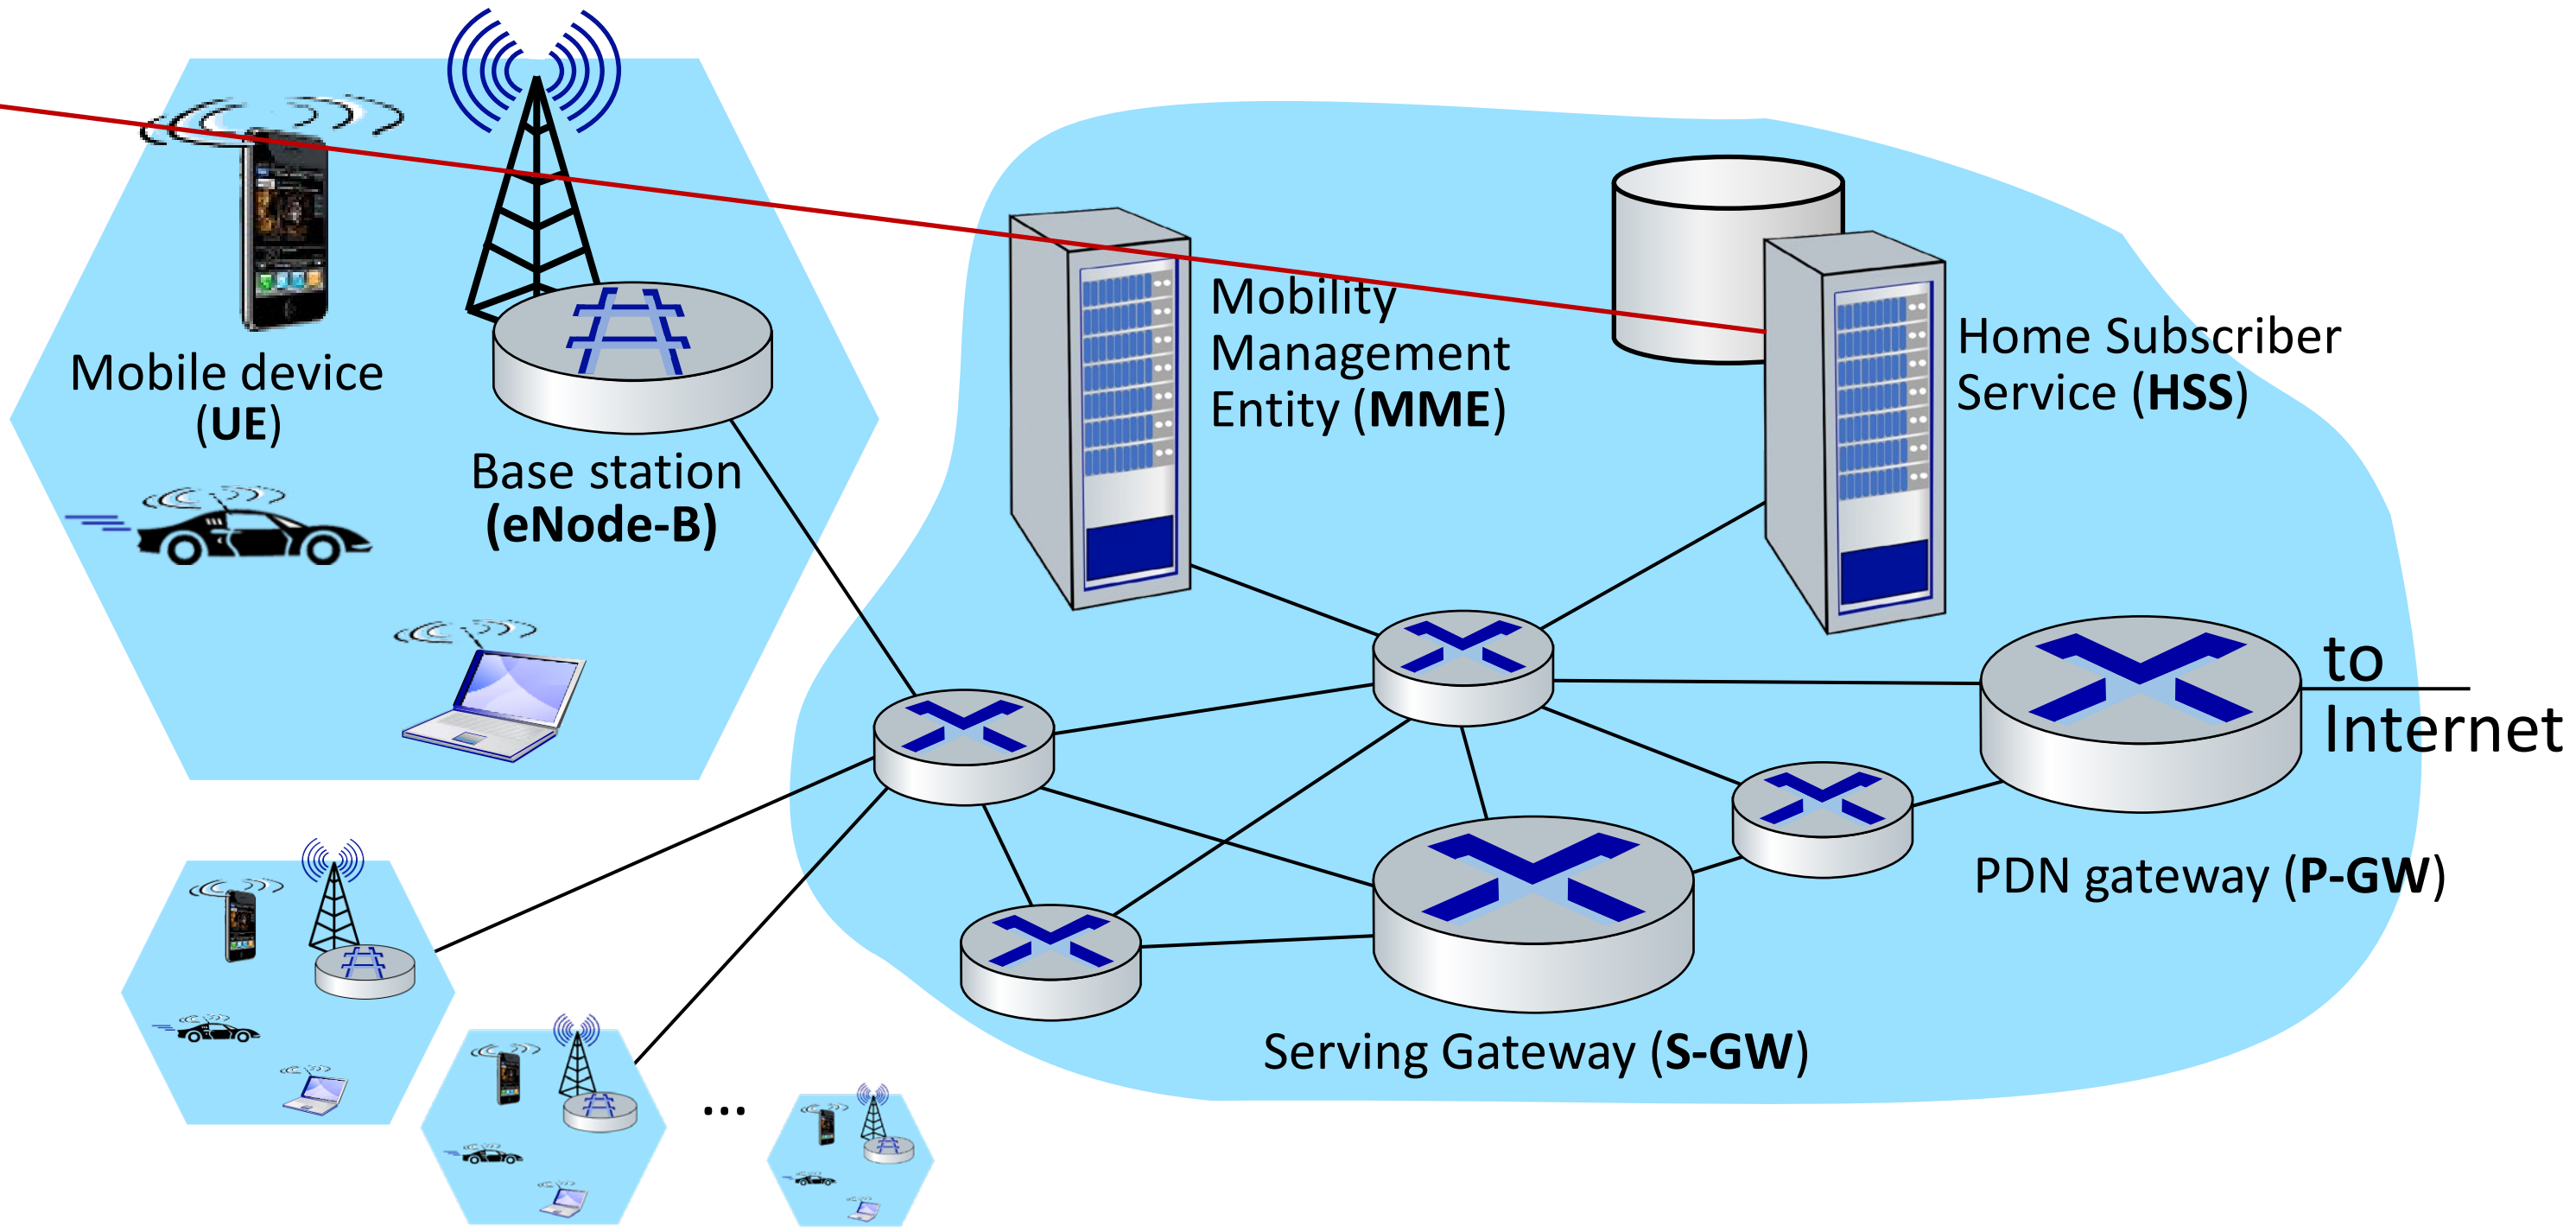

Elements of 4G LTE architecture

Serving Gateway (S-GW), PDN Gateway (P-GW)

- lie on data path from mobile to/from Internet
- P-GW
  - gateway to mobile cellular network
  - Looks like any other internet gateway router
  - provides NAT services
- other routers:
  - extensive use of tunneling

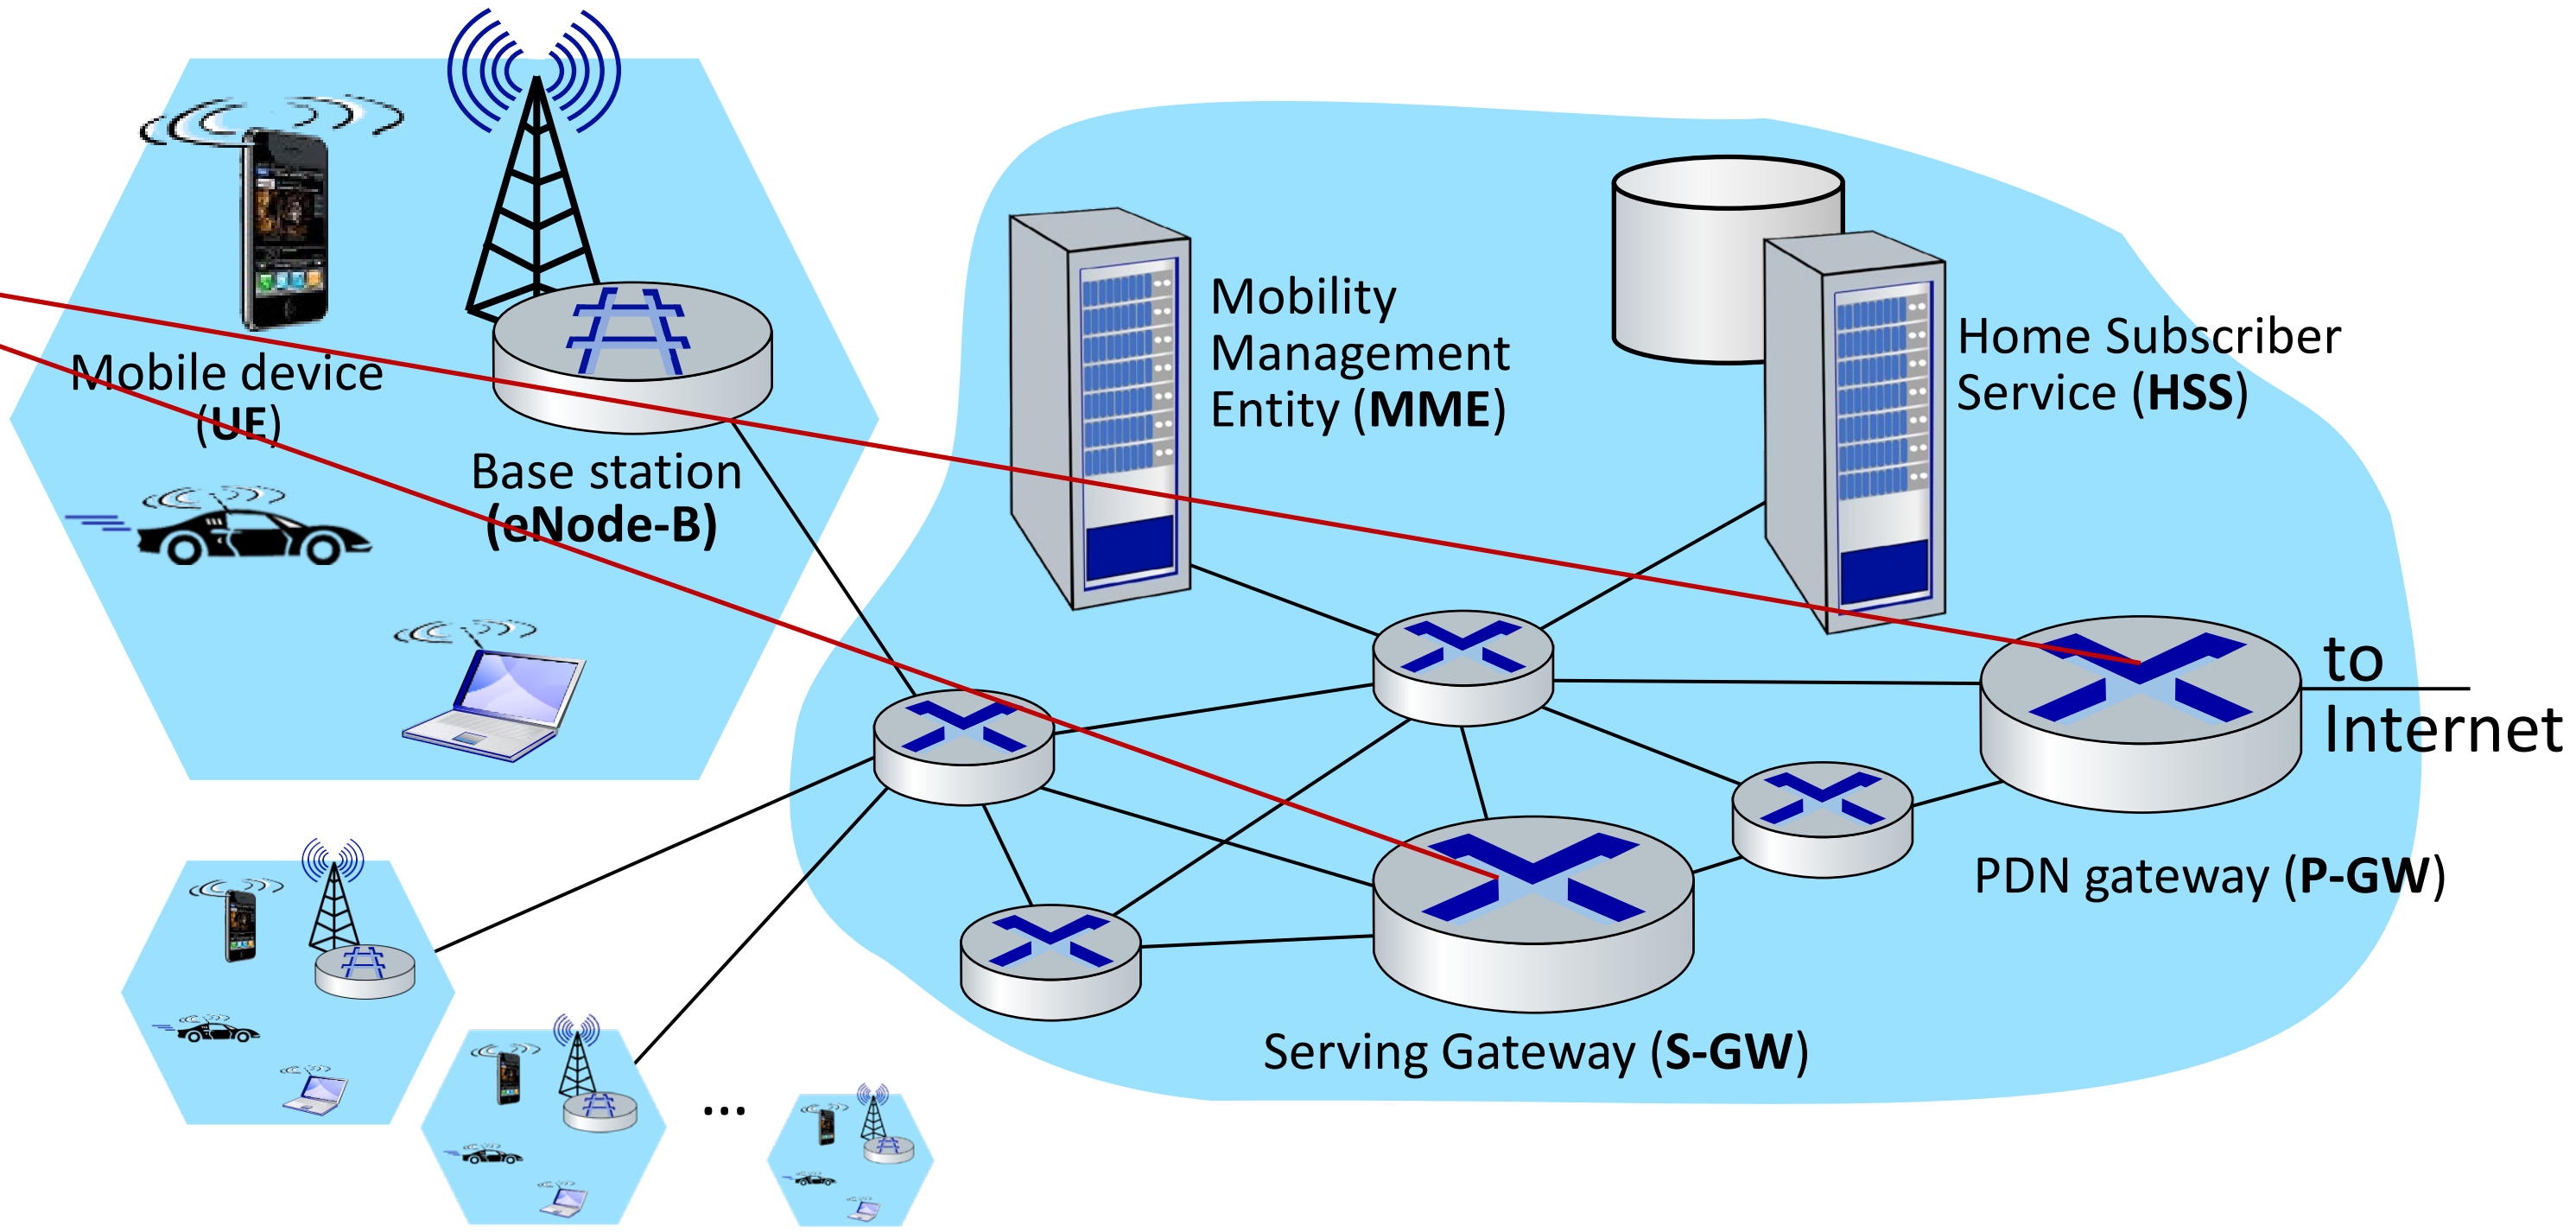

Elements of 4G LTE architecture

Mobility Management Entity

- device authentication (device-to-network, network-to-device) coordinated with mobile home network HSS
- mobile device management:
  - device handover between cells
  - tracking/paging device location
- path (tunneling) setup from mobile device to P-GW

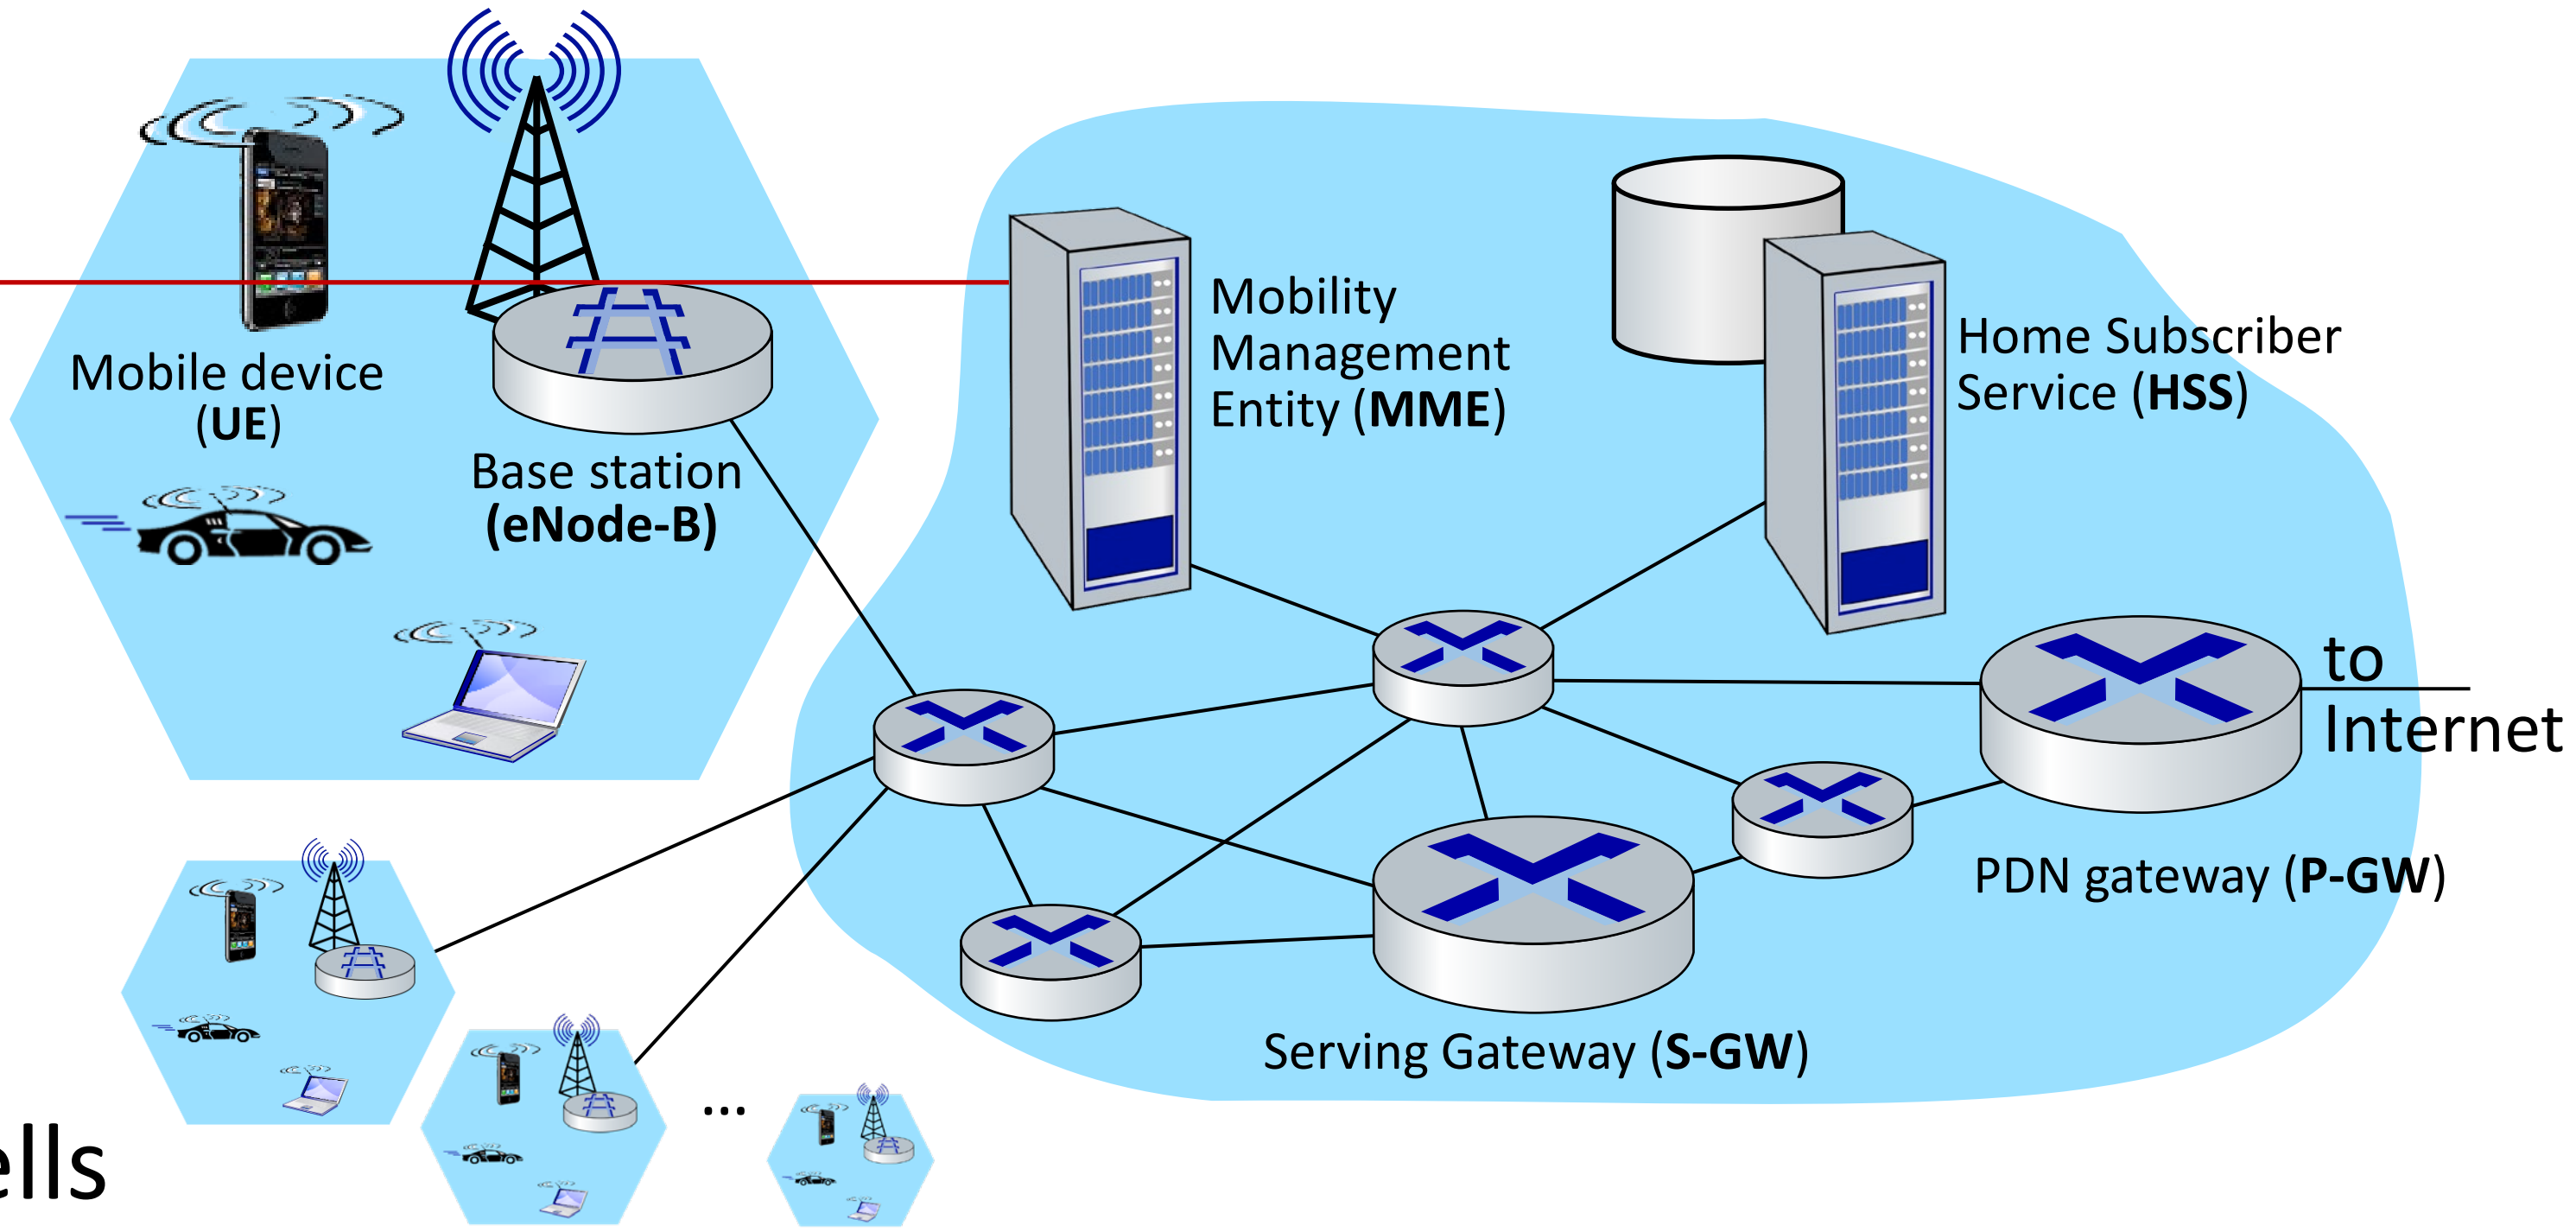

Global cellular network: a network of IP networks

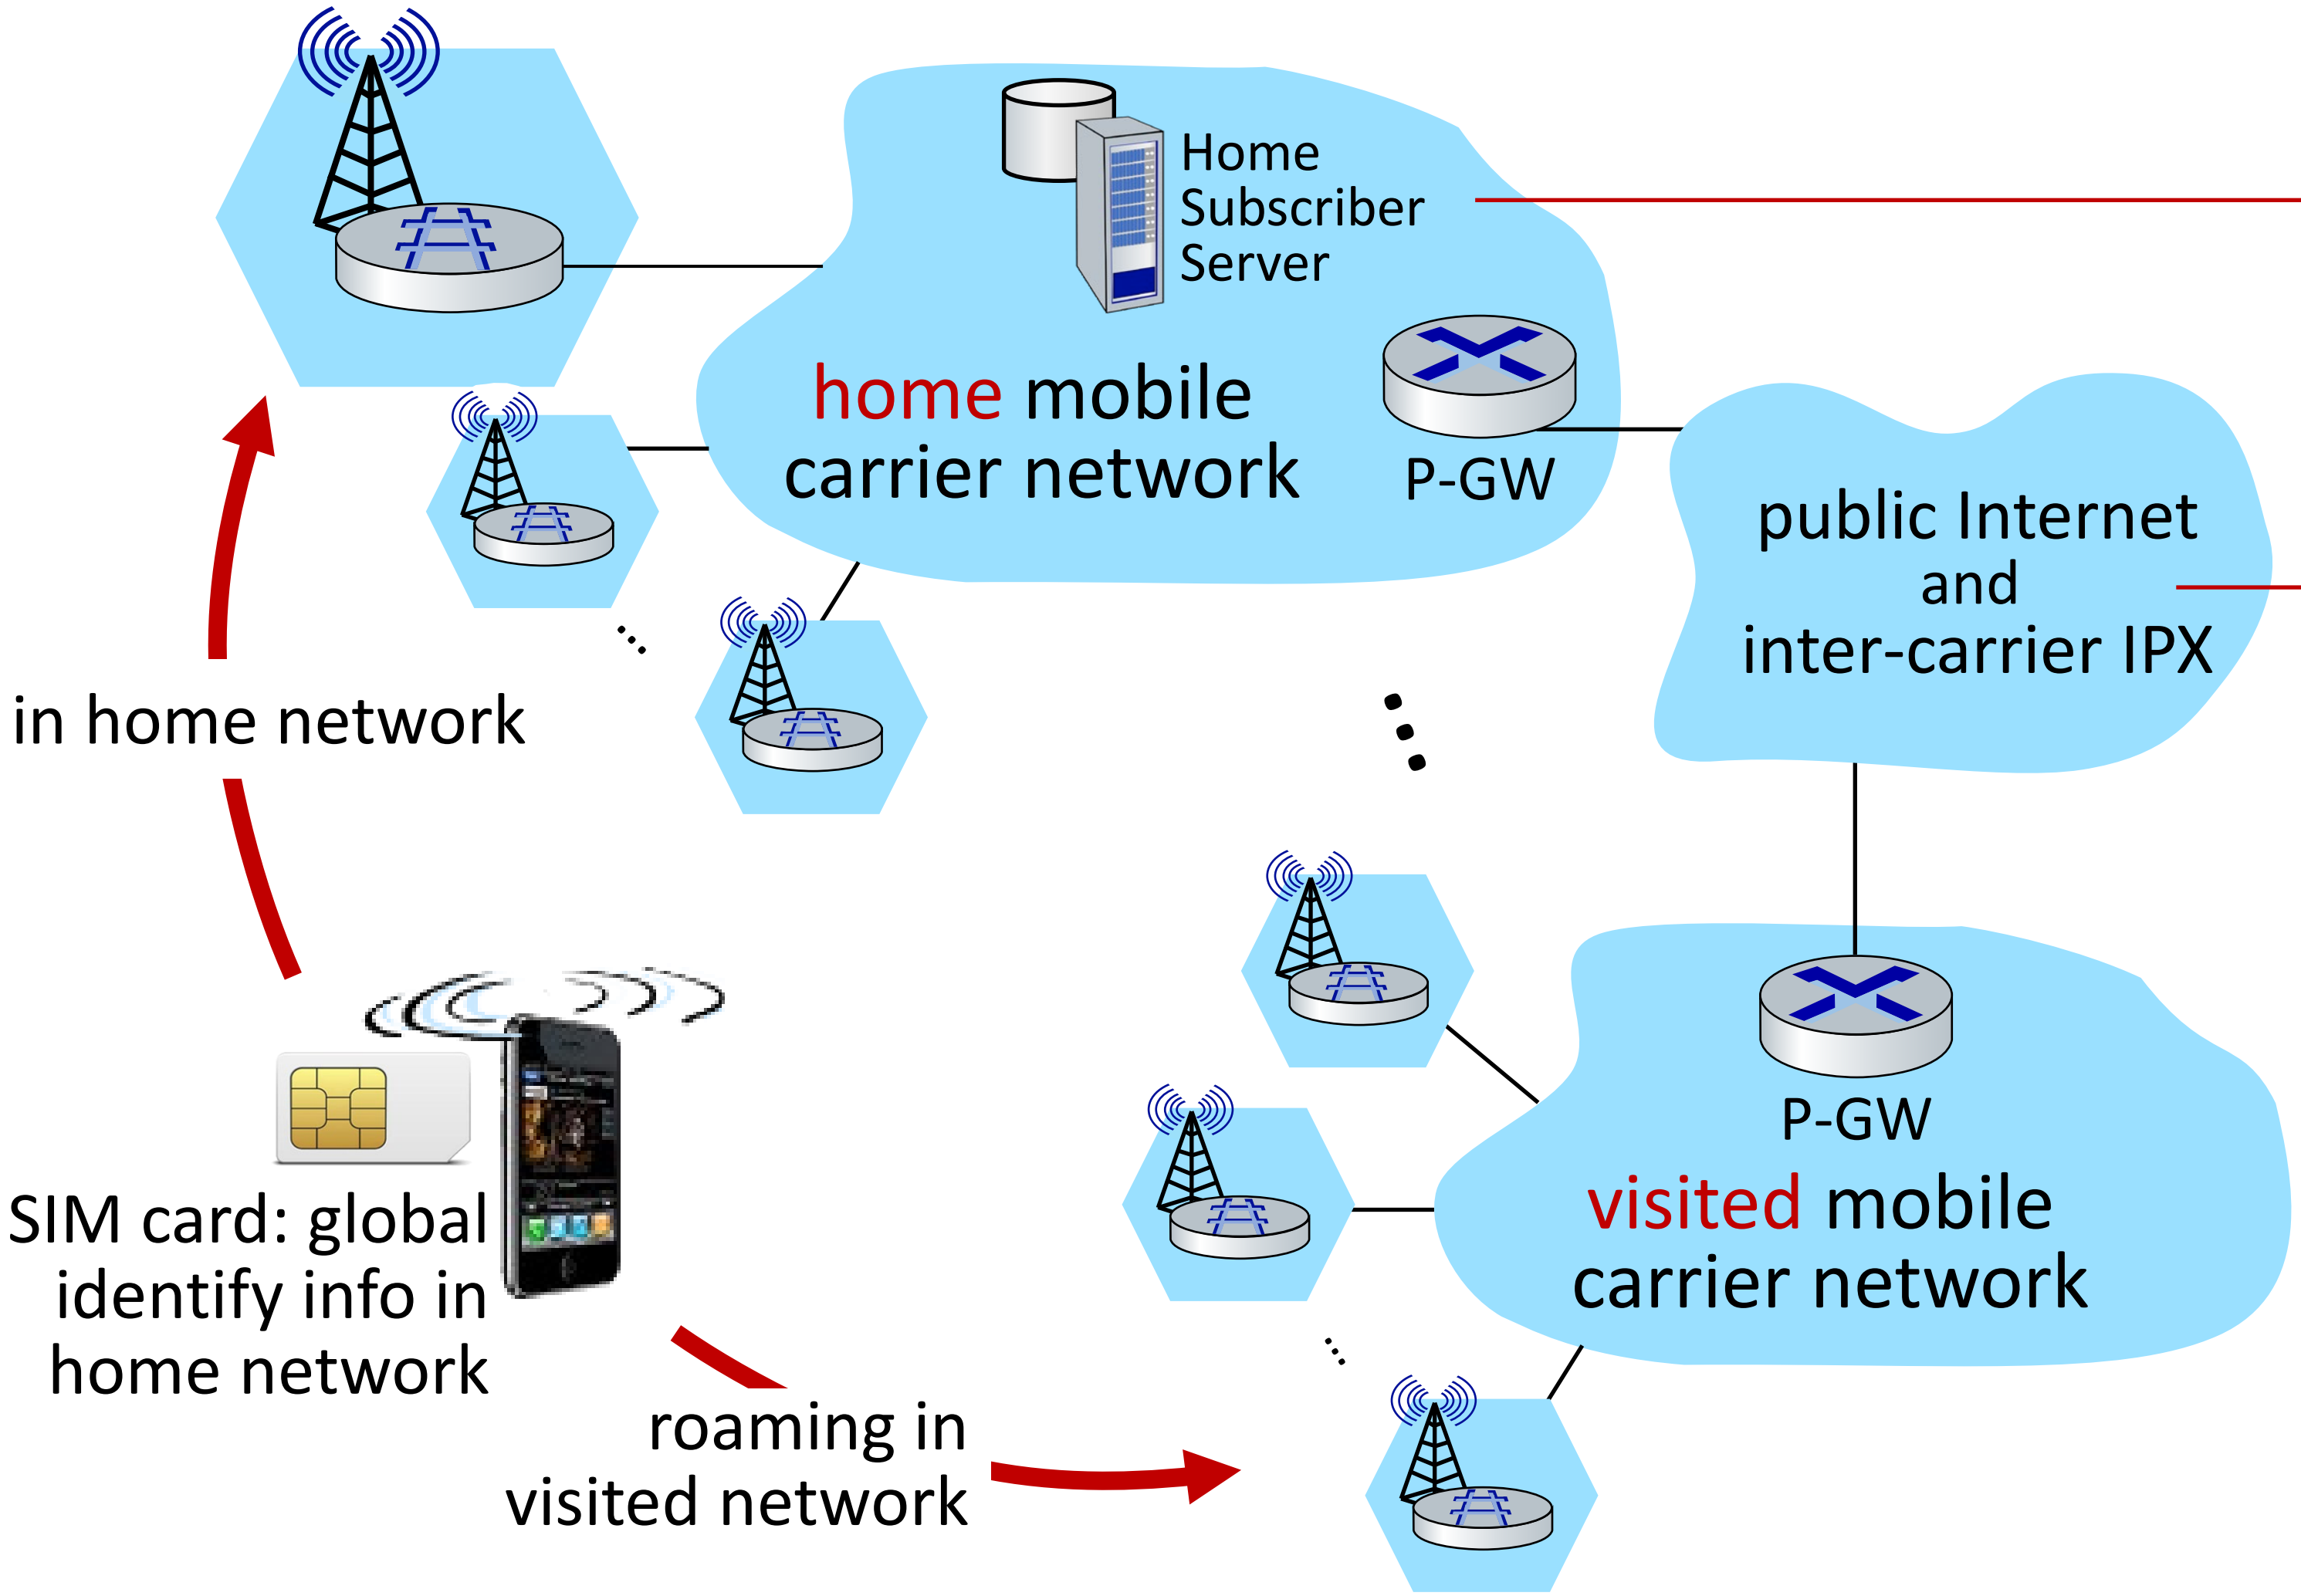

home network HSS:

- identify & services info, while in home network and roaming

all IP:

- carriers interconnect with each other, and public internet at exchange points
- legacy 2G, 3G: not all IP, handled otherwise

LTE: data plane control plane separation

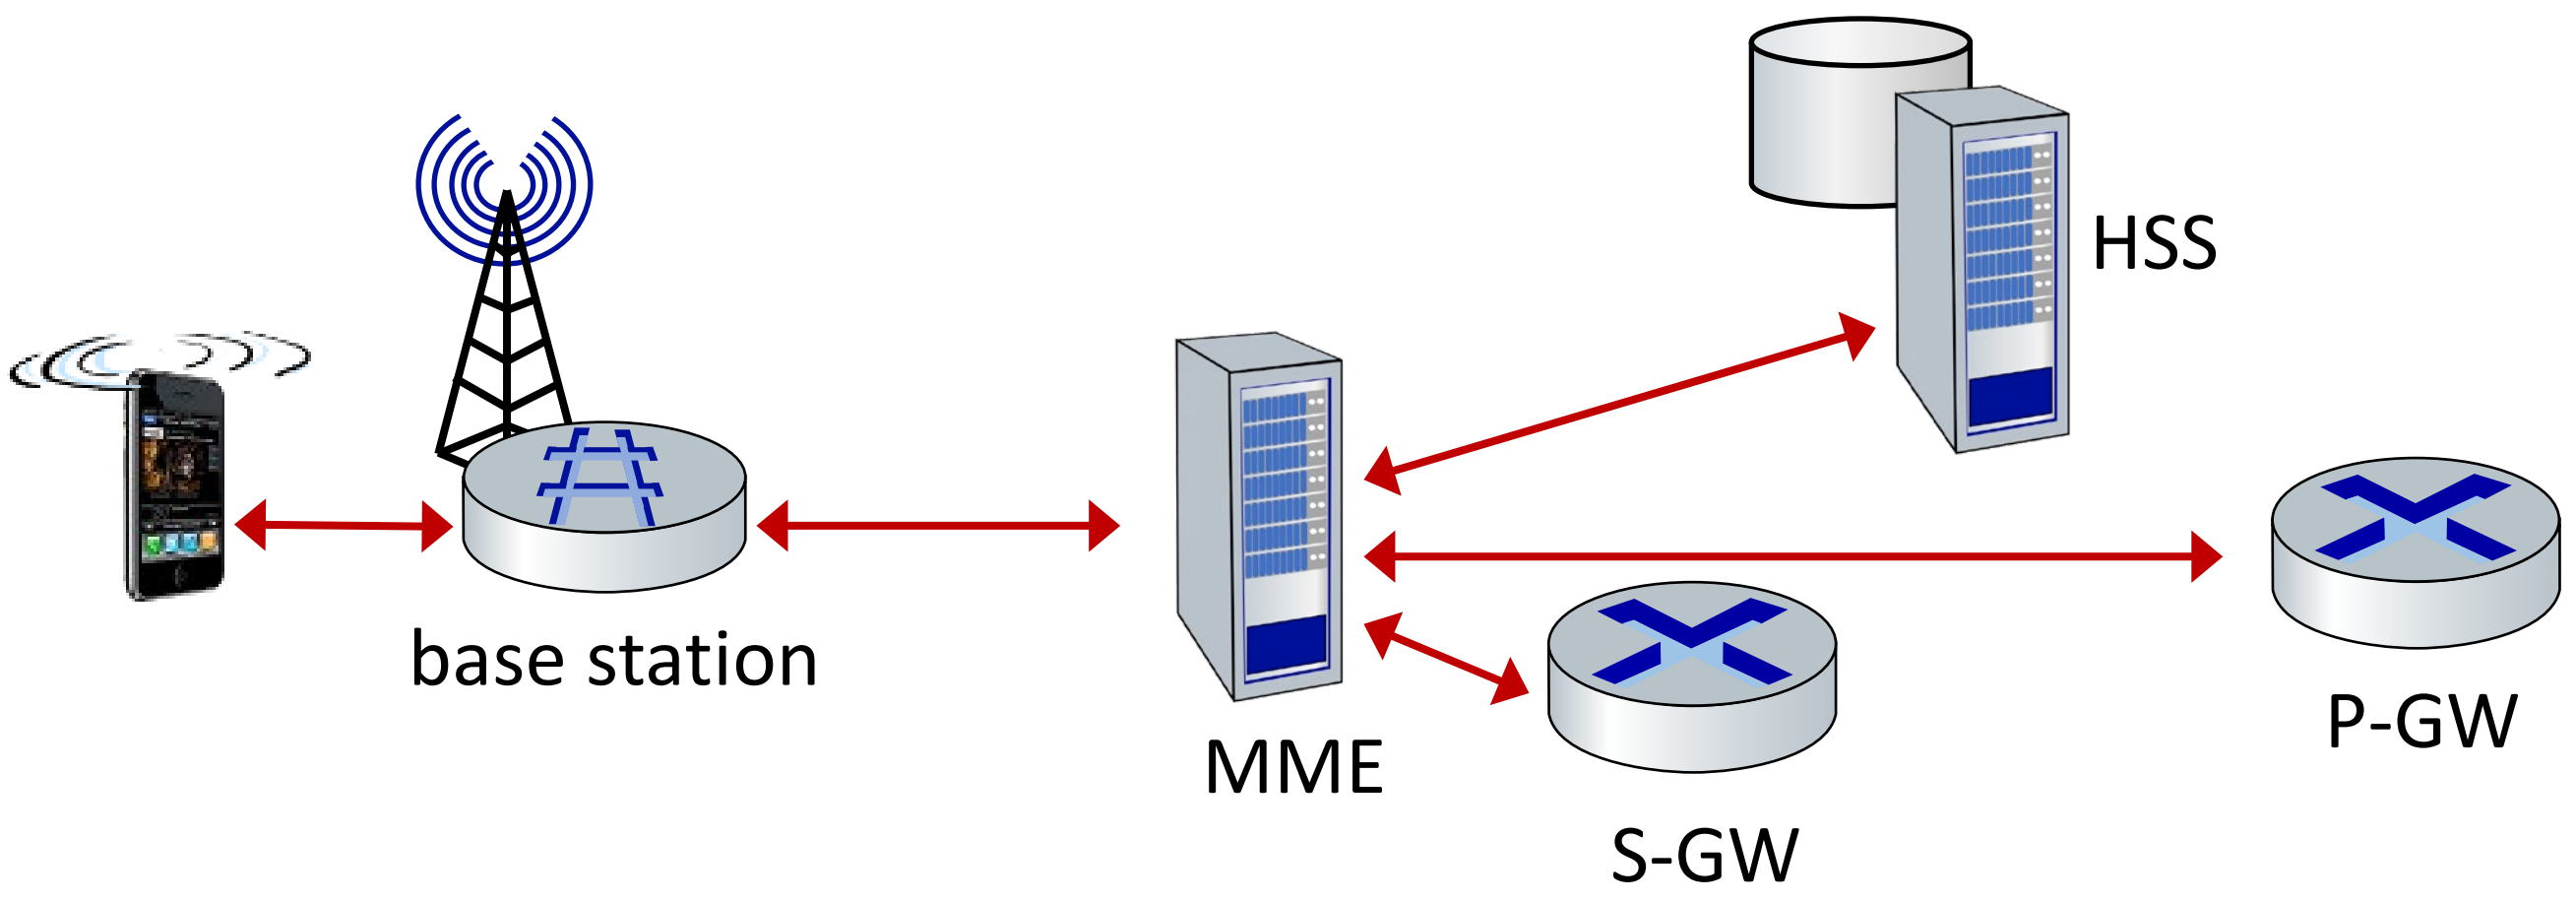

control plane

- new protocols for mobility management , security, authentication (later)

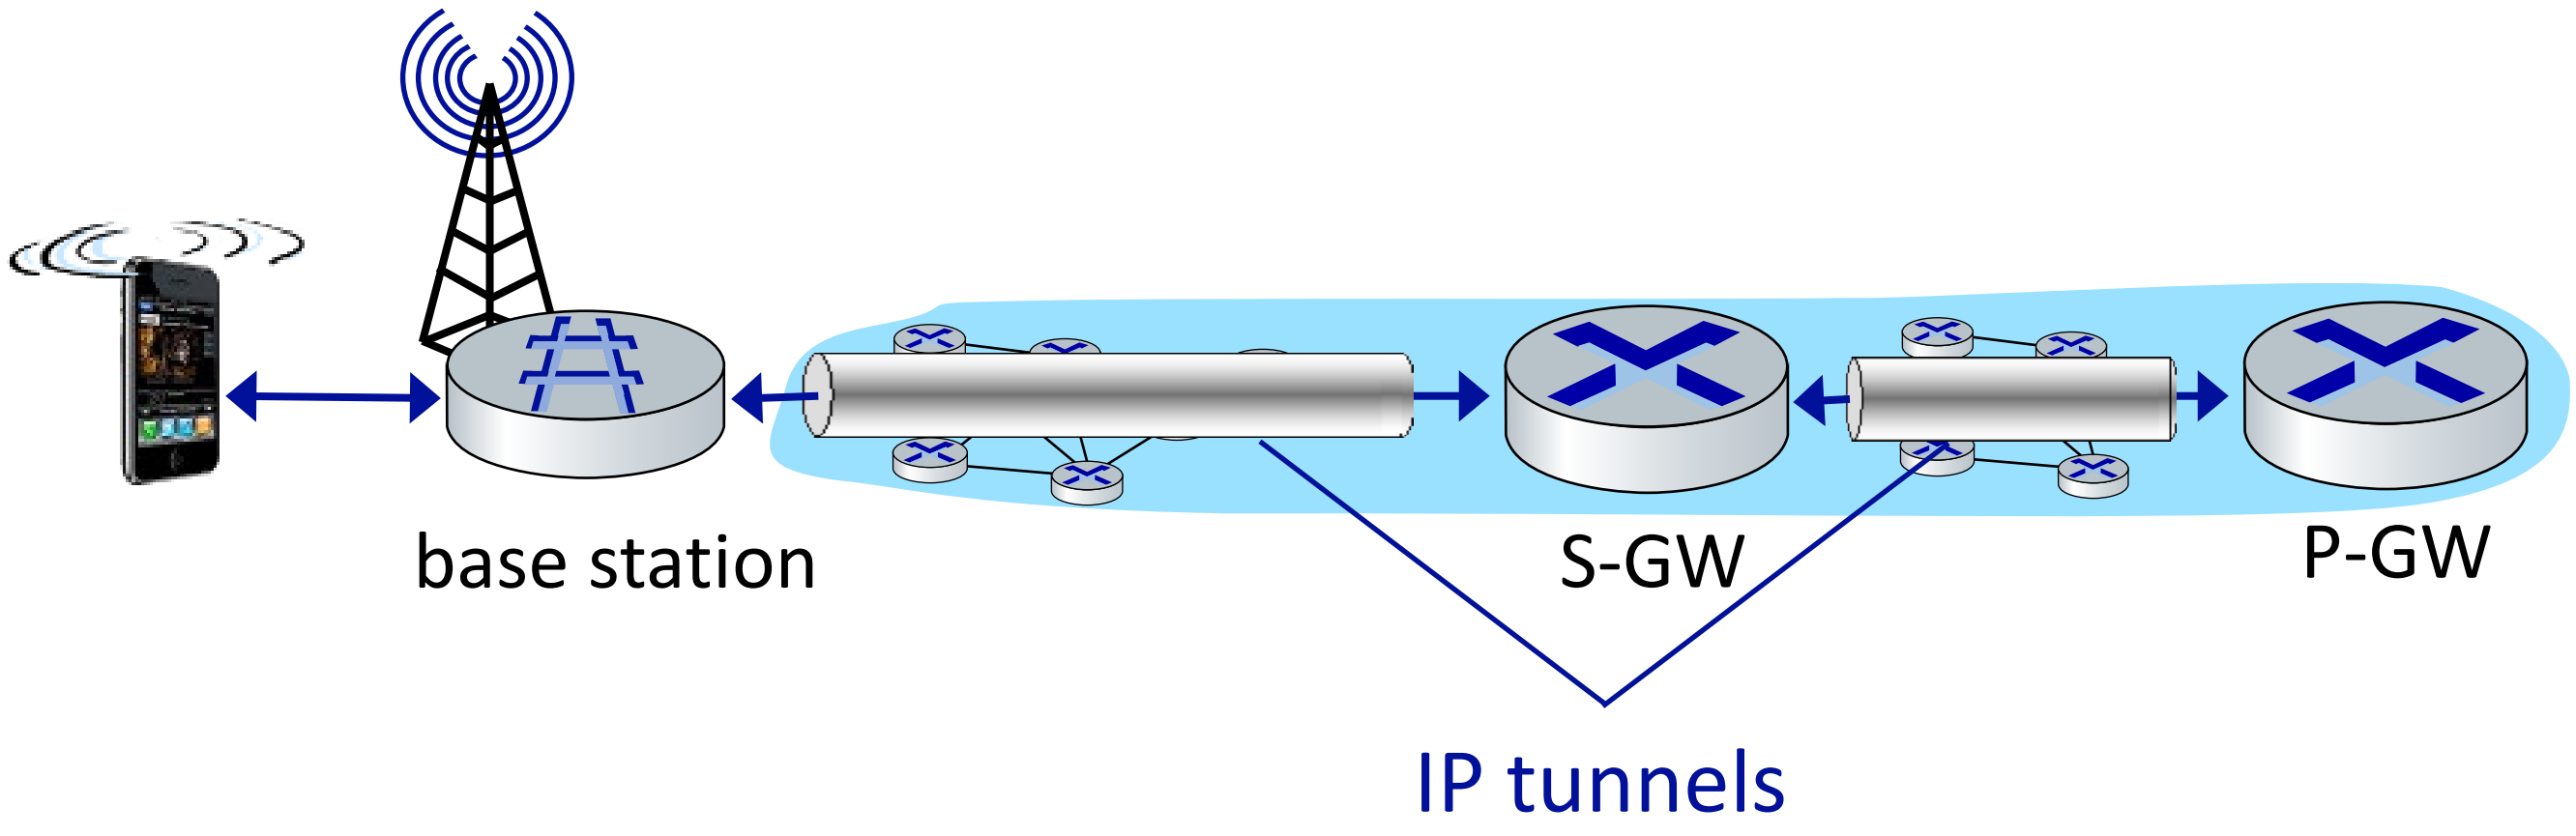

data plane

- new protocols at link, physical layers
- extensive use of tunneling to facilitate mobility

LTE data plane protocol stack: first hop

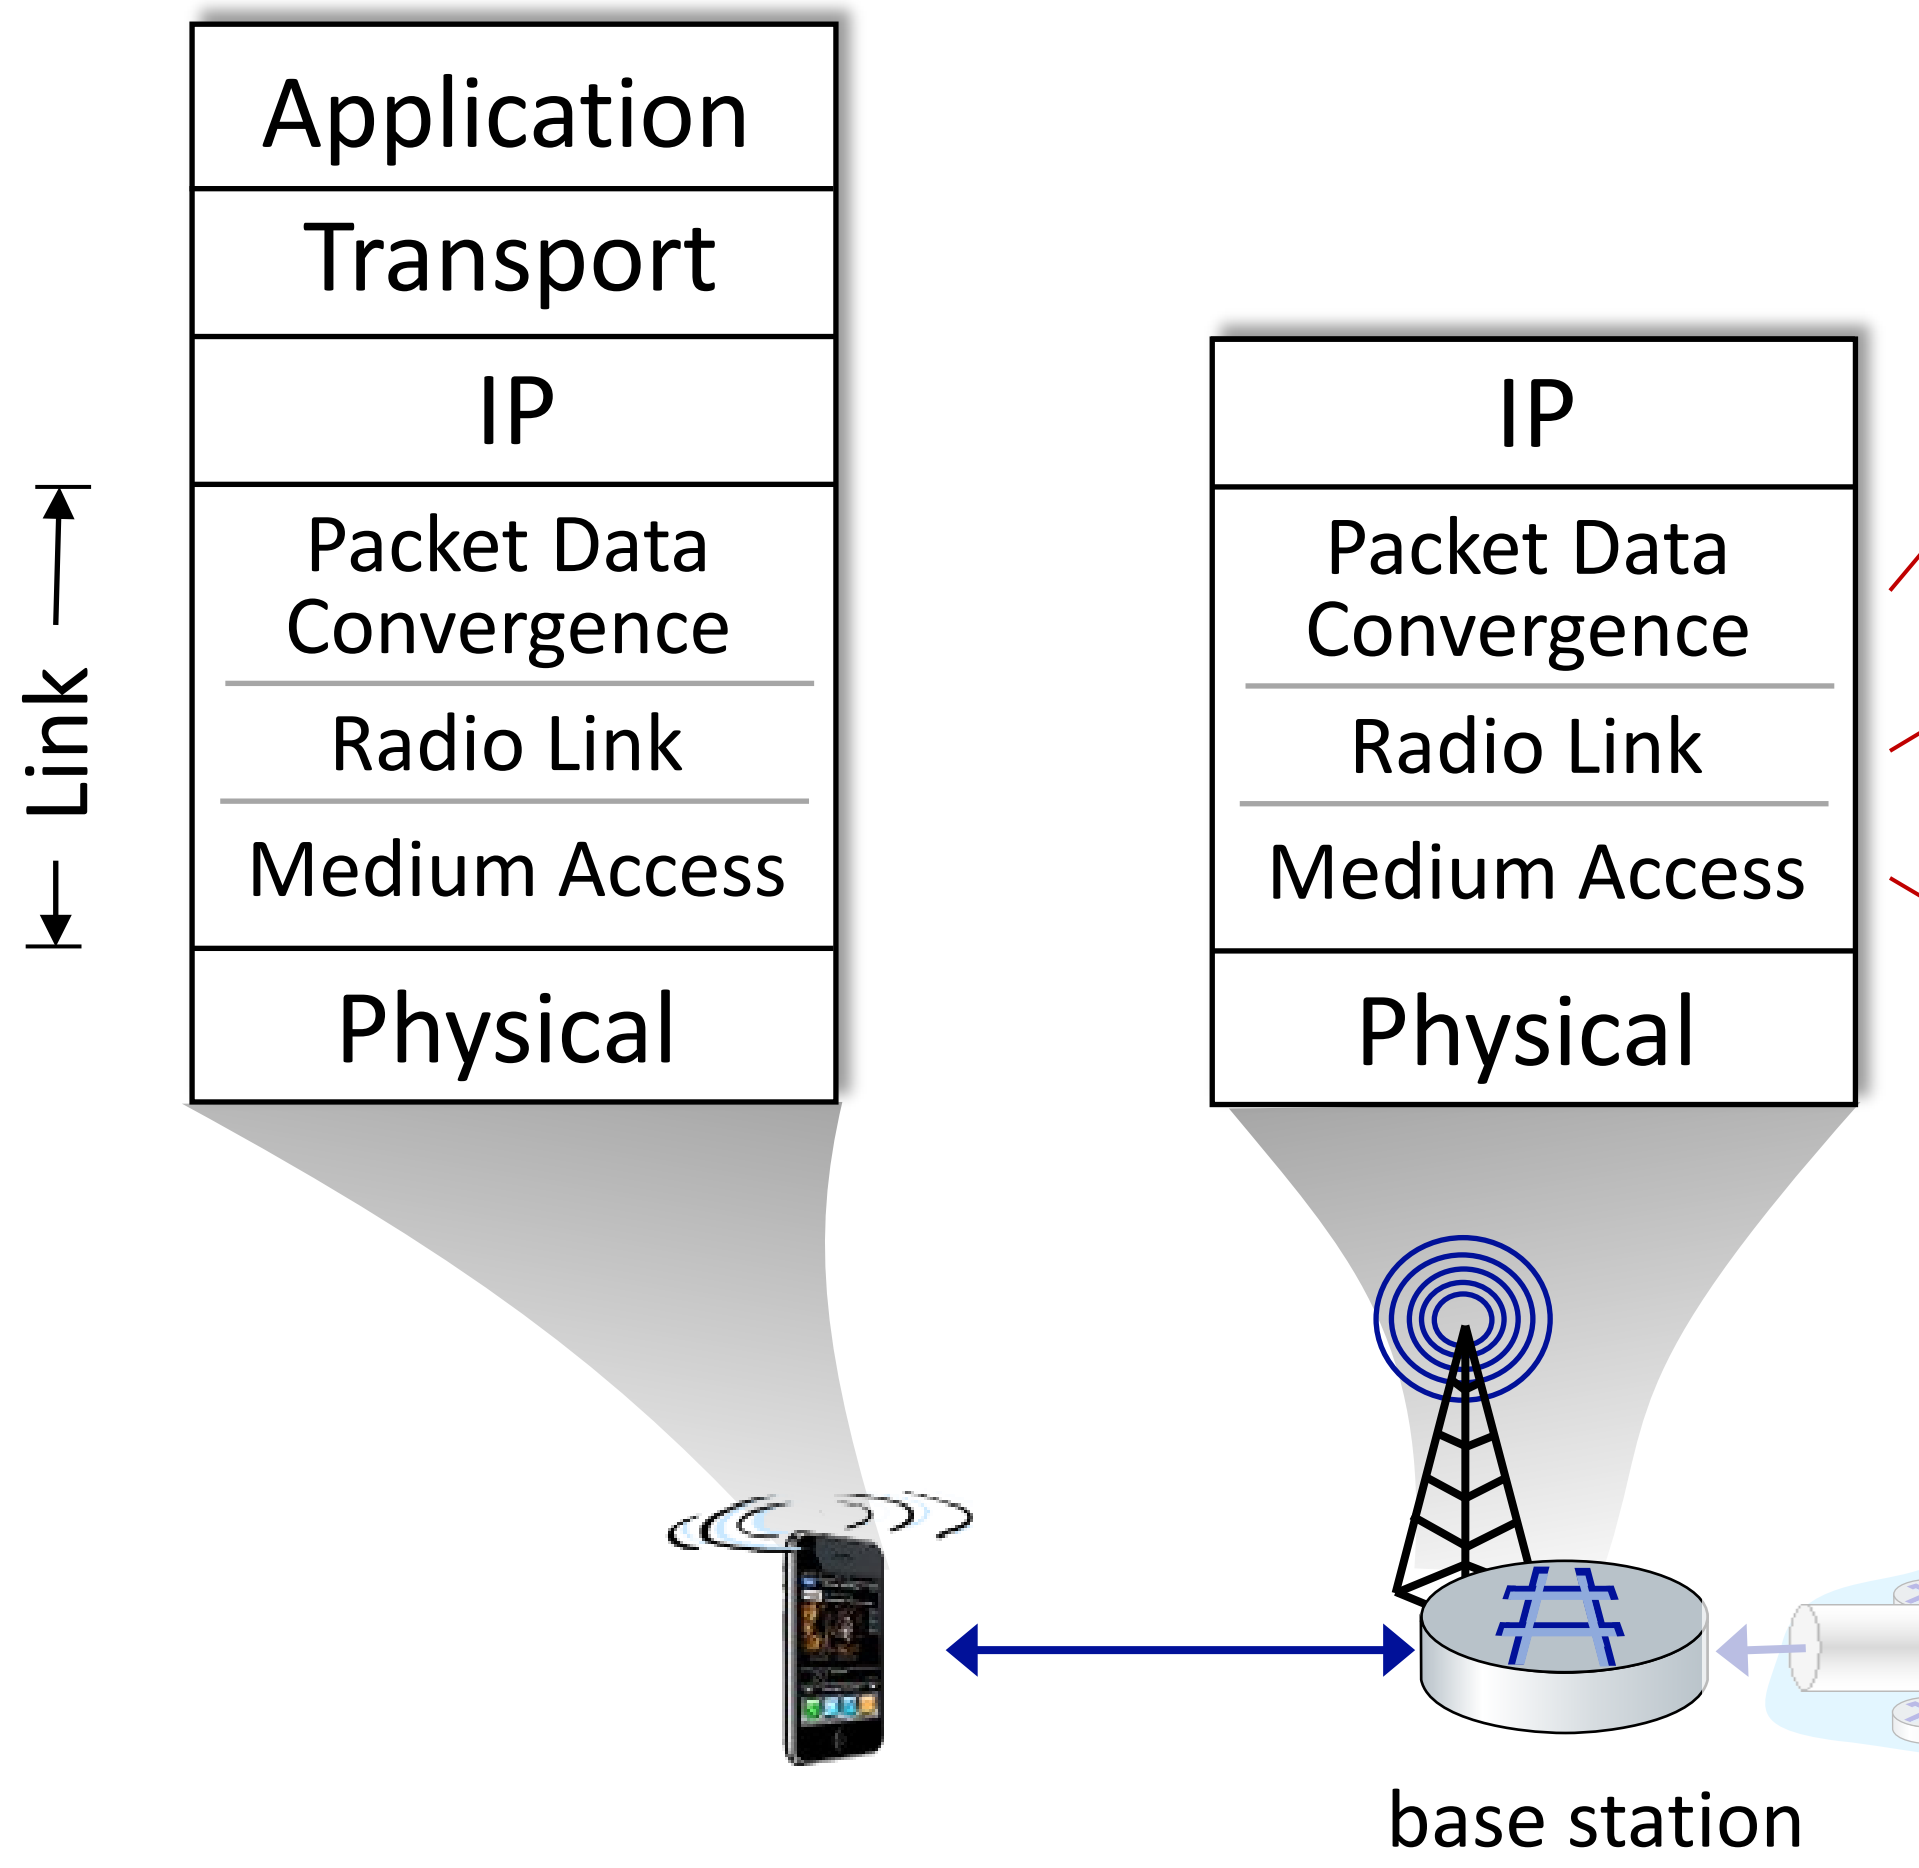

LTE link layer protocols:

- Packet Data Convergence: header compression, encryption
- Radio Link Control (RLC) Protocol: fragmentation/reassembly, reliable data transfer
- Medium Access: requesting, use of radio transmission slots

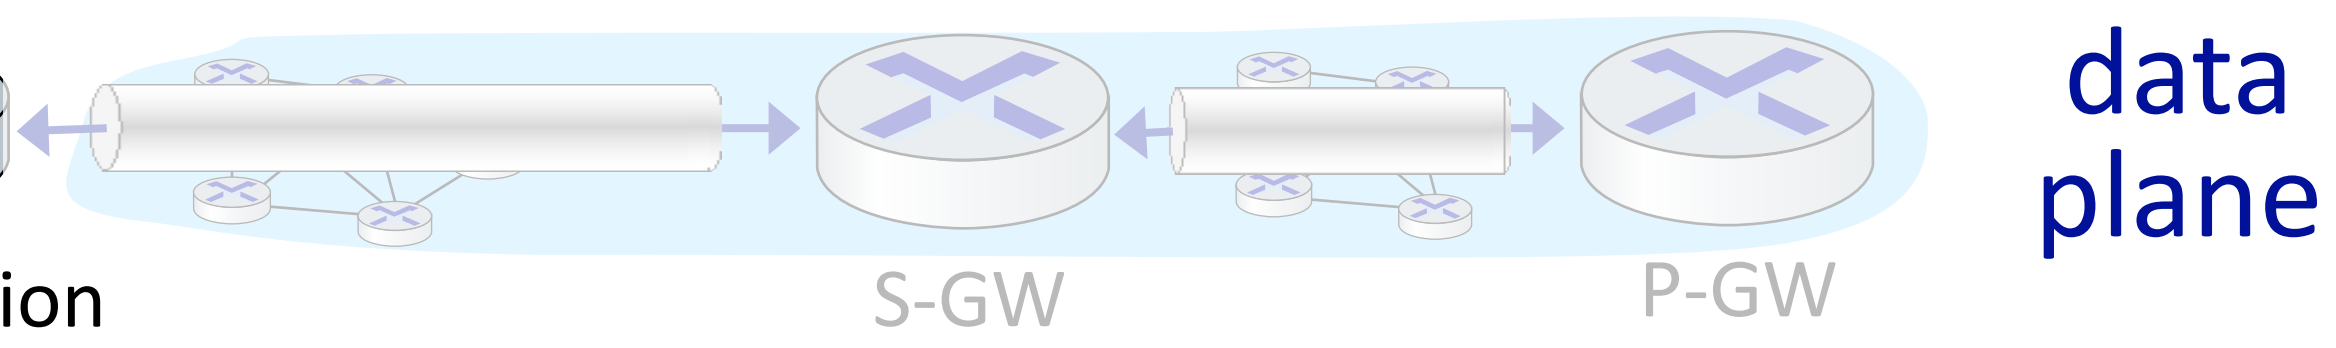

LTE data plane protocol stack: first hop

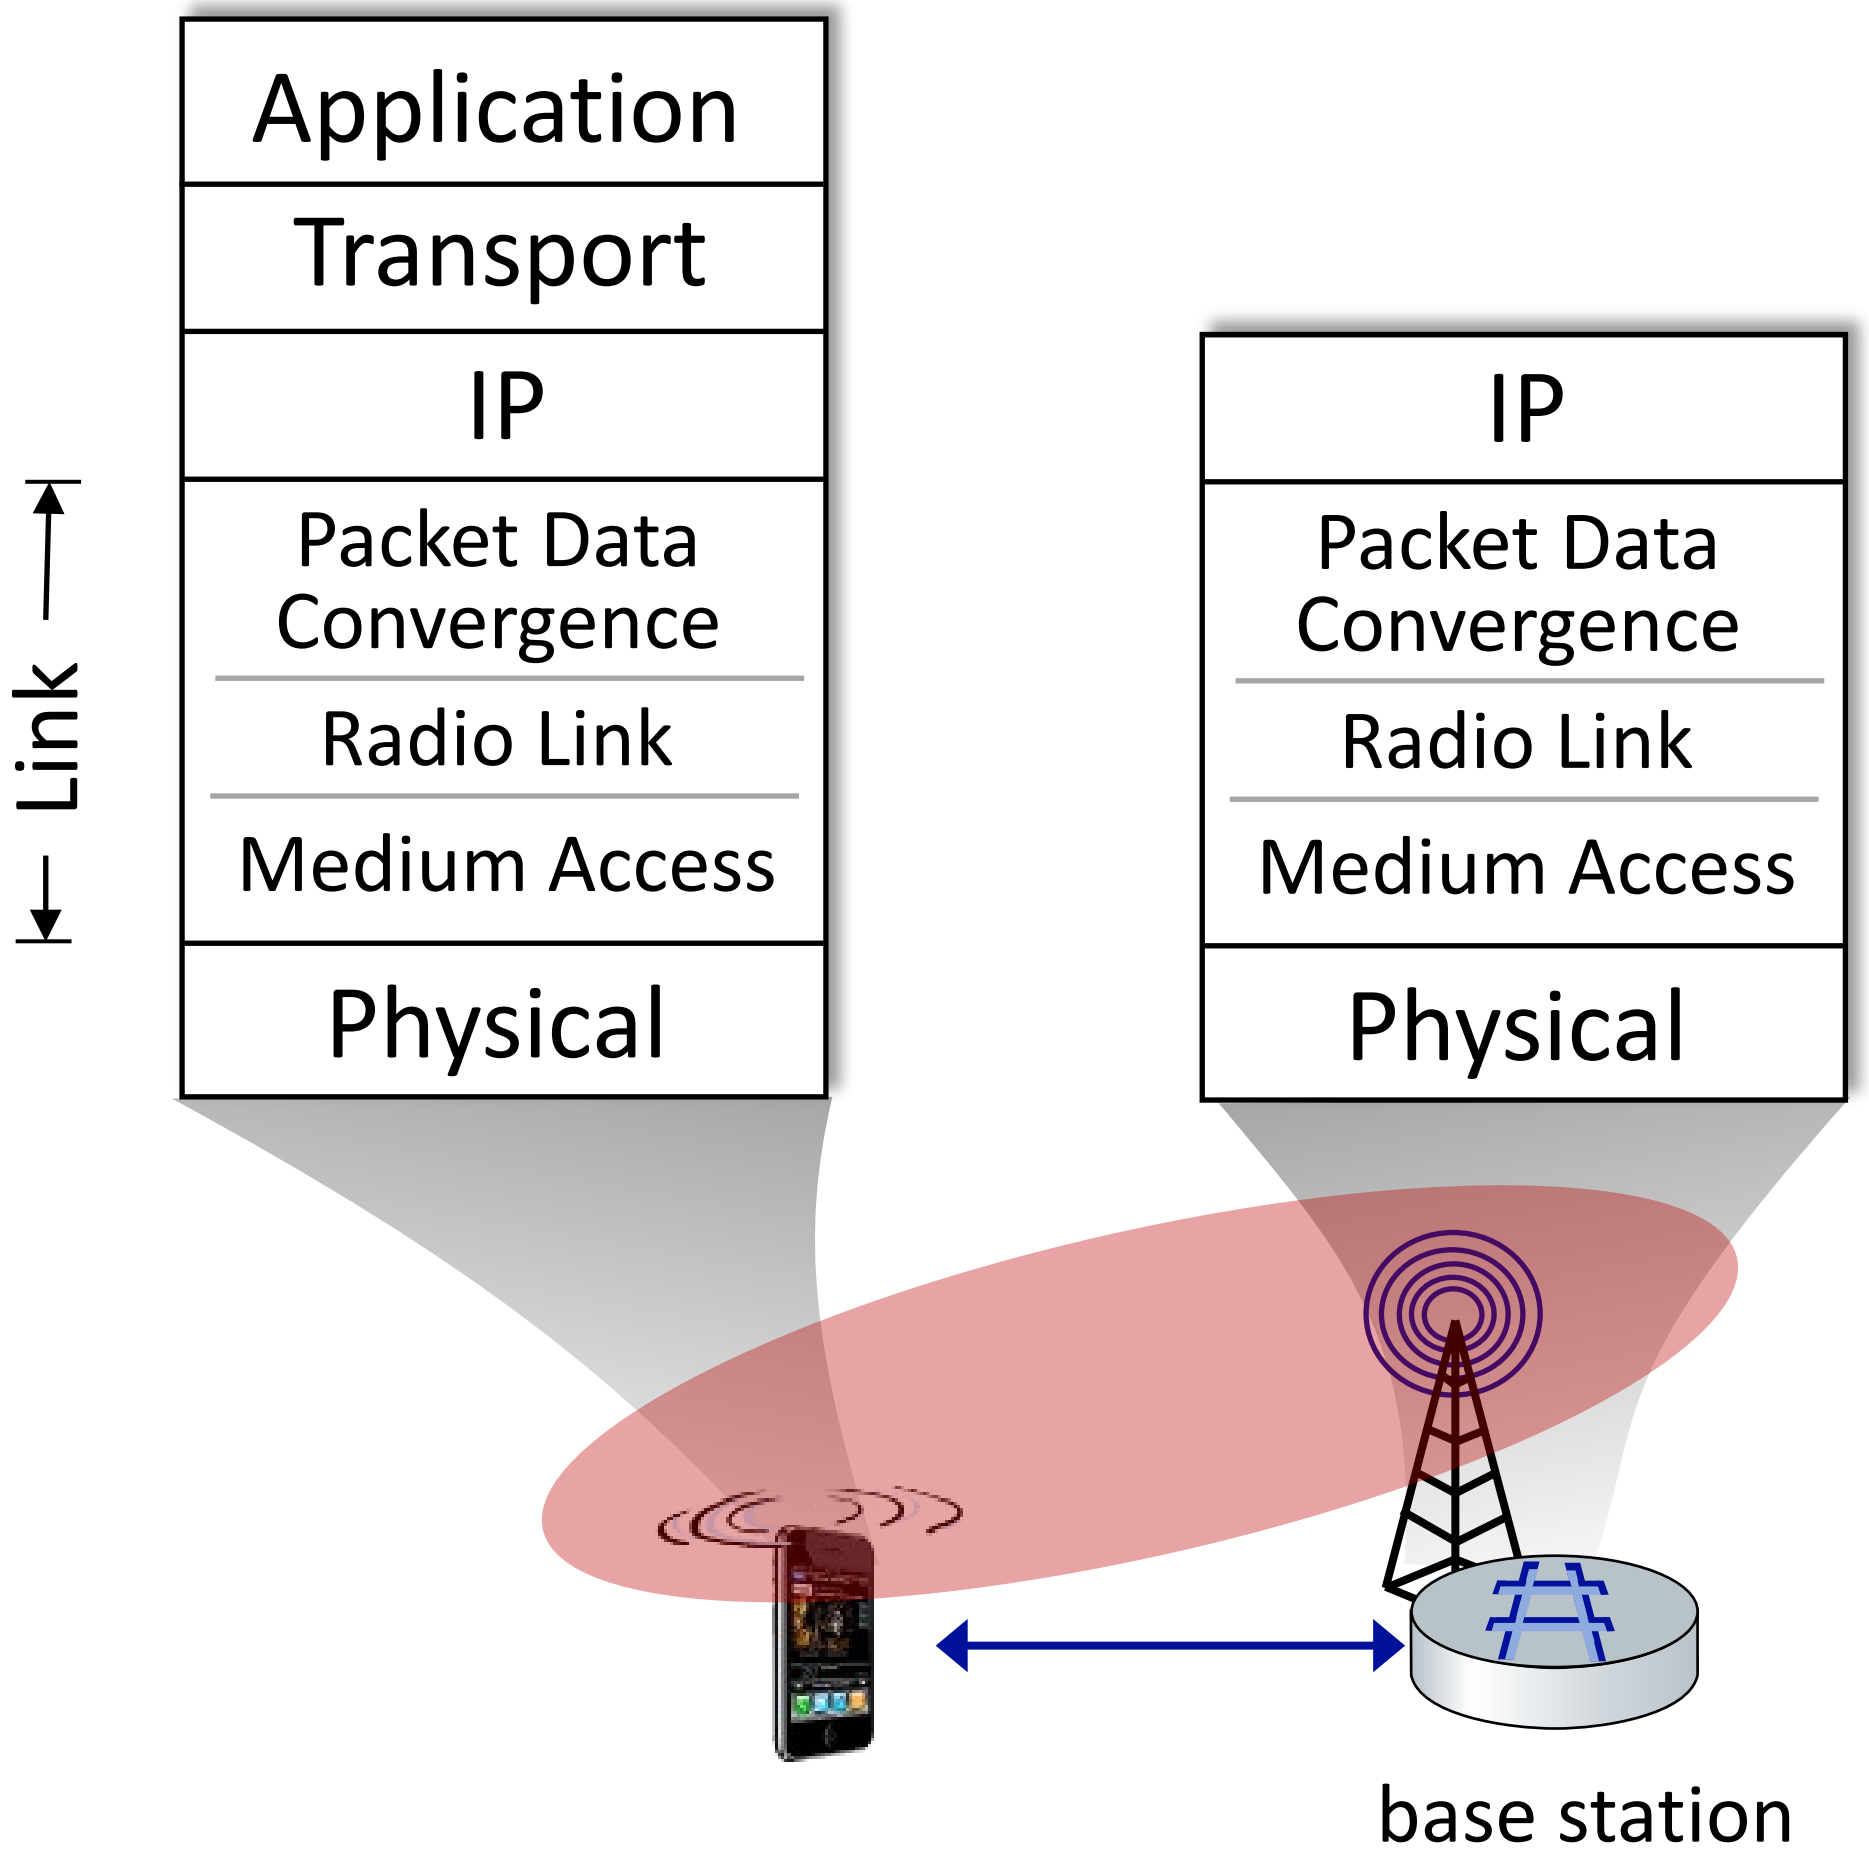

LTE radio access network:

- downstream channel: FDM, TDM within frequency channel (OFDM - orthogonal frequency division multiplexing)
  - "orthogonal": minimal interference between channels
  - upstream: FDM, TDM similar to OFDM
- each active mobile device allocated two or more 0.5 ms time slots over 12 frequencies
  - scheduling algorithm not standardized – up to operator
  - 100's Mbps per device possible

LTE data plane protocol stack: packet core

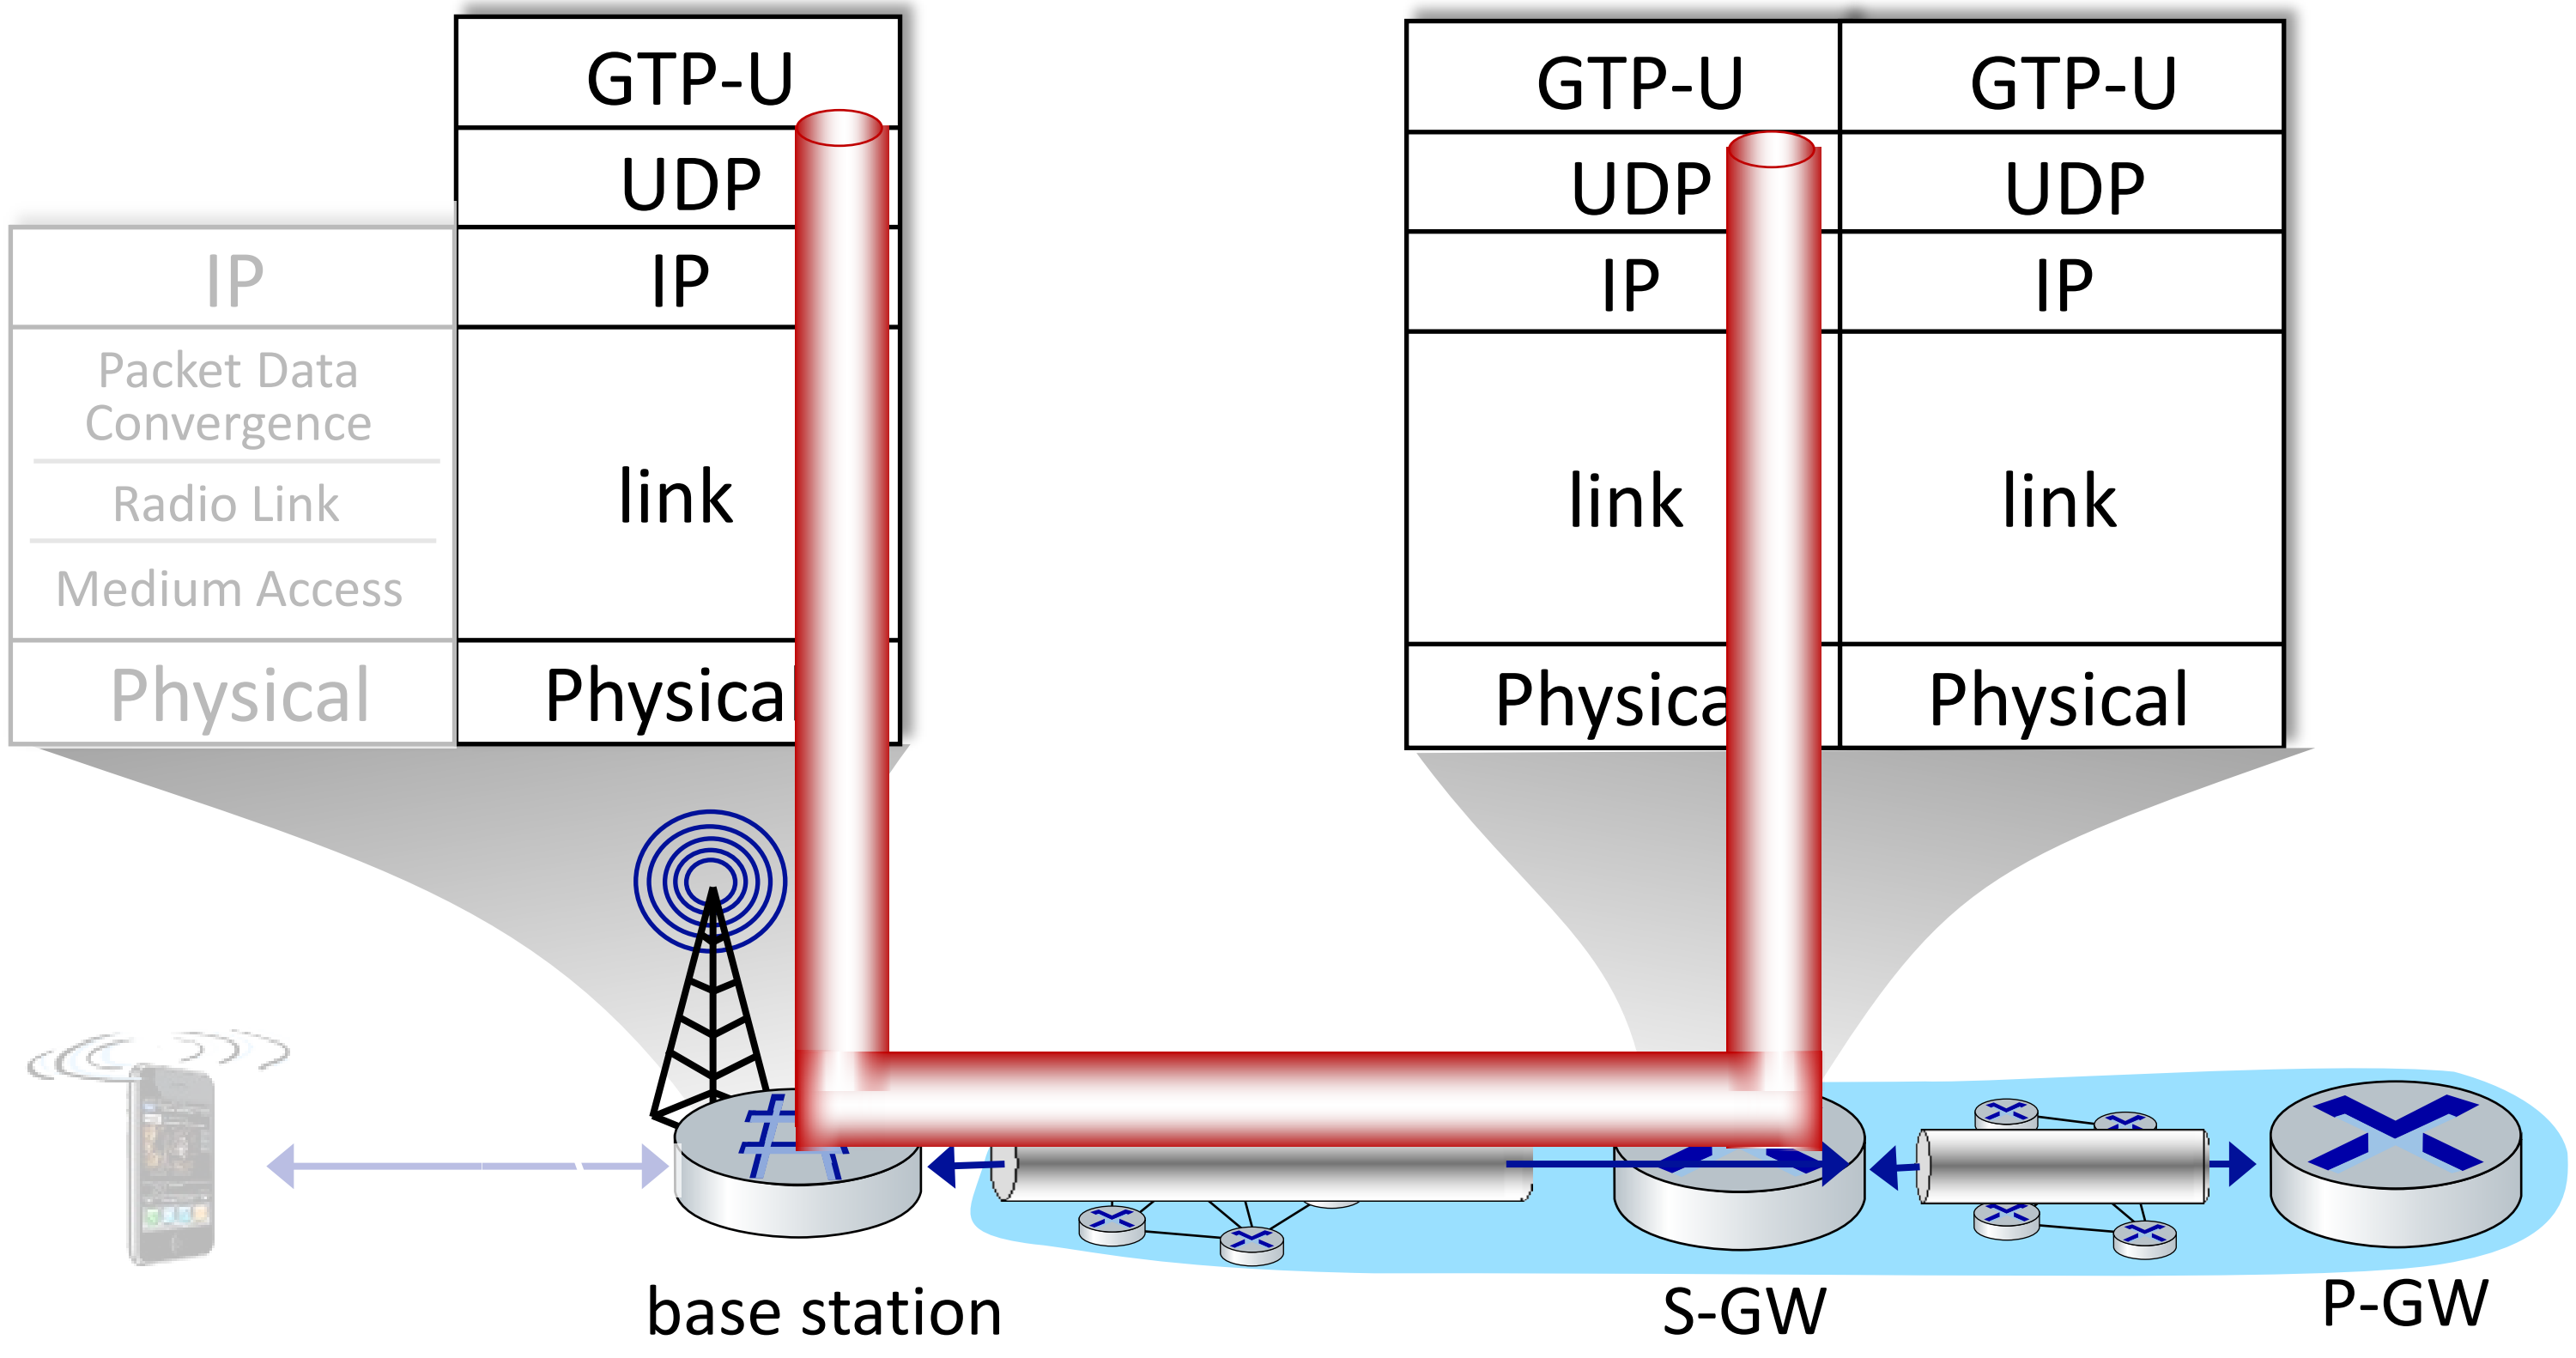

tunneling:

- mobile datagram encapsulated using GPRS Tunneling Protocol (GTP), sent inside UDP datagram to S-GW
- S-GW re-tunnels datagrams to P-GW
- supporting mobility: only tunneling endpoints change when mobile user moves

LTE data plane: associating with a BS

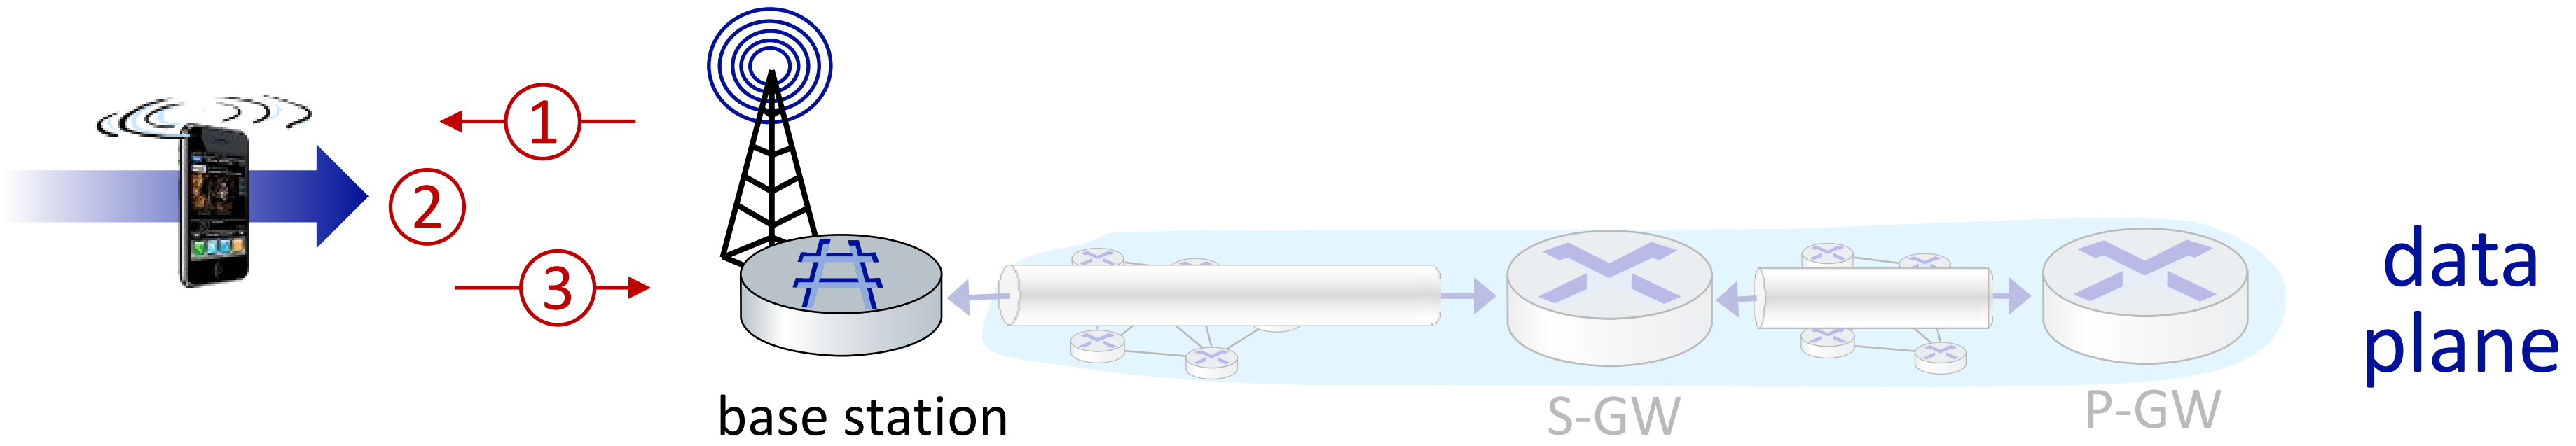

1. BS broadcasts primary synch signal every 5 ms on all frequencies
   - BSs from multiple carriers may be broadcasting synch signals

2. mobile finds a primary synch signal, then locates 2nd synch signal on this freq.
   - mobile then finds info broadcast by BS: channel bandwidth, configurations; BS's cellular carrier info
   - mobile may get info from multiple base stations, multiple cellular networks

3. mobile selects which BS to associate with (*e.g.,* preference for home carrier)

4. more steps still needed to authenticate, establish state, set up data plane

LTE mobiles: sleep modes

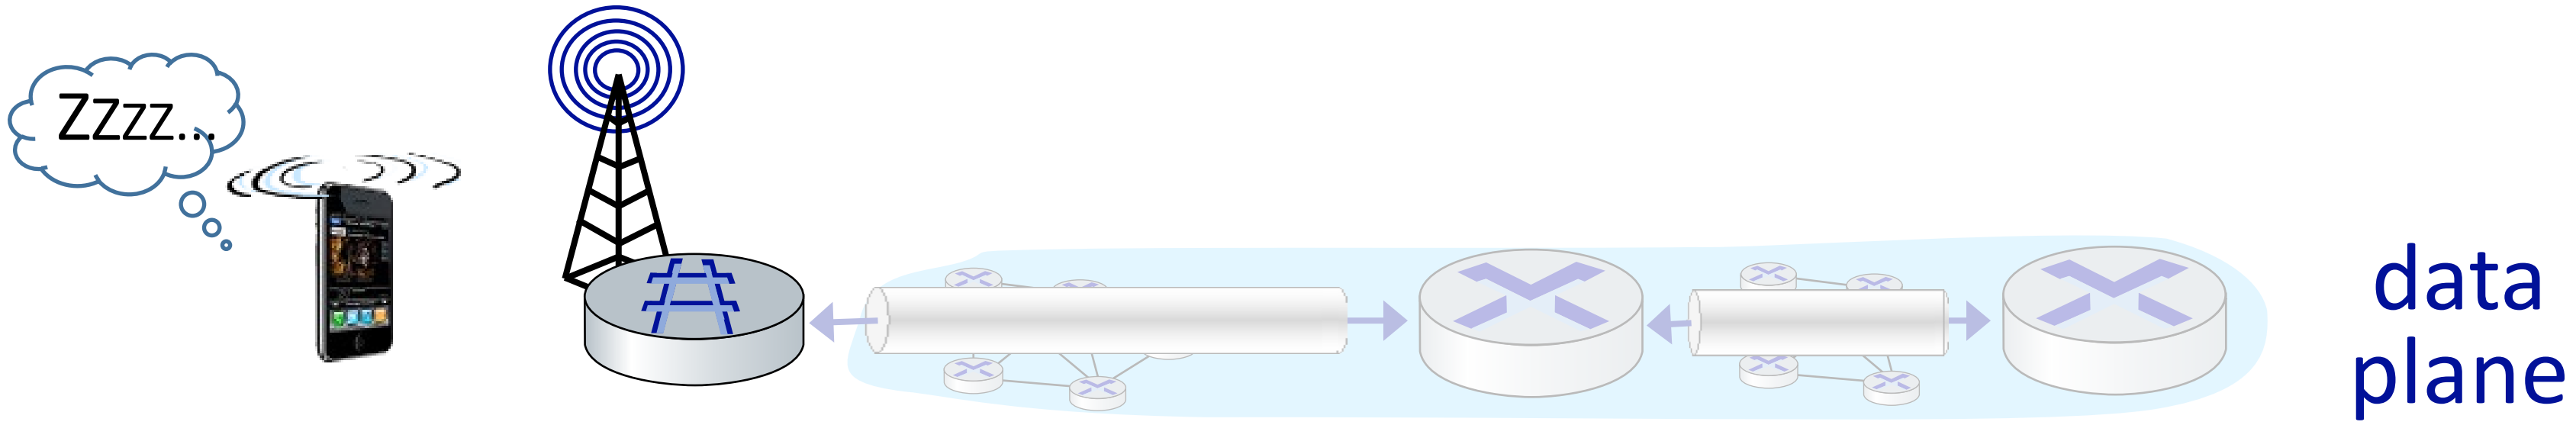

as in WiFi, Bluetooth: LTE mobile may put radio to "sleep" to conserve battery:

- light sleep: after 100's msec of inactivity
  - wake up periodically (100's msec) to check for downstream transmissions
- deep sleep: after 5-10 secs of inactivity
  - mobile may change cells while deep sleeping – need to re-establish association

Configuring LTE control-plane elements

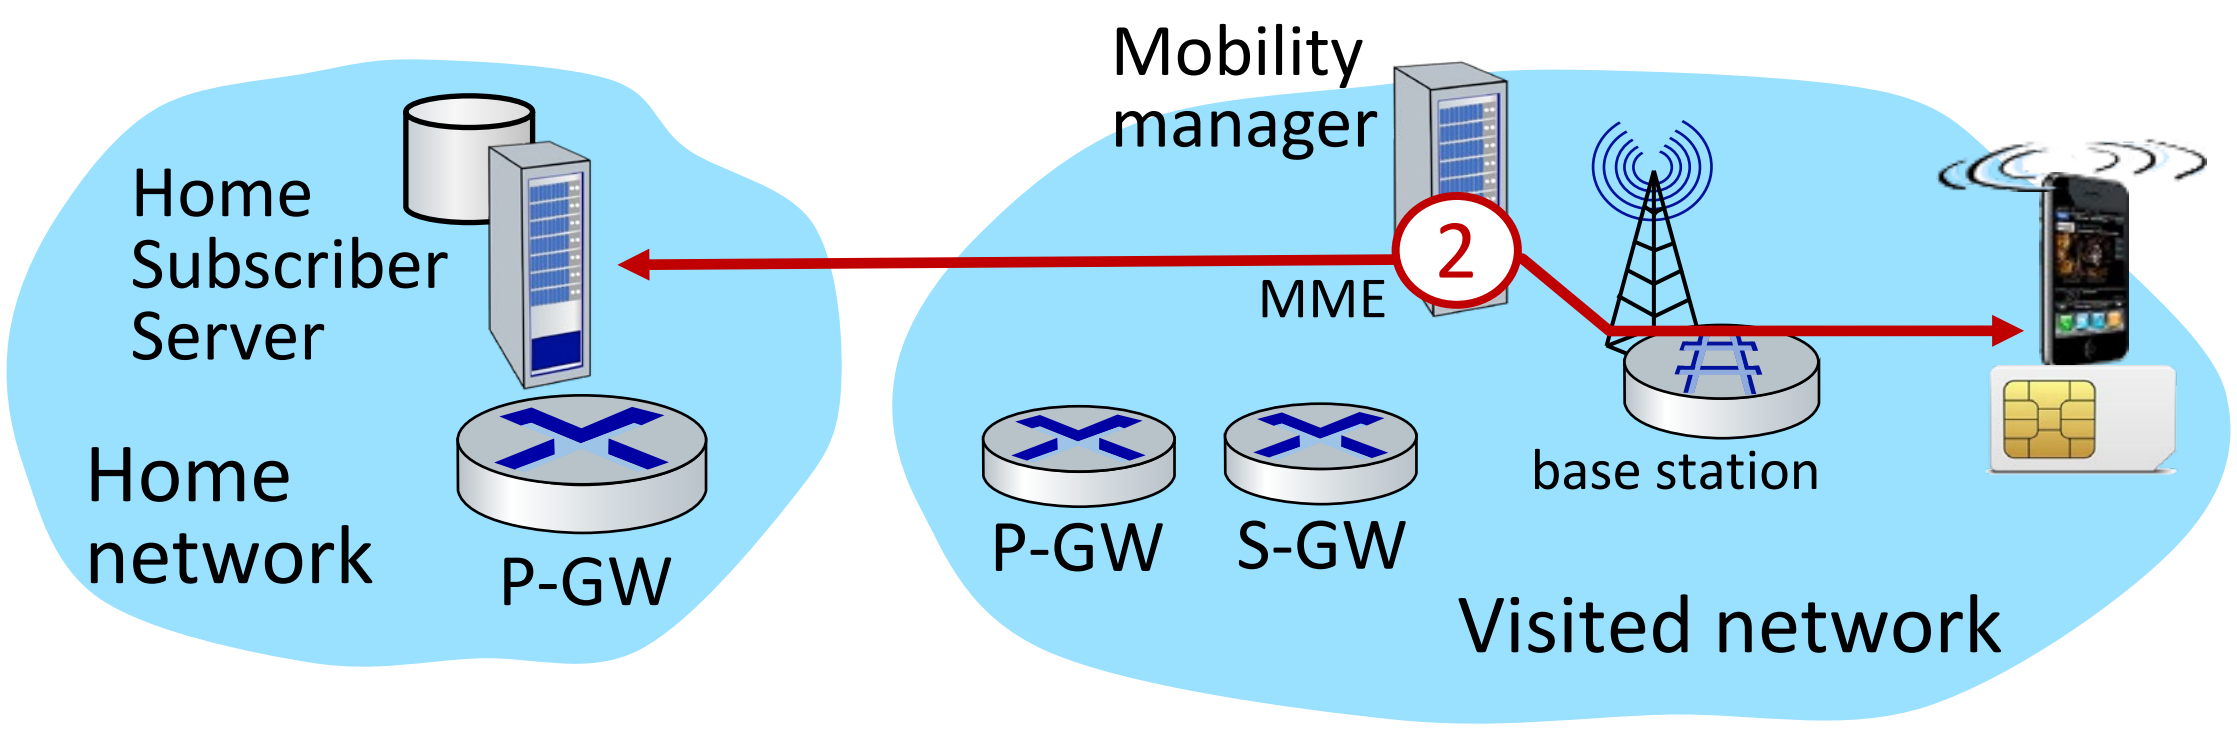

- Mobile communicates with local MME via BS control-plane channel
- MME uses mobile's IMSI info to contact mobile's home HSS
  - retrieve authentication, encryption, network service information
  - home HHS knows mobile now resident in visited network
- BS, mobile select parameters for BS-mobile data-plane radio channel

Configuring data-plane tunnels for mobile

- S-GW to BS tunnel: when mobile changes base stations, simply change endpoint IP address of tunnel
- S-GW to home P-GW tunnel: implementation of indirect routing

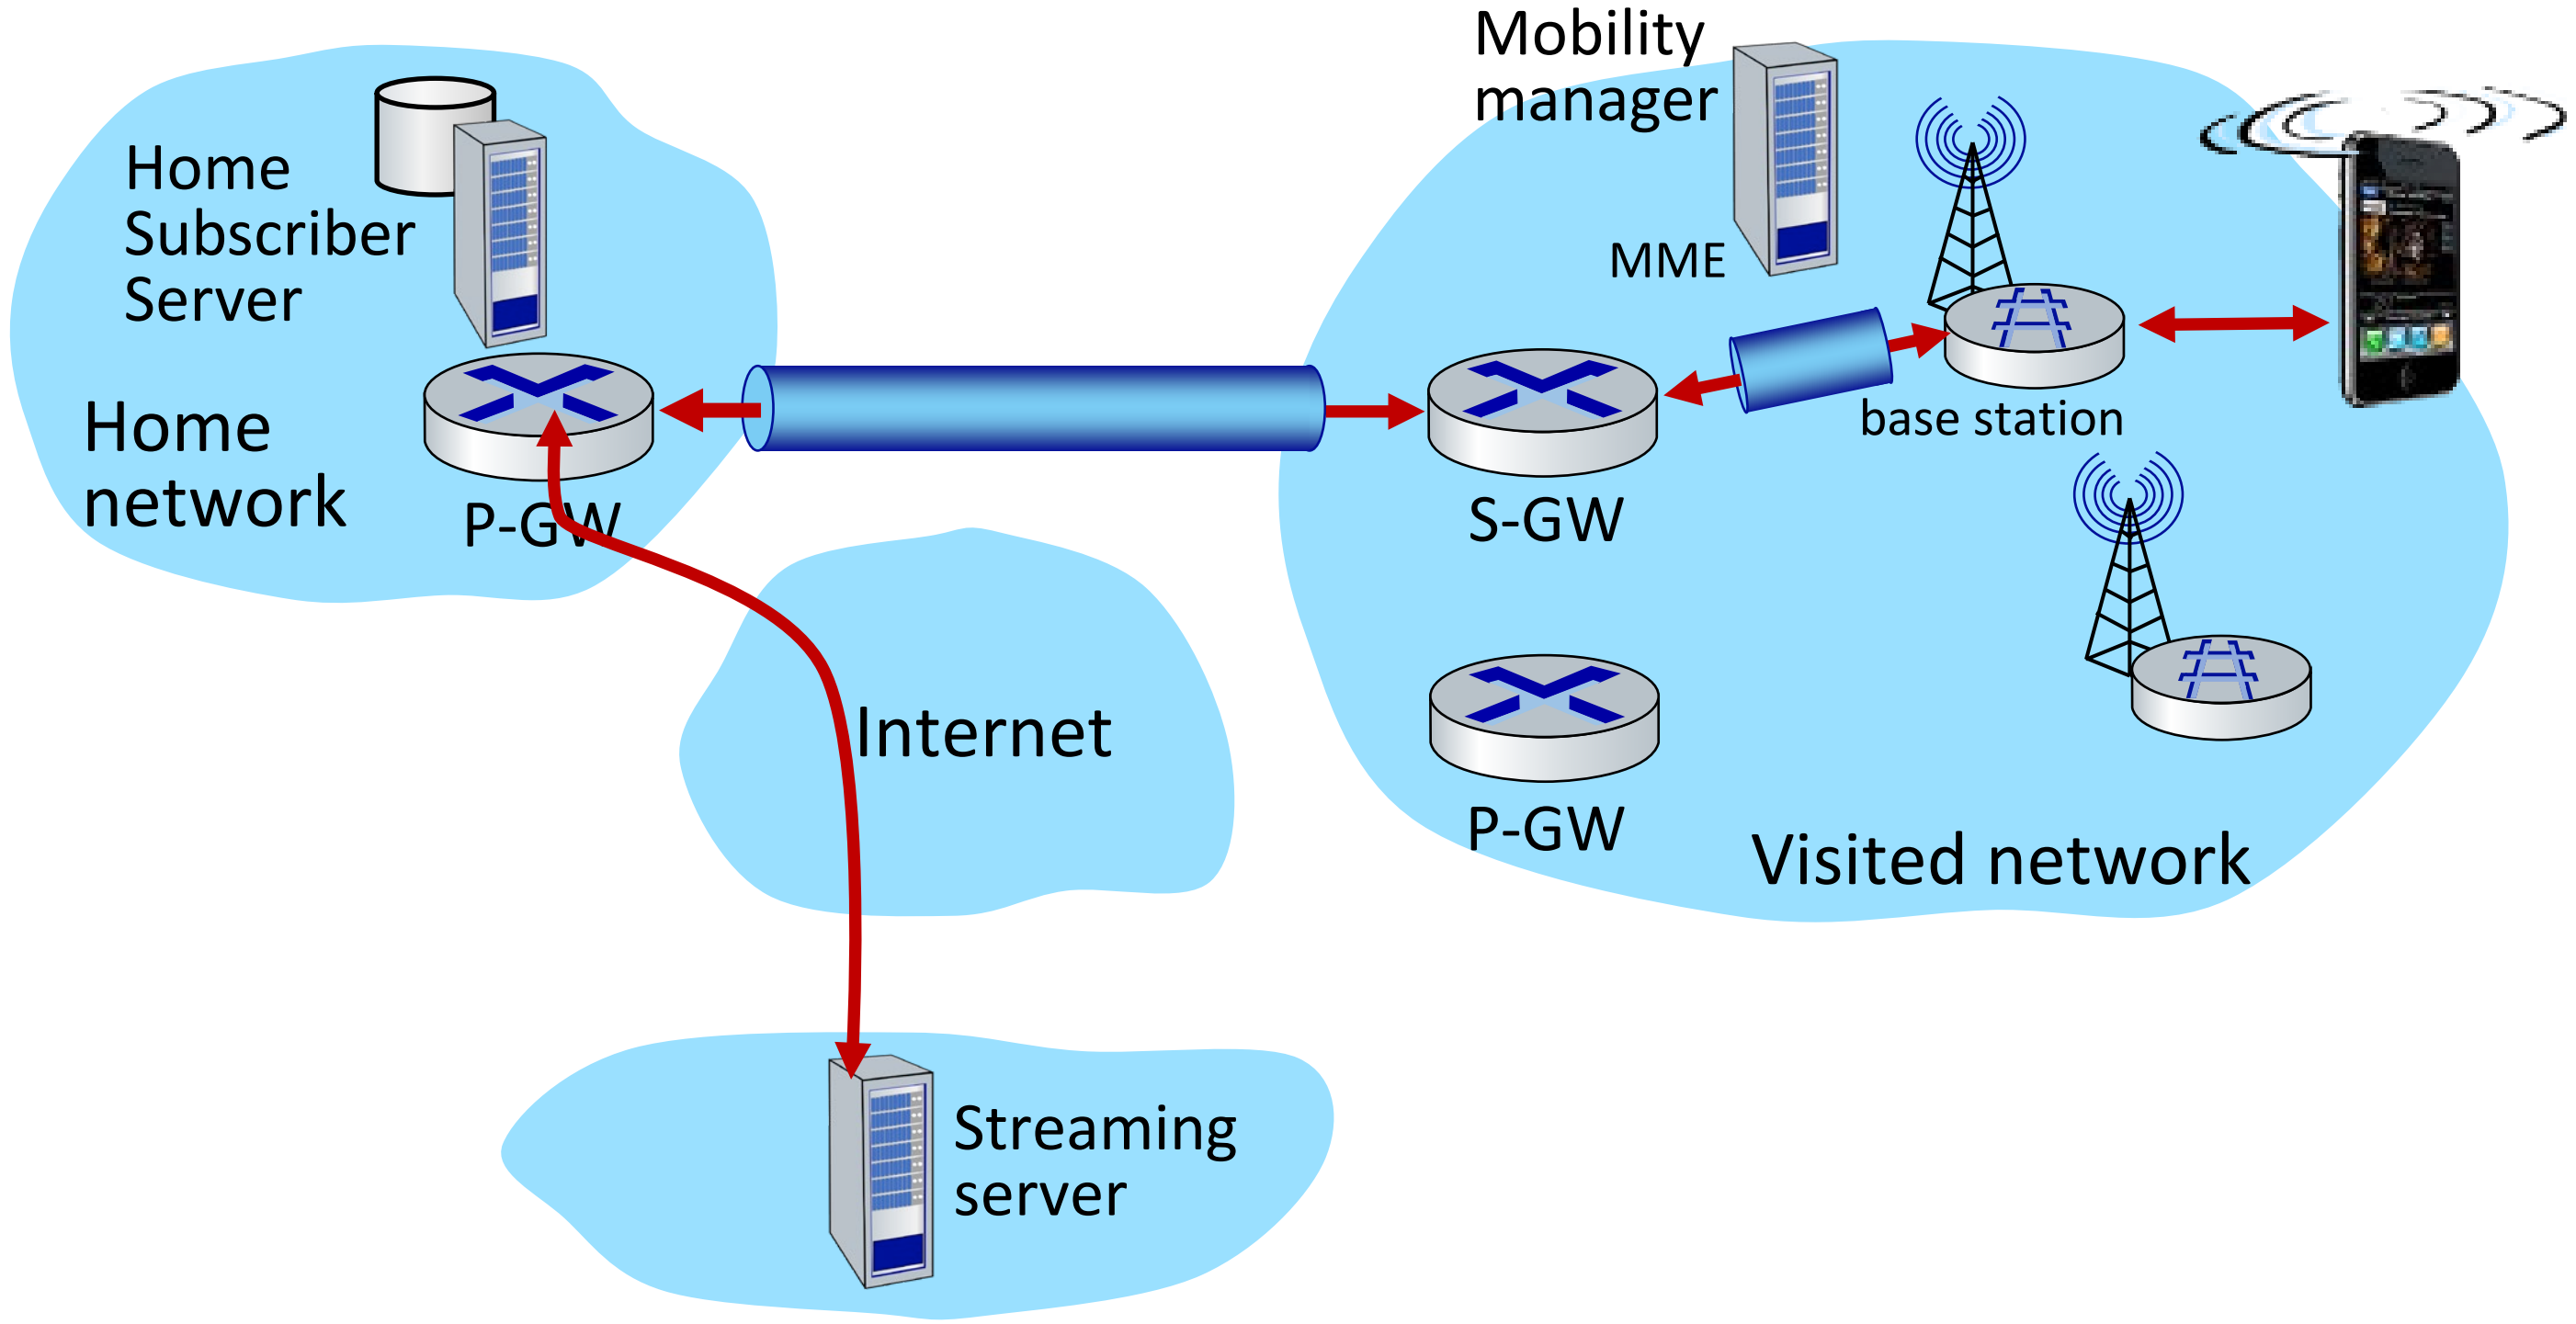

- tunneling via GTP (GPRS tunneling protocol): mobile’s datagram to streaming server encapsulated using GTP inside UDP, inside datagram

Mobility in 4G networks: major mobility tasks

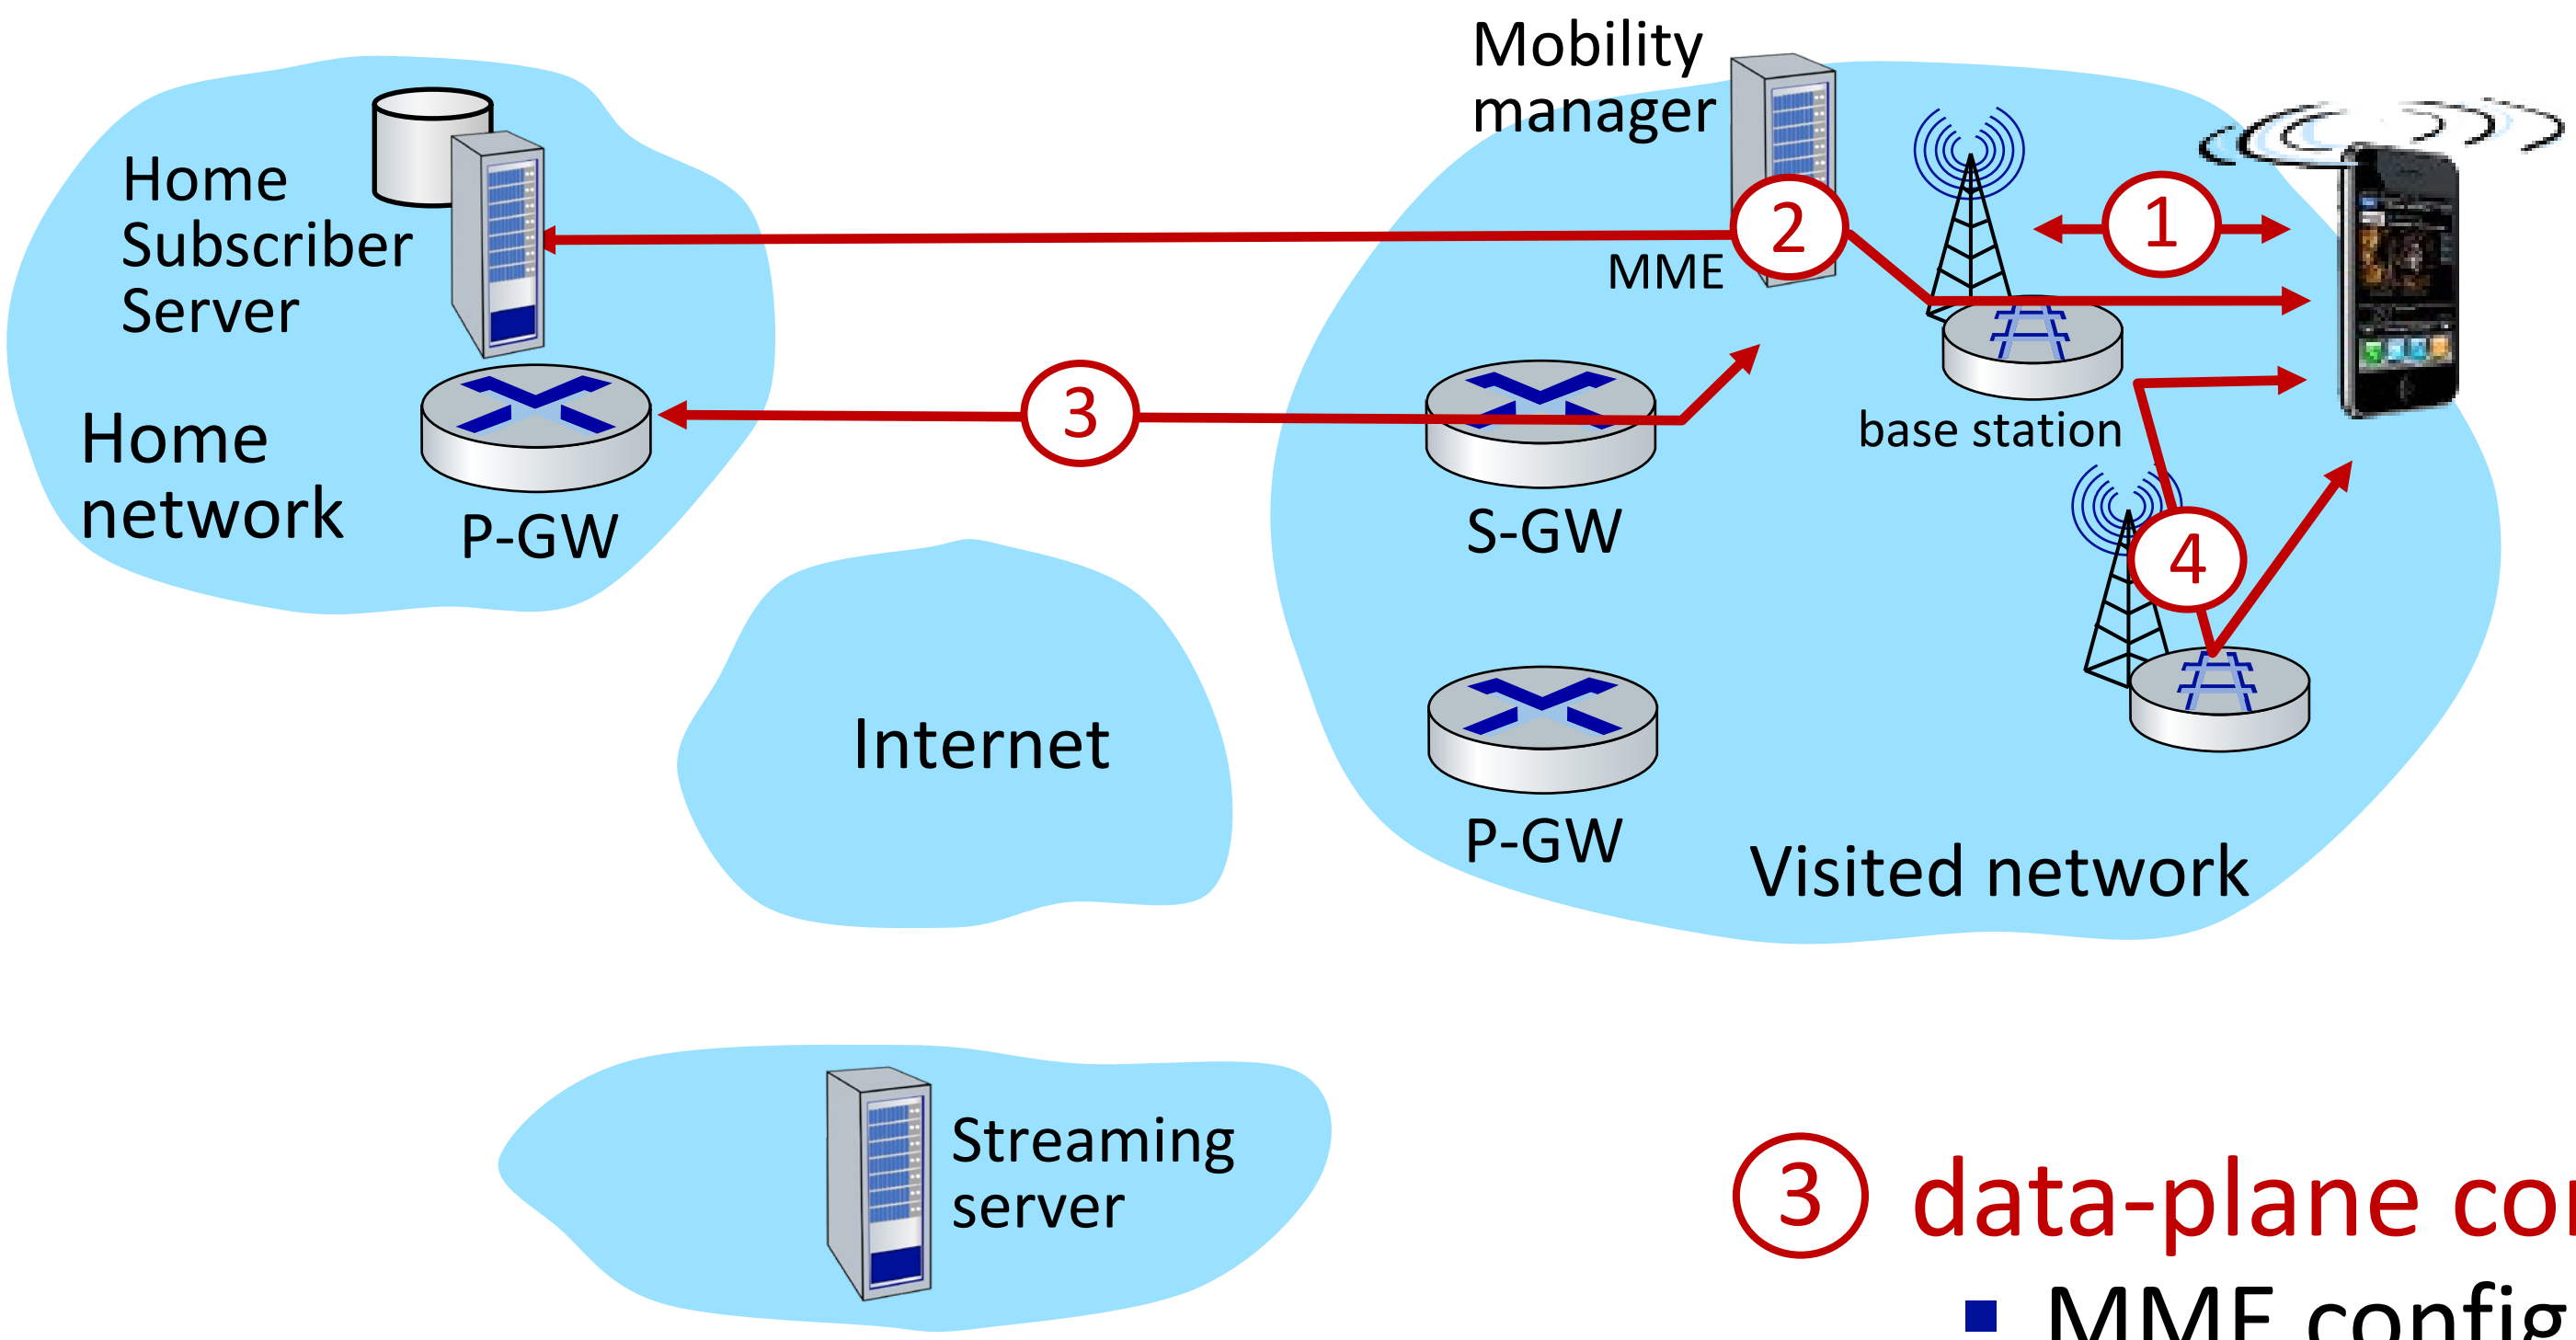

1 base station association:

- covered earlier
- mobile provides IMSI – identifying itself, home network

2 control-plane configuration:

- MME, home HSS establish control-plane state - mobile is in visited network

3 data-plane configuration:

- MME configures forwarding tunnels for mobile
- visited, home network establish tunnels from home P-GW to mobile

4 mobile handover:

- mobile device changes its point of attachment to visited network

Handover between BSs in same cellular network

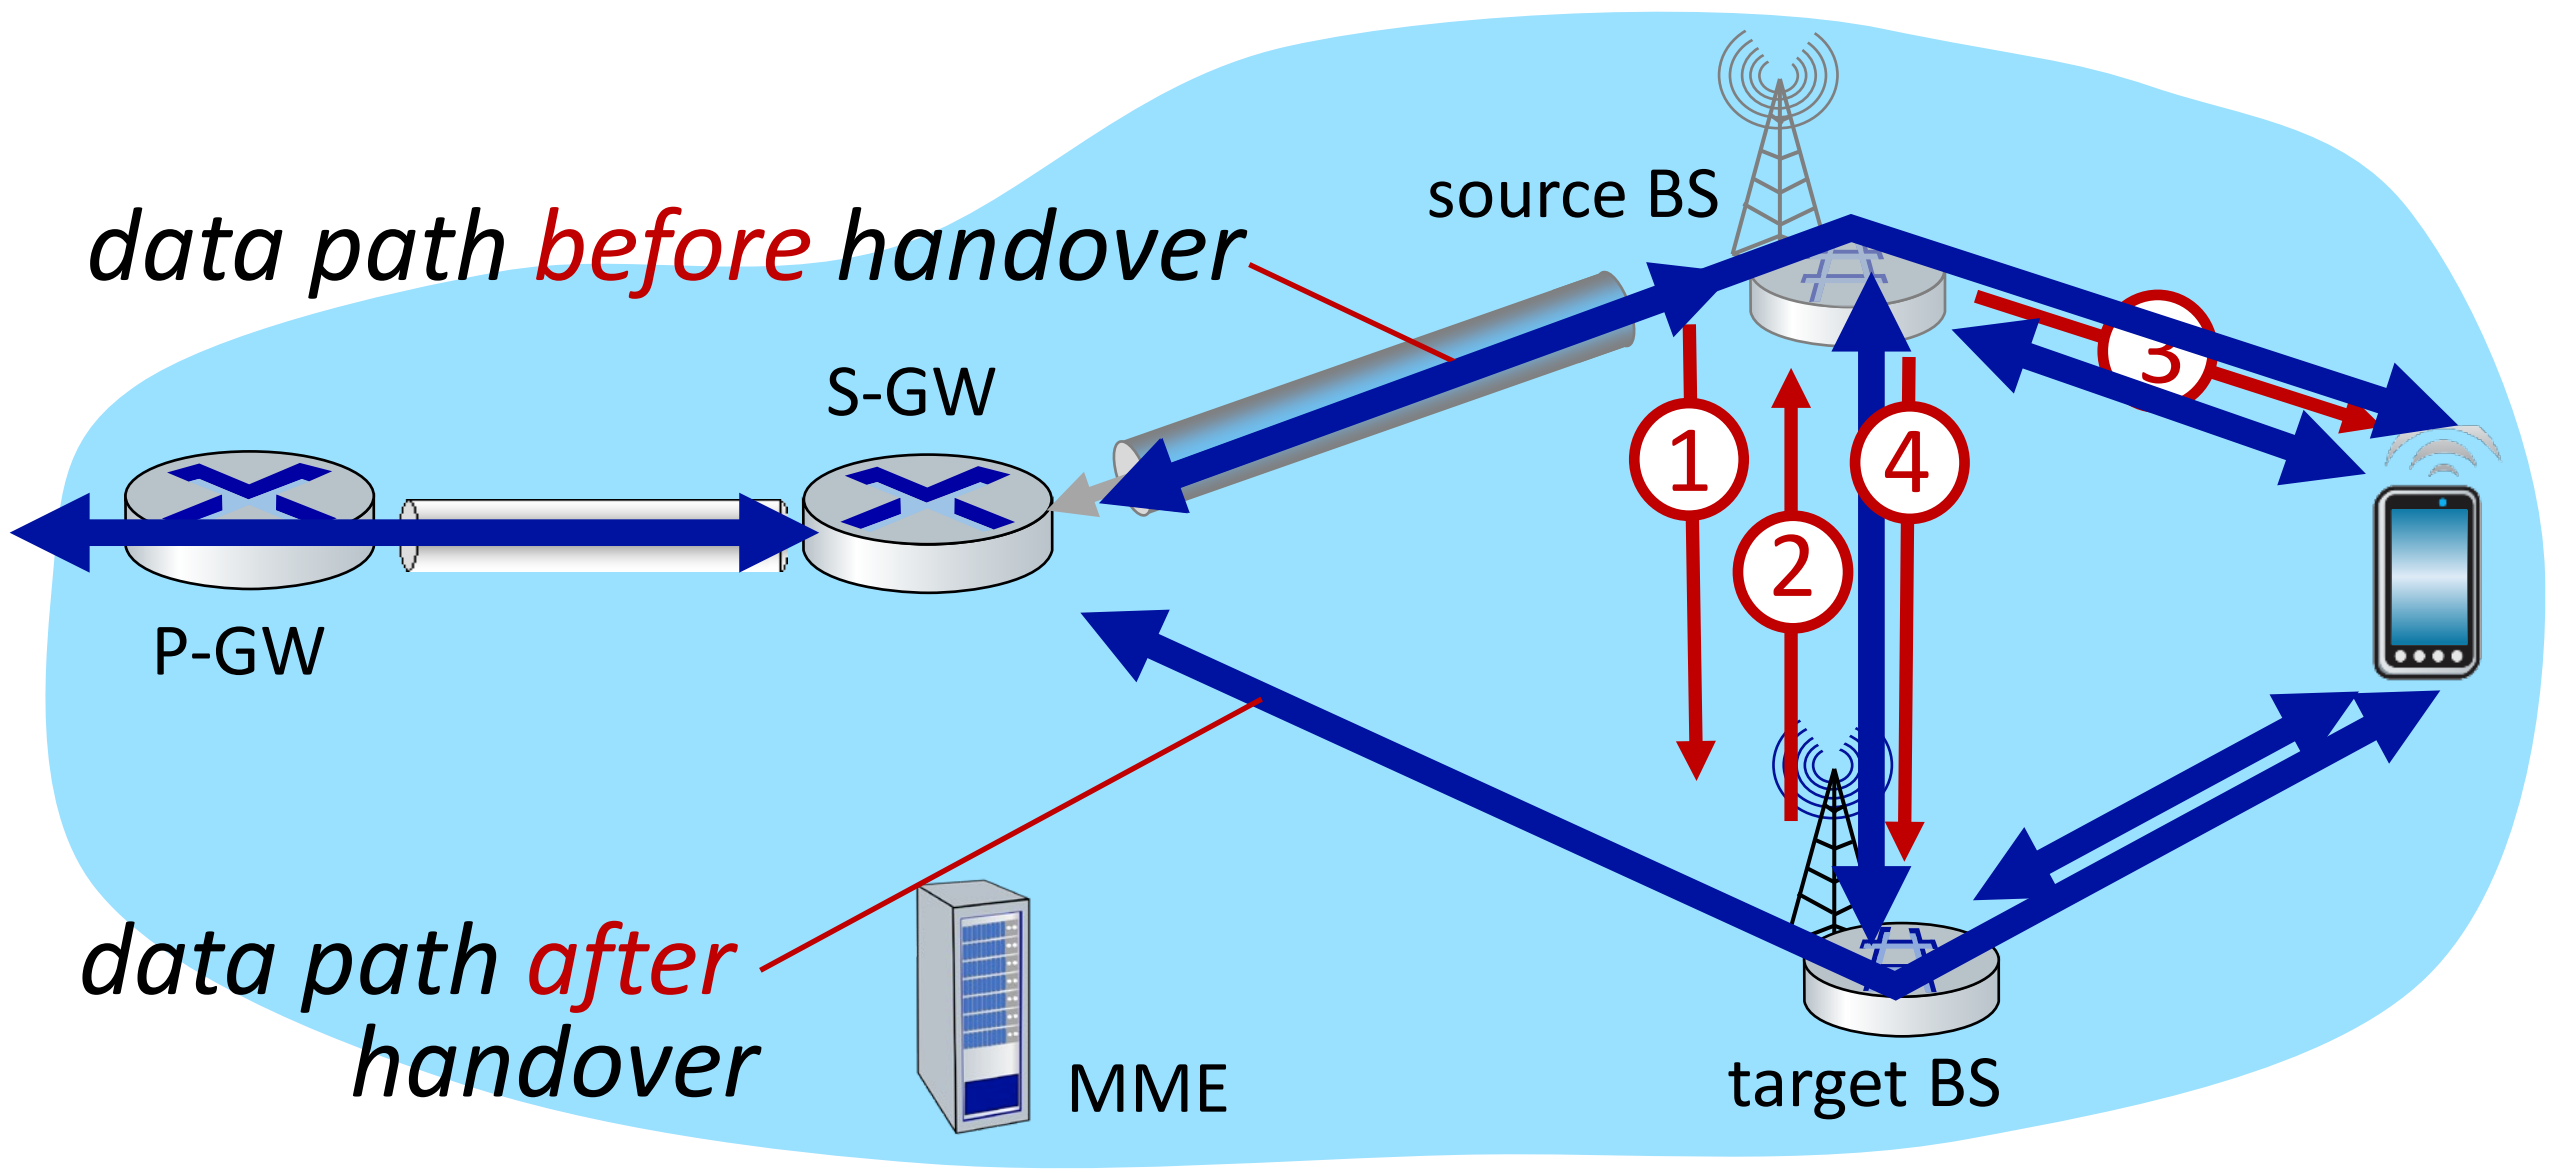

1. current (source) BS selects target BS, sends *Handover Request message* to target BS

2. target BS pre-allocates radio time slots, responds with HR ACK with info for mobile

3. source BS informs mobile of new BS
   - mobile can now send via new BS - handover *looks* complete to mobile

4. source BS stops sending datagrams to mobile, instead forwards to new BS (who forwards to mobile over radio channel)

Handover between BSs in same cellular network

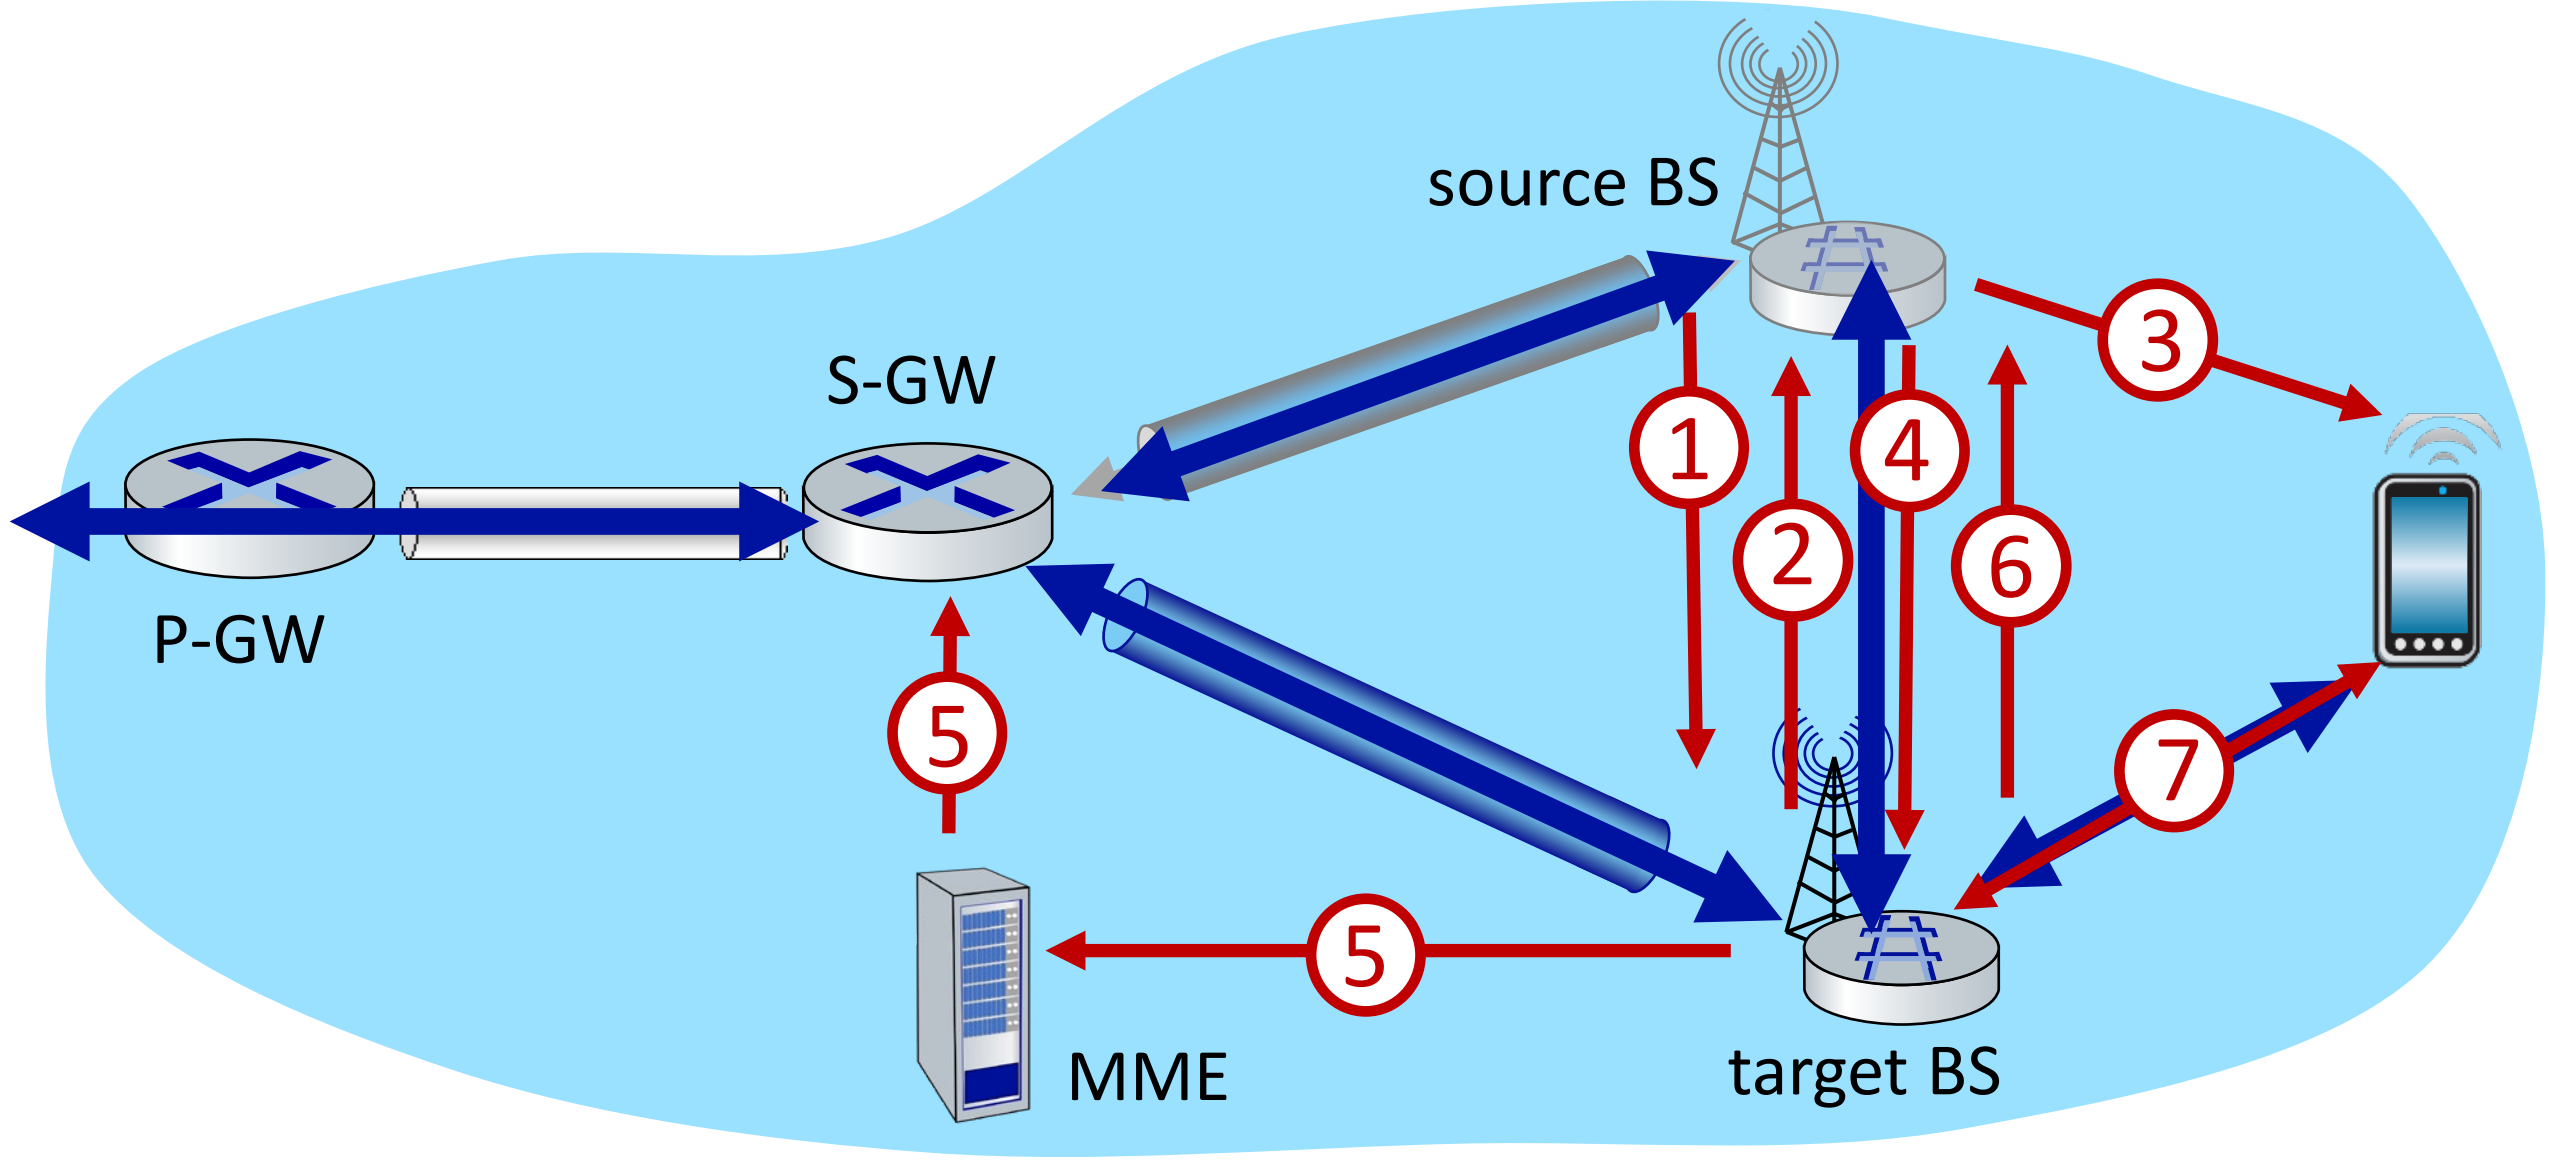

5 target BS informs MME that it is new BS for mobile

- MME instructs S-GW to change tunnel endpoint to be (new) target BS

6 target BS ACKs back to source BS: handover complete, source BS can release resources

7 mobile's datagrams now flow through new tunnel from target BS to S-GW

On to 5G!

- goal: 10x increase in peak bitrate, 10x decrease in latency, 100x increase in traffic capacity over 4G
- 5G NR (new radio):
  - two frequency bands: FR1 (450 MHz–6 GHz) and FR2 (24 GHz–52 GHz): millimeter wave frequencies
  - not backwards-compatible with 4G
  - MIMO: multiple directional antennae
- millimeter wave frequencies: much higher data rates, but over shorter distances
  - pico-cells: cells diameters: 10-100 m
  - massive, dense deployment of new base stations required

Reading: Book Kurose & Ross

Class textbook:
Computer Networking: A Top-Down Approach *(8th ed.)*
J.F. Kurose, K.W. Ross
Pearson, 2020
http://gaia.cs.umass.edu/kurose_ross



- Week 14
  - 7 (Wireless and Mobile Networks)

Check Your Knowledge

PROBLEM SOLVING HOME | TRY A RANDOM PROBLEM

INTERACTIVE END-OF-CHAPTER EXERCISES

Supplement to Computer Networking: A Top Down Approach 8th Edition

"Tell me and I forget. Show me and I remember. Involve me and I understand." Chinese proverb

CHAPTER 7: WIRELESS AND MOBILE NETWORKS

- CDMA - Basic
- CDMA - Advanced
- 4G Wireless Tunneling
- 4G Wireless Handover

http://gaia.cs.umass.edu/kurose_ross/interactive/