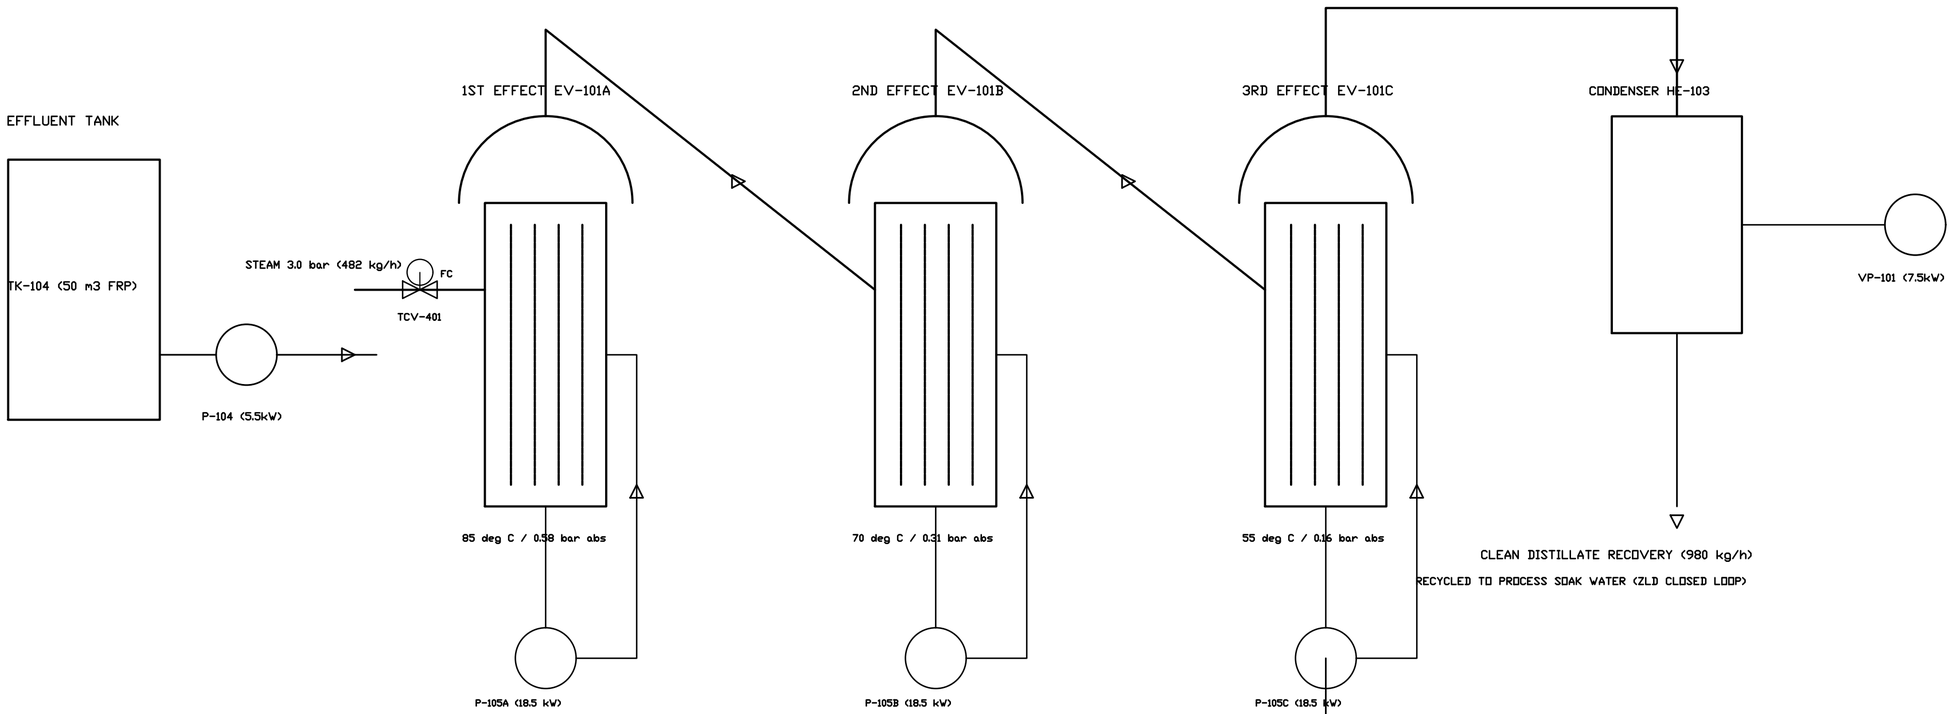

ZLD TRIPLE-EFFECT EVAPORATOR OPERATING SPECIFICATIONS & INSTRUMENTATION:

1. Feed Rate: 1,018.75 kg/h spent soak liquor @ 0.63 wt% dissolved organic/mineral solids.
2. Evaporation Capacity: 980.0 kg/h clean distillate recovery (96.2% volumetric water recovery rate).
3. Steam Economy: 2.38 kg H2O evaporated per kg 3.0 bar g motive steam supplied (0.42 kg steam / kg H2O).
4. Distillate Quality: Total Dissolved Solids (TDS) < 25 ppm, Conductivity < 40 uS/cm (Recycled directly to soak process).
5. Instrumentation: Full ISA-5.1 control loops (TIC-401 steam feed, LIC-401/402 inter-effect, DIC-403 density bleed).
6. Concentrate Discharge: 38.75 kg/h heavy slurry (40% total solids) to solar crystallization pan.

FINNOAQ AGRO-INDUSTRIAL TECHNOLOGIES LTD.
15,000 kg/day Split Pigeon Pea Optimization Greenfield Project

P&ID - TRIPLE-EFFECT ZLD WASTEWATER EVAPORATOR

DISCIPLINE: PIPING | LEAD: SOURISH SENAPATI | GUIDANCE: DR. ARCHISMAN RAY (IIT KGP)

DWG NO: DWG-FIN-15T-010	REV: V8.0	SHEET: 10 OF 12
SCALE: AS SHOWN DATE: 2026-10-17	STATUS: PRELIMINARY	GATE: G-A HOLD

CONCEPTUAL FEED - PRELIMINARY - NOT FOR CONSTRUCTION / NOT FOR PROCUREMENT | COPYRIGHT FINNOAQ