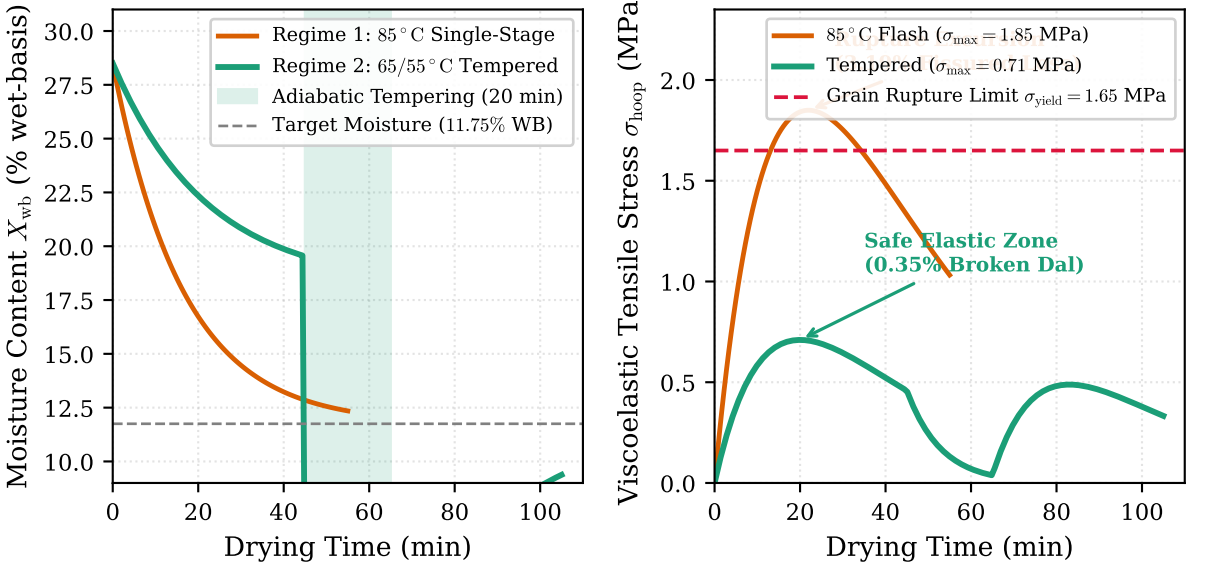

(a) Convective Moisture Desorption Curves
(b) Cotyledon Internal Stress Profile
Regime 1: 85 °C Single-Stage
Regime 2: 65/55 °C Tempered
Adiabatic Tempering (20 min)
Target Moisture (11.75% WB)
Moisture Content X_{wb} (% wet-basis)
Drying Time (min)
85 °C Flash ($\sigma_{max} = 1.85$ MPa)
Tempered ($\sigma_{max} = 0.71$ MPa)
Grain Rupture Limit $\sigma_{yield} = 1.65$ MPa
Safe Elastic Zone
(0.35% Broken Dal)
Viscoelastic Tensile Stress σ_{hoop} (MPa)
Drying Time (min)