


3.2 Rest

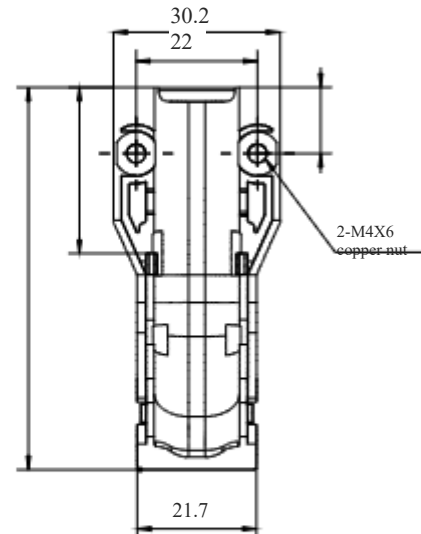

2. All materials use 100% new materials. 3. All materials must be sample confirmed before production; 4. The appearance is frosted, and the texture refers to the sample; 5. The product cannot be deformed, and no strains, shrinkage, edges, or air marks are allowed, and other surface defects; 6. The surface of the parts is clean and free of oil, chips, dust, etc. 7. The surface is protected from scratches, bumps, bruises, deformation and other defects. * 8. Comply with the latest RoHS regulatory requirements; 9. No dimensions are noted, please refer to the 3D drawings; 10. There is no warning after assembly with the hot bed wire (drip upper shell), and the buckles are tightly locked.

			Linear tolerances are implemented according to GB/T1184 in kind; geometric tolerances are implemented according to GB/T1184 in kind.						design	RenSX	2024/9/7	Jie Xinhua Technology Co., Ltd.			Drawing number	PA66+10% fiber		
			Limit deviation values for linear basic size segments						Review						model material	MP3A02		
			<div><div>> 6 ~ 30</div><div>> 30 ~ 120</div><div>> 120 ~ 400</div><div>> 400 ~ 1000</div><div>> 1000 ~ 2000</div><div>> 2000 ~ 4000</div></div>						approve				stage mark	quantity	weight	Proportion		JXHMP3A02-01023-d
A0	initial release	2024-8-21	<div><div>±0.2</div><div>±0.3</div><div>±0.5</div><div>±0.8</div><div>±1.2</div><div>±2</div></div>															
Version mark	Change content	date	<div><div>≤10</div><div>> 10 ~ 30</div><div>> 30 ~ 100</div><div>> 100 ~ 300</div><div>> 300 ~ 1000</div><div>> 1000 ~ 3000</div></div>															
			<div><div>0.05</div><div>0.1</div><div>0.2</div><div>0.4</div><div>0.6</div><div>0.8</div></div>															
			Unspecified tolerance values for straightness and flatness							1 in total	Picture 1			1:1	name	Hot bed line fixed lower cover		