This material code	A0
	200599100208

4010 blower fan

24'Ball 8000r/min

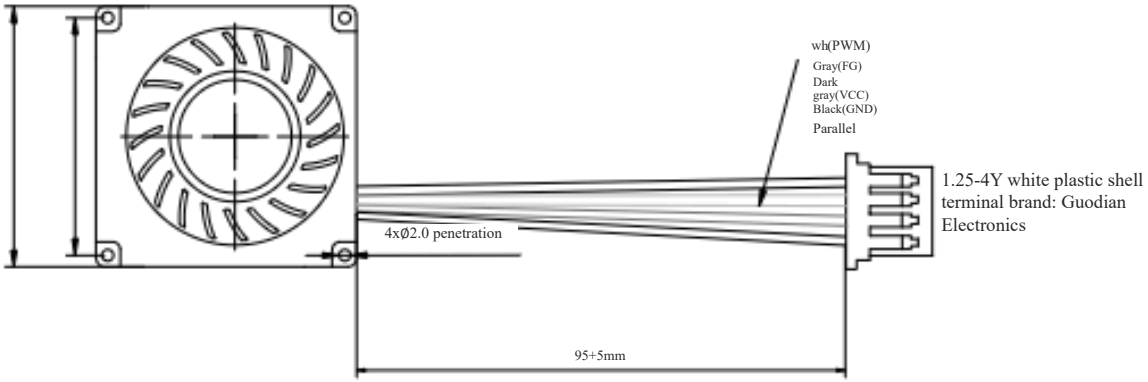

Technical requirements: 1. The dimensions with "△" in the picture are important inspection items; 2. The marked dimensional tolerances are all positive tolerances; 3. The exterior surface must be free of dirt and damage, and there must be no broken copper wires inside the wires;

△4, the joint can withstand 58N/89N without loosening;

5. The wires are not damaged, and the terminals are not deformed or rusted; 6. The wires must comply with UL certification;

7. Comply with the company's odor test standards, no odor at 200°C/0.5h; 8. Comply with RoHS (the European market also complies with REACH requirements); 9. Comply with the "Management Measures for the Restriction of the Use of Hazardous Substances in Electrical and Electronic Products"; 10. The fan can Passed stepper motor strong magnetic

11. The noise is less than 52dB, the air volume is within 4-4.5 (CFM), and the wind pressure is within 14-17.5 (mmH20); 12. The vibration over-frame and abnormal sound tests comply with SIP standards;

serial number	describe	model	quantity	unit
1	Wire	28AWG(0.5A) , UL1007	4	PCS

Linear tolerances are implemented according to GB/T1804-m level; geometric tolerances are implemented according to GB/T1184-K level.

Limit deviation values for linear basic size segments	> 6 ~ 30	> 30 ~ 120	> 120 ~ 400	> 400 ~ 1000	> 1000 ~ 2000	> 2000 ~ 4000
	±0.2	±0.3	±0.5	±0.8	±1.2	±2

Unspecified tolerance values for straightness and flatness	≤10	> 30 ~ 100	> 100 ~ 300	> 300 ~ 1000	> 10 ~ 30	> 1000 ~ 3000

Versicmark	Change content	date

design	McConnel	2024/6/26	Jie Xinhua Technology Co., Ltd.	Material	
Review				model	MP3A02
approve			stage mark Drawing number		JXHMP3A02-09019-g
	1 in	Picture 1 name	1	1:1	4010 turbofan