



A0 version material
code 200203005788

3.2 Rest /

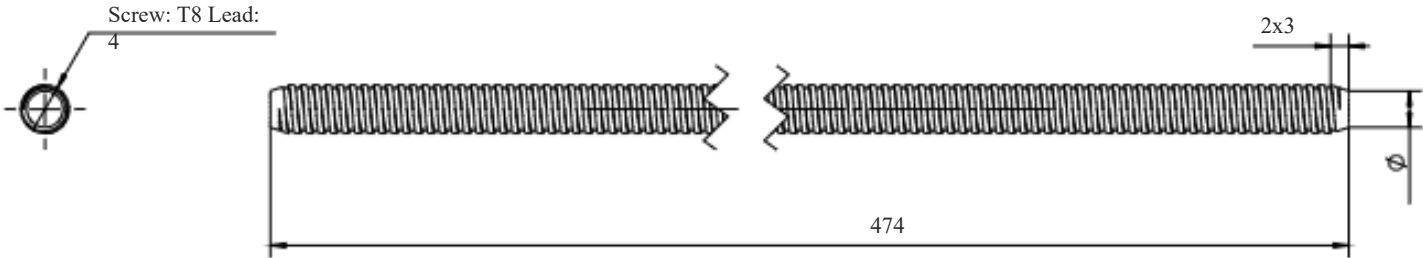

Technical requirements: 1. Deburring, sharp corners blunt; 2. No chamfering C0.2 noted; 3. Dimensions marked with * are key dimensions; 4. The surface should be protected from scratches, bumps, crushes, deformation and other defects. 5. The matching clearance with the part "JXHSV06-03008-a screw POM nut" is 0-0.01mm

			Linear tolerances are implemented according to GB/T1184-as level; geometric tolerances are implemented according to GB/T1184-k level.							design	Wang Ende		2023/2/7		Jie Xinhua Technology Co., Ltd.				Drawing number	SUS304	
			Limit deviation values for linear basic size segments	> 6 ~ 30	> 30 ~ 120 ~ 400	> 120 ~ 400	> 400 ~ 1000	> 1000 ~ 2000	> 2000 ~ 4000	Review							model material	JXHSV06P			
			Unspecified tolerance values for straightness and flatness	≤10	> 10 ~ 30	> 30 ~ 100 ~ 300	> 100 ~ 300	> 300 ~ 1000	> 1000 ~ 3000	approve			stage mark		quantity	weight	Proportion	JXHSV06P-02			
Versionmark	Change content	date		0.05	0.1	0.2	0.4	0.6	0.8	 1 in total	Picture 1				1	0.2	1:1	name	Z-axis trapezoidal screw		