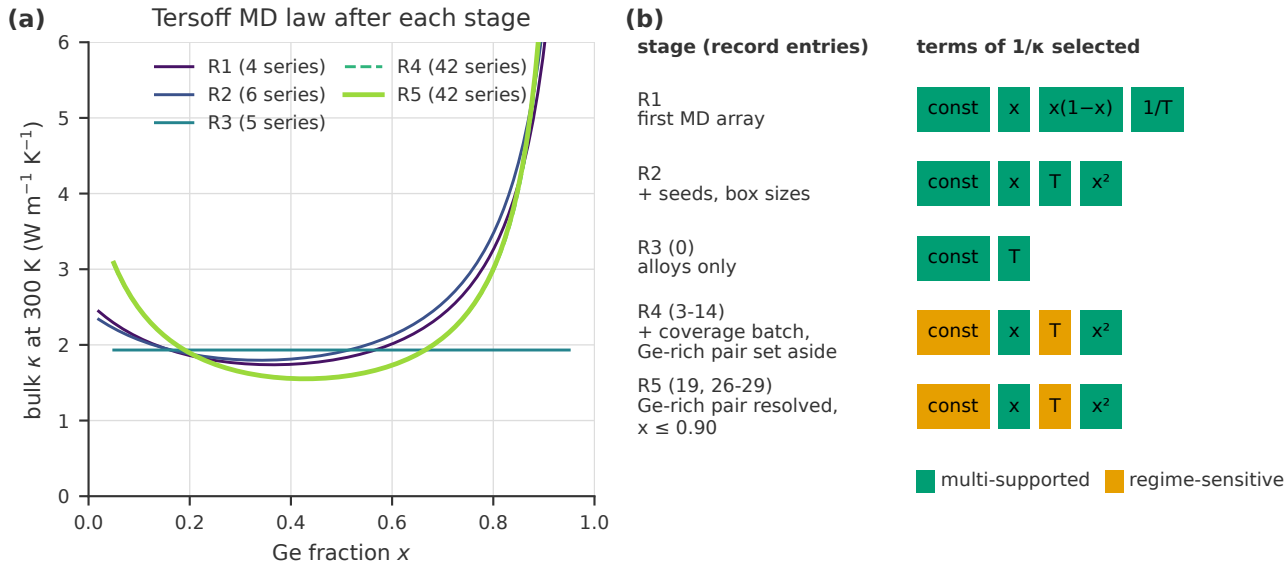
(a)
Tersoff MD law after each stage
R1 (4 series)
R2 (6 series)
R3 (5 series)
R4 (42 series)
R5 (42 series)
bulk κ at 300 K (W m⁻¹ K⁻¹)
Ge fraction x
0
1
2
3
4
5
6
0.0
0.2
0.4
0.6
0.8
1.0
(b)
stage (record entries)
terms of 1/κ selected
R1
first MD array
const
x
x(1−x)
1/T
R2
+ seeds, box sizes
const
x
T
x²
R3 (0)
alloys only
const
T
R4 (3-14)
+ coverage batch,
Ge-rich pair set aside
const
x
T
x²
R5 (19, 26-29)
Ge-rich pair resolved,
x ≤ 0.90
const
x
T
x²
multi-supported
regime-sensitive