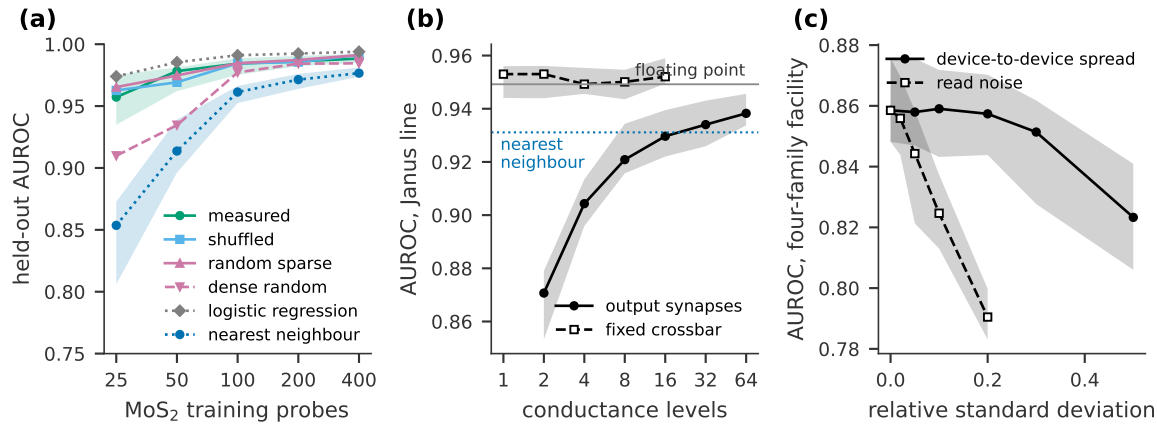
(a)
held-out AUROC
1.00
0.95
0.90
0.85
0.80
0.75
measured
shuffled
random sparse
dense random
logistic regression
nearest neighbour
25
50
100
200
400
MoS2 training probes
(b)
AUROC, Janus line
0.96
0.94
0.92
0.90
0.88
0.86
floating point
nearest
neighbour
output synapses
fixed crossbar
1
2
4
8
16
32
64
conductance levels
(c)
AUROC, four-family facility
0.88
0.86
0.84
0.82
0.80
0.78
device-to-device spread
read noise
0.0
0.2
0.4
relative standard deviation