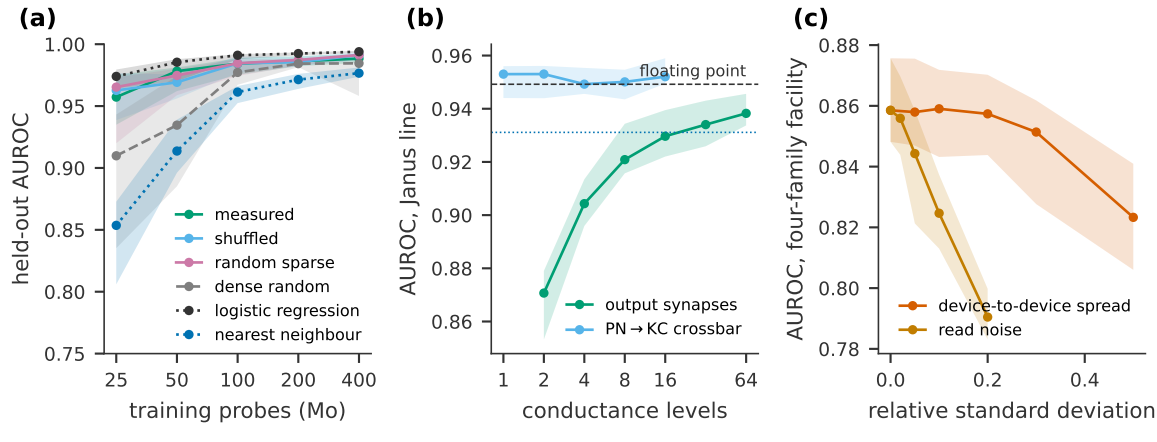
(a)
held-out AUROC
1.00
0.95
0.90
0.85
0.80
0.75
measured
shuffled
random sparse
dense random
logistic regression
nearest neighbour
25
50
100
200
400
training probes (Mo)
(b)
AUROC, Janus line
0.96
0.94
0.92
0.90
0.88
0.86
floating point
output synapses
PN → KC crossbar
1
2
4
8
16
64
conductance levels
(c)
AUROC, four-family facility
0.88
0.86
0.84
0.82
0.80
0.78
device-to-device spread
read noise
0.0
0.2
0.4
relative standard deviation