



PRODUCT INFORMATION DOCUMENT

FEATURES

- Innovative, modular, high quality range of LED Downlights available in standard and antiglare options
- Unique wattage selectable design with choices of 7W and 9W via switch located on the driver
- Switch on the back of the fitting allows CCT changing between 3,000K, 4,000K, 5,000K and 6,500K
- Excellent colour reproduction thanks to CRI exceeding 90
- Offers IC-4 Thermal Insulation rating
- Modular design allowing easy change between standard and anti-glare options if required
- Available accessories: black standard trim (RCX9TRIM-04), anti-glare reflectors in white (RCX9RFT-01), black (RCX9RFT-04), silver (RCX9RFT-15) and gold (RCX9RFT-28)

CONSTRUCTION

- Polycarbonate housing with aluminium heat sink
- Polycarbonate trim & diffuser
- 0.6m of flex and plug



WARRANTY



LUMINAIRE
LIFETIME



LUMENS
PER W



IK RATING



IP RATING



OPERATING
VOLTAGE



BEAM ANGLE



DIMMING



CCT



SAFETY
CLASS



IC RATING

Product Code:	RCXCCT4-01	RCXCCT404-04	RCXCCT415-01
Comparable to:	50W Halogen	50W Halogen	50W Halogen
Total Power (W):	6.6/8.4	6.6/8.4	6.6/8.4
Power Factor:	0.9	0.9	0.9
Total Light Output (lm):	830/1020	650/800	750/970
Efficacy (lm/cctW):	126/122	100/96	120/116
Lux at 1m (lux):	640/790	650/790	850/1040
CCT (K):	3000/4000/5000/6500	3000/4000/5000/6500	3000/4000/5000/6500
CRI:	90	90	90
IP:	65	65	65
Operation Temperature (°C):	-20 ≤ Ta ≤ +40	-20 ≤ Ta ≤ +40	-20 ≤ Ta ≤ +40
Inrush Current:	8A/2us	8A/2us	8A/2us
RG Value:	0	0	0
SDCM:	<6	<6	<6
Rated Life to L70B50 (Hrs):	30000	30000	30000
Dimensions ØxH (mm):	105x75	105x70	105x70
Weight (kg):	0.34	0.34	0.34

Product is certified to all the relevant standards.

Please contact our technical department for market specific compliances.

PLEASE NOTE: INFORMATION IN THIS DOCUMENT MAY BE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

IRE: TEL: +353 1 709 9000
UK: TEL: 0800 973 220
AUS: TEL: +61 7 3890 5444
NZ: TEL: +64 03 668 5285

WEB: ROBUS.COM
WEB: ROBUS.COM
WEB: ROBUS.COM.AU
WEB: ROBUSED.CO.NZ

LED GROUP EUROPE · UK · AUSTRALIA · NEW ZEALAND · ASIA · MIDDLE EAST · AFRICA

TAYLOR PLUS CCT4 LED DOWNLIGHT

7W

9W

CCT4

Cone Illuminance Diagram

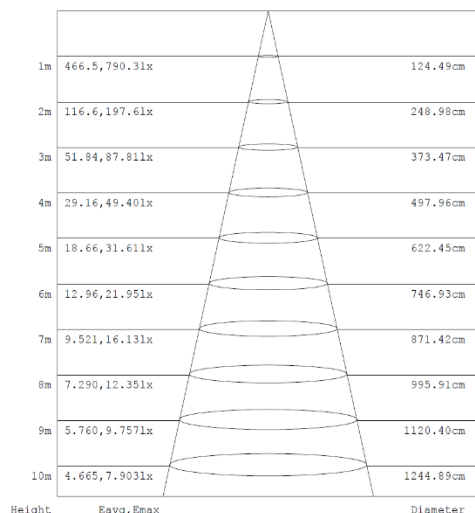


Diagram for RCXCCT4-01 in 9W 4000K. Other diagrams available on request

Polar Intensity Diagram


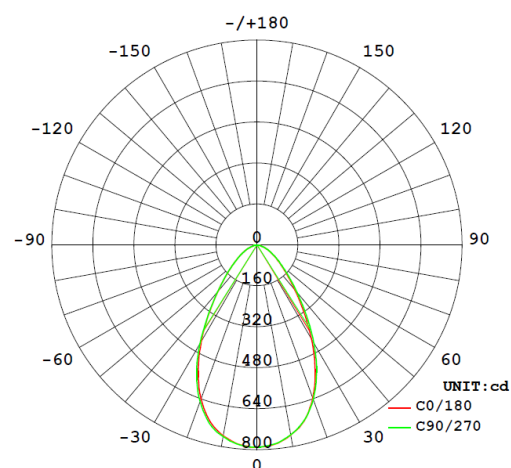



Diagram for RCXCCT4-01 in 9W 4000K. Other diagrams available on request

Dimension Diagram

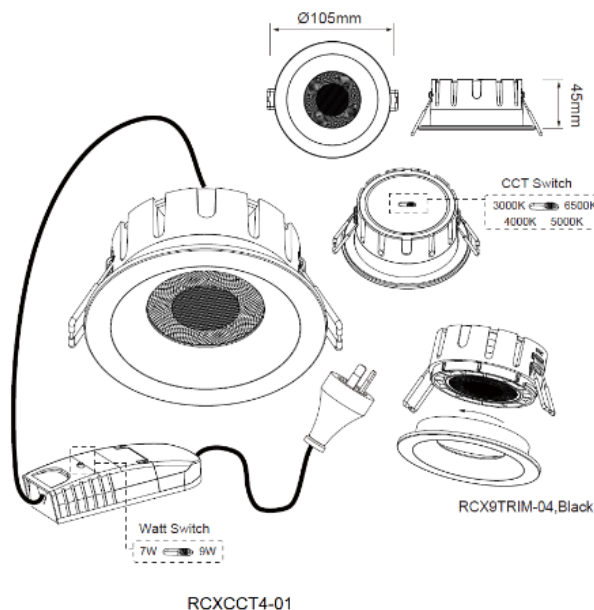

Accessories

RCX9TRIM-04	Taylor Plus Black Recessed Trim
RCX9RFT-01	Taylor Plus Anti-Glare White Insert
RCX9RFT-04	Taylor Plus Anti-Glare Black Insert
RCX9RFT-15	Taylor Plus Anti-Glare Silver Insert
RCX9RFT-28	Taylor Plus Anti-Glare Gold Insert

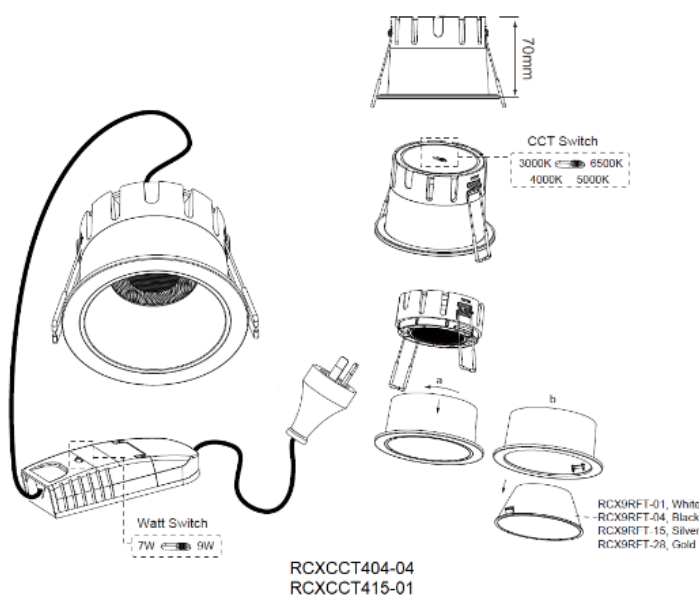

PLEASE NOTE: INFORMATION IN THIS DOCUMENT MAY BE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

IRE: TEL: +353 1 709 9000
 UK: TEL: 0800 973 220
 AUS: TEL: +61 7 3890 5444
 NZ: TEL: +64 03 668 5285

WEB: ROBUS.COM
 WEB: ROBUS.COM
 WEB: ROBUS.COM.AU
 WEB: ROBUSLED.CO.NZ

LED GROUP EUROPE · UK · AUSTRALIA · NEW ZEALAND · ASIA · MIDDLE EAST · AFRICA