




Switch debounce circuit (no software debouncing)

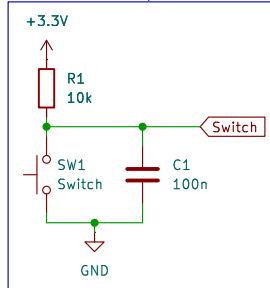


SSD 1306 32X128 OLED



Reset inverter




Connection to the wheelbase




NOTES:

- Every button should have an debouncing circuit, because there is no software debouncing (except the Encoder Button).
- The button mappings can be changed in the code. These button mapping show my implementation for my wheel.
- Don't connect the pi to USB, while it is connected to the wheelbase, because the -5v on Vsys will destroy the Wheelbase
- The not connected pin in the wheelbase connector is the PA14 pin, which is probably only used during firmware update of the original wheel.
- The pullup resistors for the encoder are already on most encoder breakout boards.

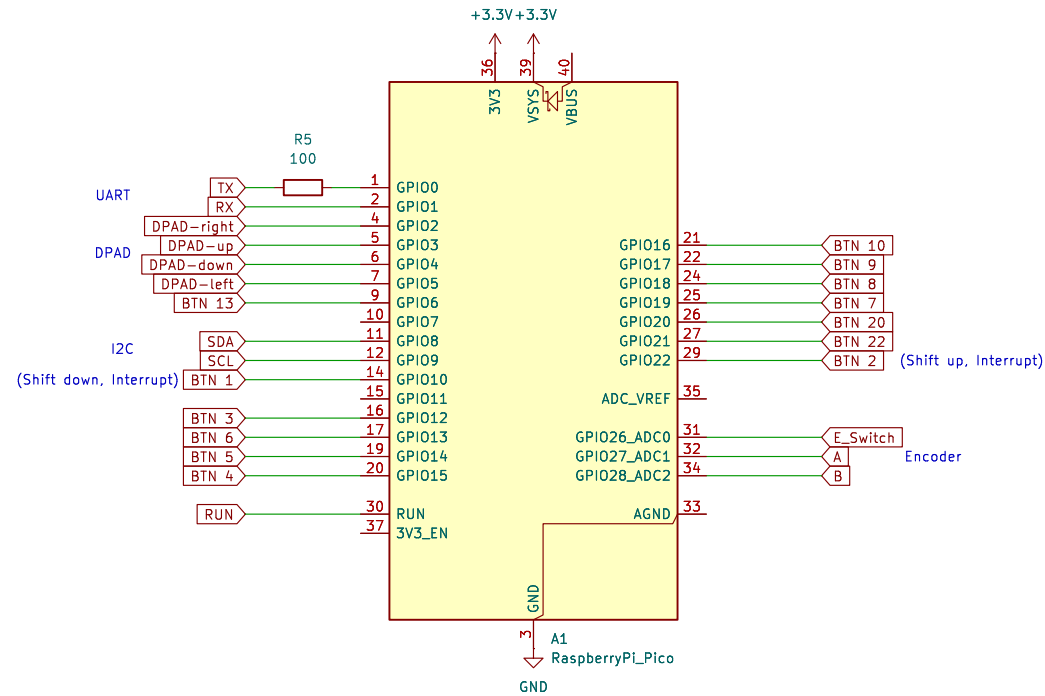

Encoder breakout module

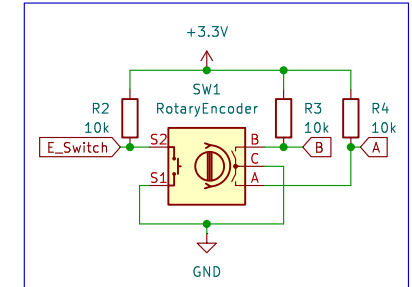

Sheet: /
File: T248 Diy Wheel.kicad_sch

Title: T248 DIY steeringwheel

Size: A4
KiCad E.D.A. 8.0.8

Rev:
Id: 1/1