MODX M Controller

Studio 87. Free and open source (AGPL-3.0-or-later).

Intro

MODX M Controller sends and receives the MIDI messages (CC and NRPN) of the Yamaha MODX M, so you can control the synth from your DAW, automate it, and see its settings change in the plugin. It is an early build: the editor is a searchable list of every control.

Quick start

- On the Yamaha MODX M, turn on MIDI CC receive and transmit (and NRPN where the device has the option).
- Insert the plugin on a MIDI track whose output goes to the Yamaha MODX M, and send the track's MIDI to the device. Set the plugin's MIDI channel to the one the device listens on.
- Move a value in the list: the matching message is sent to the device. Turn a knob on the device: the value moves in the plugin.
- Use the group menu and the search box to find a control. Send all sends every value to the device at once.
- Every control is an automatable parameter in your DAW.

Honest status

- The map has 15 entries (Channel messages). It was written from the maker's documentation, nothing was invented.
- None of the 15 controls has been tested on the real device. Every control is marked "not tested on hardware yet" in the list. A range that the documentation does not print is assumed to be 0 to 127 and is marked that way.
- No SysEx and no patch librarian yet. Nothing is sent that is not in the map.
- Incoming messages from the device are consumed by the plugin and never echoed back. At most 16 values are sent per audio block so the device is not flooded.


Window

- Resize by dragging any edge or corner; the shape stays the same. Hover a control for its address (CC or NRPN number).
- Free and open source. The plugin collects no data and never touches the network.

Interface tour

One picture per page of the interactive mockup (docs/mockups). The mockup mirrors the plugin window; the compiled plugin can differ by a few pixels of layout.

Home

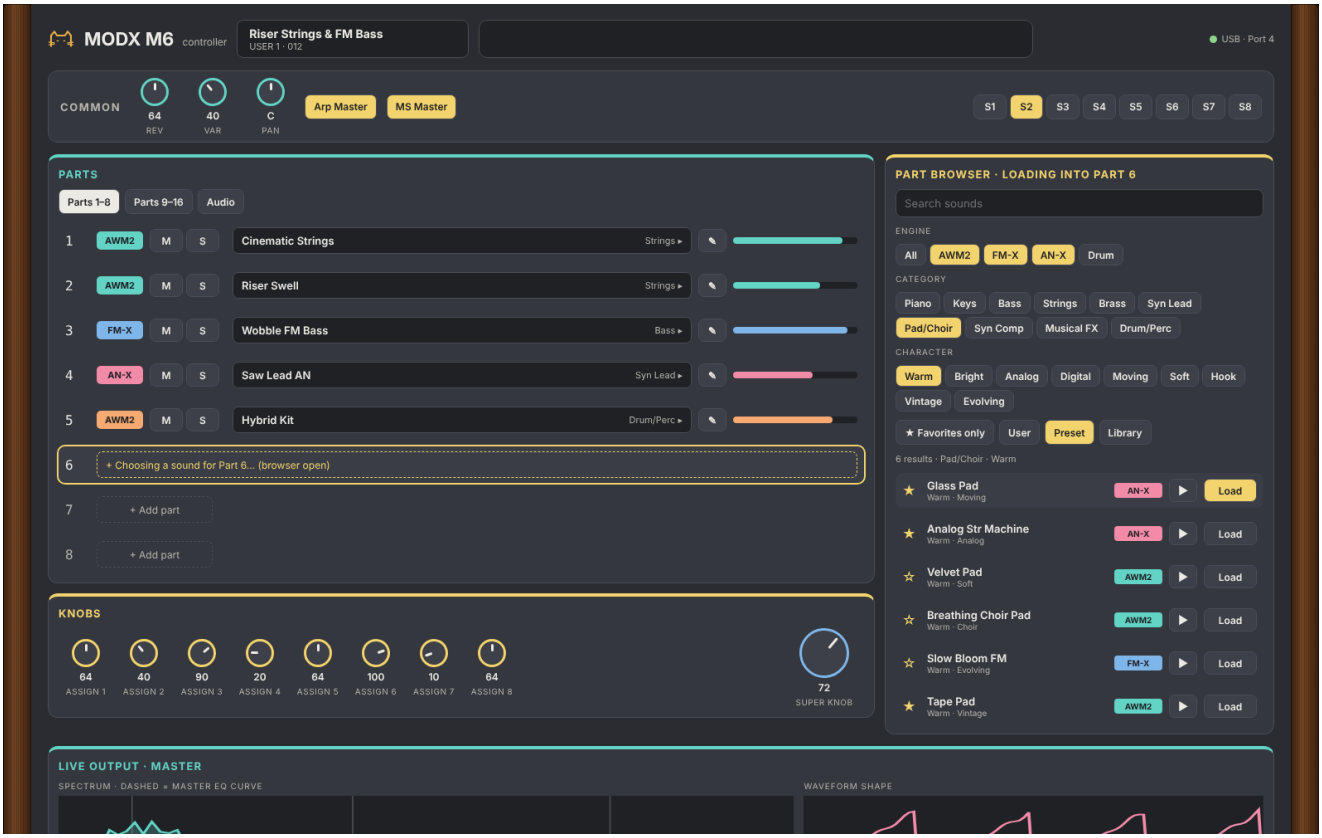

AWM2




FM-X


MODX M6 controller
Riser Strings & FM Bass
USER 1 · 012
USB · Port 4
ALGORITHM 67 · HOW IT WORKS
67
4 parallel 2-op stacks · bright, layered
Browse all algorithms
MODULATORS · shape the tone (add harmonics)
feedback 3
OP2
OP4
OP6
OP8
OP1
OP3
OP5
OP7
CARRIERS · what you hear
OUTPUT
Tap an operator to edit it · arrows show which operator modulates which · line thickness follows level.
HARMONICS PRODUCED (LIVE)
1 2 3 4 5 6 7 8 9 10 11 12
Harmonic number → raising OP2 level adds upper harmonics
OPERATORS
OP1 CARRIER 99 LEVEL 1.00 RATIO +0 DET
OP2 MOD 80 LEVEL 2.00 RATIO +0 DET
OP3 CARRIER 70 LEVEL 1.00 RATIO +0 DET
OP4 MOD 55 LEVEL 3.00 RATIO +0 DET
OP5 CARRIER 92 LEVEL 0.50 RATIO +0 DET
OP6 MOD 40 LEVEL 7.00 RATIO +0 DET
OP7 CARRIER 30 LEVEL 1.00 RATIO +0 DET
OP8 MOD 64 LEVEL 14.0 RATIO +0 DET

AN-X


MODX M6 controller
Riser Strings & FM Bass
USER 1 · 012
USB · Port 4
OSC 1
Saw1 Saw2 Square Triangle Sine
0 OCTAVE +0 PITCH +3 FINE 50 PULSE W
20 SHAPER 100 LEVEL Off SYNC 0 FM
OSC 2
Saw1 Saw2 Square Triangle Sine
0 OCTAVE +0 PITCH +3 FINE 50 PULSE W
20 SHAPER 100 LEVEL Off SYNC 0 FM
OSC 3
Saw1 Saw2 Square Triangle Sine
0 OCTAVE +0 PITCH +3 FINE 50 PULSE W
20 SHAPER 100 LEVEL Off SYNC 0 FM
OSCILLATOR MIX · WHAT IT PRODUCES
Saw1 + Square (PW 50) + Saw1 −12 st, before the filters
FILTER 1
LPF24 TYPE 95 CUTOFF 40 RESO 20 DRIVE
FILTER 2
HPF12 TYPE 10 CUTOFF 0 RESO Serial ROUTING
FILTER EG · AMP EG
NOISE · RING · FOLD
10 NOISE 60 TONE 0 RING 3→1 30 FOLDER 45 TEXTURE


Effects

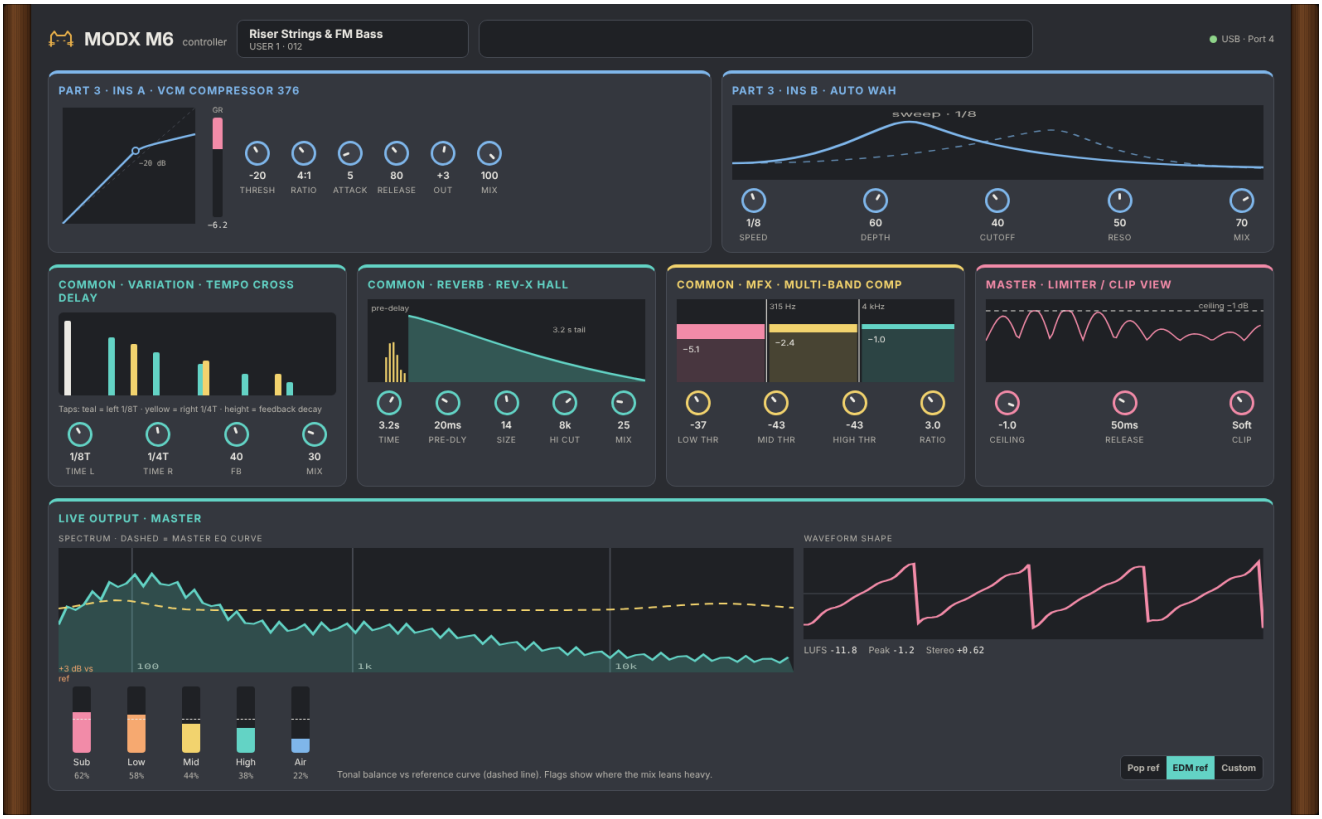

Motion & Arp



Smart Morph

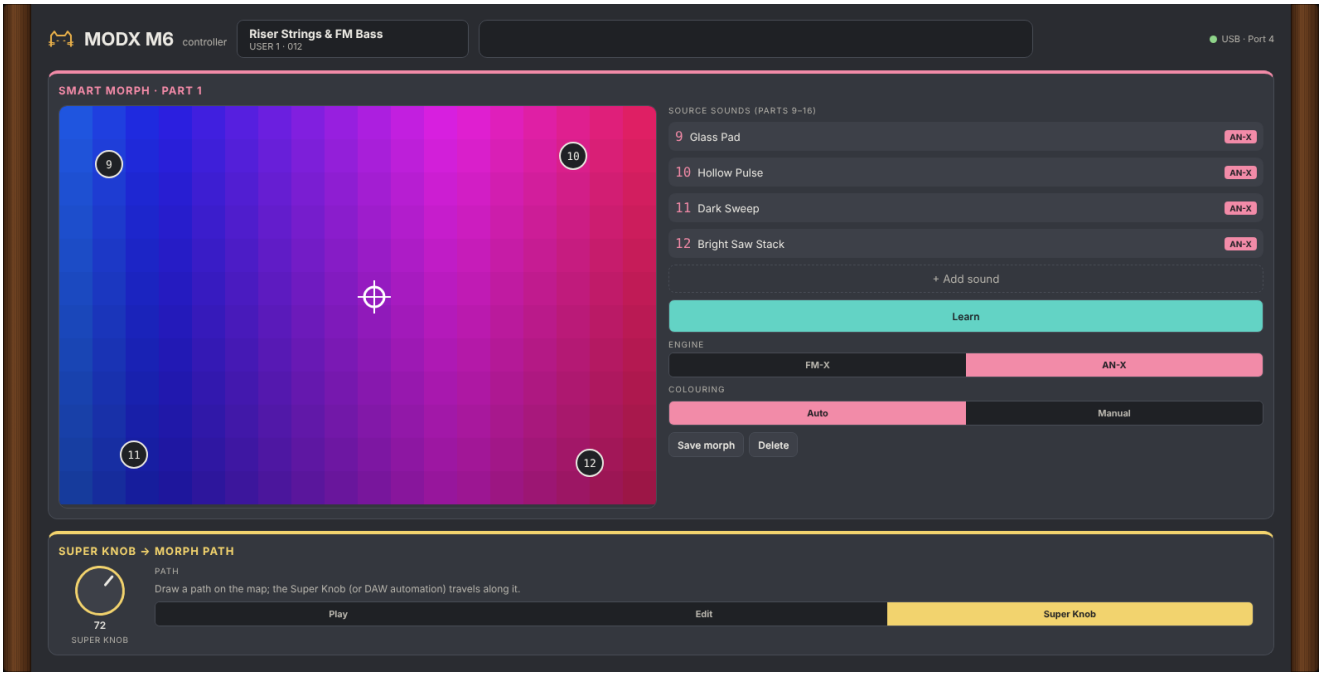

Library

