

**Partner: BiAmp**  
**Model: AudiaFlex & Nexia**  
**Device Type: DSP**



## GENERAL INFORMATION

<b>SIMPLWINDOWS NAME:</b>	Biamp AudiaFlex + Nexia Preset Control v5.1
<b>CATEGORY:</b>	Mixer
<b>VERSION:</b>	V5.1
<b>SUMMARY:</b>	This module recalls presets in the BiAmp AudiaFlex and Nexia.
<b>GENERAL NOTES:</b>	<p>This module will recall presets in the BiAmp AudiaFlex and Nexia.</p> <p>This module <b>MUST</b> be used in conjunction with the Biamp AudiaFlex + Nexia Command Processor v5.1.umc module. This module processes all transmitted and received serial strings and reformats device feedback so that this data can be sent to the proper module for final processing.</p> <p>When polling the BiAmp for current status, you should poll for only the information you really need at the time. The more data points you poll for at one time, the longer it will take to get an update for any one data point. It should not normally be necessary to poll for all data points all the time.</p> <p>This module has (11) eleven parameter fields. All parameters are entered as ASCII characters. ADDRESS is the device's ID and is automatically assigned when the .dap file is compiled. PRESET ID is the preset id number from the .dap file.</p> <p>This information is all contained in the Block properties field when developing the .dap file within the Biamp Audia Flex Windows software. A .dap file (Crestron Test v5.dap) was created by Crestron for testing purposes and <b>MUST</b> be used for proper operation of the Pro2 DEMO v5.1 program.</p> <p>NOTE: THIS MODULE WAS DEVELOPED AND TESTED WITH THE BIAMP AUDIAFLEX. THE INCLUDED .DAP FILE WAS PROVIDED BY BIAMP, AND IS FOR THE AUDIAFLEX ONLY. ACCORDING TO BIAMP, THESE MODULES WILL WORK FOR THE NEXIA. A CONFIGURATION FILE WILL NEED TO BE CREATED FOR THE NEXIA (NOT PROVIDED), AND WILL BE REQUIRED FOR OPERATION OF THE UNIT. FOR MORE INFORMATION ABOUT CONFIGURATION FILES AND HOW TO CREATE THEM PLEASE CONTACT BIAMP.</p> <p>All responses from the BiAmp must be routed through the BiAmp AudiaFlex + Nexia Unit Buffer v5.1 module. This module will send the response string to only modules that are controlling the particular instance in the BiAmp. If there are more than 20 modules controlling a single instance object in the BiAmp, you must add buffering outside this module to send the response to no more than 20 modules at a time. Please see the demo program for an example of this.</p>
<b>CRESTRON HARDWARE REQUIRED:</b>	ST-COM, C2-COM
<b>SETUP OF CRESTRON HARDWARE:</b>	RS232 Baud: 38400 Parity: N Data Bits: 8 Stop Bits: 1


**Partner: BiAmp**  
**Model: AudiaFlex & Nexia**  
**Device Type: DSP**




**VENDOR FIRMWARE:**

4.380

Rear View of Connector

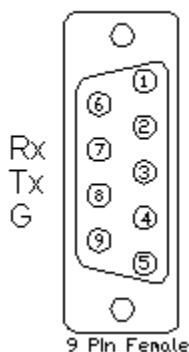

Rear View of Connector

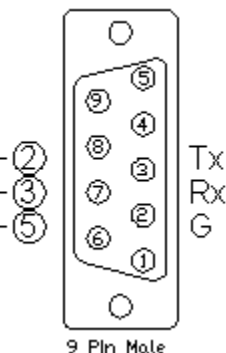

## CONTROL:

**Preset\_\***

D

Pulse to select the desired preset.

## FEEDBACK:

**To\_Processor\$**

S

Serial data signal to be sent to the Biamp AudiaFlex + Nexia Command Processor v5.1.

## PARAMETERS:

**ADDRESS**

ASCII

Device address automatically assigned after the Biamp .dap file is compiled

**PRESET ID \***

ASCII

Preset ID number from the .dap file.

**Partner: BiAmp**  
**Model: AudiaFlex & Nexia**  
**Device Type: DSP**

**TESTING:**

**OPS USED FOR TESTING:** 3.155.1240

**SIMPL WINDOWS USED FOR TESTING:** 2.08.44

**CRES DB USED FOR TESTING:** 18.09.02.001

**SYMBOL LIBRARY USED FOR TESTING:** 531

**SAMPLE PROGRAM:** BiAmp AudiaFlex + Nexia Demo Pro2 v5.1

**REVISION HISTORY:**

V3 – 2-Series Only, corrected dialer timing, text display, speed of dialing and over all operation (firmware)

V4 – Changed timing of dialer strings sent when off hook

V5 – Made changes for the new responses from the BiAmp. These new responses have the command details and status in them. This eliminates the need to poll for status when making changes. Added new commands. Added buffering for the responses to improve system response.

V5.1-Changed the Command Processor module to handle the response for presets. Also eliminated the Command Processor sending any response if the unit ID is determined to be 0. Changed all of the modules to allow instance IDs up to 65534d. Changed all modules to look for the proper channel ID. Added MBMUTE command to the On-Off module.