Optimising SKA1-Mid Scale-Dependent Sensitivity

O. M. Smirnov[1,2], S. Makhathini[1,2], M. Jarvis[3,4] and F. B. Abdalla[5]

[1] *Rhodes University, Artillery Road P O Box 94, Grahamstown 6140, South Africa*

[2] *SKA South Africa, 3rd Floor, Park Road, Pinelands, 7405, South Africa*

[3] *University of the Western Cape, ZA-7535 Cape Town, South Africa*

[4] *Astrophysics, Department of Physics, University of Oxford, Oxford OX1 3RH, UK*

[5] *Department of Physics and Astronomy, University College London, Gower Place, London WC1E 6BT, UK*

April 9, 2014

Abstract

In this report we study the scale dependent sensitivity of the SKA1-Mid baseline design. We also propose changes to the baseline design that enhance the sensitivity at smaller angular scales (e.g. 0.4-1 arcsec at 650MHz) without compromising the performance at larger scales. The changes we propose are guided by the SKA1-Mid level-zero science requirements [2], which suggest that very long baselines (> 150km) are not necessary to achieve the SKA1-Mid science objectives. In particular, we show that a layout with a maximum baseline of 120km can improve the SKA1-Mid survey speed by up to 50% on angular scales 0.4-1 arcsec (over 650-1100MHz), without compromising the performance at larger scales. Such an improvement on these scales could be transformational for other sciences, such as cosmology with weak lensing. Furthermore, this layout spans significantly less space which could potentially reduce trenching and data transport costs.

1   Introduction

The SKA at mid frequencies (SKA-Mid) will be built in two distinct phases, SKA-Mid phase one (SKA1-Mid) and phase two (SKA2-Mid) in South Africa, and SKA-SUR in phase 1 in Australia. The key science goals for SKA1-Mid include the study of the history and role of neutral hydrogen in the Universe from the dark ages to the present-day, the use of pulsars as probes of fundamental physics [1] and continuum and HI surveys to pin down the cosmological model. The large emphasis on key science projects is outlined in several SKA memos, as the baseline design has emerged. It should however be noted that changes which do not compromise the key science cases are possible and such changes could be transformational for other science cases.

In this document, we attempt to gauge the scale-dependent sensitivity of the mid-frequency array described in the *SKA1 System Baseline Design* (BD) document [1]. The performance of this configuration is then compared to two alternative configurations. We also explore different weighting and tapering schemes as a way of increasing performance.

The rest of this document is laid out as follows: in subsection 1.2 we discuss the science requirements for SKA1-Mid, then in subsection 1.3 we describe the layouts that we consider. In section 2 we describe our simulation techniques and the metrics we generated from the experiment. Finally, the results and concluding remarks are in section 3.

1.1   SKA1-Mid Baseline Design

The mid-frequency array described in the BD is a 254 dish array with about 36% of the dishes within a radius of 400m (core), 40% of the dishes are between 400m and 4km (outer-core) with the remaining 24% in 3 three spiral arm-like structures starting from about 2km and stretching out to a radius around 100km. Figures 1 and 2 show the BD layout and baseline distribution histogram (log_{10} space). With about 200 fifteen metre dishes (bar the 64 13.5 metre MeerKAT dishes) within a radius of 4km, this array promises high sensitivity, with noise values around 63μJy beam^{-1} hr$^{1/2}$ [1]. However, with three distinct dish-density regions, the resulting full sensitivity (natural weighting) point spread function (PSF) has two pedestals corresponding to the abrupt changes in dish densities from the core to the outer-core and from the outer-core to the spiral arms (see Appendix A). With such a configuration, a uv-weighting that tends towards uniform is required to obtain high resolution and uv-tapering might be also be required to get a well behaved PSF. Leading to significantly lower sensitivity due to the down-weighting of baselines[1]. It is therefore important to quantify the scale-dependent sensitivity of this configuration,

---

[1] uniform uv-weighting down-weights the uv-points corresponding to shorter baselines, and hence gives better resolution, while a uv-taper down-weights the edges of the uv-coverage (longer baselines) to decrease sidelobe levels

i.e., what is the sensitivity at different angular scales and how this sensitivity is affected by different uv-weighting and tapering schemes.

1.2 SKA1-Mid science requirements

In this subsection we outline the scientific rationale for a change in the baseline design, which we believe is as cost neutral as possible given the information we received from the SKA office and which gives a direction which is different for the configuration of SKA-MID. We have based the propositions in this document upon the assessment workshop for the Cosmology working group where extensive discussion have taken place with the pulsar and transient senior scientists, along with direct communication with the Continuum Science SWG, plus several informal discussions between the Cosmology members and the HI/continuum members.

1.2.1 Highlights of requirements of each science area

Pulsar science: the pulsar search science is mainly dependent on the core of SKA-MID. One of the key factor being the instantaneous sensitivity which depends on the number of antennas in the core. Furthermore if the antennas are moved out of the core, the synthesised beam would be reduced which increases the pulsar search time. During the discussions in the SWG, it was our understanding that an increase of the core area of around 10% would be a minor perturbation in the overall pulsar search, although one in which computation costs increase (see Pulsar SWG for more details).

Cosmology: in what concerns the baseline distribution in this document we have four aspects which we would like to highlight: Cosmology with continuum and HI galaxy surveys, weak gravitational lensing and intensity mapping.

- **Cosmology with HI surveys**: The key requirement for HI surveys for cosmology is to have a large survey speed coupled with baselines which do not resolve out the flux of the galaxies being observed. Given the sizes of galaxies and the fact that we would like a significant amount of the flux not to be resolved out, the baselines of most interest are baselines below around 5km. Hence an outer core is the most important aspect of a telescope for such science. However losing a small amount of sensitivity compared to the baseline design in this region of uv space is not critical and was discussed at the Cosmology science assessment workshop, and in fact we find that we do not lose any sensitivity in this regime for out preferred configuration.

- **Cosmology with weak lensing**: Here the main aspect is a high sensitivity at scales which can measure the structure and shape of the galaxies in continuum. Given the size of galaxies, this requires significant sensitivity at scales which correspond to 0.5 to 1 arcsec. The current baseline design has a natural sensitivity very close to the JVLA at the scales of interest, something that will only damage the scientific reputation of the SKA. For these reasons having a larger number of antennas in the spiral arms out to around 70-80 km is beneficial for this science and the lack of those baselines would simply make such a survey unfeasible. Such studies also have to be done with SKA-MID as SKA-SUR does not have enough antennas to produce reliable maps as the number of UV tracks is much lower than SKA-MID. This is intrinsically due to the fact that the sensitivity of SKA-SUR is coming from PAFs and not from extra collecting area.

- **HI and continuum morphologies**: In the current baseline design there is a lack of sensitivity in the baselines which one would need to study morphologies of the detected continuum and HI galaxies. The baselines needed for morphological studies of galaxies are similar to the baselines needed for the weak lensing experiment with weak lensing, and therefore should be advantageous for galaxy evolution studies which are central to the goals of the HI and Continuum SWGs.

- **Cosmology with intensity mapping surveys**: Intensity mapping requires very short baselines and would benefit from having several clusters of antennas placed either in the core or in the outer core. This arrangement is not incompatible with the configuration proposed here and is briefly discussed below.

1.2.2 General rationale

Cost Neutral proposal: We propose here a baseline change outlined in this document. The scientific rationale is that baselines larger than $\sim 80 - 90$km are expensive given that the signal needs significant boosting to reach the main correlator, and the extra trenching and the key fact that none of the main science goals are directly affected by a modest reduction of the maximum baseline (the science case that we believe to have the most stringent requirement for high resolution is the 40mas at ν 14GHz for the Cradle of Life) . This cost saving should allow for extra antennas to be placed in the spiral arms. We have estimated (after informally enquiring with individuals at the SKA office) this cost saving to allow for an extra 12 antennas.

We also note here that we have assumed an approximate cost neutrality for the SKA-Mid in isolation. If we were to consider a solution where the whole of the mid-frequency SKA1 as cost neutral (i.e. not interfering with SKA-Low baseline costing) then a significant number of additional dishes could be distributed within our proposed configurations which would substantially increase the imaging capability, the survey speed and the sheer volume of science that could be carried out with the SKA at mid-frequencies, but which could not be carried out with a separate site solution for SKA-Mid. We assume such studies will be incorporated into the new science case for the SKA, but do not consider them here.

A proposal that should be encompassing of all science cases: The rationale that the array has significant UV coverage all the way up to 70-80 km baselines to cover the above science cases would suggest a smooth transition form the core to the outer core to the spiral arms. This is obtained by a slight puffing up of the core as suggested it be possible by the pulsar/transient team. The number of antennas in the core is preserved in our proposal. This transitions to the outer core which is slightly reduced as the main science for the outer core is the HI detection for cosmology and galaxy evolution. We propose this sacrifice as the science loss here is minimal for a loss of around 9 antennas. We further propose to reduce the spiral arms as no science directly needs those large baselines and instead move the spiral arms with the extra 21 antennas which were sacrificed from the outer core (9) plus the antennas which could be purchased from a cost effective reduction of the maximum baseline.

This arrangement is very beneficial for HI and continuum morphological studies, furthermore it produces a survey speed which allows weak lensing experiments to be possible with SKA-1. It does not strongly effect HI and pulsar science as a whole and allows for better imaging capabilities with SKA-MID. We believe that this is beneficial for the project compared to the baseline design. Furthermore we suggest that several clusters of around 6 antennas, depending on the exact masking of roads/environments, be placed in the core/outer core as to increase the sensitivity for intensity mapping. We do not investigate this here as we belive it will only cause a minor perturbation in the survey speed and sensitivities that we discuss here.

1.2.3 Specific layout implementation:

The general scientific requirements for SKA1[2] (SRD) published by the SPO in March 2014 suggest that (at least for SKA1-Mid), an array with a maximum baseline of around 100km is required. Therefore, we seek a layout with the shortest possible maximum baseline that does at least as well as the "second generation" baseline design in the resolution range 0.4-1 arcsec over 650, 800 and 1100MHz while not significantly compromising the performance at the larger angular scales. Moreover, as stated previously, having a layout which performs just as well as (or better) than the baseline layout but which covers significantly less space translates to a reduction in trenching and data transport costs, which presents an opportunity to re-invest the funds somewhere else, therefore we consider the conservative addition of 12 dishes. However, we note that improvements on the scales of interest are still possible without these 12 additional dishes. In the next section we present two alternative layouts, these layouts have maximum baselines of 90,100,120 and 133 km. The scale dependent sensitivity of these layouts is compared to the baseline layout in section 2.

1.3 Background on Layouts

The following SKA1-Mid layouts are under consideration here:

REF2A100B173 The Second-generation layout (254 dishes) produced by Robert Braun (September 2013)[2]. This layout has a maximum baseline of 173km. In this report, we also refer to this layout as REF2.

Wi-jAkBl This is the REF2 layout with the core "puffed up" by 10%, with i dishes moved from the outer core to the spiral arms and j extra dishes added to the spiral arms. The spacing in the arms is then optimised to get more sensitivity on the longer (> 50km) baselines (See baseline distribution histograms in Figure 2). Each spiral arm stretches out to k kilometres and the maximum baseline length is about l kilometres.

The details of the layouts are tabulated in Table 1, and Figure 1 shows the layouts and Figure 2 shows the baseline distribution histogram for the different layouts. Figure 5 shows the uv-coverage for the different layouts at 1.1GHz for declinations -50,-30,-10 degrees and for 8hr tracks. At this point no optimisation has been done on the antenna distributions and we emphasise that further improvements can be and should be made.

---

[2]We assume this to be the baseline layout.

Table 1: Breakdown of the layouts under consideration.

REF2A100B173 [254 dishes]	SKA dishes	MeerKAT dishes	Both	%
Core	70	30	100	39.4
Outer-core	60	34	94	37.0
Spiral-arms	60	0	60	23.6
W9-0A72B120 [254 dishes]				
Core	70	30	100	39.4
Outer-core	51	34	85	33.5
Spiral-arms	69	0	69	27.1
W9-12A60B120 [266 dishes]				
Core	70	30	100	37.6
Outer-core	51	34	85	32.0
Spiral-arms	81	0	81	30.4
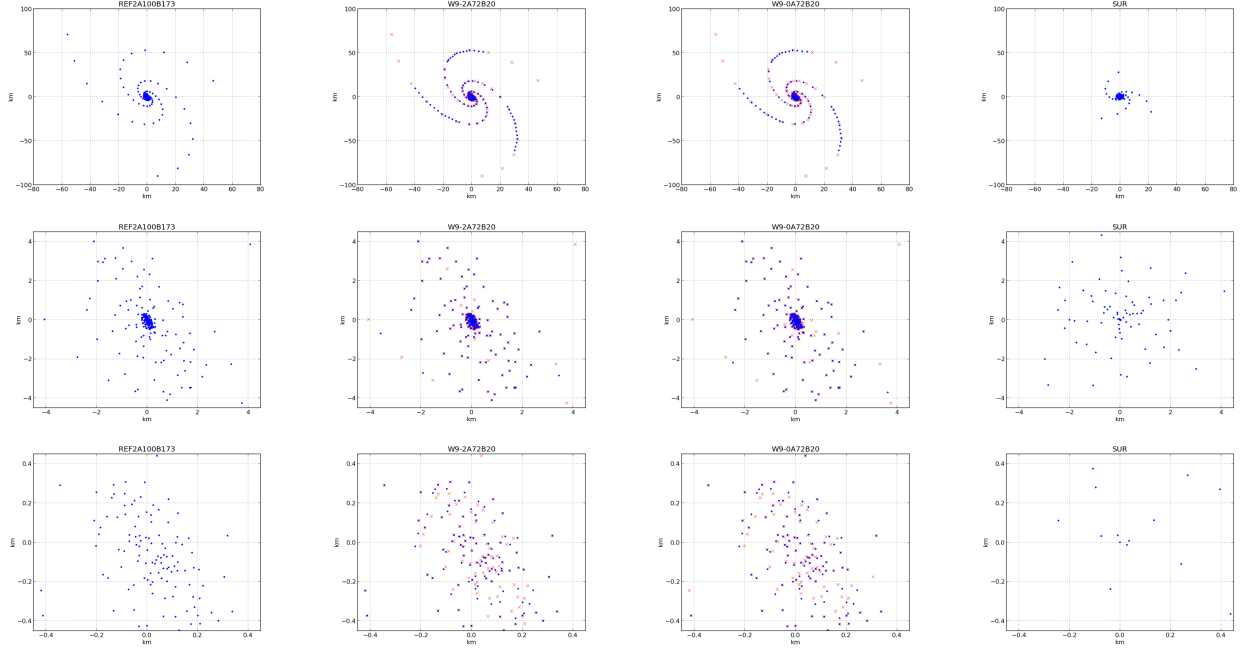
Figure 1: Antenna layouts, REF2 plotted as a reference (red crosses)
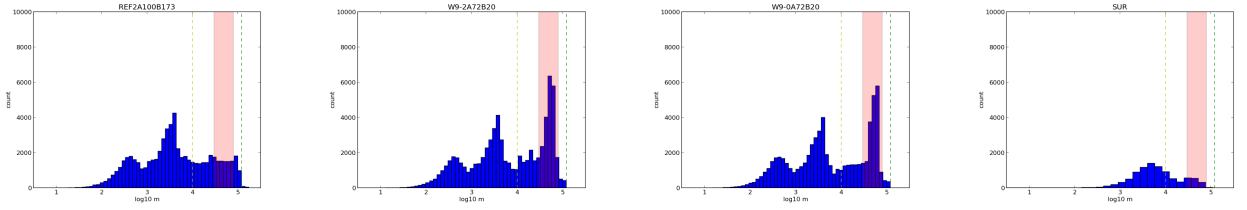
Figure 2: Baseline distribution with the uv-distance in log_{10} km . Yellow and green dashed lines mark 10 and 120 kilometres respectively, and the pink strip represents baselines from 30-80km.
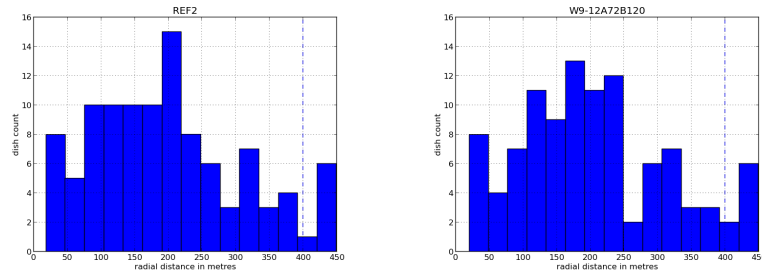
Figure 3: Dish density histograms (row 1) of the core for the layouts under consideration. The dashed line marks 400m. The core of the W-9-12 layouts is the same, therefore we only need to plot one of these.
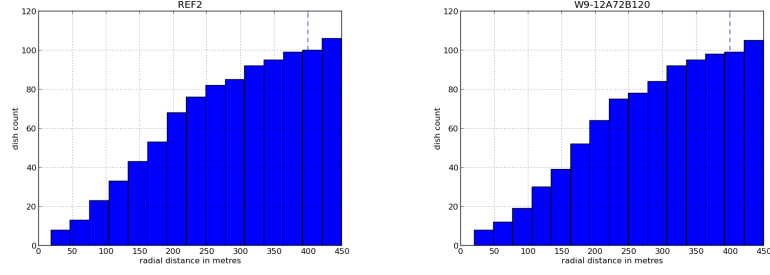
Figure 4: Cummulative dish density histograms (row 1) of the core for the layouts under consideration. The dashed line marks 400m. The core of the W-9-12 layouts is the same, therefore we only need to plot one of these.
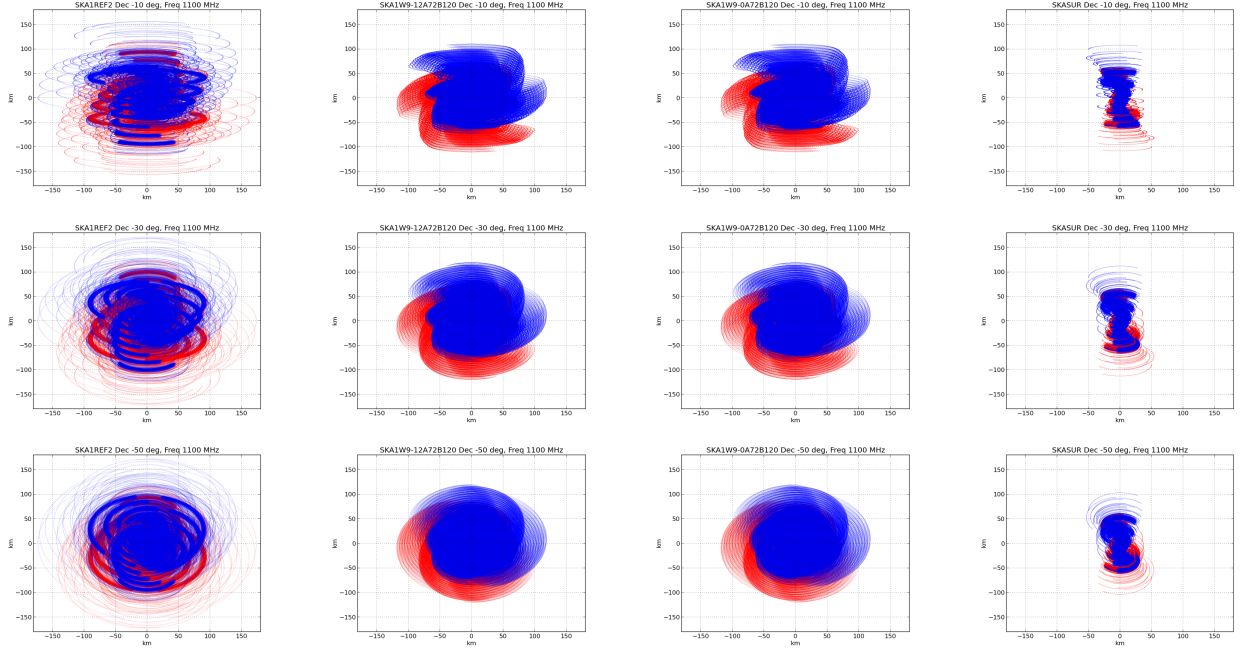
Figure 5: UV-Coverage for 8-hr tracks at 1.1 GHz (50MHz bandwidth) at declinations -50,-30,-10 for the different layouts. Blue indicates uv-points, red indicates conjugate uv-points.

2 The Experiment

Our aim is to investigate the scale-dependent sensitivity of the layouts described in the previous section. We use the `makems` tool to make simulated measurement sets (MS) of 8hr tracks with a 60s integration time for declinations {-50, -30, -10} degrees at frequencies of {650, 800, 1100}MHz with a single 50MHz channel. The expected rms noise per real and imaginary part for each visibility is calculated as

$$\sigma_{\mathrm{vis}} = \frac{\mathrm{SEFD}}{\sqrt{2\Delta t \Delta \nu}}. \tag{1}$$

We use the baseline designs SEFD value of 400 corresponding to the 15 m dishes. We then fill the MS with random Gaussian noise using the computed value of the noise for a given integration and bandwidth. We then use the (CASA-derived) `lwimager` tool to make maps of the PSF as well as dirty maps of the noise using various weighting schemes. Note that for uniform and robust weighting, a crucial parameter is the size of the uv-bin over which weights are uniformized. By default this is determined from the full image size, but `lwimager` allows one to uniformize the weights over bins corresponding to a user-defined FoV instead. For these simulations uv-bins corresponding to a FoV of 10 arcmin were used. The following metrics were generated:

Note: These metrics are generated at different angular scales, this is done by applying an inner-taper[3] to taper out baselines that do not fall within a given resolution range, i.e., we only consider uv-points that correspond to a given resolution.

---

[3]The weights for the taper are generated using a Butterworth function.

- PSF full width at halfW maximum (FWHM) size (mean of the FWHM dimensions). This was measured by making high-resolution images of the PSF (0.05 arcsec resolution), and fitting a Gaussian to the PSF. Note that for the highly non-Gaussian PSFs corresponding to natural and (some) robust weighting schemes, the fit is very poor, so the size parameter becomes somewhat ill-defined (Table 2). A catalog of PSF cross-sections is provided in Appendix A

- PSF symmetry (PSF size parameters are obtained as explained above). As a measure of PSF symmetry, we define $\text{PSF}_{sym} = 1 - \text{FWHM}_{min}/\text{FWHM}_{maj}$, then $\text{PSF}_{sym} = 0$ is perfect symmetry, and the symmetry degenerates as $\text{PSF}_{sym} \rightarrow 1$ (Table 3).

- Rms pixel noise at different angular scales for 50kHz, 50MHz and 166MHz wide bands (Tables 4 and 6).

- SNR for a 10μJy source at 1100MHz with a spectral index of -0.7 after 8hrs for a 166MHz band (Table 7).

- Average SNR over frequencies 650, 800 and 1100MHz (166MHz band) after 8 hours, for a 10μJy source at 1100MHz with a spectral index of -0.7 (Table 8). $\overline{SNR10} = \sqrt{SNR10_{650}^2 + SNR10_{800}^2 + SNR10_{1100}^2}$.

- Hours required to reach a mean SNR of 10 (Table 9).

Table 2: FWHM PSF sizes (in arcseconds) for the different layouts at different angular scales. These values are generated at 650, 800 and 1100MHz, for angular scales {0.4-1, 1-2, 2-3, 3-4, 600-3600} arcsec and are labeled *resbin* {1, 2, 3, 4, 5} respectively. This is done for natural, robust-2 weighting and robust-2 weighting with a 1 arcsec Gaussian taper, at declinations -10, -30 and -50 degrees. For each column, the intensity of the color increases with the value.

(a) DEC=-10, natural weighting

resbin	650MHz					800MHz					1100MHz				
	1	2	3	4	5	1	2	3	4	5	1	2	3	4	5
SKA1REF2	0.65	1.33	2.33	3.35	803.1	0.60	1.33	2.35	3.34	792.3	0.59	1.33	2.35	3.35	763.6
SKA1W9-12A72B120	0.78	1.22	2.35	3.35	798.7	0.70	1.28	2.35	3.32	790.4	0.57	1.32	2.32	3.33	763.3
SKA1W9-0A72B120	0.78	1.21	2.35	3.35	802.2	0.70	1.27	2.36	3.31	796.6	0.56	1.32	2.34	3.37	773.3
SKASUR	1.17	1.69	3.09	3.88	938.3	1.00	1.69	2.81	3.78	930.5	0.86	1.80	2.71	3.75	776

(b) DEC=-10, robust-2 weighting

resbin	650MHz					800MHz					1100MHz				
	1	2	3	4	5	1	2	3	4	5	1	2	3	4	5
SKA1REF2	0.73	1.22	2.25	3.26	745.2	0.62	1.21	2.24	3.25	791.8	0.53	1.19	2.24	3.26	761.5
SKA1W9-12A72B120	0.77	1.16	2.24	3.25	736	0.64	1.15	2.24	3.25	790.2	0.53	1.17	2.23	3.25	761.8
SKA1W9-0A72B120	0.79	1.16	2.25	3.25	739.2	0.65	1.15	2.24	3.25	796.2	0.54	1.17	2.24	3.25	771.7
SKASUR	1.59	1.75	2.99	3.57	910.2	1.32	1.62	2.71	3.43	942.1	1.00	1.60	2.41	3.29	776

(c) DEC=-10, robust-2 weighting with a 1 arcsec Gaussian taper

resbin	650MHz					800MHz					1100MHz				
	1	2	3	4	5	1	2	3	4	5	1	2	3	4	5
SKA1REF2	1.03	1.33	2.27	3.27	745.2	0.98	1.31	2.27	3.26	791.8	0.94	1.29	2.26	3.26	761.5
SKA1W9-12A72B120	1.01	1.26	2.26	3.26	736	0.93	1.25	2.26	3.26	790.2	0.87	1.26	2.25	3.26	761.8
SKA1W9-0A72B120	1.02	1.25	2.27	3.26	739.2	0.94	1.25	2.26	3.26	796.2	0.87	1.27	2.26	3.26	771.7
SKASUR	1.83	1.88	3.00	3.57	910.2	1.61	1.77	2.73	3.43	942.1	1.41	1.74	2.43	3.29	776

(d) DEC=-30, natural weighting

resbin	650MHz					800MHz					1100MHz				
	1	2	3	4	5	1	2	3	4	5	1	2	3	4	5
SKA1REF2	0.65	1.34	2.35	3.37	797.3	0.60	1.33	2.35	3.34	790.6	0.59	1.33	2.35	3.35	759.2
SKA1W9-12A72B120	0.78	1.22	2.37	3.35	792.9	0.69	1.29	2.34	3.31	790.2	0.56	1.33	2.32	3.34	752.2
SKA1W9-0A72B120	0.79	1.21	2.35	3.34	798.1	0.70	1.29	2.35	3.30	795.5	0.55	1.34	2.33	3.37	763.4
SKASUR	1.20	1.68	3.12	3.92	976.6	1.04	1.62	2.87	3.81	961	0.87	1.75	2.75	3.77	766.8

(e) DEC=-30, robust-2 weighting

resbin	650MHz					800MHz					1100MHz				
	1	2	3	4	5	1	2	3	4	5	1	2	3	4	5
SKA1REF2	0.71	1.21	2.24	3.26	737.5	0.60	1.19	2.24	3.24	789.8	0.51	1.18	2.24	3.25	757.1
SKA1W9-12A72B120	0.75	1.15	2.24	3.25	732.5	0.63	1.14	2.23	3.24	789.9	0.52	1.16	2.22	3.25	750.8
SKA1W9-0A72B120	0.77	1.15	2.25	3.25	737.9	0.64	1.14	2.23	3.25	795.2	0.53	1.17	2.23	3.25	762.5
SKASUR	1.54	1.65	2.71	3.47	988.6	1.27	1.53	2.57	3.38	960.7	0.95	1.45	2.36	3.27	758.2

(f) DEC=-30, robust-2 weighting with a 1 arcsec Gaussian taper

resbin	650MHz					800MHz					1100MHz				
	1	2	3	4	5	1	2	3	4	5	1	2	3	4	5
SKA1REF2	1.02	1.31	2.26	3.26	737.5	0.97	1.29	2.27	3.25	789.8	0.93	1.28	2.26	3.26	757.1
SKA1W9-12A72B120	1.00	1.25	2.26	3.26	732.5	0.92	1.24	2.25	3.25	789.9	0.87	1.26	2.25	3.26	750.8
SKA1W9-0A72B120	1.00	1.25	2.27	3.26	737.9	0.92	1.24	2.26	3.26	795.2	0.87	1.27	2.26	3.26	762.5
SKASUR	1.74	1.77	2.73	3.47	988.6	1.53	1.65	2.59	3.38	960.7	1.32	1.59	2.39	3.28	758.2

(g) DEC=-50, natural weighting

resbin	650MHz					800MHz					1100MHz				
	1	2	3	4	5	1	2	3	4	5	1	2	3	4	5
SKA1REF2	0.65	1.34	2.34	3.35	799.8	0.60	1.33	2.36	3.34	789.6	0.58	1.33	2.34	3.36	763.9
SKA1W9-12A72B120	0.79	1.22	2.35	3.34	796.7	0.70	1.28	2.35	3.32	786.4	0.56	1.33	2.32	3.34	756.6
SKA1W9-0A72B120	0.79	1.21	2.34	3.35	799.6	0.70	1.28	2.35	3.32	791	0.56	1.34	2.33	3.39	768.3
SKASUR	1.28	1.63	2.84	3.78	995.7	1.06	1.53	2.74	3.69	946.1	0.87	1.54	2.66	3.68	776.2

(h) DEC=-50, robust-2 weighting

resbin	650MHz					800MHz					1100MHz				
	1	2	3	4	5	1	2	3	4	5	1	2	3	4	5
SKA1REF2	0.71	1.21	2.24	3.26	743.3	0.60	1.19	2.24	3.25	788.9	0.51	1.17	2.24	3.25	762
SKA1W9-12A72B120	0.76	1.15	2.24	3.25	741.5	0.63	1.14	2.23	3.24	786.3	0.52	1.16	2.23	3.25	756.2
SKA1W9-0A72B120	0.78	1.15	2.25	3.25	743.2	0.64	1.14	2.23	3.25	790.8	0.53	1.17	2.24	3.25	768
SKASUR	1.55	1.59	2.42	3.38	949.4	1.28	1.45	2.41	3.34	940.7	0.96	1.32	2.33	3.27	765.8

(i) DEC=-50, robust-2 weighting with a 1 arcsec Gaussian taper

resbin	650MHz					800MHz					1100MHz				
	1	2	3	4	5	1	2	3	4	5	1	2	3	4	5
SKA1REF2	1.02	1.31	2.26	3.27	743.3	0.97	1.29	2.26	3.26	788.9	0.92	1.27	2.26	3.26	762
SKA1W9-12A72B120	1.00	1.25	2.26	3.26	741.5	0.92	1.24	2.25	3.25	786.3	0.87	1.26	2.25	3.25	756.2
SKA1W9-0A72B120	1.01	1.24	2.27	3.26	743.2	0.93	1.25	2.25	3.26	790.8	0.87	1.27	2.26	3.26	768
SKASUR	1.70	1.69	2.45	3.39	949.4	1.48	1.56	2.43	3.35	940.7	1.24	1.45	2.35	3.27	765.8

Table 3: PSF symmetry (see section 2) for the different layouts at different angular scales. These values are generated at 650, 800 and 1100MHz, for angular scales {0.4-1, 1-2, 2-3, 3-4, 600-3600} arcsec and are labeled *resbin* {1, 2, 3, 4, 5} respectively. This is done for natural, robust-2 weighting and robust-2 weighting with a 1 arcsec Gaussian taper, at declinations -10, -30 and -50 degrees. For each column, the intensity of the color increases with the value.

(a) DEC=-10, natural weighting

resbin	650MHz					800MHz					1100MHz				
	1	2	3	4	5	1	2	3	4	5	1	2	3	4	5
SKA1REF2	0.05	0.02	0.04	0.07	0.00	0.06	0.06	0.02	0.06	0.03	0.06	0.02	0.07	0.03	0.05
SKA1W9-12A72B120	0.05	0.03	0.05	0.06	0.00	0.06	0.06	0.01	0.06	0.03	0.05	0.00	0.06	0.01	0.01
SKA1W9-0A72B120	0.05	0.03	0.07	0.04	0.03	0.06	0.05	0.01	0.06	0.03	0.05	0.01	0.08	0.04	0.01
SKASUR	0.66	0.58	0.59	0.48	0.42	0.62	0.62	0.49	0.43	0.40	0.61	0.61	0.44	0.44	0.15

(b) DEC=-10, robust-2 weighting

resbin	650MHz					800MHz					1100MHz				
	1	2	3	4	5	1	2	3	4	5	1	2	3	4	5
SKA1REF2	0.07	0.01	0.00	0.01	0.01	0.07	0.02	0.01	0.00	0.03	0.06	0.00	0.00	0.00	0.05
SKA1W9-12A72B120	0.06	0.02	0.00	0.00	0.01	0.07	0.00	0.01	0.00	0.03	0.04	0.01	0.00	0.00	0.01
SKA1W9-0A72B120	0.07	0.02	0.00	0.01	0.03	0.07	0.00	0.01	0.00	0.03	0.05	0.02	0.00	0.01	0.00
SKASUR	0.67	0.65	0.58	0.36	0.38	0.67	0.60	0.46	0.25	0.41	0.66	0.59	0.28	0.08	0.15

(c) DEC=-10, robust-2 weighting with a 1 arcsec Gaussian taper

resbin	650MHz					800MHz					1100MHz				
	1	2	3	4	5	1	2	3	4	5	1	2	3	4	5
SKA1REF2	0.05	0.02	0.00	0.01	0.01	0.04	0.02	0.01	0.00	0.03	0.03	0.00	0.00	0.00	0.05
SKA1W9-12A72B120	0.04	0.01	0.00	0.00	0.01	0.03	0.00	0.01	0.00	0.03	0.01	0.01	0.00	0.00	0.01
SKA1W9-0A72B120	0.04	0.01	0.00	0.01	0.03	0.03	0.00	0.01	0.00	0.03	0.01	0.02	0.00	0.01	0.00
SKASUR	0.65	0.64	0.57	0.36	0.38	0.64	0.60	0.45	0.25	0.41	0.61	0.56	0.28	0.08	0.15

(d) DEC=-30, natural weighting

resbin	650MHz					800MHz					1100MHz				
	1	2	3	4	5	1	2	3	4	5	1	2	3	4	5
SKA1REF2	0.13	0.07	0.08	0.06	0.02	0.09	0.08	0.06	0.08	0.03	0.06	0.08	0.06	0.05	0.07
SKA1W9-12A72B120	0.16	0.01	0.05	0.06	0.02	0.13	0.00	0.07	0.06	0.03	0.11	0.06	0.05	0.04	0.04
SKA1W9-0A72B120	0.16	0.00	0.04	0.08	0.03	0.13	0.02	0.07	0.07	0.03	0.11	0.06	0.03	0.01	0.04
SKASUR	0.68	0.58	0.59	0.50	0.52	0.64	0.58	0.53	0.43	0.43	0.62	0.58	0.45	0.45	0.19

(e) DEC=-30, robust-2 weighting

resbin	650MHz					800MHz					1100MHz				
	1	2	3	4	5	1	2	3	4	5	1	2	3	4	5
SKA1REF2	0.12	0.04	0.02	0.01	0.05	0.11	0.03	0.00	0.01	0.03	0.07	0.02	0.00	0.01	0.07
SKA1W9-12A72B120	0.10	0.01	0.01	0.00	0.03	0.10	0.01	0.01	0.01	0.03	0.06	0.00	0.01	0.00	0.04
SKA1W9-0A72B120	0.10	0.01	0.01	0.00	0.04	0.10	0.01	0.01	0.00	0.03	0.07	0.00	0.00	0.00	0.04
SKASUR	0.65	0.60	0.49	0.30	0.62	0.64	0.55	0.39	0.19	0.43	0.64	0.50	0.22	0.05	0.17

(f) DEC=-30, robust-2 weighting with a 1 arcsec Gaussian taper

resbin	650MHz					800MHz					1100MHz				
	1	2	3	4	5	1	2	3	4	5	1	2	3	4	5
SKA1REF2	0.07	0.04	0.02	0.01	0.05	0.05	0.03	0.00	0.01	0.03	0.03	0.02	0.00	0.01	0.07
SKA1W9-12A72B120	0.05	0.01	0.01	0.00	0.03	0.03	0.01	0.01	0.01	0.03	0.01	0.00	0.01	0.00	0.04
SKA1W9-0A72B120	0.05	0.01	0.01	0.00	0.04	0.03	0.00	0.01	0.00	0.03	0.01	0.00	0.00	0.00	0.04
SKASUR	0.61	0.58	0.48	0.30	0.62	0.60	0.54	0.39	0.18	0.43	0.55	0.48	0.22	0.05	0.17

(g) DEC=-50, natural weighting

resbin	650MHz					800MHz					1100MHz				
	1	2	3	4	5	1	2	3	4	5	1	2	3	4	5
SKA1REF2	0.11	0.04	0.06	0.02	0.02	0.10	0.07	0.07	0.08	0.03	0.06	0.05	0.06	0.03	0.08
SKA1W9-12A72B120	0.14	0.01	0.04	0.03	0.01	0.10	0.00	0.05	0.07	0.06	0.09	0.04	0.06	0.02	0.03
SKA1W9-0A72B120	0.14	0.01	0.04	0.05	0.03	0.10	0.01	0.03	0.09	0.06	0.09	0.04	0.04	0.03	0.03
SKASUR	0.68	0.51	0.51	0.45	0.43	0.63	0.51	0.49	0.38	0.40	0.59	0.51	0.40	0.40	0.16

(h) DEC=-50, robust-2 weighting

resbin	650MHz					800MHz					1100MHz				
	1	2	3	4	5	1	2	3	4	5	1	2	3	4	5
SKA1REF2	0.08	0.03	0.01	0.00	0.02	0.08	0.01	0.00	0.01	0.03	0.04	0.01	0.00	0.00	0.08
SKA1W9-12A72B120	0.08	0.02	0.00	0.01	0.02	0.07	0.01	0.00	0.00	0.06	0.04	0.00	0.01	0.01	0.03
SKA1W9-0A72B120	0.08	0.02	0.00	0.01	0.01	0.07	0.00	0.00	0.00	0.06	0.05	0.00	0.00	0.01	0.03
SKASUR	0.58	0.55	0.34	0.22	0.37	0.58	0.46	0.29	0.13	0.40	0.57	0.39	0.16	0.03	0.15

(i) DEC=-50, robust-2 weighting with a 1 arcsec Gaussian taper

resbin	650MHz					800MHz					1100MHz				
	1	2	3	4	5	1	2	3	4	5	1	2	3	4	5
SKA1REF2	0.04	0.02	0.01	0.00	0.02	0.03	0.01	0.00	0.01	0.03	0.02	0.01	0.00	0.00	0.08
SKA1W9-12A72B120	0.03	0.01	0.00	0.01	0.02	0.02	0.00	0.00	0.00	0.06	0.01	0.00	0.01	0.01	0.03
SKA1W9-0A72B120	0.03	0.01	0.00	0.01	0.01	0.02	0.00	0.00	0.00	0.06	0.01	0.00	0.00	0.01	0.03
SKASUR	0.54	0.52	0.34	0.22	0.37	0.52	0.45	0.28	0.13	0.40	0.46	0.37	0.16	0.03	0.15

Table 4: Noise (in μJy) for a 50kHz band after an 8hr synthesis with a 60s integration for the differenr layouts at different angular scales. These values are generated at 650, 800 and 1100 MHz, at angular scales {0.4-1, 1-2, 2-3, 3-4, 600-3600} arcsec and are labeled *resbin* {1, 2, 3, 4, 5} respectively. This is done for natural, robust-2 weighting and robust-2 weighting with a 1 arcsec Gaussian taper, at declinations -10, -30 and -50 degrees. For each column, the intensity of the color increases with the value.

(a) DEC=-10, natural weighting

resbin	650MHz					800MHz					1100MHz				
	1	2	3	4	5	1	2	3	4	5	1	2	3	4	5
SKA1REF2	90.00	94.00	120	150	310	81.00	93.00	130	150	380	81.00	96.00	130	150	550
SKA1W9-12A72B120	67.00	66.00	120	140	320	57.00	80.00	120	150	390	52.00	88.00	130	170	580
SKA1W9-0A72B120	71.00	73.00	130	160	320	61.00	89.00	140	160	400	56.00	100	140	190	570
SKASUR	500	330	550	540	3200	390	360	500	480	3800	300	390	390	370	5100

(b) DEC=-10, robust-2 weighting

resbin	650MHz					800MHz					1100MHz				
	1	2	3	4	5	1	2	3	4	5	1	2	3	4	5
SKA1REF2	100	120	160	180	300	100	130	160	170	380	100	130	150	150	550
SKA1W9-12A72B120	87.00	82.00	140	160	310	86.00	92.00	140	170	390	81.00	120	140	170	580
SKA1W9-0A72B120	92.00	92.00	170	200	310	91.00	110	180	210	400	87.00	140	180	220	570
SKASUR	320	330	510	570	3100	320	340	500	560	3800	310	350	470	500	5100

(c) DEC=-10, robust-2 weighting with a 1 arcsec Gaussian taper

resbin	650MHz					800MHz					1100MHz				
	1	2	3	4	5	1	2	3	4	5	1	2	3	4	5
SKA1REF2	96.00	120	160	180	300	98.00	120	160	170	380	98.00	120	140	150	550
SKA1W9-12A72B120	71.00	82.00	140	160	310	71.00	92.00	140	160	390	78.00	110	140	170	580
SKA1W9-0A72B120	79.00	93.00	170	200	310	81.00	110	170	200	400	91.00	130	170	210	570
SKASUR	290	320	510	570	3100	280	330	500	560	3800	270	330	460	500	5100

(d) DEC=-30, natural weighting

resbin	650MHz					800MHz					1100MHz				
	1	2	3	4	5	1	2	3	4	5	1	2	3	4	5
SKA1REF2	87.00	94.00	120	150	320	83.00	93.00	130	150	410	80.00	94.00	130	150	590
SKA1W9-12A72B120	63.00	69.00	120	140	340	55.00	84.00	120	150	430	52.00	89.00	130	170	600
SKA1W9-0A72B120	67.00	76.00	140	160	340	60.00	95.00	130	170	430	56.00	100	150	200	600
SKASUR	520	330	520	540	3400	390	350	470	490	4400	310	380	400	360	5600

(e) DEC=-30, robust-2 weighting

resbin	650MHz					800MHz					1100MHz				
	1	2	3	4	5	1	2	3	4	5	1	2	3	4	5
SKA1REF2	96.00	120	150	160	320	94.00	120	140	150	410	98.00	120	130	140	590
SKA1W9-12A72B120	82.00	76.00	140	150	330	81.00	90.00	130	150	430	76.00	110	130	160	600
SKA1W9-0A72B120	87.00	86.00	160	180	330	85.00	110	160	190	430	82.00	130	160	200	600
SKASUR	310	330	520	560	3600	300	330	490	550	4400	300	350	470	470	5600

(f) DEC=-30, robust-2 weighting with a 1 arcsec Gaussian taper

resbin	650MHz					800MHz					1100MHz				
	1	2	3	4	5	1	2	3	4	5	1	2	3	4	5
SKA1REF2	90.00	110	150	160	320	90.00	110	140	150	410	91.00	110	130	140	590
SKA1W9-12A72B120	65.00	77.00	130	150	330	68.00	89.00	130	150	430	73.00	100	130	160	600
SKA1W9-0A72B120	74.00	89.00	160	180	330	77.00	100	160	190	430	87.00	120	150	200	600
SKASUR	280	310	510	560	3600	270	320	490	550	4400	270	330	460	470	5600

(g) DEC=-50, natural weighting

resbin	650MHz					800MHz					1100MHz				
	1	2	3	4	5	1	2	3	4	5	1	2	3	4	5
SKA1REF2	89.00	94.00	120	150	320	80.00	94.00	130	150	410	80.00	95.00	130	150	570
SKA1W9-12A72B120	64.00	68.00	120	140	330	55.00	82.00	120	150	420	52.00	89.00	130	170	600
SKA1W9-0A72B120	67.00	75.00	140	160	330	61.00	94.00	140	160	420	56.00	100	140	200	600
SKASUR	580	340	480	570	3700	440	340	480	510	4200	330	350	430	380	5500

(h) DEC=-50, robust-2 weighting

resbin	650MHz					800MHz					1100MHz				
	1	2	3	4	5	1	2	3	4	5	1	2	3	4	5
SKA1REF2	94.00	110	140	150	310	93.00	120	140	150	410	96.00	120	130	140	570
SKA1W9-12A72B120	81.00	74.00	130	140	320	80.00	87.00	120	150	420	75.00	110	120	160	600
SKA1W9-0A72B120	86.00	83.00	160	170	330	85.00	100	150	170	420	81.00	130	150	190	600
SKASUR	310	320	470	570	3600	300	320	490	560	4300	290	340	470	440	5600

(i) DEC=-50, robust-2 weighting with a 1 arcsec Gaussian taper

resbin	650MHz					800MHz					1100MHz				
	1	2	3	4	5	1	2	3	4	5	1	2	3	4	5
SKA1REF2	89.00	110	140	150	310	90.00	110	140	150	410	88.00	110	130	140	570
SKA1W9-12A72B120	64.00	75.00	120	140	320	64.00	86.00	120	150	420	71.00	97.00	120	160	600
SKA1W9-0A72B120	72.00	86.00	150	170	330	76.00	100	150	170	420	85.00	120	150	190	600
SKASUR	280	310	470	570	3600	270	310	490	560	4300	270	320	470	440	5600

Table 5: Noise (in μJy) for a 50MHz band after an 8hr synthesis with a 60s integration for the differenr layouts at different angular scales. These values are generated at 650, 800 and 1100 MHz, at angular scales {0.4-1, 1-2, 2-3, 3-4, 600-3600} arcsec and are labeled *resbin* {1, 2, 3, 4, 5} respectively. This is done for natural, robust-2 weighting and robust-2 weighting with a 1 arcsec Gaussian taper, at declinations -10, -30 and -50 degrees. For each column, the intensity of the color increases with the value.

(a) DEC=-10, natural weighting

resbin	650MHz					800MHz					1100MHz				
	1	2	3	4	5	1	2	3	4	5	1	2	3	4	5
SKA1REF2	2.80	3.00	3.90	4.70	9.70	2.60	2.90	4.00	4.80	12.00	2.50	3.00	4.00	4.70	17.00
SKA1W9-12A72B120	2.10	2.10	3.70	4.40	10.00	1.80	2.50	3.80	4.80	12.00	1.70	2.80	4.00	5.30	18.00
SKA1W9-0A72B120	2.20	2.30	4.20	5.00	10.00	1.90	2.80	4.30	5.20	13.00	1.80	3.20	4.50	6.10	18.00
SKASUR	16.00	10.00	17.00	17.00	100	12.00	11.00	16.00	15.00	120	9.50	12.00	12.00	12.00	160

(b) DEC=-10, robust-2 weighting

resbin	650MHz					800MHz					1100MHz				
	1	2	3	4	5	1	2	3	4	5	1	2	3	4	5
SKA1REF2	3.20	3.90	5.10	5.60	9.40	3.20	4.10	5.00	5.30	12.00	3.20	4.30	4.60	4.80	17.00
SKA1W9-12A72B120	2.80	2.60	4.60	5.20	9.80	2.70	2.90	4.60	5.20	12.00	2.60	3.70	4.40	5.40	18.00
SKA1W9-0A72B120	2.90	2.90	5.50	6.30	9.80	2.90	3.40	5.60	6.50	13.00	2.80	4.30	5.60	6.80	18.00
SKASUR	10.00	11.00	16.00	18.00	100	10.00	11.00	16.00	18.00	120	9.70	11.00	15.00	16.00	160

(c) DEC=-10, robust-2 weighting with a 1 arcsec Gaussian taper

resbin	650MHz					800MHz					1100MHz				
	1	2	3	4	5	1	2	3	4	5	1	2	3	4	5
SKA1REF2	3.00	3.70	5.00	5.60	9.40	3.10	3.80	5.00	5.30	12.00	3.10	3.90	4.50	4.70	17.00
SKA1W9-12A72B120	2.30	2.60	4.50	5.20	9.80	2.30	2.90	4.50	5.20	12.00	2.50	3.40	4.30	5.40	18.00
SKA1W9-0A72B120	2.50	2.90	5.50	6.30	9.80	2.60	3.40	5.50	6.50	13.00	2.90	4.10	5.50	6.80	18.00
SKASUR	9.10	10.00	16.00	18.00	100	8.80	10.00	16.00	18.00	120	8.40	10.00	15.00	16.00	160

(d) DEC=-30, natural weighting

resbin	650MHz					800MHz					1100MHz				
	1	2	3	4	5	1	2	3	4	5	1	2	3	4	5
SKA1REF2	2.80	3.00	3.90	4.80	10.00	2.60	3.00	4.10	4.80	13.00	2.50	3.00	4.00	4.80	19.00
SKA1W9-12A72B120	2.00	2.20	3.70	4.50	11.00	1.80	2.70	3.80	4.80	13.00	1.60	2.80	4.00	5.30	19.00
SKA1W9-0A72B120	2.10	2.40	4.30	5.10	11.00	1.90	3.00	4.20	5.20	14.00	1.80	3.20	4.60	6.20	19.00
SKASUR	16.00	11.00	16.00	17.00	110	12.00	11.00	15.00	15.00	140	9.70	12.00	13.00	12.00	180

(e) DEC=-30, robust-2 weighting

resbin	650MHz					800MHz					1100MHz				
	1	2	3	4	5	1	2	3	4	5	1	2	3	4	5
SKA1REF2	3.00	3.70	4.70	5.00	10.00	3.00	3.90	4.50	4.80	13.00	3.10	3.90	4.20	4.50	19.00
SKA1W9-12A72B120	2.60	2.40	4.30	4.60	11.00	2.60	2.90	4.10	4.90	13.00	2.40	3.40	4.10	5.10	19.00
SKA1W9-0A72B120	2.80	2.70	5.10	5.70	11.00	2.70	3.30	5.10	5.90	14.00	2.60	4.10	4.90	6.30	19.00
SKASUR	9.80	10.00	16.00	18.00	110	9.60	10.00	16.00	18.00	140	9.30	11.00	15.00	15.00	180

(f) DEC=-30, robust-2 weighting with a 1 arcsec Gaussian taper

resbin	650MHz					800MHz					1100MHz				
	1	2	3	4	5	1	2	3	4	5	1	2	3	4	5
SKA1REF2	2.90	3.50	4.70	4.90	10.00	2.80	3.60	4.40	4.80	13.00	2.90	3.50	4.20	4.50	19.00
SKA1W9-12A72B120	2.10	2.40	4.20	4.60	11.00	2.10	2.80	4.10	4.80	13.00	2.30	3.20	4.10	5.10	19.00
SKA1W9-0A72B120	2.40	2.80	5.00	5.70	11.00	2.40	3.30	5.00	5.90	14.00	2.70	3.80	4.90	6.30	19.00
SKASUR	8.80	10.00	16.00	18.00	110	8.60	10.00	15.00	17.00	140	8.40	11.00	15.00	15.00	180

(g) DEC=-50, natural weighting

resbin	650MHz					800MHz					1100MHz				
	1	2	3	4	5	1	2	3	4	5	1	2	3	4	5
SKA1REF2	2.80	3.00	3.90	4.80	10.00	2.50	3.00	4.00	4.80	13.00	2.50	3.00	4.00	4.80	18.00
SKA1W9-12A72B120	2.00	2.20	3.60	4.60	11.00	1.70	2.60	3.80	4.70	13.00	1.60	2.80	4.00	5.40	19.00
SKA1W9-0A72B120	2.10	2.40	4.30	5.10	11.00	1.90	3.00	4.30	5.20	13.00	1.80	3.20	4.50	6.30	19.00
SKASUR	18.00	11.00	15.00	18.00	120	14.00	11.00	15.00	16.00	130	10.00	11.00	14.00	12.00	180

(h) DEC=-50, robust-2 weighting

resbin	650MHz					800MHz					1100MHz				
	1	2	3	4	5	1	2	3	4	5	1	2	3	4	5
SKA1REF2	3.00	3.60	4.40	4.80	9.80	2.90	3.80	4.30	4.60	13.00	3.00	3.80	4.10	4.40	18.00
SKA1W9-12A72B120	2.60	2.30	4.00	4.50	10.00	2.50	2.80	3.90	4.60	13.00	2.40	3.40	4.00	5.00	19.00
SKA1W9-0A72B120	2.70	2.60	4.90	5.50	10.00	2.70	3.20	4.70	5.50	13.00	2.60	4.00	4.70	5.90	19.00
SKASUR	9.70	10.00	15.00	18.00	110	9.50	10.00	16.00	18.00	130	9.30	11.00	15.00	14.00	180

(i) DEC=-50, robust-2 weighting with a 1 arcsec Gaussian taper

resbin	650MHz					800MHz					1100MHz				
	1	2	3	4	5	1	2	3	4	5	1	2	3	4	5
SKA1REF2	2.80	3.40	4.40	4.80	9.80	2.80	3.50	4.30	4.60	13.00	2.80	3.40	4.00	4.40	18.00
SKA1W9-12A72B120	2.00	2.40	3.90	4.50	10.00	2.00	2.70	3.90	4.60	13.00	2.20	3.10	3.90	5.00	19.00
SKA1W9-0A72B120	2.30	2.70	4.80	5.40	10.00	2.40	3.20	4.70	5.50	13.00	2.70	3.70	4.60	5.90	19.00
SKASUR	8.80	9.70	15.00	18.00	110	8.60	9.90	15.00	18.00	130	8.40	10.00	15.00	14.00	180

Table 6: Noise (in μJy) for a 166MHz band after an 8hr synthesis with a 60s integration for the different layouts at different angular scales. These values are generated at 650, 800 and 1100 MHz, at angular scales {0.4-1, 1-2, 2-3, 3-4, 600-3600} arcsec and are labeled *resbin* {1, 2, 3, 4, 5} respectively. This is done for natural, robust-2 weighting and robust-2 weighting with a 1 arcsec Gaussian taper, at declinations -10, -30 and -50 degrees. For each column, the intensity of the color increases with the value.

(a) DEC=-10, natural weighting

resbin	650MHz					800MHz					1100MHz				
	1	2	3	4	5	1	2	3	4	5	1	2	3	4	5
SKA1REF2	1.60	1.60	2.20	2.60	5.30	1.40	1.60	2.20	2.60	6.60	1.40	1.70	2.20	2.60	9.50
SKA1W9-12A72B120	1.20	1.20	2.00	2.40	5.50	0.99	1.40	2.10	2.60	6.80	0.91	1.50	2.20	2.90	10.00
SKA1W9-0A72B120	1.20	1.30	2.30	2.70	5.60	1.10	1.50	2.40	2.80	6.90	0.97	1.80	2.50	3.30	9.80
SKASUR	8.60	5.70	9.60	9.40	56.00	6.80	6.30	8.70	8.30	66.00	5.20	6.80	6.80	6.40	89.00

(b) DEC=-10, robust-2 weighting

resbin	650MHz					800MHz					1100MHz				
	1	2	3	4	5	1	2	3	4	5	1	2	3	4	5
SKA1REF2	1.80	2.20	2.80	3.10	5.20	1.70	2.20	2.80	2.90	6.60	1.80	2.30	2.50	2.60	9.50
SKA1W9-12A72B120	1.50	1.40	2.50	2.90	5.40	1.50	1.60	2.50	2.90	6.80	1.40	2.00	2.40	3.00	10.00
SKA1W9-0A72B120	1.60	1.60	3.00	3.50	5.40	1.60	1.80	3.10	3.60	6.90	1.50	2.40	3.10	3.70	9.80
SKASUR	5.50	5.80	8.90	9.80	55.00	5.50	6.00	8.70	9.70	66.00	5.30	6.00	8.10	8.80	89.00

(c) DEC=-10, robust-2 weighting with a 1 arcsec Gaussian taper

resbin	650MHz					800MHz					1100MHz				
	1	2	3	4	5	1	2	3	4	5	1	2	3	4	5
SKA1REF2	1.70	2.00	2.80	3.00	5.20	1.70	2.10	2.70	2.90	6.60	1.70	2.10	2.50	2.60	9.50
SKA1W9-12A72B120	1.20	1.40	2.50	2.80	5.40	1.20	1.60	2.50	2.90	6.80	1.30	1.90	2.40	3.00	10.00
SKA1W9-0A72B120	1.40	1.60	3.00	3.50	5.40	1.40	1.90	3.00	3.60	6.90	1.60	2.20	3.00	3.70	9.80
SKASUR	5.00	5.60	8.80	9.80	55.00	4.80	5.70	8.60	9.70	66.00	4.60	5.80	8.00	8.70	89.00

(d) DEC=-30, natural weighting

resbin	650MHz					800MHz					1100MHz				
	1	2	3	4	5	1	2	3	4	5	1	2	3	4	5
SKA1REF2	1.50	1.60	2.10	2.60	5.60	1.40	1.60	2.20	2.60	7.10	1.40	1.60	2.20	2.60	10.00
SKA1W9-12A72B120	1.10	1.20	2.00	2.50	5.90	0.96	1.50	2.10	2.60	7.40	0.90	1.60	2.20	2.90	10.00
SKA1W9-0A72B120	1.20	1.30	2.40	2.80	5.90	1.00	1.70	2.30	2.90	7.40	0.98	1.80	2.50	3.40	10.00
SKASUR	9.00	5.80	9.00	9.30	59.00	6.70	6.10	8.20	8.40	77.00	5.30	6.70	7.00	6.30	97.00

(e) DEC=-30, robust-2 weighting

resbin	650MHz					800MHz					1100MHz				
	1	2	3	4	5	1	2	3	4	5	1	2	3	4	5
SKA1REF2	1.70	2.00	2.60	2.70	5.50	1.60	2.10	2.50	2.70	7.10	1.70	2.10	2.30	2.50	10.00
SKA1W9-12A72B120	1.40	1.30	2.30	2.50	5.80	1.40	1.60	2.30	2.70	7.40	1.30	1.90	2.20	2.80	10.00
SKA1W9-0A72B120	1.50	1.50	2.80	3.20	5.80	1.50	1.80	2.80	3.30	7.40	1.40	2.20	2.70	3.50	10.00
SKASUR	5.40	5.60	9.00	9.80	63.00	5.30	5.70	8.60	9.60	77.00	5.10	6.10	8.10	8.20	96.00

(f) DEC=-30, robust-2 weighting with a 1 arcsec Gaussian taper

resbin	650MHz					800MHz					1100MHz				
	1	2	3	4	5	1	2	3	4	5	1	2	3	4	5
SKA1REF2	1.60	1.90	2.60	2.70	5.50	1.60	2.00	2.40	2.60	7.10	1.60	1.90	2.30	2.50	10.00
SKA1W9-12A72B120	1.10	1.30	2.30	2.50	5.80	1.20	1.50	2.20	2.70	7.40	1.30	1.70	2.20	2.80	10.00
SKA1W9-0A72B120	1.30	1.50	2.80	3.10	5.80	1.30	1.80	2.70	3.20	7.40	1.50	2.10	2.70	3.40	10.00
SKASUR	4.80	5.50	8.90	9.80	63.00	4.70	5.50	8.50	9.60	77.00	4.60	5.80	8.00	8.20	96.00

(g) DEC=-50, natural weighting

resbin	650MHz					800MHz					1100MHz				
	1	2	3	4	5	1	2	3	4	5	1	2	3	4	5
SKA1REF2	1.50	1.60	2.10	2.60	5.60	1.40	1.60	2.20	2.60	7.10	1.40	1.60	2.20	2.60	10.00
SKA1W9-12A72B120	1.10	1.20	2.00	2.50	5.80	0.96	1.40	2.10	2.60	7.30	0.90	1.50	2.20	2.90	10.00
SKA1W9-0A72B120	1.20	1.30	2.40	2.80	5.80	1.10	1.60	2.40	2.80	7.30	0.97	1.80	2.50	3.40	10.00
SKASUR	10.00	5.80	8.40	9.80	64.00	7.70	5.80	8.30	8.90	74.00	5.70	6.10	7.50	6.60	96.00

(h) DEC=-50, robust-2 weighting

resbin	650MHz					800MHz					1100MHz				
	1	2	3	4	5	1	2	3	4	5	1	2	3	4	5
SKA1REF2	1.60	2.00	2.40	2.60	5.40	1.60	2.10	2.40	2.50	7.10	1.70	2.10	2.20	2.40	10.00
SKA1W9-12A72B120	1.40	1.30	2.20	2.50	5.60	1.40	1.50	2.20	2.50	7.30	1.30	1.80	2.20	2.70	10.00
SKA1W9-0A72B120	1.50	1.40	2.70	3.00	5.70	1.50	1.80	2.60	3.00	7.30	1.40	2.20	2.60	3.20	10.00
SKASUR	5.30	5.50	8.20	9.90	63.00	5.20	5.60	8.50	9.80	74.00	5.10	5.90	8.20	7.60	97.00

(i) DEC=-50, robust-2 weighting with a 1 arcsec Gaussian taper

resbin	650MHz					800MHz					1100MHz				
	1	2	3	4	5	1	2	3	4	5	1	2	3	4	5
SKA1REF2	1.50	1.90	2.40	2.60	5.40	1.60	1.90	2.30	2.50	7.10	1.50	1.90	2.20	2.40	10.00
SKA1W9-12A72B120	1.10	1.30	2.20	2.50	5.60	1.10	1.50	2.10	2.50	7.30	1.20	1.70	2.10	2.70	10.00
SKA1W9-0A72B120	1.30	1.50	2.70	3.00	5.70	1.30	1.80	2.60	3.00	7.30	1.50	2.00	2.50	3.20	10.00
SKASUR	4.80	5.30	8.10	9.90	63.00	4.70	5.40	8.40	9.70	74.00	4.60	5.60	8.10	7.60	97.00

Table 7: SNR after 8 hours relative to a 10μJy source at 1100Hz (166 MHz band) with a spectral index of -0.7 for the different layouts. These values are generated at 650, 800 and 1100 MHz, at angular scales {0.4-1, 1-2, 2-3, 3-4, 600-3600} arcsec and are labeled *resbin* {1, 2, 3, 4, 5} respectively. This is done for natural, robust-2 weighting and robust-2 weighting with a 1 arcsec Gaussian taper, at declinations -10, -30 and -50 degrees. For each column, the intensity of the color increases with the value.

(a) DEC=-10, natural weighting

resbin	650MHz					800MHz					1100MHz				
	1	2	3	4	5	1	2	3	4	5	1	2	3	4	5
SKA1REF2	9.25	8.84	6.70	5.61	2.73	8.91	7.76	5.68	4.72	1.90	7.15	6.00	4.54	3.88	1.06
SKA1W9-12A72B120	12.44	12.53	7.14	5.92	2.61	12.60	9.01	5.97	4.76	1.83	10.99	6.56	4.59	3.46	0.99
SKA1W9-0A72B120	11.73	11.46	6.25	5.30	2.60	11.79	8.09	5.27	4.41	1.81	10.31	5.71	4.08	3.00	1.02
SKASUR	1.68	2.53	1.51	1.54	0.26	1.84	1.99	1.43	1.50	0.19	1.91	1.47	1.47	1.55	0.11

(b) DEC=-10, robust-2 weighting

resbin	650MHz					800MHz					1100MHz				
	1	2	3	4	5	1	2	3	4	5	1	2	3	4	5
SKA1REF2	8.15	6.71	5.17	4.72	2.79	7.16	5.61	4.53	4.30	1.90	5.62	4.28	3.97	3.82	1.05
SKA1W9-12A72B120	9.53	10.15	5.77	5.05	2.69	8.40	7.79	4.99	4.36	1.83	7.11	4.97	4.17	3.37	1.00
SKA1W9-0A72B120	9.02	9.08	4.76	4.15	2.69	7.94	6.78	4.07	3.51	1.81	6.60	4.22	3.28	2.67	1.02
SKASUR	2.61	2.49	1.62	1.47	0.26	2.27	2.10	1.43	1.29	0.19	1.88	1.66	1.23	1.14	0.11

(c) DEC=-10, robust-2 weighting with a 1 arcsec Gaussian taper

resbin	650MHz					800MHz					1100MHz				
	1	2	3	4	5	1	2	3	4	5	1	2	3	4	5
SKA1REF2	8.70	7.11	5.23	4.74	2.79	7.37	6.00	4.59	4.31	1.90	5.87	4.69	4.03	3.84	1.05
SKA1W9-12A72B120	11.70	10.14	5.84	5.07	2.69	10.08	7.84	5.06	4.37	1.83	7.41	5.34	4.22	3.38	1.00
SKA1W9-0A72B120	10.57	8.93	4.81	4.17	2.69	8.86	6.72	4.12	3.51	1.81	6.32	4.48	3.31	2.69	1.02
SKASUR	2.89	2.59	1.64	1.47	0.26	2.58	2.19	1.45	1.29	0.19	2.16	1.74	1.24	1.14	0.11

(d) DEC=-30, natural weighting

resbin	650MHz					800MHz					1100MHz				
	1	2	3	4	5	1	2	3	4	5	1	2	3	4	5
SKA1REF2	9.56	8.83	6.83	5.52	2.59	8.70	7.72	5.61	4.75	1.76	7.16	6.13	4.54	3.82	0.98
SKA1W9-12A72B120	13.24	12.11	7.11	5.86	2.47	12.98	8.58	6.02	4.72	1.69	11.11	6.45	4.53	3.44	0.96
SKA1W9-0A72B120	12.43	11.02	6.08	5.20	2.46	12.10	7.57	5.38	4.35	1.69	10.24	5.63	3.96	2.94	0.96
SKASUR	1.61	2.49	1.60	1.55	0.24	1.86	2.05	1.53	1.48	0.16	1.88	1.50	1.44	1.58	0.10

(e) DEC=-30, robust-2 weighting

resbin	650MHz					800MHz					1100MHz				
	1	2	3	4	5	1	2	3	4	5	1	2	3	4	5
SKA1REF2	8.69	7.08	5.57	5.32	2.64	7.65	5.89	5.09	4.70	1.76	5.88	4.68	4.31	4.05	0.98
SKA1W9-12A72B120	10.15	10.95	6.17	5.67	2.51	8.87	7.97	5.53	4.68	1.69	7.55	5.29	4.44	3.55	0.96
SKA1W9-0A72B120	9.56	9.66	5.16	4.58	2.51	8.44	6.86	4.49	3.84	1.69	7.00	4.48	3.71	2.90	0.95
SKASUR	2.69	2.56	1.61	1.47	0.23	2.37	2.18	1.46	1.30	0.16	1.95	1.64	1.23	1.22	0.10

(f) DEC=-30, robust-2 weighting with a 1 arcsec Gaussian taper

resbin	650MHz					800MHz					1100MHz				
	1	2	3	4	5	1	2	3	4	5	1	2	3	4	5
SKA1REF2	9.23	7.52	5.66	5.34	2.64	8.03	6.39	5.18	4.72	1.76	6.34	5.16	4.39	4.07	0.98
SKA1W9-12A72B120	12.76	10.81	6.26	5.69	2.51	10.62	8.08	5.60	4.70	1.69	7.86	5.73	4.50	3.57	0.96
SKA1W9-0A72B120	11.18	9.38	5.22	4.60	2.51	9.34	6.88	4.56	3.85	1.69	6.66	4.82	3.74	2.91	0.95
SKASUR	3.00	2.65	1.63	1.48	0.23	2.65	2.27	1.47	1.31	0.16	2.17	1.73	1.24	1.22	0.10

(g) DEC=-50, natural weighting

resbin	650MHz					800MHz					1100MHz				
	1	2	3	4	5	1	2	3	4	5	1	2	3	4	5
SKA1REF2	9.38	8.87	6.76	5.50	2.59	8.98	7.66	5.76	4.77	1.76	7.22	6.07	4.53	3.81	1.00
SKA1W9-12A72B120	13.06	12.19	7.23	5.79	2.49	13.02	8.74	5.98	4.80	1.71	11.10	6.49	4.57	3.39	0.95
SKA1W9-0A72B120	12.36	11.16	6.07	5.20	2.49	11.90	7.69	5.29	4.42	1.72	10.27	5.66	4.05	2.91	0.96
SKASUR	1.44	2.48	1.72	1.47	0.22	1.62	2.14	1.51	1.40	0.17	1.76	1.64	1.34	1.52	0.10

(h) DEC=-50, robust-2 weighting

resbin	650MHz					800MHz					1100MHz				
	1	2	3	4	5	1	2	3	4	5	1	2	3	4	5
SKA1REF2	8.82	7.26	5.93	5.50	2.68	7.73	6.02	5.24	4.91	1.76	5.98	4.80	4.49	4.11	1.00
SKA1W9-12A72B120	10.23	11.26	6.58	5.84	2.57	9.06	8.26	5.80	4.95	1.71	7.68	5.43	4.61	3.64	0.95
SKA1W9-0A72B120	9.68	9.99	5.36	4.81	2.55	8.52	7.07	4.81	4.13	1.72	7.10	4.55	3.92	3.09	0.96
SKASUR	2.72	2.61	1.76	1.45	0.23	2.40	2.22	1.47	1.28	0.17	1.97	1.70	1.22	1.31	0.10

(i) DEC=-50, robust-2 weighting with a 1 arcsec Gaussian taper

resbin	650MHz					800MHz					1100MHz				
	1	2	3	4	5	1	2	3	4	5	1	2	3	4	5
SKA1REF2	9.40	7.77	6.02	5.52	2.68	8.01	6.56	5.33	4.93	1.76	6.52	5.33	4.57	4.14	1.00
SKA1W9-12A72B120	12.98	11.13	6.68	5.86	2.57	11.21	8.41	5.88	4.96	1.71	8.10	5.94	4.67	3.66	0.95
SKA1W9-0A72B120	11.54	9.65	5.44	4.84	2.55	9.44	7.12	4.88	4.14	1.72	6.77	4.98	3.96	3.11	0.96
SKASUR	3.00	2.70	1.77	1.46	0.23	2.66	2.31	1.48	1.29	0.17	2.16	1.78	1.24	1.32	0.10

Table 8: SNR after 8 hours relative to a 10μJy source at 1100Hz (166 MHz band) with a spectral index of -0.7 averaged over 650,800 and 1100MHz, for the different layouts at different angular scales. These values are generated for angular scales {0.4-1, 1-2, 2-3, 3-4, 600-3600} arcsec and are labeled *resbin* {1, 2, 3, 4, 5} respectively. This is done for natural weighting at declinations -10, -30 and -50 degrees. For each column, the intensity of the color increases with the value.

(a) DEC=-10, natural weighting

resbin	1	2	3	4	5
SKA1REF2	14.69	13.21	9.89	8.29	3.49
SKA1W9-12A72B120	20.84	16.77	10.38	8.35	3.34
SKA1W9-0A72B120	19.57	15.14	9.14	7.51	3.32
SKASUR	3.14	3.54	2.55	2.65	0.34

(b) DEC=-30, natural weighting

resbin	1	2	3	4	5
SKA1REF2	14.78	13.24	9.94	8.22	3.28
SKA1W9-12A72B120	21.61	16.18	10.35	8.27	3.14
SKA1W9-0A72B120	20.15	14.51	9.03	7.39	3.13
SKASUR	3.09	3.56	2.64	2.66	0.31

(c) DEC=-50, natural weighting

resbin	1	2	3	4	5
SKA1REF2	14.86	13.20	9.97	8.21	3.29
SKA1W9-12A72B120	21.52	16.35	10.44	8.25	3.17
SKA1W9-0A72B120	19.99	14.69	9.01	7.42	3.17
SKASUR	2.80	3.66	2.65	2.53	0.30

Table 9: The hours required to reach a mean SNR of 10 (average over 650,800 and 1100MHz), relative to a 10μJy source at 1100MHz with a spectral index of -0.7 for the different layouts at different angular scales. These values are generated for angular scales {0.4-1, 1-2, 2-3, 3-4, 600-3600} arcsec and are labeled *resbin* {1, 2, 3, 4, 5} respectively. This is done for natural weighting at declinations -10, -30 and -50 degrees. For each column, the intensity of the color increases with the value.

(a) DEC=-10, natural weighting

resbin	1	2	3	4	5
SKA1REF2	3.70	4.59	8.18	11.64	65.73
SKA1W9-12A72B120	1.84	2.84	7.43	11.49	71.91
SKA1W9-0A72B120	2.09	3.49	9.58	14.17	72.48
SKASUR	81.25	63.74	123.1	113.9	6899

(b) DEC=-30, natural weighting

resbin	1	2	3	4	5
SKA1REF2	3.66	4.57	8.10	11.84	74.42
SKA1W9-12A72B120	1.71	3.06	7.46	11.69	80.96
SKA1W9-0A72B120	1.97	3.80	9.81	14.64	81.68
SKASUR	83.57	63.04	114.6	112.8	8241

(c) DEC=-50, natural weighting

resbin	1	2	3	4	5
SKA1REF2	3.62	4.59	8.05	11.86	73.87
SKA1W9-12A72B120	1.73	2.99	7.34	11.75	79.77
SKA1W9-0A72B120	2.00	3.71	9.85	14.53	79.52
SKASUR	102.3	59.64	113.7	124.5	8914

3   Conclusions

The metrics we have used suggest that the science goals (at least those listed in the SRD in addition to cosmology with weak lensing and H I surveys) can be met by a layout which covers significantly less space compared to the baseline layout. The SKA1-W9-0A72B120 layout performs significantly better at smaller angular scales, up to a 42% improvement in terms of the noise properties and a 50% improvement in survey speed, without compromising the larger scales. Moreover, the performance the SKA1-Mid performance can be further enhanced by adding a handfull of dishes in the spairal arms as can be seen with the SKA1W9-12A72B120 layout.

Bringing in the dishes from the longer baselines translates to a greater sensitivity on the relevant (to the science goals of SKA1-Mid) smaller scales, as can be seen in Tables 4-9. Even more encouraging is the fact that this doesn't compromise the size or the symmetry of the PSF as seen in Tables 2 and 3. **We proffer the SKA1W9-0A72B120 configuration as a solution which allows allows for weak lensing, H I and continuum source morphology characterisation for galaxy evolution studies, as well as the other science cases detailed in the SRD. Although we note that such a configuration also needs to be analysed by other SWGs, in particular the H I SWG.**

References

[1] http://www.skatelescope.org/wp-content/uploads/2013/05/SKA-TEL-SKO-DD-001-1_
    BaselineDesign1.pdf

[2] https://www.skatelescope.org/wp-content/uploads/2014/03/SKA-TEL_SCI-SKO-SRQ-001-1_Level_
    0_Requirements-1.pdf
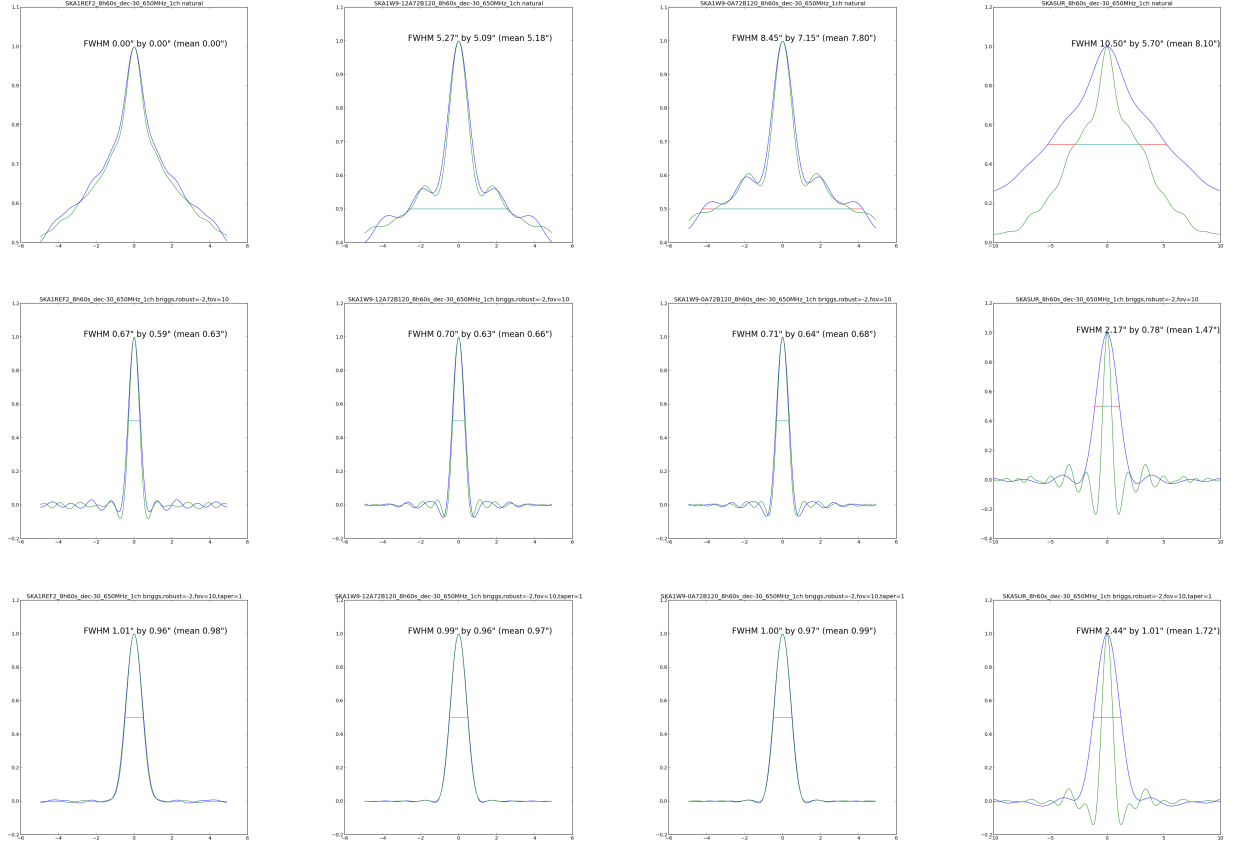
A PSF cross-sections

Figure 6: PSF cross-sections at Dec=-30 deg, Freq=650MHz. Row 1 and 2 are for natural and robust-2 weighting respectively, and row 3 is for robust-2 weighting with a 1 arcsec Gaussian taper. The blue and green curves are cross-sections along l and m respectively, and the horizontal line marks the FWHM. FWHM parameters are included in the plot. The naturally weighted REF2 PSF (top left) is larger than 10 arcsec.
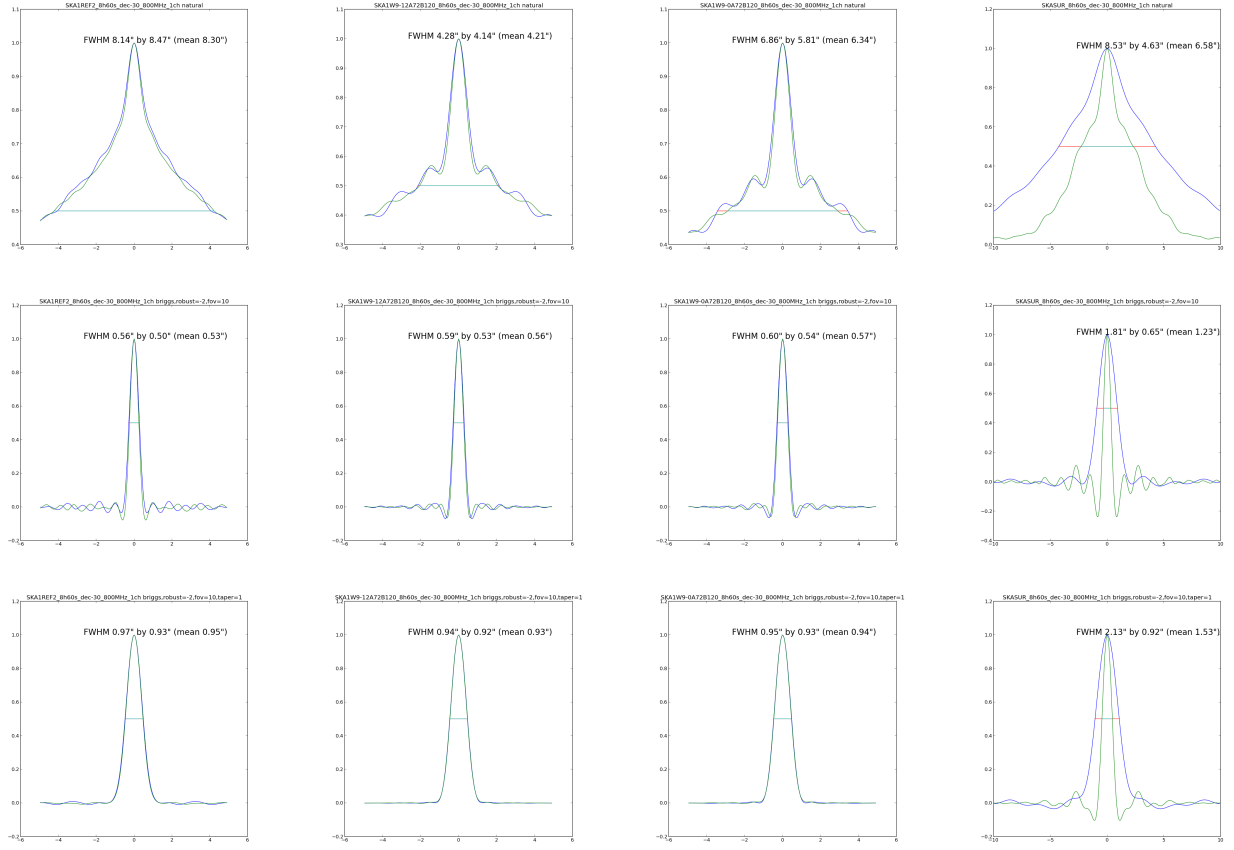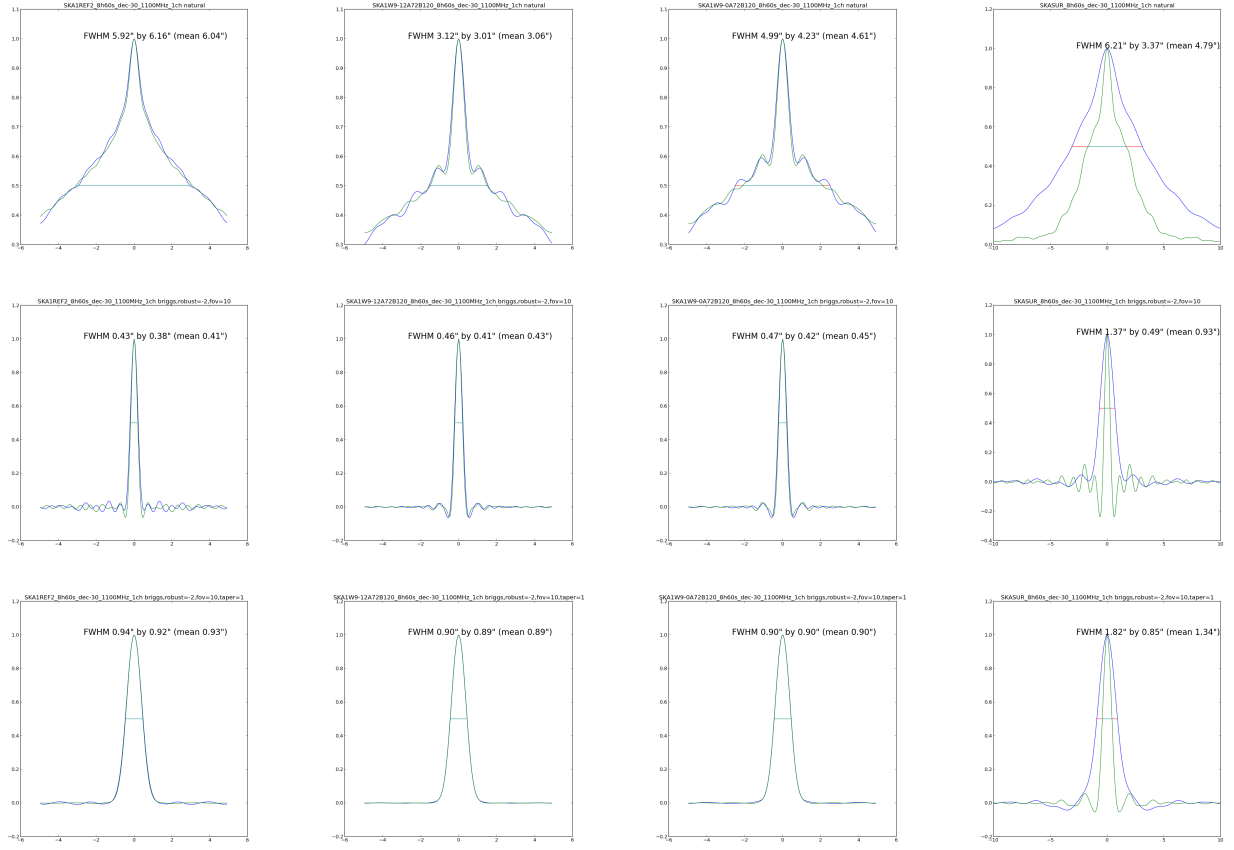
Figure 7: PSF cross-sections at Dec=-30 deg, Freq=800MHz. Row 1 and 2 are for natural and robust-2 weighting respectively, and row 3 is for robust-2 weighting with a 1 arcsec Gaussian taper. The blue and green curves are cross-sections along l and m respectively, and the horizontal line marks the FWHM. FWHM parameters are included in the plot.

Figure 8: PSF cross-sections at Dec=-30 deg, Freq=1100MHz. Row 1 and 2 are for natural and robust-2 weighting respectively, and row 3 is for robust-2 weighting with a 1 arcsec Gaussian taper. The blue and green curves are cross-sections along l and m respectively, and the horizontal line marks the FWHM. FWHM parameters are included in the plot.