


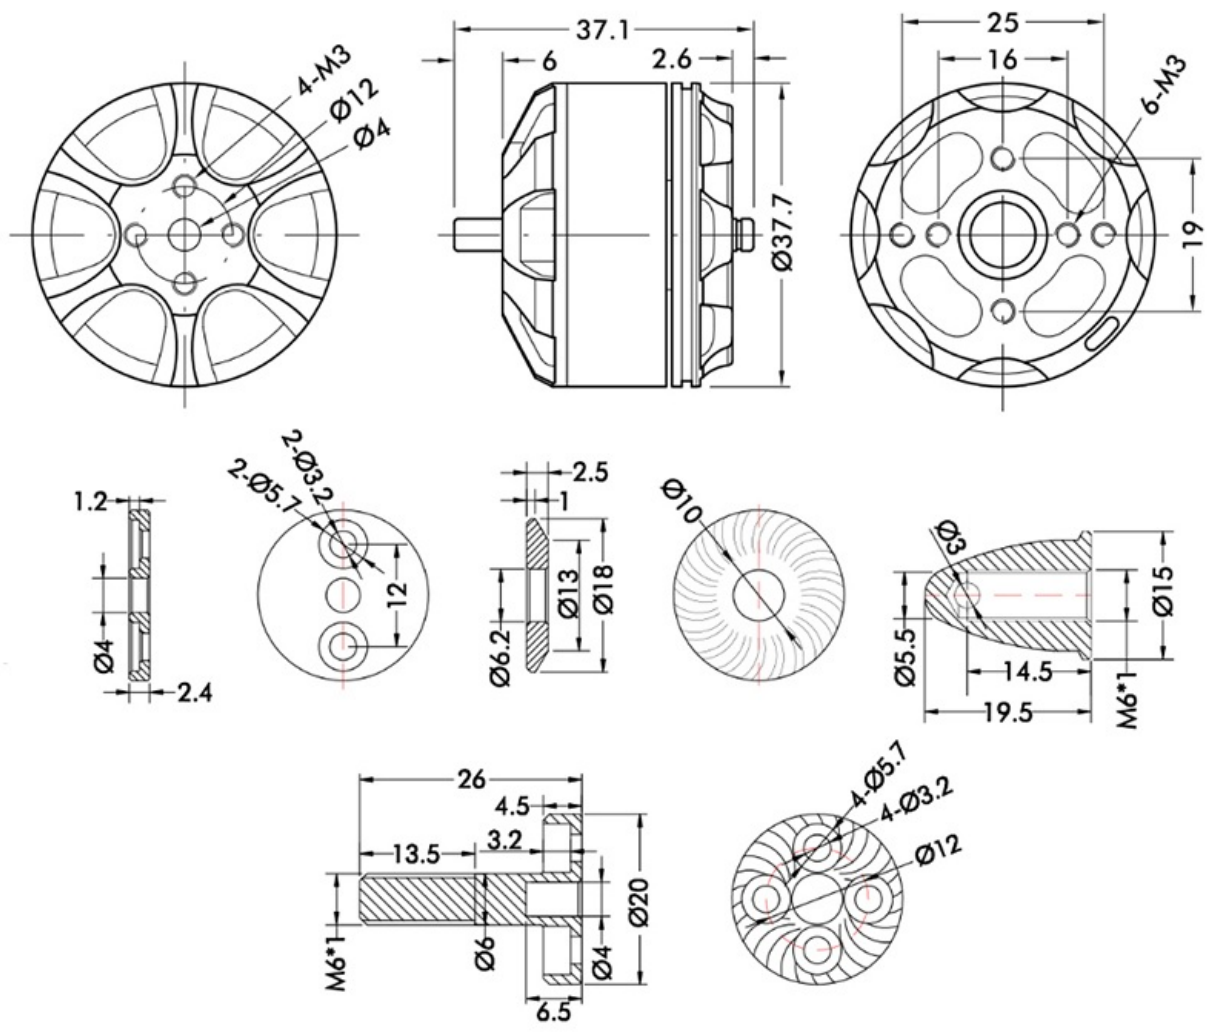

Specification

|                           |               |                             |                                  |
|---------------------------|---------------|-----------------------------|----------------------------------|
| Test Item                 | MN3110 KV470  | Configuration               | 12N14P                           |
| Internal Resistance       | 135m $\Omega$ | Motor Dimensions            | $\Phi 37.7 \times 28.5\text{mm}$ |
| Shaft Diameter            | 4mm           | Stator Height               | 10mm                             |
| Stator Diameter           | 31mm          | Cable Length                | 600mm                            |
| AWG                       | 18#           | Weight Excluding Cables     | 80g                              |
| Weight Including Cables   | 98g           | Idle Current@10v            | 0.3A                             |
| No.of Cells(Lipo)         | 3-6S          | Max Continuous Current 180S | 15A                              |
| Max Continuous Power 180S | 330W          |                             |                                  |
| Test Item                 | MN3110 KV700  | Configuration               | 12N14P                           |
| Internal Resistance       | 92m $\Omega$  | Motor Dimensions            | $\Phi 37.7 \times 28.5\text{mm}$ |
| Shaft Diameter            | 4mm           | Stator Height               | 10mm                             |
| Stator Diameter           | 31mm          | Cable Length                | 600mm                            |
|                           |               |                             |                                  |

|                           |              |                             |              |
|---------------------------|--------------|-----------------------------|--------------|
| AWG                       | 18#          | Weight Excluding Cables     | 80g          |
| Weight Including Cables   | 99g          | Idle Current@10v            | 0.3A         |
| No.of Cells(Lipo)         | 3-6S         | Max Continuous Current 180S | 21A          |
| Max Continuous Power 180S | 466W         |                             |              |
| Test Item                 | MN3110 KV780 | Configuration               | 12N14P       |
| Internal Resistance       | 71mΩ         | Motor Dimensions            | Φ37.7×28.5mm |
| Shaft Diameter            | 4mm          | Stator Height               | 10mm         |
| Stator Diameter           | 31mm         | Cable Length                | 600mm        |
| AWG                       | 18#          | Weight Excluding Cables     | 80g          |
| Weight Including Cables   | 100g         | Idle Current@10v            | 0.4A         |
| No.of Cells(Lipo)         | 3-6S         | Max Continuous Current 180S | 26A          |
| Max Continuous Power 180S | 481W         |                             |              |

Test Data

| Item No.        | Voltage (V) | Prop                 | Throttle | Current (A) | Power (W) | Thrust (G) | RPM  | Efficiency (G/W) | Operating Temperature (°C) |
|-----------------|-------------|----------------------|----------|-------------|-----------|------------|------|------------------|----------------------------|
| MN3110<br>KV470 | 14.8        | LIGPOWER<br>13*4.4CF | 50%      | 1.5         | 22.20     | 290        | 3300 | 13.06            | 40                         |
|                 |             |                      | 65%      | 2.6         | 38.48     | 410        | 4000 | 10.65            |                            |
|                 |             |                      | 75%      | 3.5         | 51.80     | 550        | 4600 | 10.62            |                            |
|                 |             |                      | 85%      | 4.9         | 72.52     | 680        | 5200 | 9.38             |                            |
|                 |             |                      | 100%     | 5.8         | 85.84     | 780        | 5500 | 9.09             |                            |
|                 |             | LIGPOWER<br>14*4.8CF | 50%      | 2.0         | 29.60     | 370        | 3000 | 12.50            | 50                         |
|                 |             |                      | 65%      | 3.5         | 51.80     | 600        | 3800 | 11.58            |                            |
|                 |             |                      | 75%      | 5.0         | 74.00     | 790        | 4300 | 10.68            |                            |
|                 |             |                      | 85%      | 7.0         | 103.60    | 990        | 4800 | 9.56             |                            |
|                 |             |                      | 100%     | 8.0         | 118.40    | 1090       | 5050 | 9.21             |                            |
|                 |             | LIGPOWER<br>15*5CF   | 50%      | 2.2         | 32.56     | 460        | 2800 | 14.13            | 53                         |
|                 |             |                      | 65%      | 4.3         | 63.64     | 730        | 3600 | 11.47            |                            |
|                 |             |                      | 75%      | 6.2         | 91.76     | 930        | 4100 | 10.14            |                            |
|                 |             |                      | 85%      | 8.2         | 121.36    | 1100       | 4500 | 9.06             |                            |
|                 |             |                      | 100%     | 9.5         | 140.60    | 1220       | 4800 | 8.68             |                            |
|                 | 22.2        | LIGPOWER<br>10*3.3CF | 50%      | 1.5         | 33.30     | 350        | 5500 | 10.51            | 41                         |
|                 |             |                      | 65%      | 2.5         | 55.50     | 500        | 6500 | 9.01             |                            |
|                 |             |                      | 75%      | 3.5         | 77.70     | 630        | 7300 | 8.11             |                            |
|                 |             |                      | 85%      | 4.8         | 106.56    | 780        | 8300 | 7.32             |                            |
|                 |             |                      | 100%     | 5.3         | 117.66    | 890        | 8600 | 7.56             |                            |
|                 |             |                      | 50%      | 1.9         | 42.18     | 430        | 4900 | 10.19            |                            |

|                                                                                                                  |      |                      |      |      |        |      |      |       |    |
|------------------------------------------------------------------------------------------------------------------|------|----------------------|------|------|--------|------|------|-------|----|
|                                                                                                                  |      | LIGPOWER<br>11*3.7CF | 65%  | 3.5  | 77.70  | 690  | 6300 | 8.88  | 44 |
|                                                                                                                  |      |                      | 75%  | 5.0  | 111.00 | 860  | 7100 | 7.75  |    |
|                                                                                                                  |      |                      | 85%  | 6.3  | 139.86 | 1030 | 7700 | 7.36  |    |
|                                                                                                                  |      |                      | 100% | 7.4  | 164.28 | 1110 | 8200 | 6.76  |    |
| Notes:The test condition of temperature is motor surface temperature at 100% throttle while the motor run 10min. |      |                      |      |      |        |      |      |       |    |
| MN3110<br><br>KV700                                                                                              | 11.1 | LIGPOWER<br>11*3.7CF | 50%  | 1.8  | 19.98  | 280  | 3900 | 14.01 | 39 |
|                                                                                                                  |      |                      | 65%  | 3    | 33.30  | 380  | 4600 | 11.41 |    |
|                                                                                                                  |      |                      | 75%  | 4.3  | 47.73  | 500  | 5500 | 10.48 |    |
|                                                                                                                  |      |                      | 85%  | 5.6  | 62.16  | 600  | 6000 | 9.65  |    |
|                                                                                                                  |      |                      | 100% | 6.9  | 76.59  | 700  | 6400 | 9.14  |    |
|                                                                                                                  |      | LIGPOWER<br>12*4CF   | 50%  | 2.1  | 23.31  | 320  | 3600 | 13.73 | 39 |
|                                                                                                                  |      |                      | 65%  | 3.7  | 41.07  | 500  | 4500 | 12.17 |    |
|                                                                                                                  |      |                      | 75%  | 5.3  | 58.83  | 630  | 5000 | 10.71 |    |
|                                                                                                                  |      |                      | 85%  | 7.2  | 79.92  | 780  | 5700 | 9.76  |    |
|                                                                                                                  |      |                      | 100% | 8.9  | 98.79  | 890  | 6100 | 9.01  |    |
|                                                                                                                  |      | LIGPOWER<br>13*4.4CF | 50%  | 2.4  | 26.64  | 320  | 3500 | 12.01 | 45 |
|                                                                                                                  |      |                      | 65%  | 4.3  | 47.73  | 480  | 4500 | 10.06 |    |
|                                                                                                                  |      |                      | 75%  | 6.3  | 69.93  | 680  | 5000 | 9.72  |    |
|                                                                                                                  |      |                      | 85%  | 8.5  | 94.35  | 880  | 5600 | 9.33  |    |
|                                                                                                                  |      |                      | 100% | 10.2 | 113.22 | 980  | 6000 | 8.66  |    |
|                                                                                                                  | 14.8 | LIGPOWER<br>10*3.3CF | 50%  | 2.3  | 34.04  | 320  | 5500 | 9.40  | 42 |
|                                                                                                                  |      |                      | 65%  | 3.5  | 51.80  | 430  | 6500 | 8.30  |    |
|                                                                                                                  |      |                      | 75%  | 5    | 74.00  | 560  | 7100 | 7.57  |    |
|                                                                                                                  |      |                      | 85%  | 6.8  | 100.64 | 700  | 8000 | 6.96  |    |
|                                                                                                                  |      |                      | 100% | 8.1  | 119.88 | 800  | 8600 | 6.67  |    |
|                                                                                                                  |      | LIGPOWER<br>11*3.7CF | 50%  | 2.6  | 38.48  | 350  | 4900 | 9.10  | 42 |
|                                                                                                                  |      |                      | 65%  | 4.7  | 69.56  | 560  | 6000 | 8.05  |    |
|                                                                                                                  |      |                      | 75%  | 6.5  | 96.20  | 720  | 6900 | 7.48  |    |
|                                                                                                                  |      |                      | 85%  | 9    | 133.20 | 880  | 7600 | 6.61  |    |
|                                                                                                                  |      |                      | 100% | 10   | 148.00 | 1030 | 8100 | 6.96  |    |
|                                                                                                                  |      | LIGPOWER<br>12*4CF   | 50%  | 3.2  | 47.36  | 420  | 4800 | 8.87  | 47 |
|                                                                                                                  |      |                      | 65%  | 6.2  | 91.76  | 790  | 5700 | 8.61  |    |
|                                                                                                                  |      |                      | 75%  | 8.5  | 125.80 | 930  | 6500 | 7.39  |    |
|                                                                                                                  |      |                      | 85%  | 11.6 | 171.68 | 1190 | 7200 | 6.93  |    |
|                                                                                                                  |      |                      | 100% | 14   | 207.20 | 1290 | 7600 | 6.23  |    |

Notes:The test condition of temperature is motor surface temperature at 100% throttle while the motor run 10min.

|                 |      |                      |      |      |        |      |       |       |    |
|-----------------|------|----------------------|------|------|--------|------|-------|-------|----|
| MN3110<br>KV780 | 11.1 | LIGPOWER<br>11*3.7CF | 50%  | 2.3  | 25.53  | 260  | 4300  | 10.18 | 40 |
|                 |      |                      | 65%  | 4.1  | 45.51  | 400  | 5300  | 8.79  |    |
|                 |      |                      | 75%  | 5.7  | 63.27  | 530  | 6000  | 8.38  |    |
|                 |      |                      | 85%  | 7.7  | 85.47  | 660  | 6800  | 7.72  |    |
|                 |      |                      | 100% | 9.4  | 104.34 | 750  | 7100  | 7.19  |    |
|                 |      | LIGPOWER<br>12*4CF   | 50%  | 2.7  | 29.97  | 320  | 4000  | 10.68 | 44 |
|                 |      |                      | 65%  | 5.1  | 56.61  | 530  | 5000  | 9.36  |    |
|                 |      |                      | 75%  | 7.5  | 83.25  | 700  | 5700  | 8.41  |    |
|                 |      |                      | 85%  | 9.8  | 108.78 | 840  | 6300  | 7.72  |    |
|                 |      |                      | 100% | 12   | 133.20 | 990  | 6700  | 7.43  |    |
|                 | 14.8 | LIGPOWER<br>9*3CF    | 50%  | 2.7  | 39.96  | 300  | 6800  | 7.51  | 41 |
|                 |      |                      | 65%  | 3.6  | 53.28  | 380  | 7500  | 7.13  |    |
|                 |      |                      | 75%  | 4.8  | 71.04  | 460  | 8500  | 6.48  |    |
|                 |      |                      | 85%  | 6.6  | 97.68  | 590  | 9200  | 6.04  |    |
|                 |      |                      | 100% | 8    | 118.40 | 680  | 10000 | 5.74  |    |
|                 |      | LIGPOWER<br>10*3.3CF | 50%  | 3.1  | 45.88  | 360  | 6000  | 7.85  | 42 |
|                 |      |                      | 65%  | 4.8  | 71.04  | 530  | 7000  | 7.46  |    |
|                 |      |                      | 75%  | 6.8  | 100.64 | 660  | 8000  | 6.56  |    |
|                 |      |                      | 85%  | 9.2  | 136.16 | 850  | 8800  | 6.24  |    |
|                 |      |                      | 100% | 11   | 162.80 | 980  | 9500  | 6.02  |    |
|                 |      | LIGPOWER<br>11*3.7CF | 50%  | 3.4  | 50.32  | 430  | 5500  | 8.55  | 45 |
|                 |      |                      | 65%  | 6.5  | 96.20  | 700  | 6700  | 7.28  |    |
|                 |      |                      | 75%  | 9.2  | 136.16 | 880  | 7600  | 6.46  |    |
|                 |      |                      | 85%  | 12.4 | 183.52 | 1100 | 8500  | 5.99  |    |
|                 |      |                      | 100% | 14.9 | 220.52 | 1260 | 9000  | 5.71  |    |

Notes:The test condition of temperature is motor surface temperature at 100% throttle while the motor run 10min.

#### Packing List



Before using this product, please check if all the items listed above are included in the packaging. If there are any missing items, please contact our online customer service or leave message to "[onlinesales@ligpower.com](mailto:onlinesales@ligpower.com)" in time.