

ISOMETRIC - FRONT, STARBOARD, ABOVE


red dashed = 12 in propeller discs at the drawing's motor station (TBD)

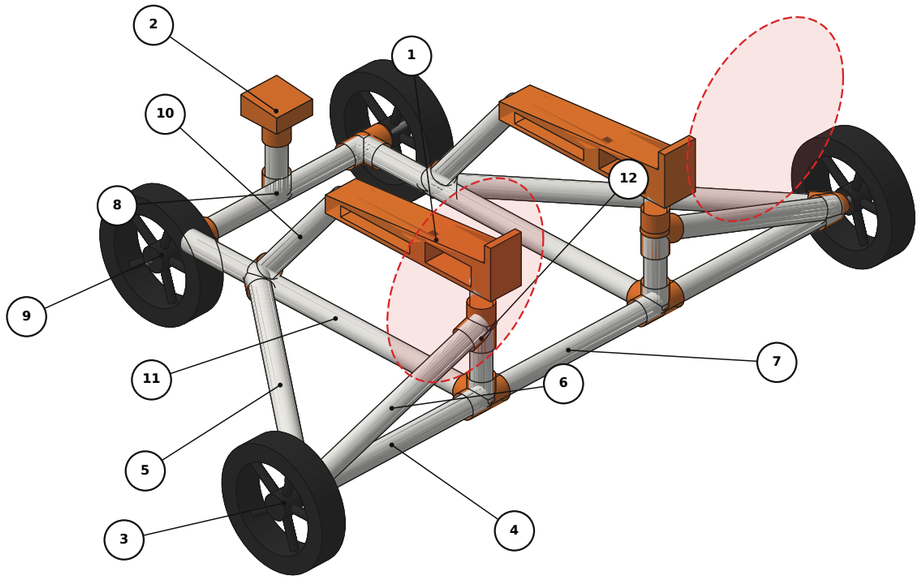


ISOMETRIC - REAR, STARBOARD, ABOVE

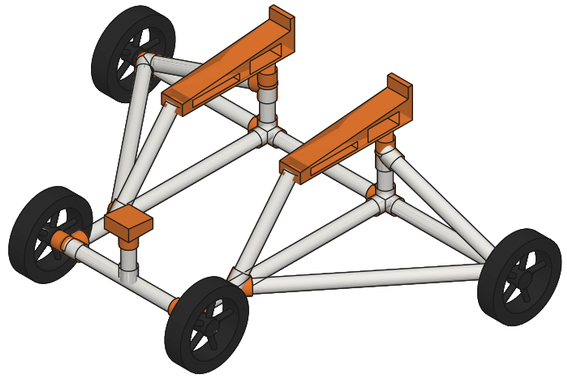


PLAN 1:15

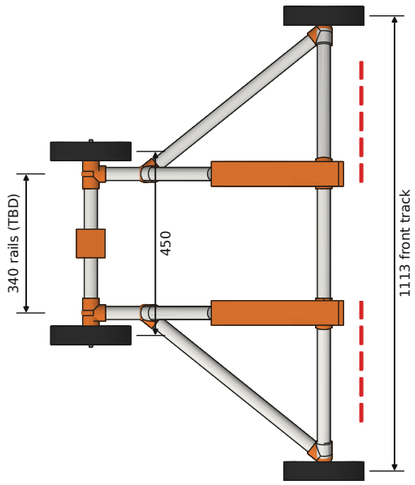

SIDE (FROM STARBOARD) 1:15

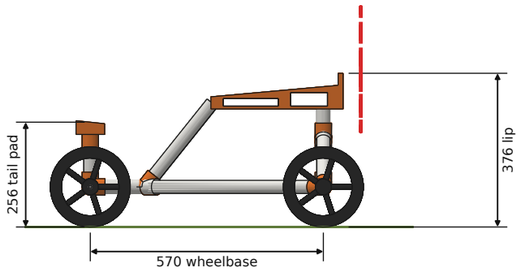

FRONT 1:15

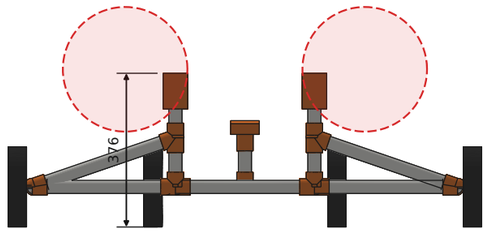

KEY DATA	VALUE
Layout	4 wheels: rear wheels on the rails, front wheels on outriggers
Wheels	196 mm; track 1113 front / 450 rear; wheelbase 570
Wing supports	5.2 deg wedge trays at y = +/-170 (TBD), 30 mm lip
Tail support	Pad top 256 above ground, 6 deg, adjustable +/-20
Front outriggers	Arm + horizontal brace + vertical strut each side; wheel outboard of prop disc
Prop disc to dolly	44 mm, at ramp S (req. >= 75; prop position TBD)
Overall L x W x H	766 x 1158 x 376 mm

ITEMS

1. Wedge tray with ramp stop (PETG, TPU cover)
2. Tail support pad (TPU) on adjustable centre post
3. Front wheel (x2), outboard of the prop discs
4. Outrigger arm from the front tee (x2)
5. Horizontal brace, outrigger end to rail tee (x2)
6. Vertical strut, outrigger end to upright tee (x2)
7. Front cross member
8. Rear cross member (carries tail post)
9. Rear wheel (x2)
10. Diagonal strut, rail tee to tray
11. Rail (x2)
12. Front upright (x2)

Side frame from the Fusion model; values marked TBD and the prop discs are not yet measured.

QUT AEROSPACE SOCIETY - BELIEVER UAV — **CONCEPT**

LAUNCH DOLLY		DWG No.
CONCEPT VIEWS - COMPLETE DOLLY		**BLV-DOL-006**
SCALE AS SHOWN (A3)	SHEET 1 OF 1	REV A 2026-11-05
UNITS mm | ANGLES deg	GENERATED: dolly_v2_sheet.py	PROJECTION