VTBL/KKM

Apt Elev **133′**


N14 52.5 E100 39.8

JEPPESEN

25 APR 25 (30-9)

LOP BURI, THAILAND

KHOK KATHIAM

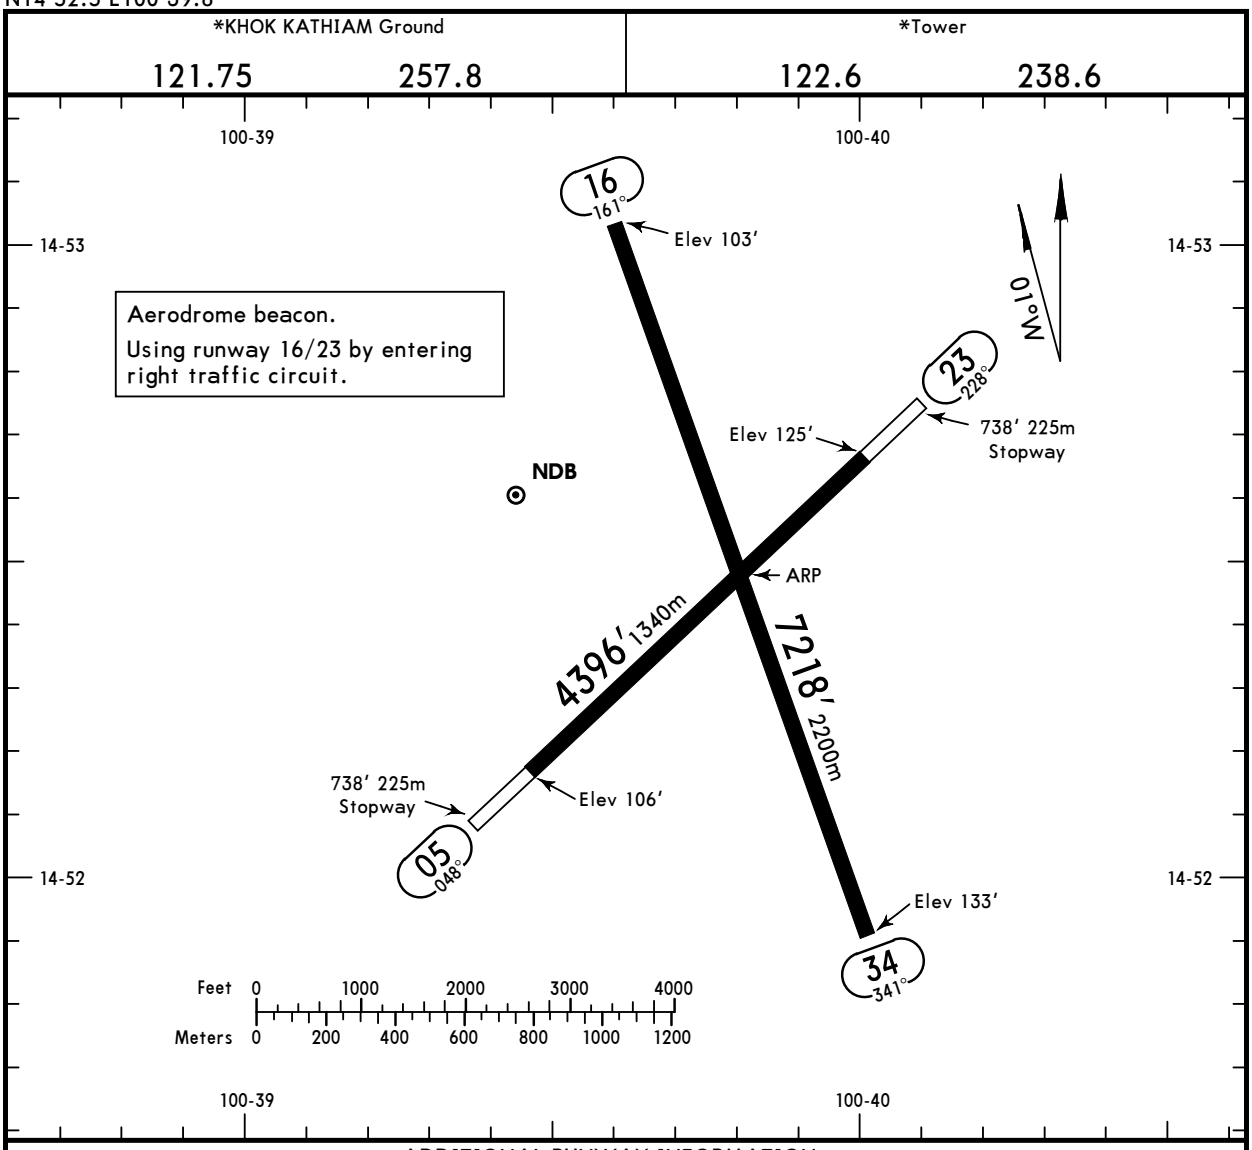

ADDITIONAL RUNWAY INFORMATION

RWY			USABLE LENGTHS — LANDING BEYOND — Threshold	Glide Slope	TAKE-OFF	WIDTH
05 23	RL (60m)	PAPI-L (angle 3.0°)		3412′ 1040m		148′ 45m
16 34	RL (60m)	PAPI-L (angle 3.0°)				148′ 45m

Std TAKE-OFF

1 RL & RCLM	1 RL or RCLM	Adequate Vis Ref DAY	Adequate Vis Ref NIGHT
R/V300m	R/V400m	R/V500m	NA

1 For NIGHT operations, at least RL and RENL are required.

CHANGES: New chart.

© JEPPESEN, 2025. ALL RIGHTS RESERVED.

VTBL/KKM
KHOK KATHIAM

JEPPESEN

25 APR 25 (31-1) CAT A & B

LOP BURI, THAILAND
ILS or LOC Rwy 05

*KHOK KATHIAM Tower		*Ground	
122.6	238.6	121.75	257.8


BRIEFING STRIP ™

LOC ILOB	Final Apch Crs	D6.0 ILOB	ILS DA(H)	Apt Elev 133′
*108.3 (CH 20X)	047°	2000′ (1894′)	790′ (684′)	Rwy 106′


MISSED APCH: Climb STRAIGHT AHEAD to 1000′, then turn LEFT to intercept outbound LB NDB R-290 and continue climb until 2500′, then turn LEFT direct to LB NDB at 3500′ and hold or as directed by ATC. No turn before MAP (for LOC only). MAX 140 KT until after turn.

Alt Set: hPa | Rwy Elev: 4 hPa | Trans level: FL130 | Trans alt: 11000′


1.NDB, DME required. 2. CAUTION: Operate under VMC only. 3.Circling not authorized.



MSA LB NDB

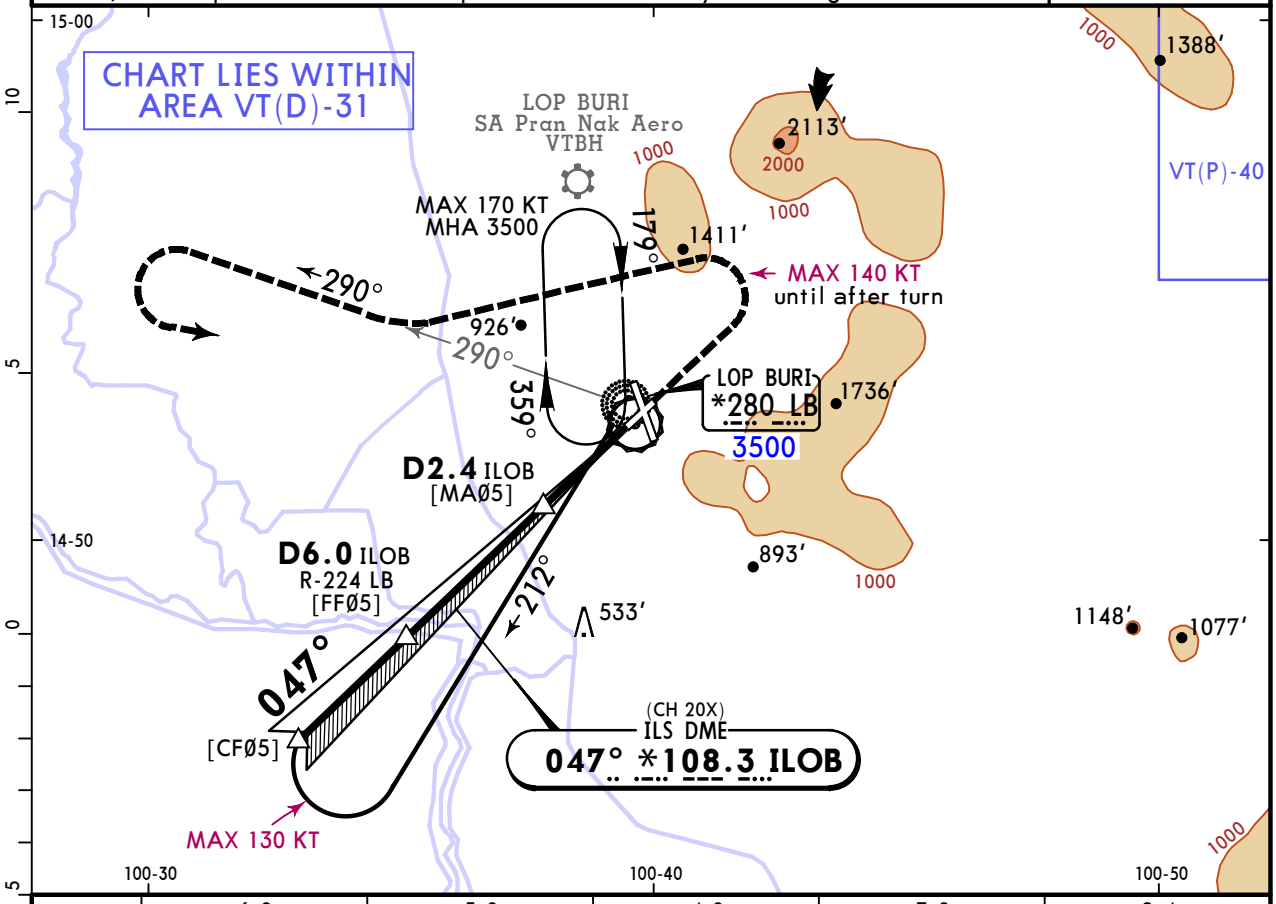

ILOB DME	6.0	5.0	4.0	3.0	2.4
ALTITUDE	2000′	1670′	1355′	1040′	850′

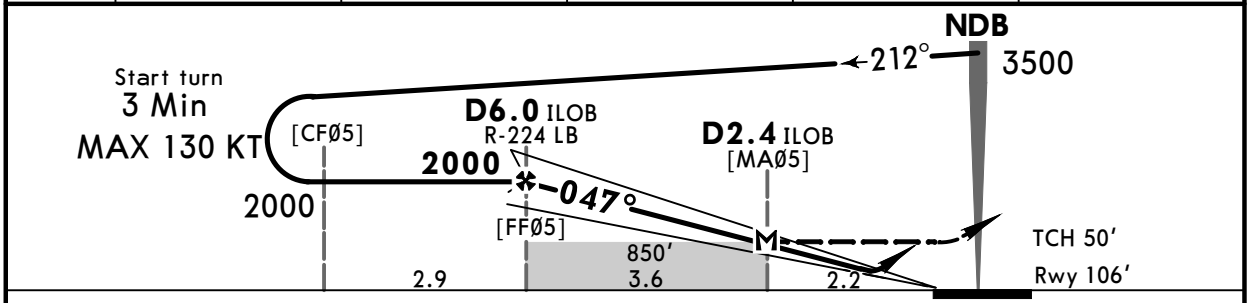

Gnd speed-Kts		70	90	100	120	140	160
GS	3.00°	372	478	531	637	743	849
MAP at D2.4 ILOB							

PAPI-L | 1000′ | LT | LB *280 R-290

PANS OPS

Std STRAIGHT-IN LANDING

	ILS	LOC (GS out) CDFA
	DA(H) 790′ (684′)	1 DA/MDA(H) 850′ (744′)
A	1500m	1500m
B		
C	NOT APPLICABLE	NOT APPLICABLE
D		

1 VNAV DA(H) in lieu of MDA(H) depends on operator policy.

CHANGES: New procedure.

© JEPPESEN, 2025. ALL RIGHTS RESERVED.