
ATIS	CHIANG MAI Ground	Tower
127.425	121.9	118.1

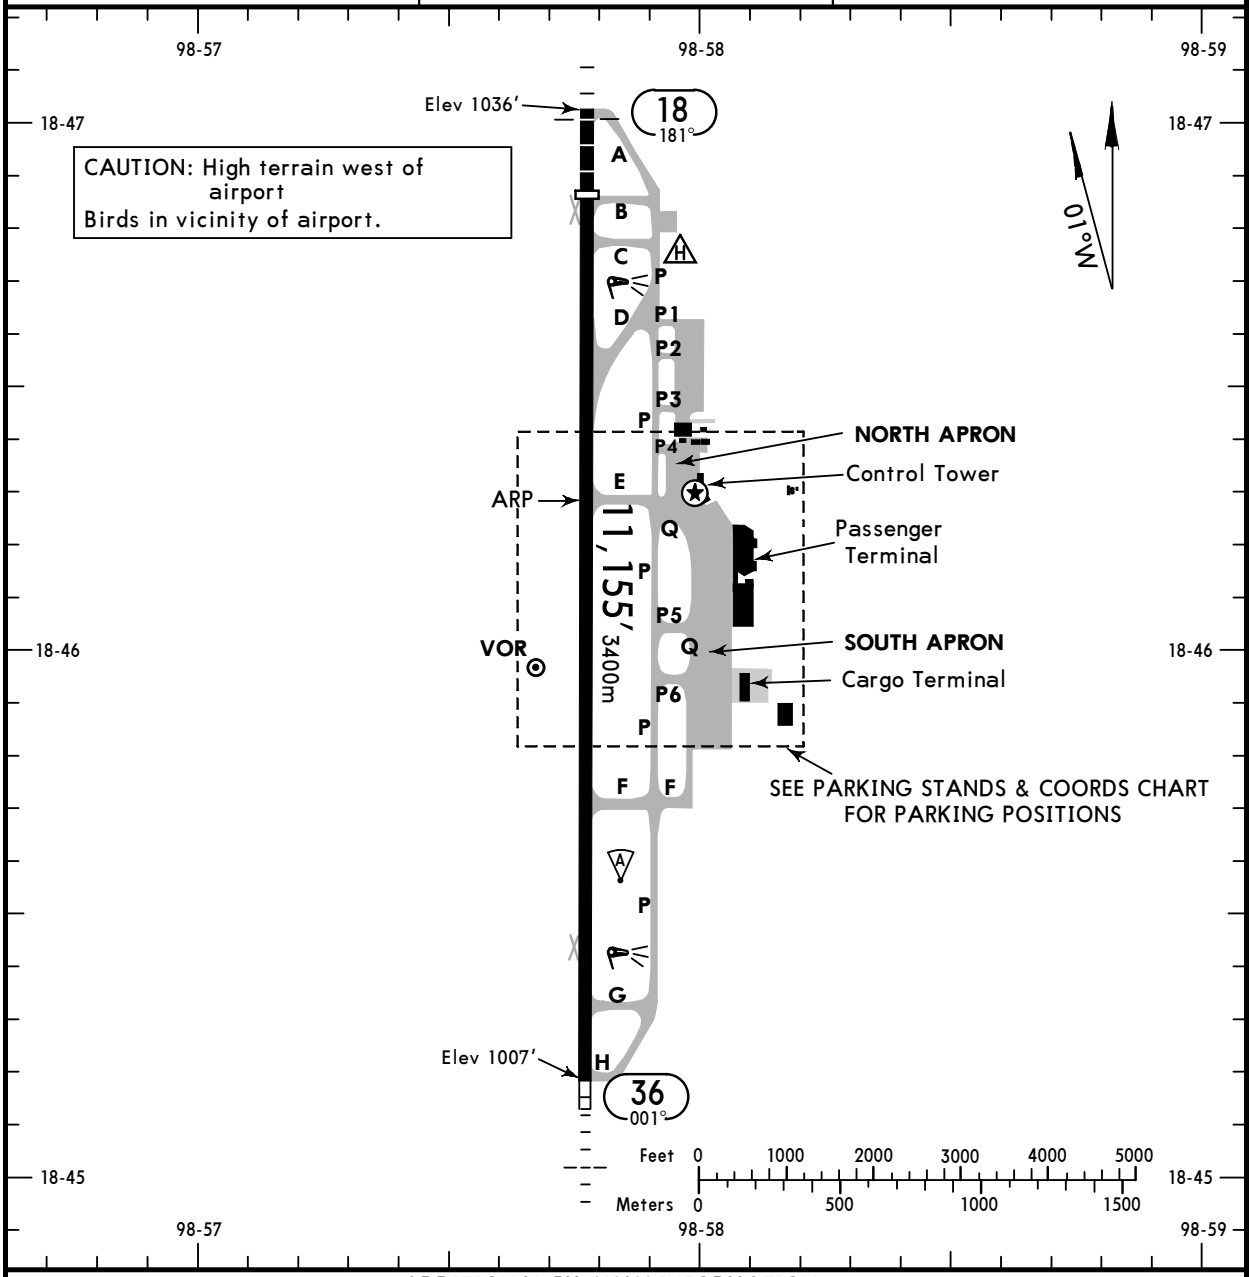

ADDITIONAL RUNWAY INFORMATION

RWY						USABLE LENGTHS — LANDING BEYOND: Threshold	Glide Slope	TAKE-OFF	WIDTH
18	HIRL(60m)	❶ SALS (LIH)	❷ PAPI			10,171′ 3100m			148′ 45m
36	HIRL(60m)	❶ SALS (LIH)	❷ PAPI	OFZ	RVR	❸	10,080′ 3072m	10,171′ 3100m	

❶ Length 420m.
❷ Angle 3.0°.
❸ LDA: 10,171′ 3100m

Std TAKE-OFF

❶ RL & RCLM	❶ RL or RCLM	Adequate Vis Ref DAY	Adequate Vis Ref NIGHT
R/V300m	R/V400m	R/V500m	NA

❶ For NIGHT operations, at least RL and RENL are required.

CHANGES: ATIS frequency change.

© JEPPESEN, 2002, 2025. ALL RIGHTS RESERVED.

THE CONSTRUCTION OF A NEW FIRE STATION AT CHIANG MAI INTERNATIONAL AIRPORT (SUP A12/26)

1. INTRODUCTION


With effect from 19 February 2026 at 0000 UTC to 14 June 2028 at 2359 UTC, the purpose of this chart is to inform all concerned of the construction of a new fire station at Chiang Mai International Airport. Any changes of this chart will be notified by NOTAM.

2. DETAILS

2.1 The temporary closure area.

Period	Key Activities	Location	Remark
11 FEB 2026 to 14 JUN 2028	Zone A: Construction of a new fire station	Distance 2953'(900m) beyond Runway 36, 1115'(340m) right side of runway centerline	See diagram below

2.2 The construction area will be considered as temporary Landside.
2.3 Mobile crane will be erected in the construction area. Maximum Height 99'(30m) AGL.
2.4 The construction area will be blocked off by barricades painted in an alternate band of red and white, the barricades will be lighted by omni-directional fixed red lights at night and during limited visibility condition.
2.5 The closure area layout is shown on the diagram.
2.6 Any revision to the construction program will be promulgated by NOTAM.

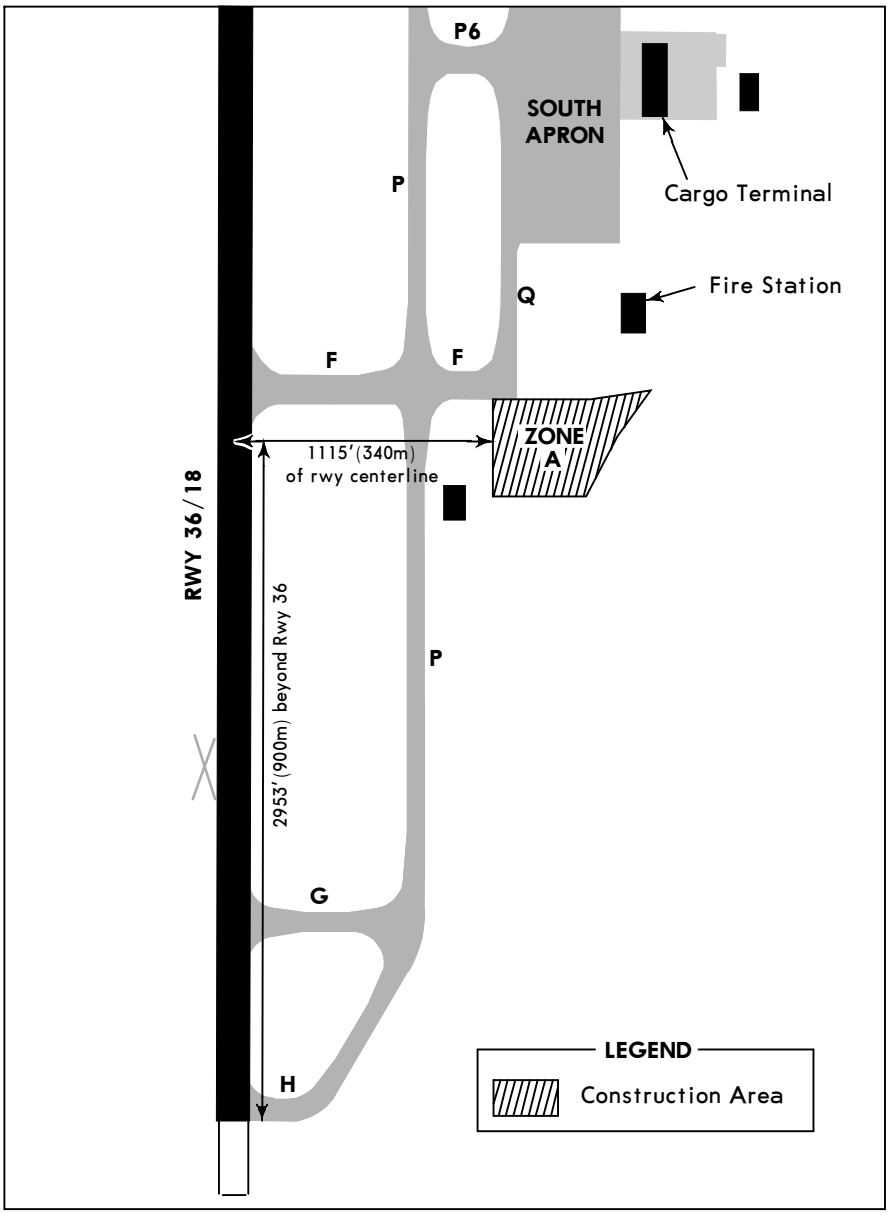

CHANGES: New temporary chart.

© JEPPESEN, 2026. ALL RIGHTS RESERVED.

THE CONSTRUCTION OF A NEW CARGO TERMINAL, CONTROL POST 2 AND GROUND SERVICE EQUIPMENT AREA AT CHIANG MAI INTERNATIONAL AIRPORT (SUP A020/26)

1. INTRODUCTION

With effect from 02 April 2026 at 0900 UTC to 14 June 2028 at 2359 UTC, the purpose of this chart is to inform all concerned of the construction of a new cargo terminal, control post 2 and ground service equipment area at Chiang Mai International Airport.

2. DETAILS

- Temporary closed area:


Period	Key Activities	Location
02 April 2026 to 14 June 2028	Zone B: construction of cargo terminal, control post 2 and ground service equipment area	Distance 3937'(1200m) beyond Rwy 36, 1804'(550m) right side of Rwy centerline

- The construction area will be considered as temporary landside.
- Mobile crane will be erected in the construction area. Max height 99' AGL.
- The construction works will be performed daily 24hr.
- The construction area will be blocked off by barricades painted in an alternate band of red and white, the barricades will be lighted by omni-directional fixed red lights at night and during limited visibility condition.
- The closure area is shown in the diagram below.
- Any revision to the closure program will be promulgated by NOTAM.

3. VALIDITY


This chart will remain current until 14 June 2028 at 2359 UTC. Any changes to this chart will be notified through NOTAM.

4. DIAGRAM

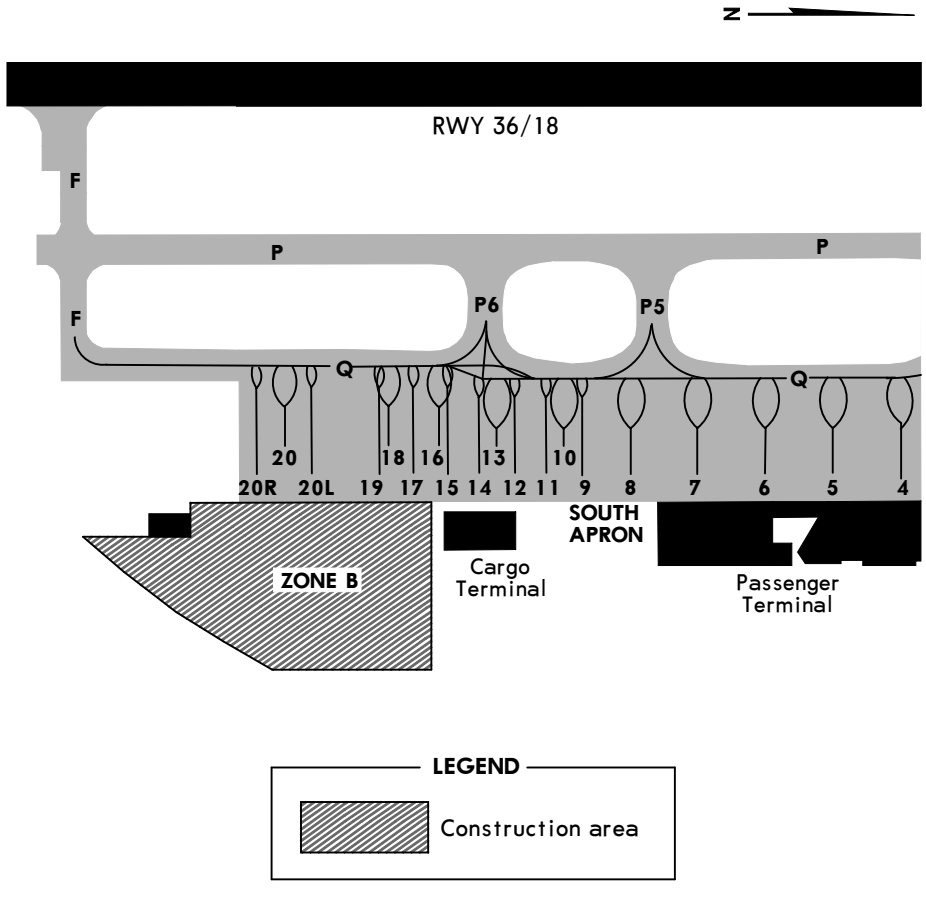

CHANGES: New temporary chart.

© JEPPESEN, 2026. ALL RIGHTS RESERVED.

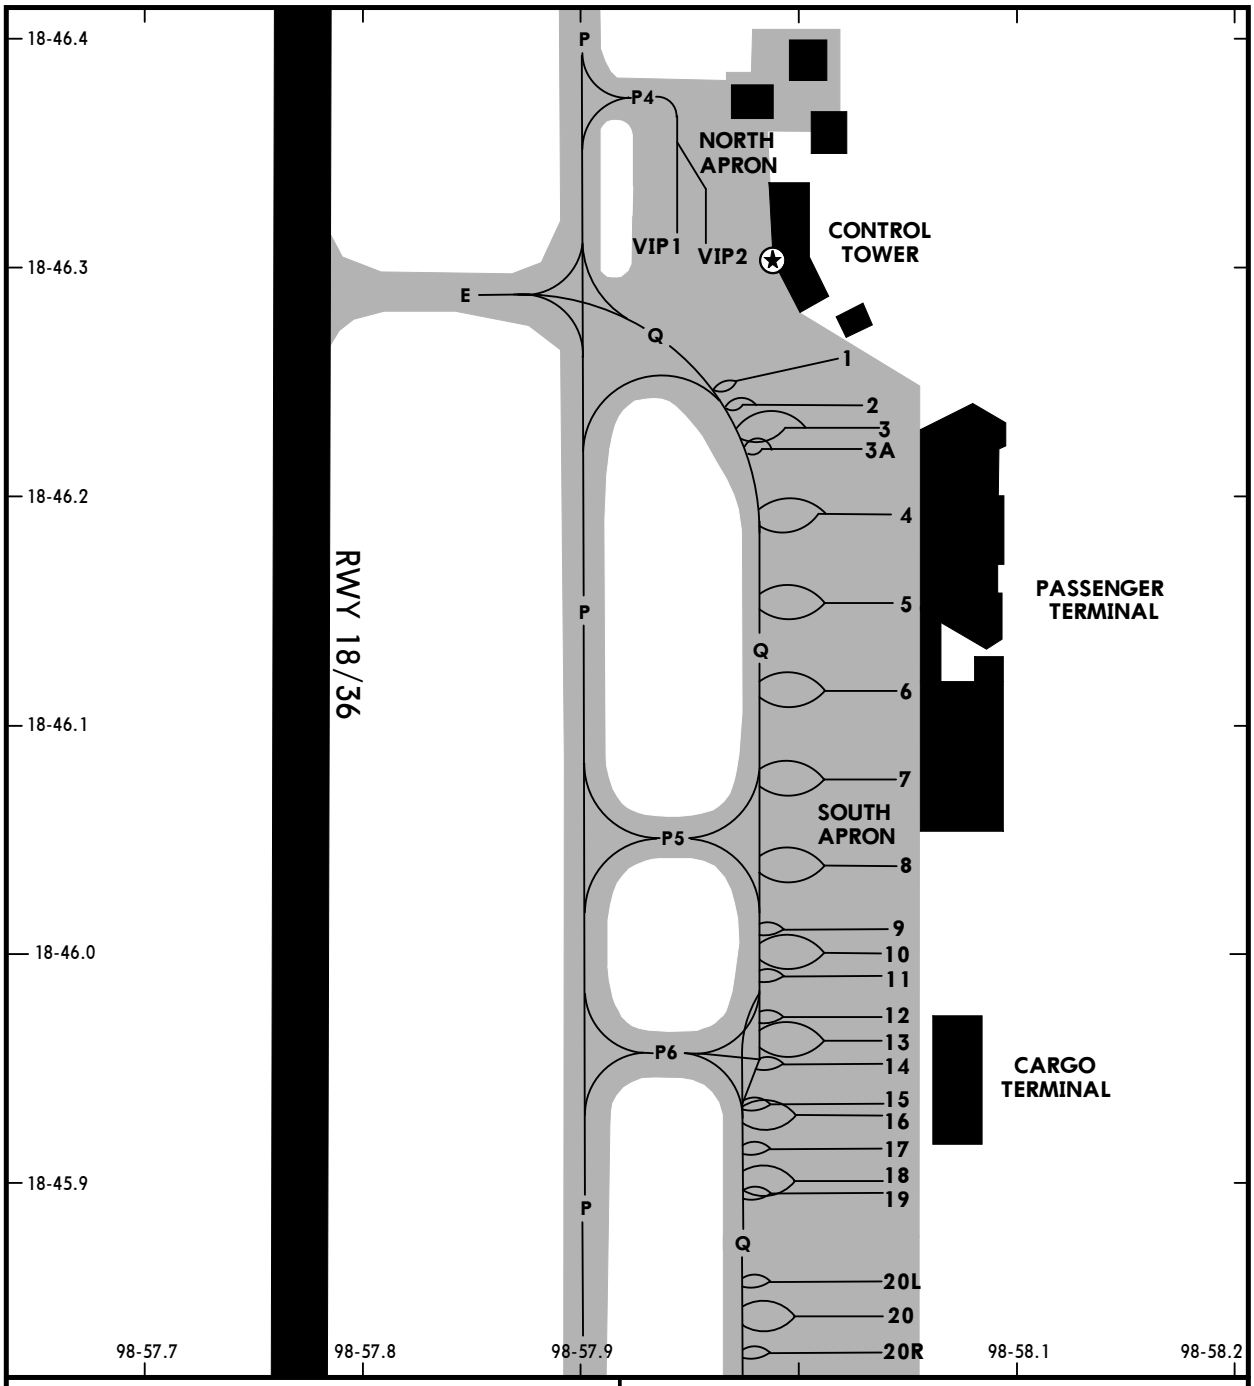

PARKING STAND COORDINATES

STAND No.	COORDINATES
1	N18 46.3 E098 58.0
2	N18 46.2 E098 58.0
3	N18 46.2 E098 58.1
3A	N18 46.2 E098 58.0
4	N18 46.2 E098 58.1
5, 6, 7	N18 46.1 E098 58.1
8	N18 46.0 E098 58.1
9	N18 46.0 E098 58.0
10	N18 46.0 E098 58.1
11, 12	N18 46.0 E098 58.0
13	N18 46.0 E098 58.1
14, 15	N18 45.9 E098 58.0
16	N18 45.9 E098 58.1
17, 18, 19	N18 45.9 E098 58.0
20	N18 45.8 E098 58.0
VIP1	N18 46.3 E098 57.9
VIP2	N18 46.3 E098 58.0

Stands 3, 4, 5, 6, 7, 8 available with safe gate docking system.

Stands 3 thru 20 available with fuel hydrant system.

North Apron stands VIP1 and VIP2 military use only.

CHANGES: None.

© JEPPESEN, 2008, 2024. ALL RIGHTS RESERVED.


CHIANG MAI Approach (R) 129.6	Apt Elev 1036	Trans alt: 11000 RNAV 1 required GNSS or DME/DME/IRU required 1. RADAR required. 2. For non-RNAV equipped aircraft, pilot shall inform ATC in order to get RADAR guidance. 3. Pilot should plan for possible climb as depicted on SID, actual climb clearance will be given by ATC. 4. If unable to comply with flight restrictions, advise ATC when aircraft commences to pushback or taxi to the holding point for Departure. 5. If unable to comply with SID or climb gradient, advise Chiang Mai Approach on 129.6.

ADLUS 2N RNAV DEPARTURE
[ADLU2N]
(RWY 36)

This SID requires a minimum climb gradient of:
316 FT/NM (5.2%) until passing FL130 for airspace restriction only.

Gnd speed-KT	75	100	150	200	250	300
316 FT/NM	395	527	790	1053	1317	1580

LOST COMMS ▼ LOST COMMS ▼ LOST COMMS
Set transponder code 7600.
Proceed on SID, comply with last assigned level or MFA, whichever is higher, until next compulsory reporting point, then climb to flight plan cruising level.
LOST COMMS ▲ LOST COMMS ▲ LOST COMMS

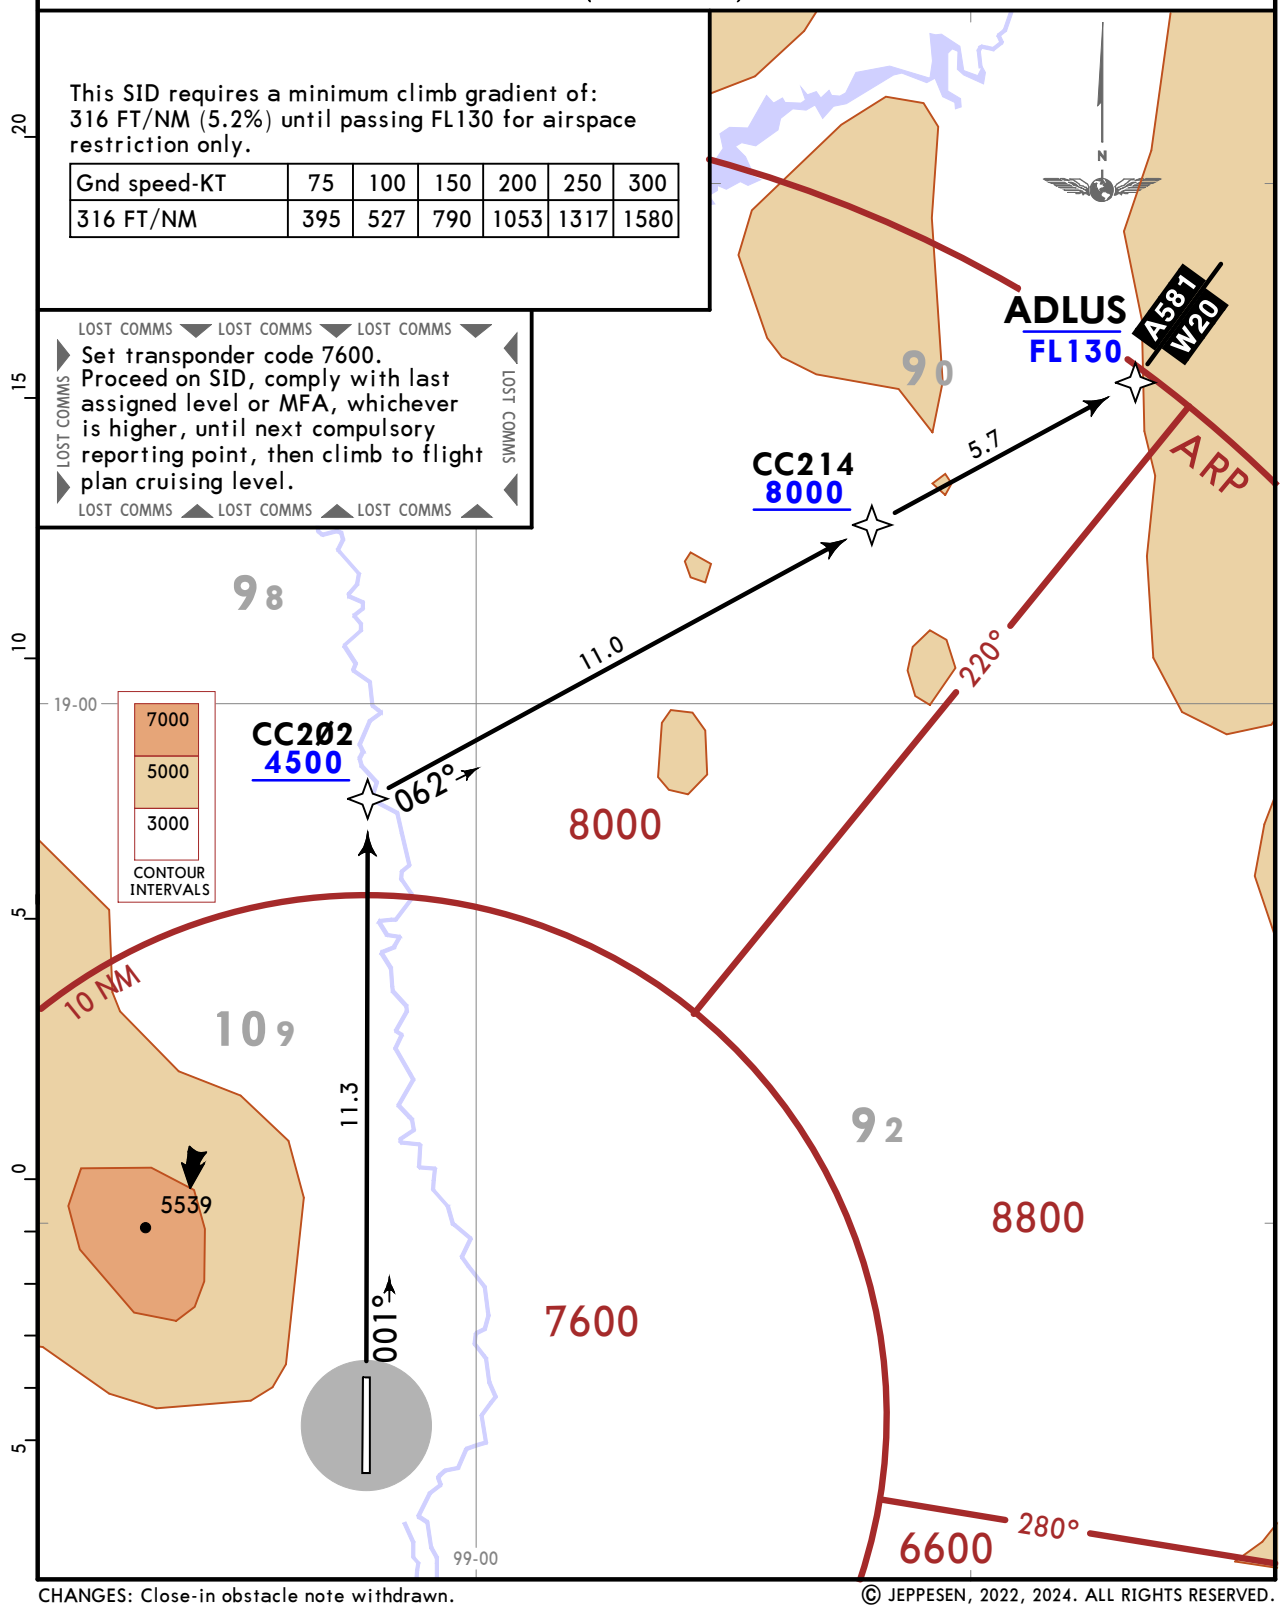

CHANGES: Close-in obstacle note withdrawn.

© JEPPESEN, 2022, 2024. ALL RIGHTS RESERVED.

CHIANG MAI Approach (R) 129.6	Apt Elev 1036	Trans alt: 11000

ADLUS 2S, IGUDA 2S:
RNAV 1 required GNSS or DME/DME/IRU required
LAMUN 2S, VISES 2S:
RNP1 required GNSS required

1. Pilot should plan for possible climb as depicted on SID, actual climb clearance will be given by ATC.
2. If unable to comply with flight restrictions, advise ATC when aircraft commences to pushback or taxi to the holding point for Departure.
3. If unable to comply with SID or climb gradient, advise CHIANG MAI Approach on 129.6.
4. Initial climb clearance 11000 or as directed by ATC.


ADLUS 2S, IGUDA 2S:
1. RADAR required.
2. For non-RNAV equipped aircraft, pilot shall inform ATC in order to get RADAR guidance.

LAMUN 2S, VISES 2S:
For non-RNP1 equipped aircraft, pilot shall inform ATC in order to get Departure instructions.

ADLUS 2S [ADLU2S]
IGUDA 2S [IGUD2S]
LAMUN 2S [LAMU2S]
VISES 2S [VISE2S]
RNAV DEPARTURES
(RWY 18)

These SIDs require minimum climb gradient of:
328 FT/NM (5.4%) until passing 9000 for airspace restriction only.

Gnd speed-KT	75	100	150	200	250	300
328 FT/NM	410	547	820	1093	1367	1640

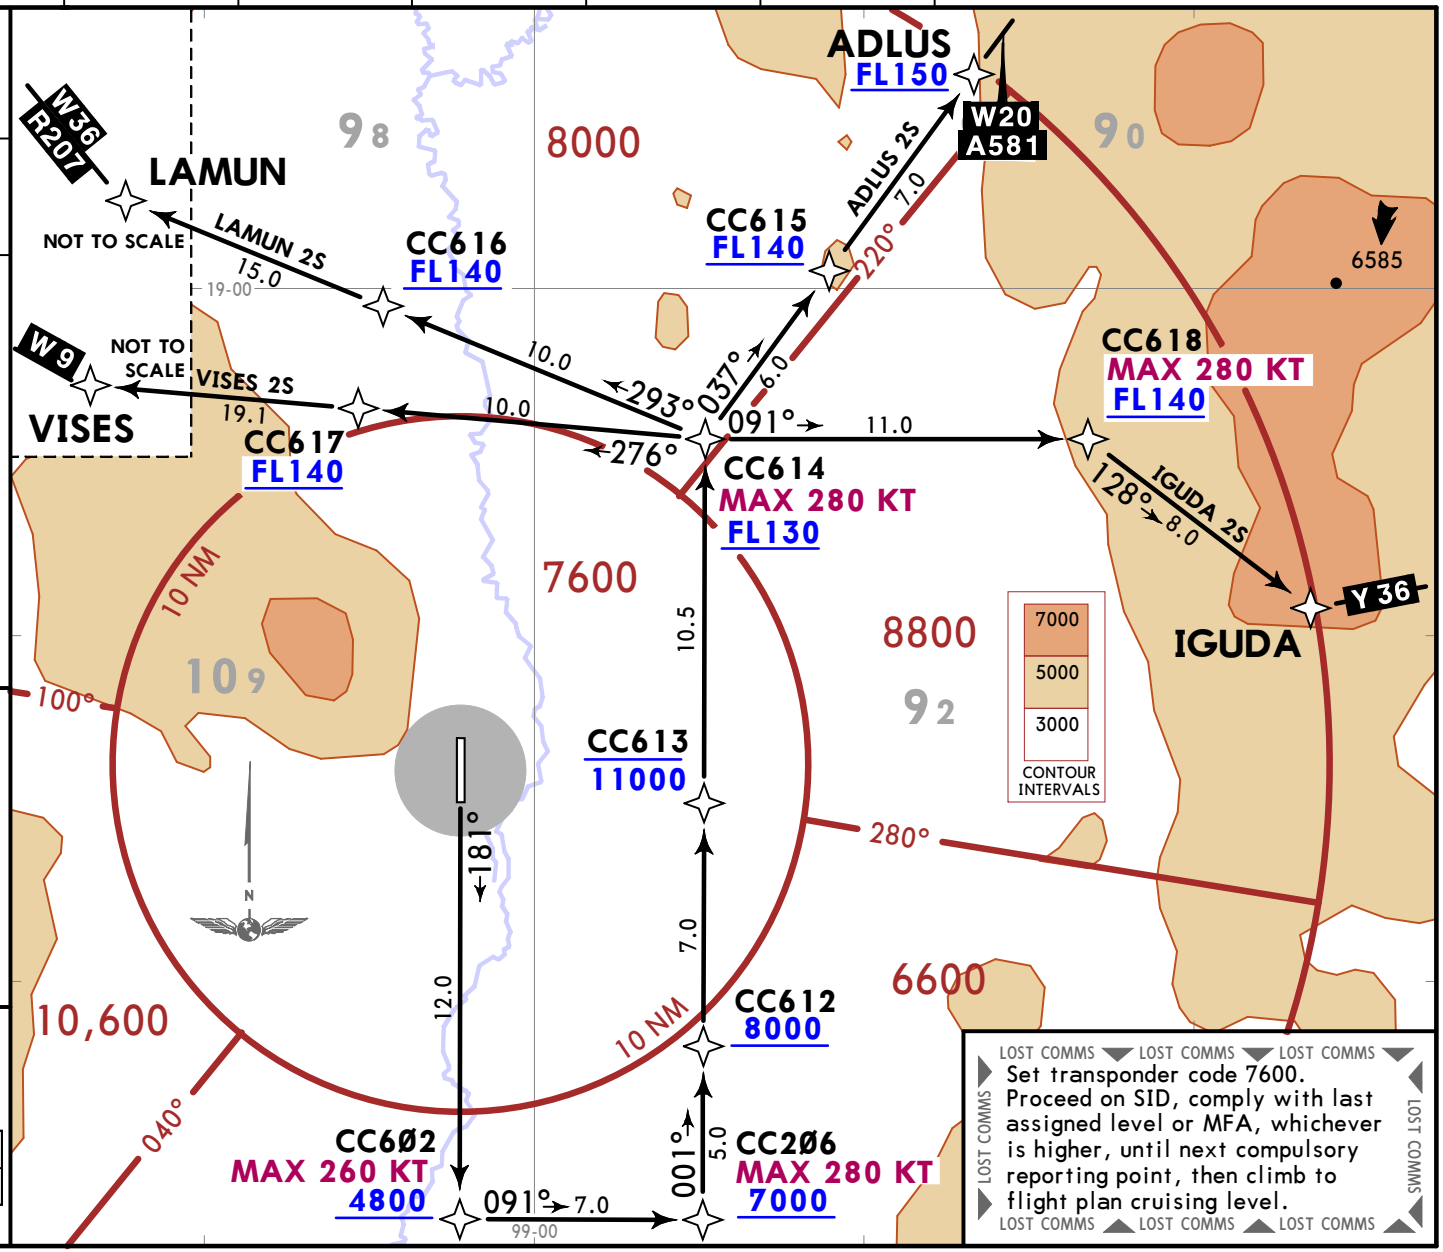


JEPPESEN CHIANG MAI, THAILAND
20 DEC 24 (10-3A) Eff 26 Dec
RNAV SID

CHANGES: IGUDA 2S and speed restriction at CC614 added, CIO note removed.

© JEPPESEN, 2022, 2024. ALL RIGHTS RESERVED.

Apt Elev	
1036	Trans alt: 11000 Contact Chiang Mai Approach on 129.6 after take-off.

CHIANG RAI 1A (CTR 1A)
CHIANG RAI 1B (CTR 1B)
DEPARTURES
(ALL RWYS)

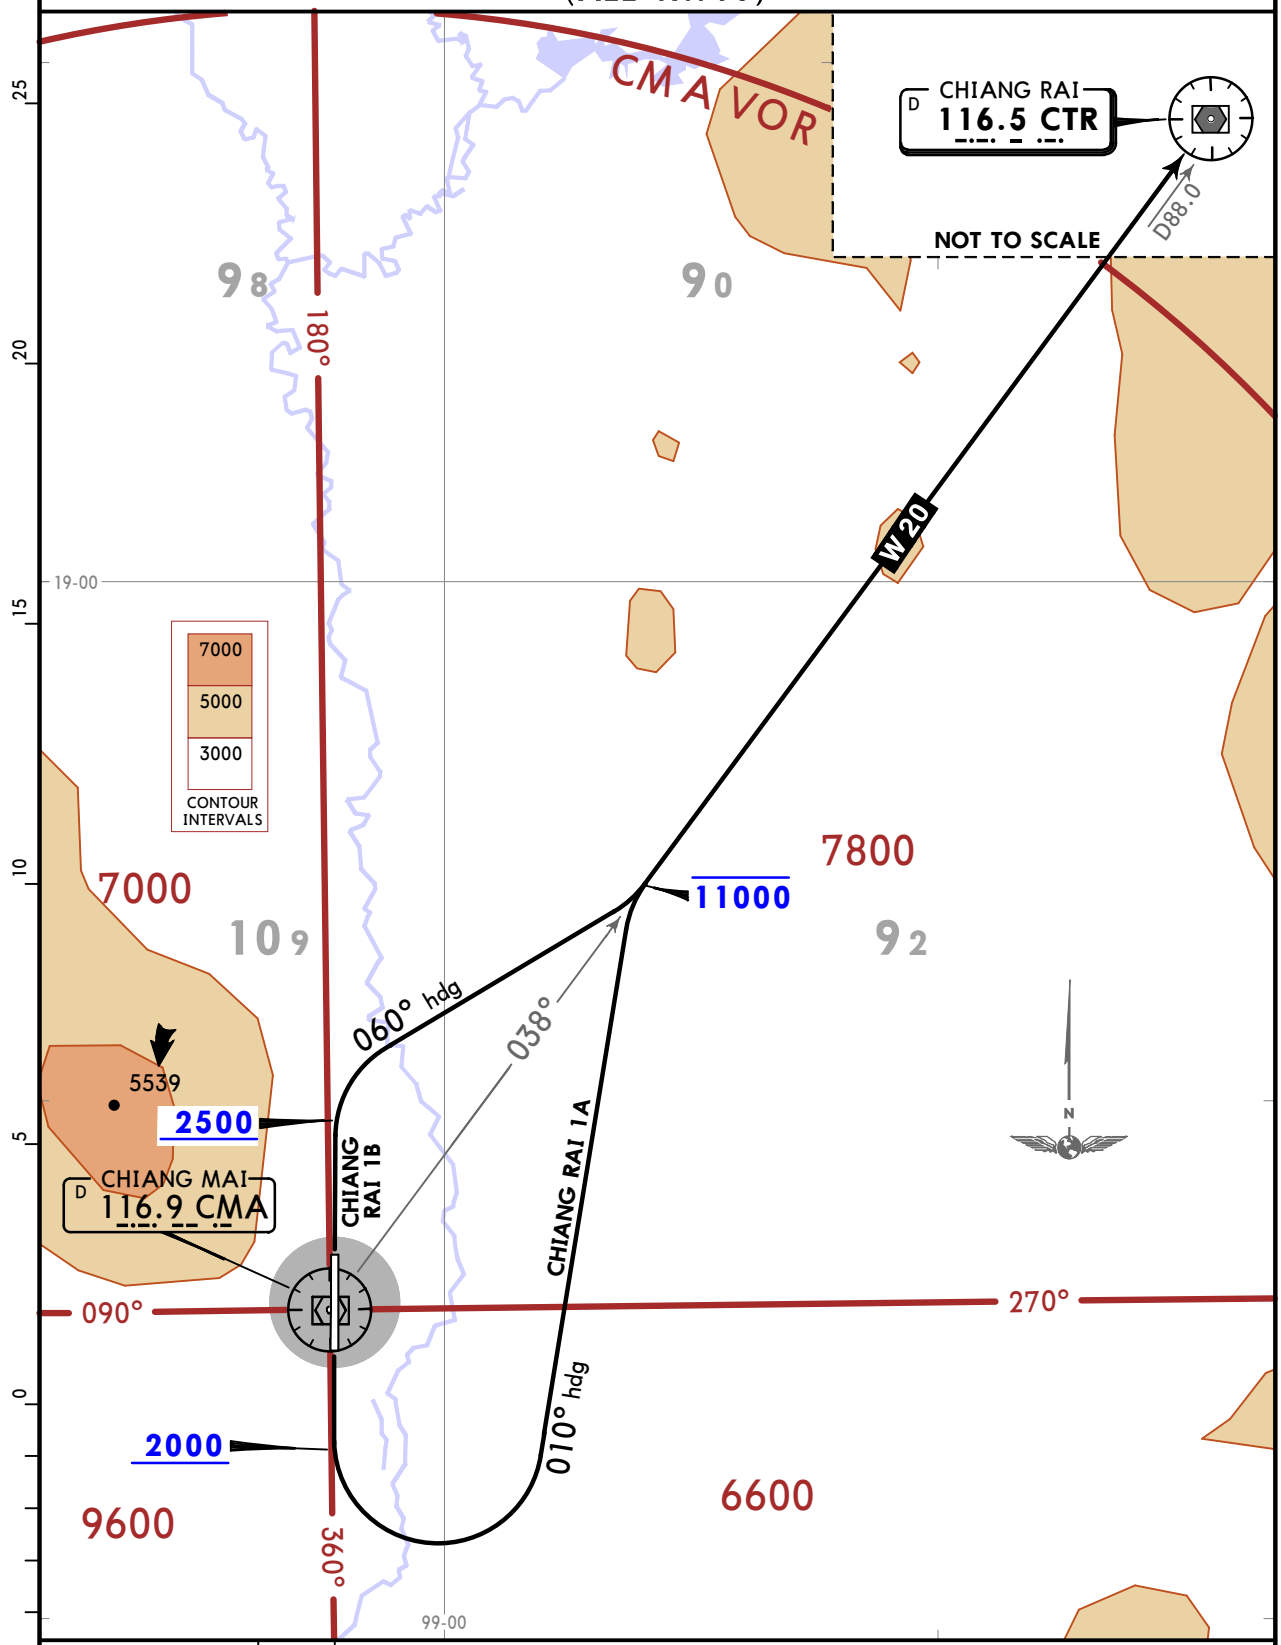


SID	RWY	INITIAL CLIMB
CHIANG RAI 1A	18	Climb runway heading until 2000 or above, then turn LEFT heading 010° to intercept and proceed on CMA R038 not above 11000. EXPECT RADAR control.
CHIANG RAI 1B	36	Climb runway heading until 2500 or above, then turn RIGHT heading 060° to intercept and proceed on CMA R038 not above 11000. EXPECT RADAR control.

CHANGES: Bearing, general note.

© JEPPESEN, 2018, 2025. ALL RIGHTS RESERVED.

Apt Elev	
1036	Trans alt: 11000 Contact Chiang Mai Approach on 129.6 after take-off.

ENBAT 1A (ENBAT 1A) [ENBA1A]
ENBAT 1B (ENBAT 1B) [ENBA1B]
DEPARTURES
(ALL RWYS)

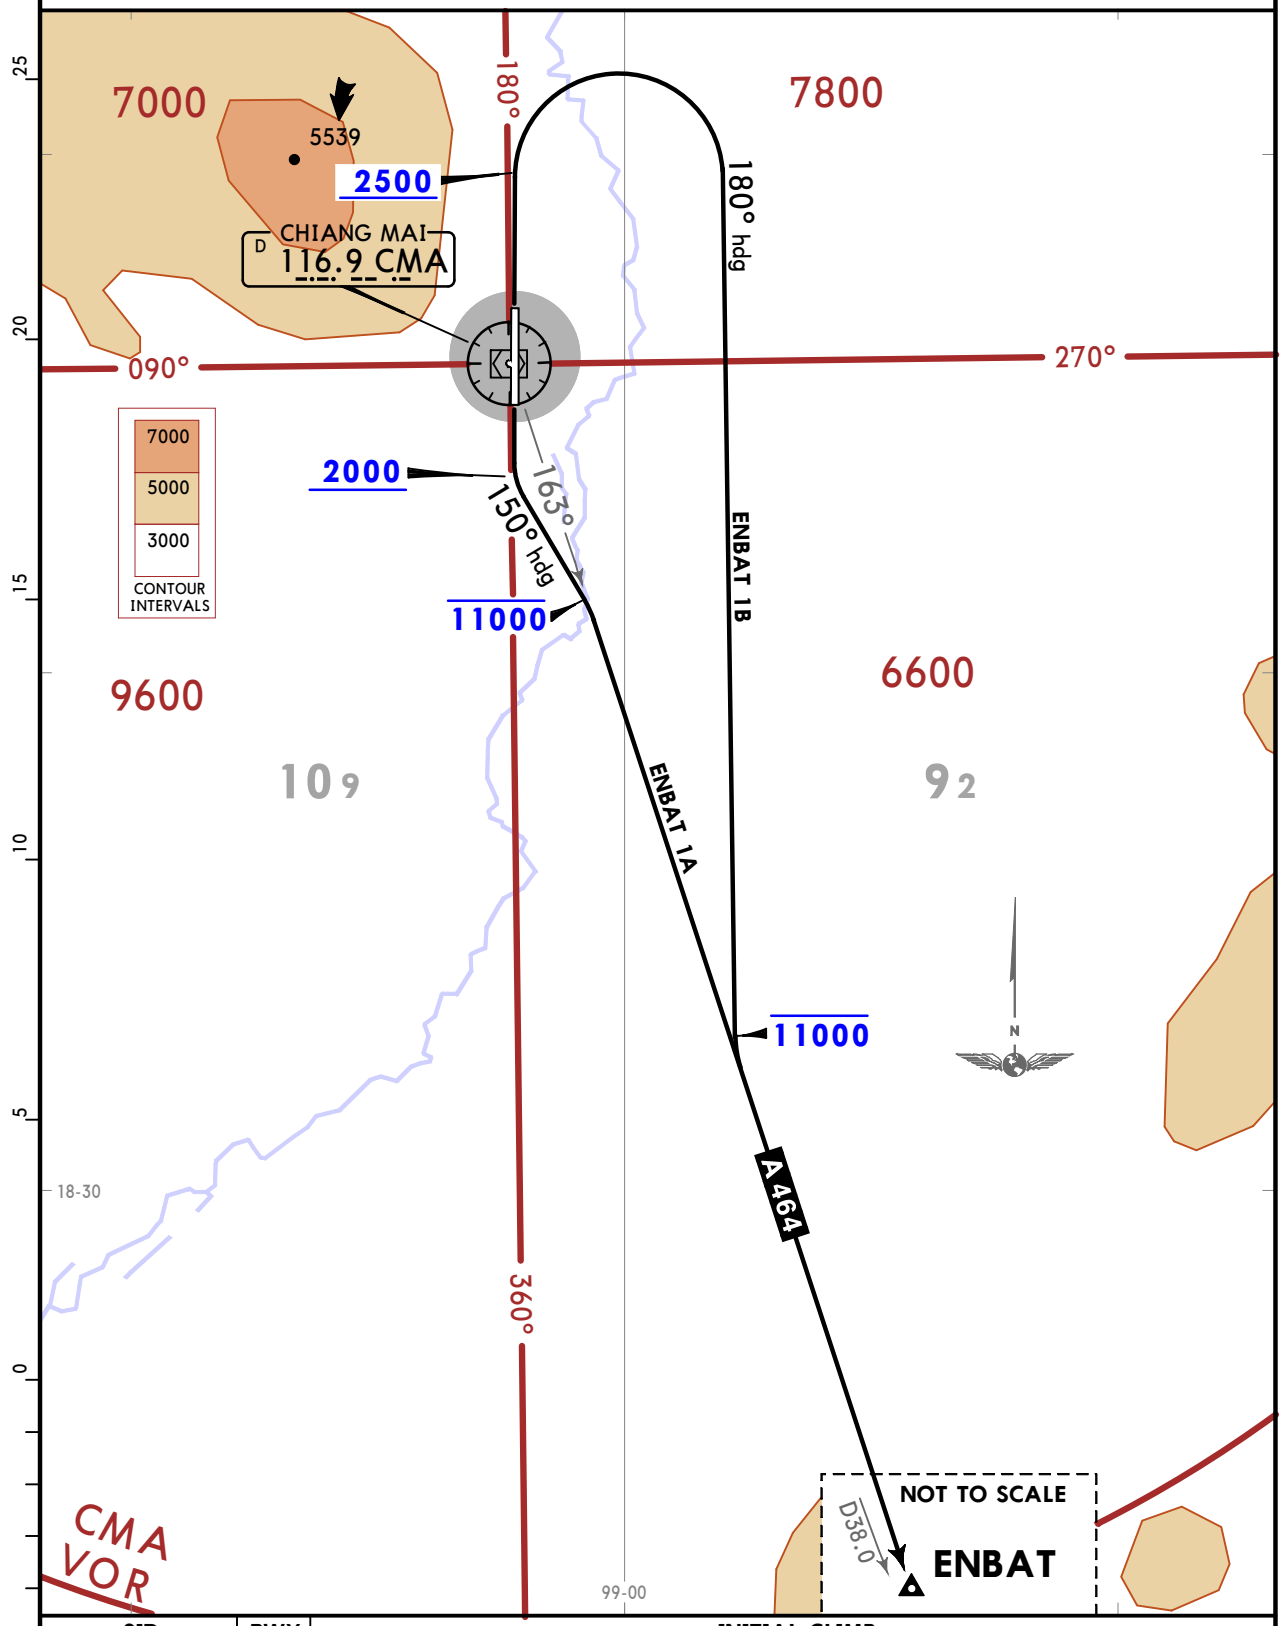


SID	RWY	INITIAL CLIMB
ENBAT 1A	18	Climb runway heading until 2000 or above, then turn LEFT heading 150° to intercept and proceed on CMA R163 not above 11000. EXPECT RADAR control.
ENBAT 1B	36	Climb runway heading until 2500 or above, then turn RIGHT heading 180° to intercept and proceed on CMA R163 not above 11000. EXPECT RADAR control.

CHANGES: KEDOB 1A & 1B renamed ENBAT 1A & 1B, bearing, general note.

© JEPPESEN, 2018, 2025. ALL RIGHTS RESERVED.

Apt Elev	Trans alt: 11000
1036	RNAV 1 required GNSS or DME/DME/IRU required

1. RADAR required.
2. For non-RNAV equipped aircraft, pilot shall inform ATC in order to get RADAR guidance.
3. Pilot should plan for possible climb as depicted on SID, actual climb clearance will be given by ATC.
4. If unable to comply with flight restrictions, advise ATC when aircraft commences to pushback or taxi to the holding point for Departure.
5. If unable to comply with SID or climb gradient, advise Chiang Mai Approach on 129.6.
6. Initial climb clearance 11000 or as directed by ATC.



MSA 25 NM ARP
7600 within 10 NM

ENBAT 2S [ENBA2S], PANTA 2S [PANT2S]
PUMAM 2S [PUMA2S]
RNAV DEPARTURES
(RWY 18)

These SIDs require minimum climb gradient of:
304 FT/NM (5.0%) until passing 9000 for airspace restriction only.

Gnd speed-KT	75	100	150	200	250	300
304 FT/NM	380	507	760	1013	1267	1520


LOST COMMS
Set transponder code 7600.
Proceed on SID, comply with last assigned level or MFA, whichever is higher, until next compulsory reporting point, then climb to flight plan cruising level.

7000
5000
3000
CONTOUR INTERVALS

10,600
7600
6600
10 NM
ARP
100°
040°
181°
15.0
129°
200°
151°
13.1
26.1
23.5
9.7
CC6Ø3
5500
CC6Ø4
10000
PUMAM
FL160
PANTA
FL160
ENBAT
FL160
PUMAM 2S
PANTA 2S
ENBAT 2S
A581
W7
A464
W9
V7
18-30
99-00

CHANGES: Bearings from CC6Ø3 to CC6Ø4 to PUMAM revised.

© JEPPESEN, 2022, 2026. ALL RIGHTS RESERVED.

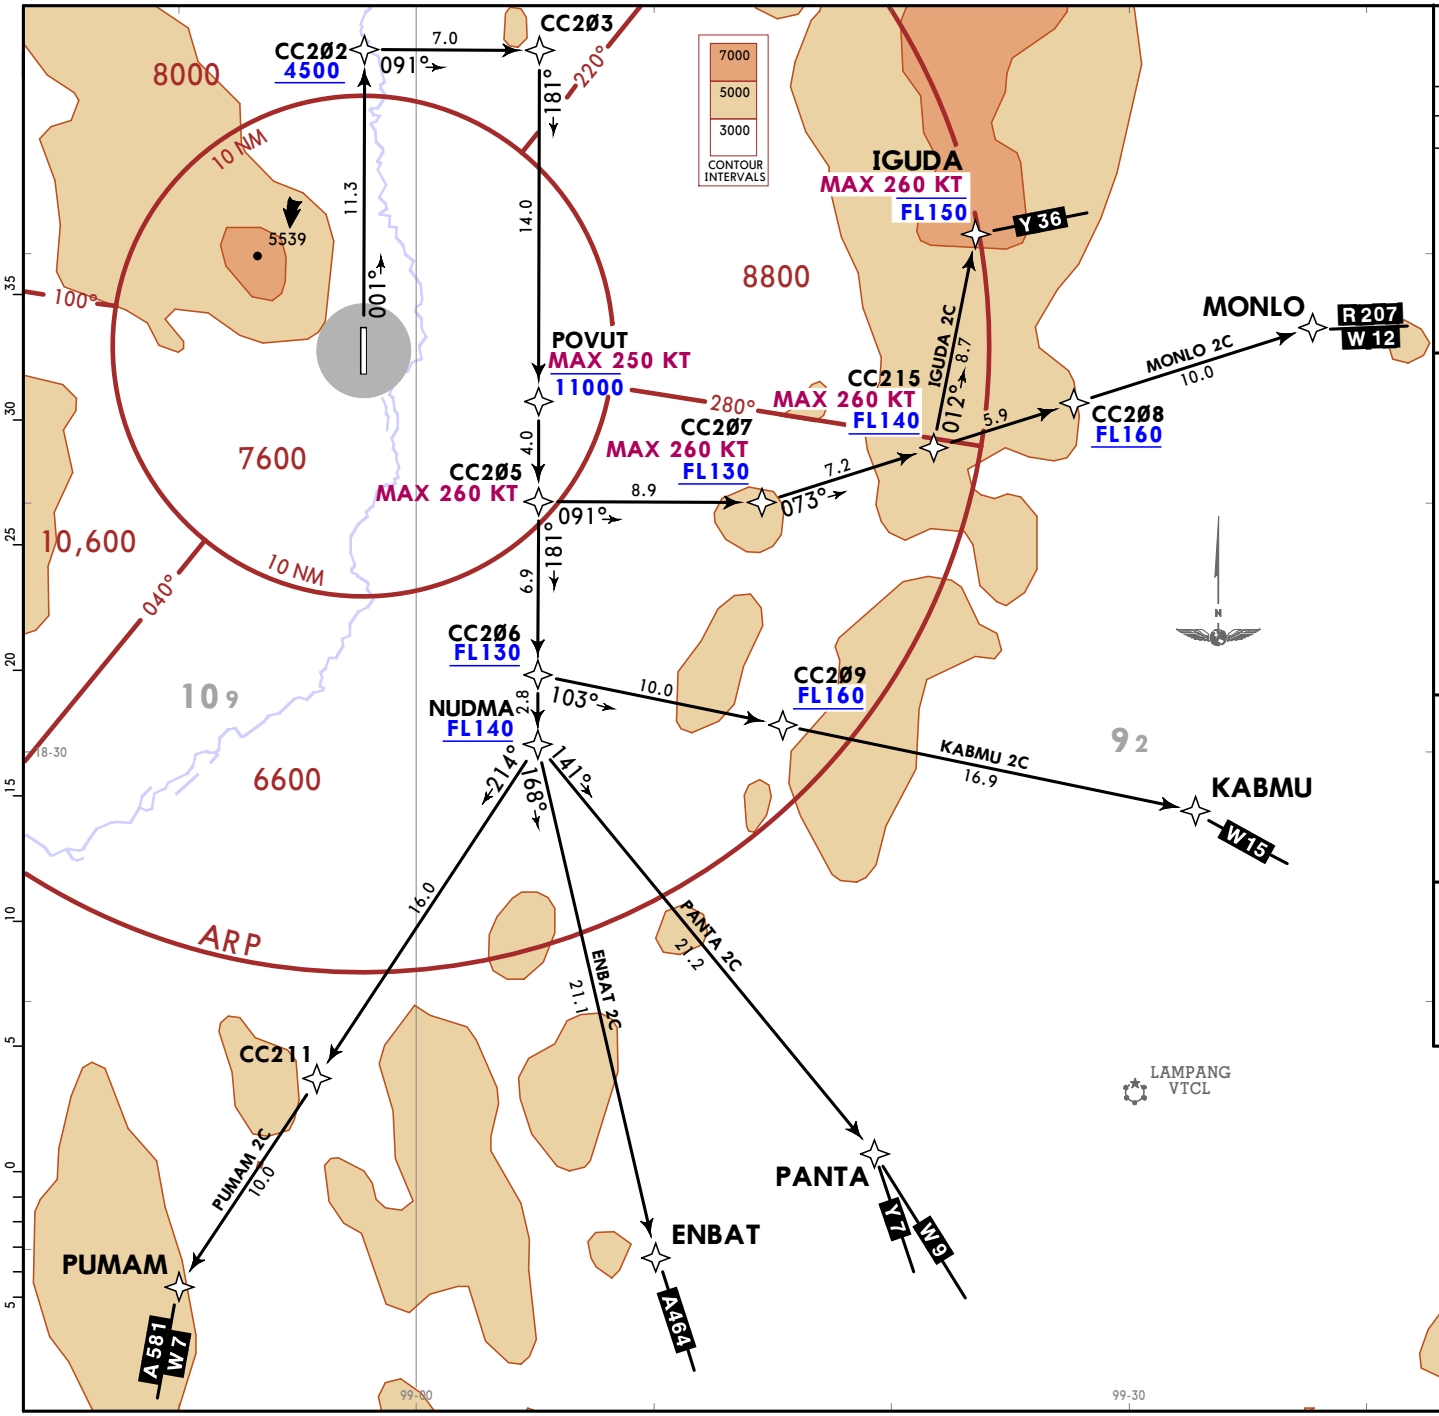

Apt Elev
1036

Trans alt: 11000

RNAV 1 required GNSS or DME/DME/IRU required

1. RADAR required.
2. For non-RNAV equipped aircraft, pilot shall inform ATC in order to get RADAR guidance.
3. Pilot should plan for possible climb as depicted on SID, actual climb clearance will be given by ATC.
4. If unable to comply with flight restrictions, advise ATC when aircraft commences to pushback or taxi to the holding point for Departure.
5. If unable to comply with SID or climb gradient, advise Chiang Mai Approach on 129.6.

ENBAT 2C [ENBA2C]
IGUDA 2C [IGUD2C]
KABMU 2C [KABM2C]
MONLO 2C [MONL2C]
PANTA 2C [PANT2C]
PUMAM 2C [PUMA2C]
RNAV DEPARTURES
(RWY 36)


These SIDs require minimum climb gradient of:
316 FT/NM (5.2%) until passing FL130 for airspace restrictions only.

Gnd speed-KT	75	100	150	200	250	300
316 FT/NM	395	527	790	1053	1317	1580

LOST COMMS
Set transponder code 7600. Proceed on SID, comply with last assigned level or MFA, whichever is higher, until next compulsory reporting point, then climb to flight plan cruising level.

CHANGES: Bearings from CC206 to CC209 to KABMU revised.

© JEPPESEN, 2022, 2026. ALL RIGHTS RESERVED.

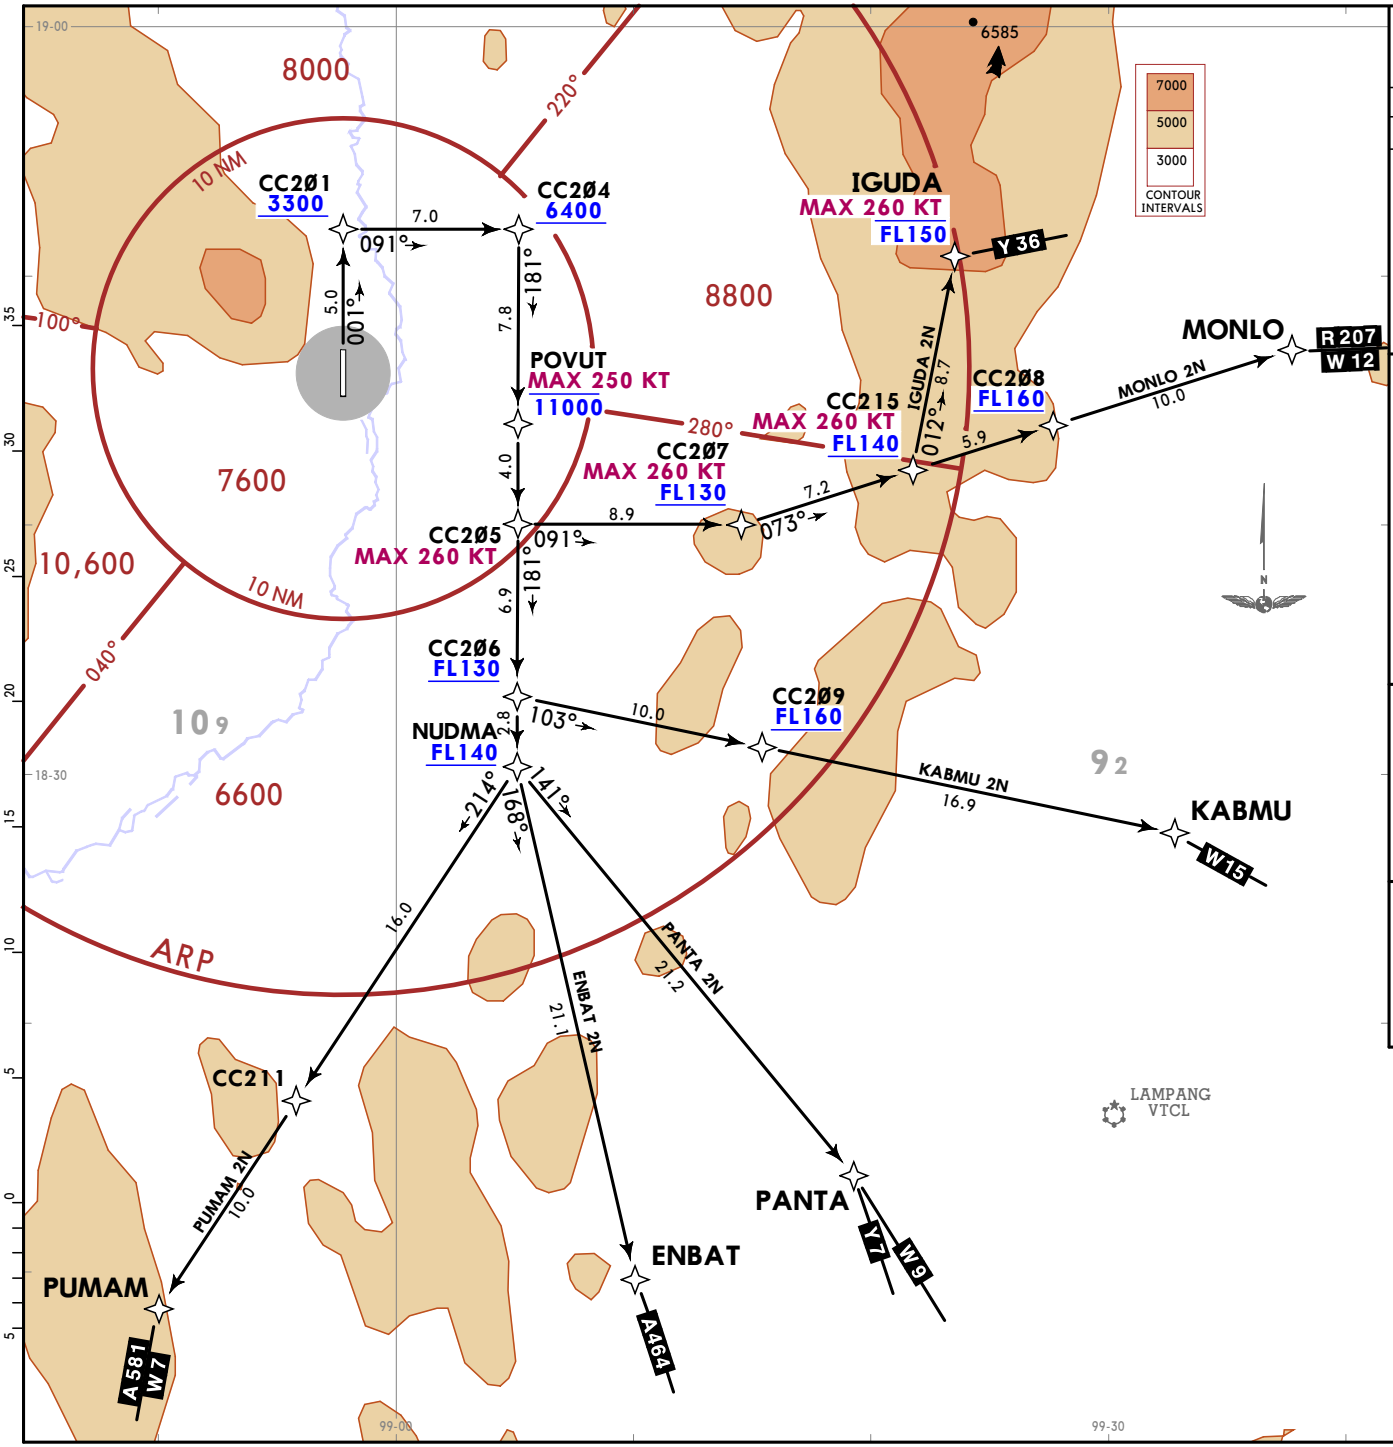

Apt Elev
1036

Trans alt: 11000

RNAV 1 required GNSS or DME/DME/IRU required

1. RADAR required.
2. For non-RNAV equipped aircraft, pilot shall inform ATC in order to get RADAR guidance.
3. Pilot should plan for possible climb as depicted on SID, actual climb clearance will be given by ATC.
4. If unable to comply with flight restrictions, advise ATC when aircraft commences to pushback or taxi to the holding point for Depature.
5. If unable to comply with SID or climb gradient, advise Chiang Mai Approach on 129.6.

ENBAT 2N [ENBA2N]
IGUDA 2N [IGUD2N]
KABMU 2N [KABM2N]
MONLO 2N [MONL2N]
PANTA 2N [PANT2N]
PUMAM 2N [PUMA2N]
RNAV DEPARTURES
(RWY 36)

These SIDs require minimum climb gradient of:
450 FT/NM (7.4%) until passing FL130 for airspace restrictions only.

Gnd speed-KT	75	100	150	200	250	300
450 FT/NM	563	750	1125	1500	1875	2250


LOST COMMS
Set transponder code 7600.
Proceed on SID, comply with last assigned level or MFA, whichever is higher, until next compulsory reporting point, then climb to flight plan cruising level.

CHANGES: Bearings from CC206 to CC209 and KABMU.

© JEPPESEN, 2022, 2026. ALL RIGHTS RESERVED.


Apt Elev	Trans alt: 11000
1036	RNAV 1 required GNSS or DME/DME/IRU required

1. RADAR required.
2. For non-RNAV equipped aircraft, pilot shall inform ATC in order to get RADAR guidance.
3. Pilot should plan for possible climb as depicted on SID, actual climb clearance will be given by ATC.
4. If unable to comply with flight restrictions, advise ATC when aircraft commences to pushback or taxi to the holding point for Departure.
5. If unable to comply with SID or climb gradient, advise Chiang Mai Approach on 129.6.
6. Initial climb clearance 11000 or as directed by ATC.



MSA 25 NM ARP
7600 within 10 NM

KABMU 2S [KABM2S]
MONLO 2S [MONL2S]
RNAV DEPARTURES
(RWY 18)

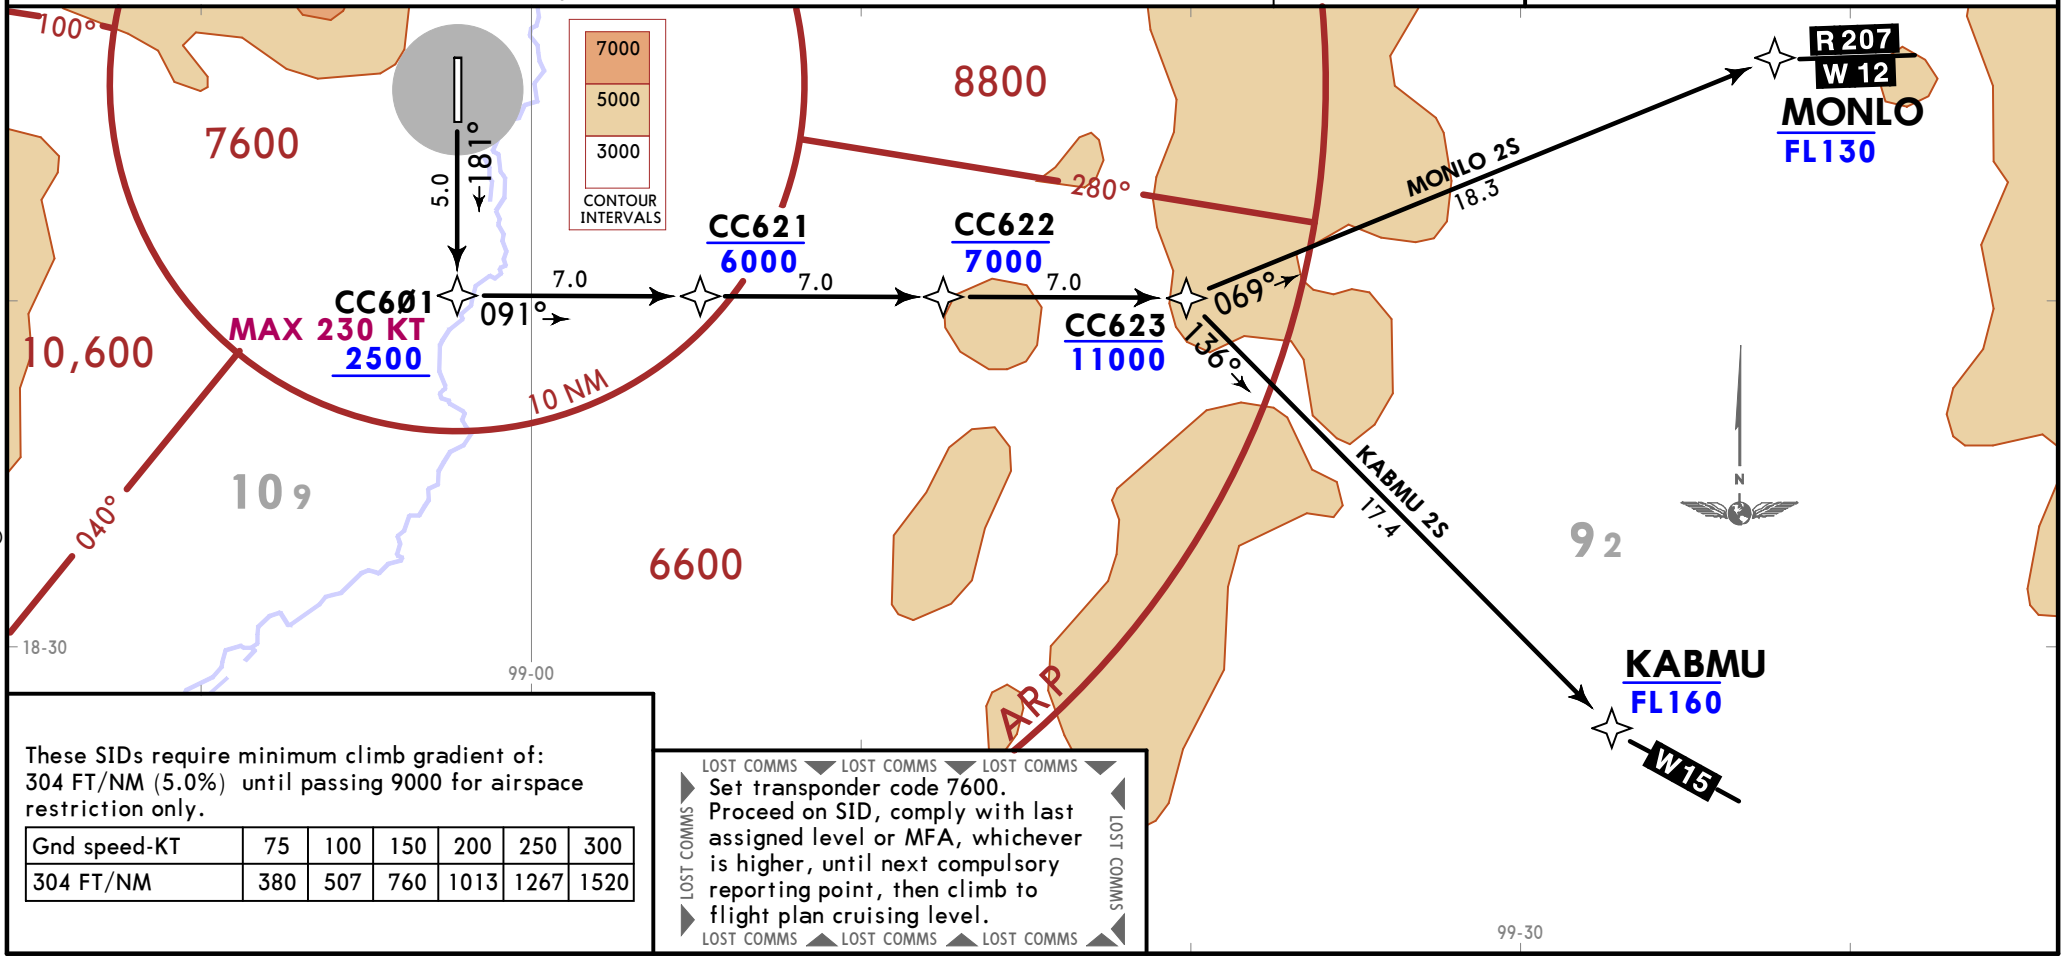

These SIDs require minimum climb gradient of:
304 FT/NM (5.0%) until passing 9000 for airspace restriction only.

Gnd speed-KT	75	100	150	200	250	300
304 FT/NM	380	507	760	1013	1267	1520

LOST COMMS
Set transponder code 7600.
Proceed on SID, comply with last assigned level or MFA, whichever is higher, until next compulsory reporting point, then climb to flight plan cruising level.


JEPPESEN CHIANG MAI, THAILAND
13 MAR 26 (10-3F) Eff 19 Mar
RNAV SID

CHANGES: Bearing from CC623 to MONLO revised.

© JEPPESEN, 2022, 2026. ALL RIGHTS RESERVED.

CHIANG MAI Approach (R) 129.6	Apt Elev 1036	Trans alt: 11000
		RNP1 required GNSS required
		1. For non-RNP1 equipped aircraft, pilot shall inform ATC in order to get Departure guidance. 2. Pilot should plan for possible climb as depicted on SID, actual climb clearance will be given by ATC. 3. If unable to comply with flight restrictions, advise ATC when aircraft commences to pushback or taxi to the holding point for Departure. 4. If unable to comply with SID or climb gradient, advise CHIANG MAI Approach on 129.6.

LAMUN 2N [LAMU2N]
VISES 2N [VISE2N]
RNAV DEPARTURES
(RWY 36)

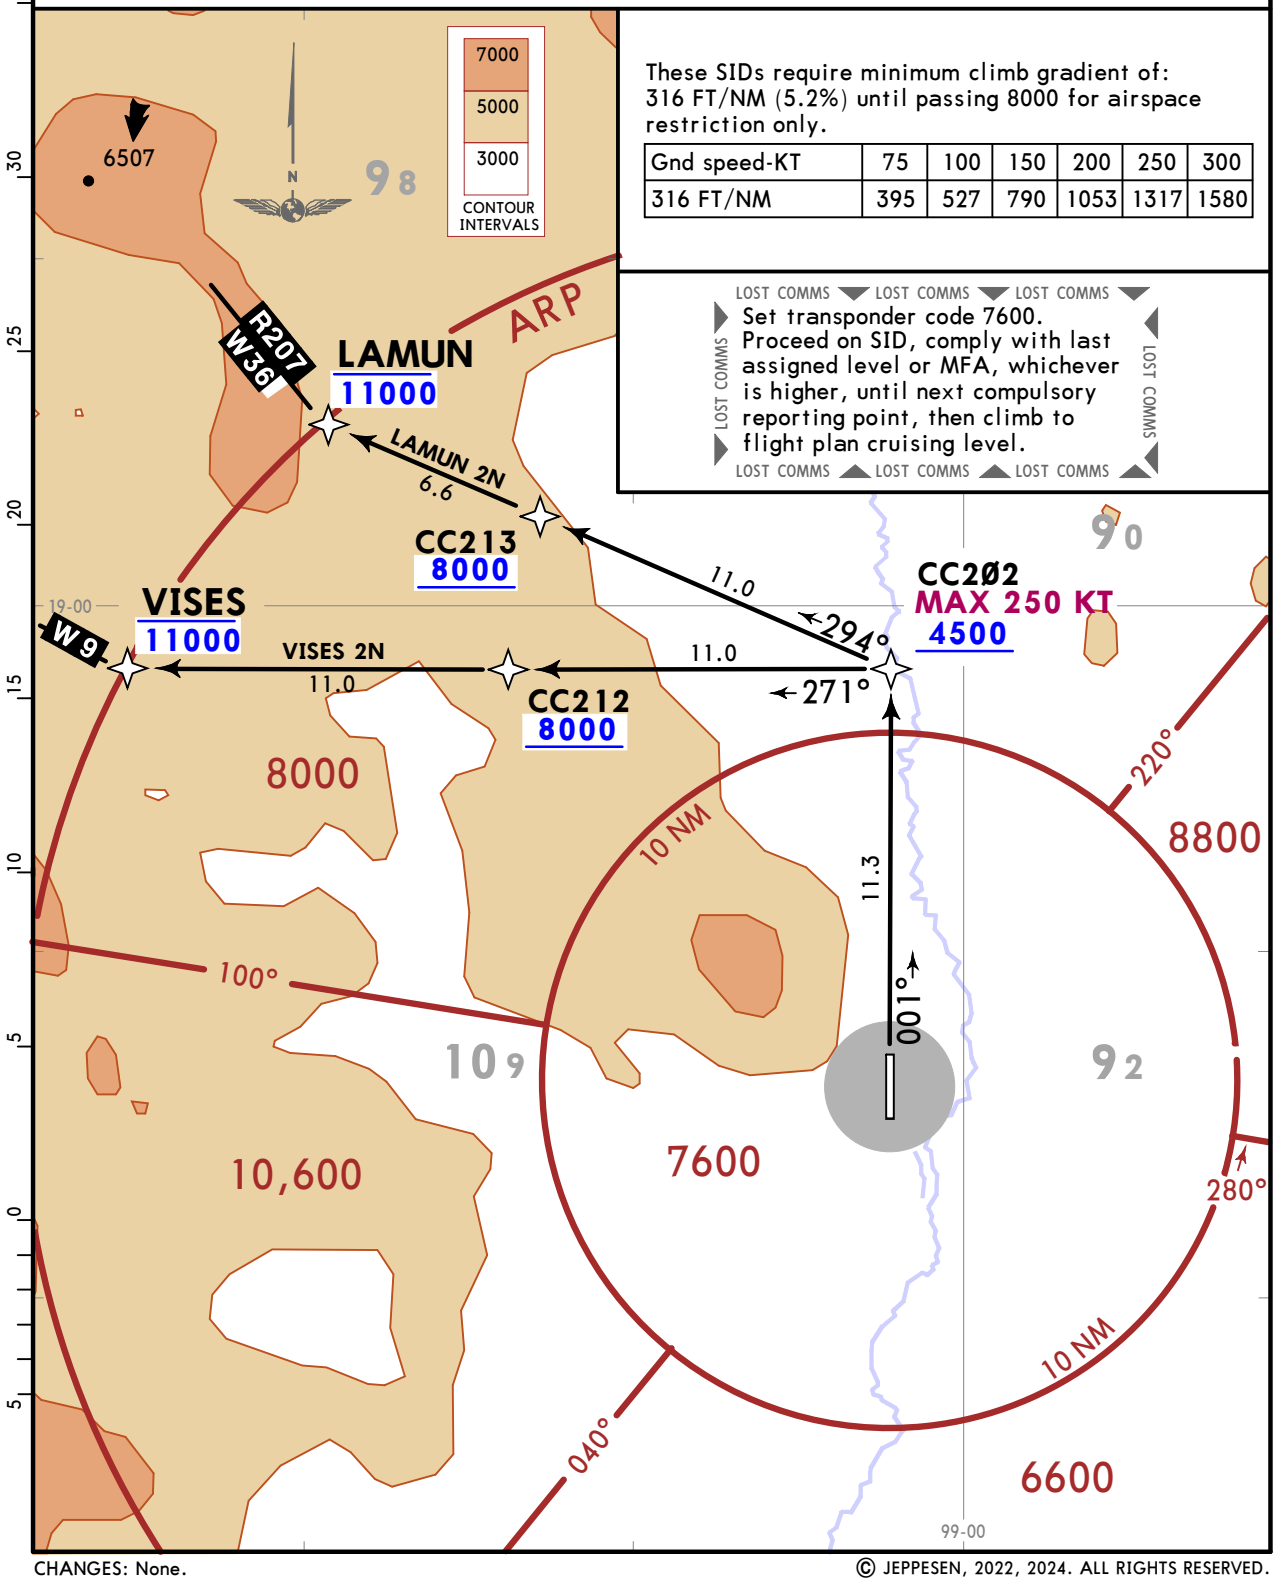


CHANGES: None.

© JEPPESEN, 2022, 2024. ALL RIGHTS RESERVED.

Apt Elev 1036	Trans alt: 11000
	RNP1 required GNSS required
	1. For non-RNP1 equipped aircraft, pilot shall inform ATC in order to get Departure instructions. 2. Pilot should plan for possible climb as depicted on SID, actual climb clearance will be given by ATC. 3. If unable to comply with flight restrictions, advise ATC when aircraft commences to pushback or taxi to the holding point for Departure. 4. If unable to comply with SID or climb gradient, advise CHIANG MAI Approach on 129.6. 5. Initial climb clearance 11000 or as directed by ATC.

LAMUN 2W [LAMU2W]
VISES 2W [VISE2W]
RNAV DEPARTURES
(RWY 18)

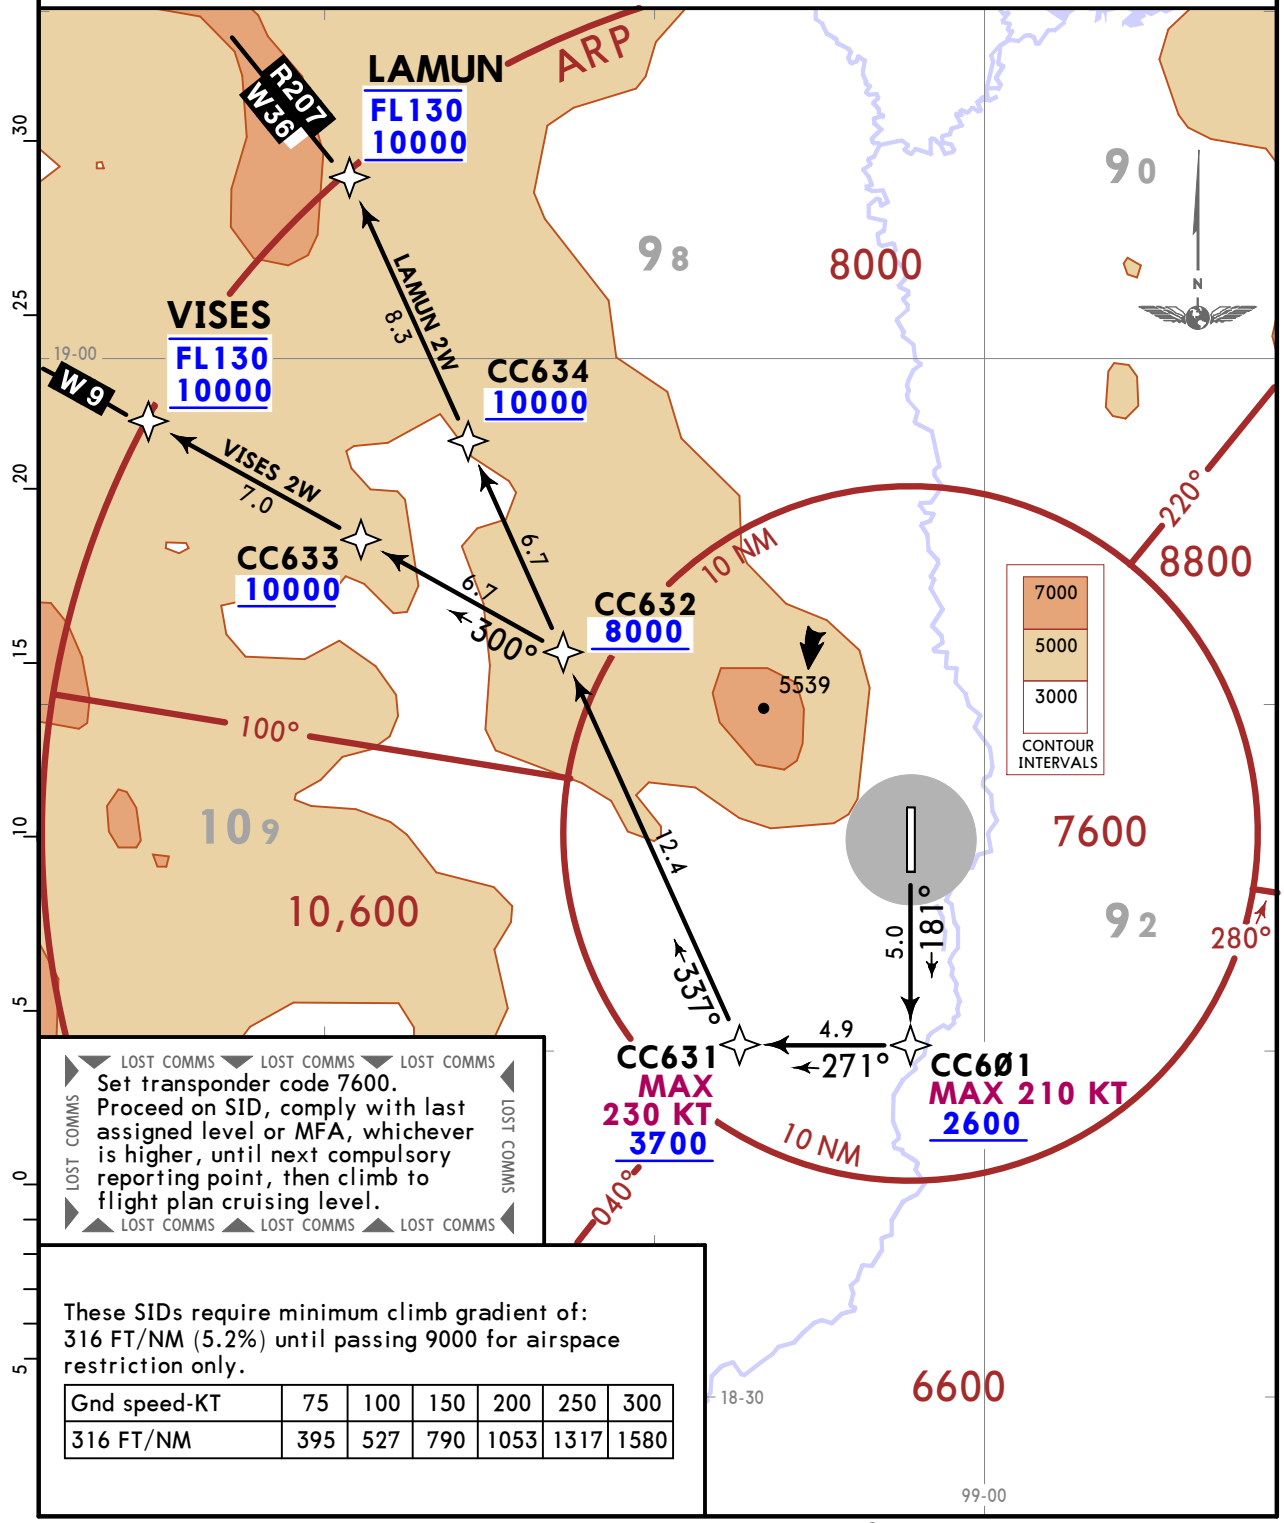

LOST COMMS LOST COMMS LOST COMMS
Set transponder code 7600.
Proceed on SID, comply with last assigned level or MFA, whichever is higher, until next compulsory reporting point, then climb to flight plan cruising level.
LOST COMMS LOST COMMS LOST COMMS

These SIDs require minimum climb gradient of:
316 FT/NM (5.2%) until passing 9000 for airspace restriction only.

Gnd speed-KT	75	100	150	200	250	300
316 FT/NM	395	527	790	1053	1317	1580


CHANGES: Bearings from CC631 to CC632 to CC634 to LAMUN revised.

© JEPPESEN, 2022, 2026. ALL RIGHTS RESERVED.

Apt Elev	
1036	Trans alt: 11000 Contact Chiang Mai Approach on 129.6 after take-off.

MAE HONG SON 1A (MHS 1A), MAE HONG SON 1B (MHS 1B) DEPARTURES (ALL RWYS)

SID	RWY	INITIAL CLIMB
MAE HONG SON 1A	18	Climb runway heading until 3500 or above, then turn RIGHT heading 320° to cross CMA R255 not below 6500, then intercept and proceed on CMA R300 not above 11000. EXPECT RADAR control.
MAE HONG SON 1B	36	Climb runway heading until 2500 or above, then turn RIGHT heading 180° to cross CMA R130 not below 6500, turn RIGHT heading 310° to intercept and proceed on CMA R300 not above 11000. EXPECT RADAR control.

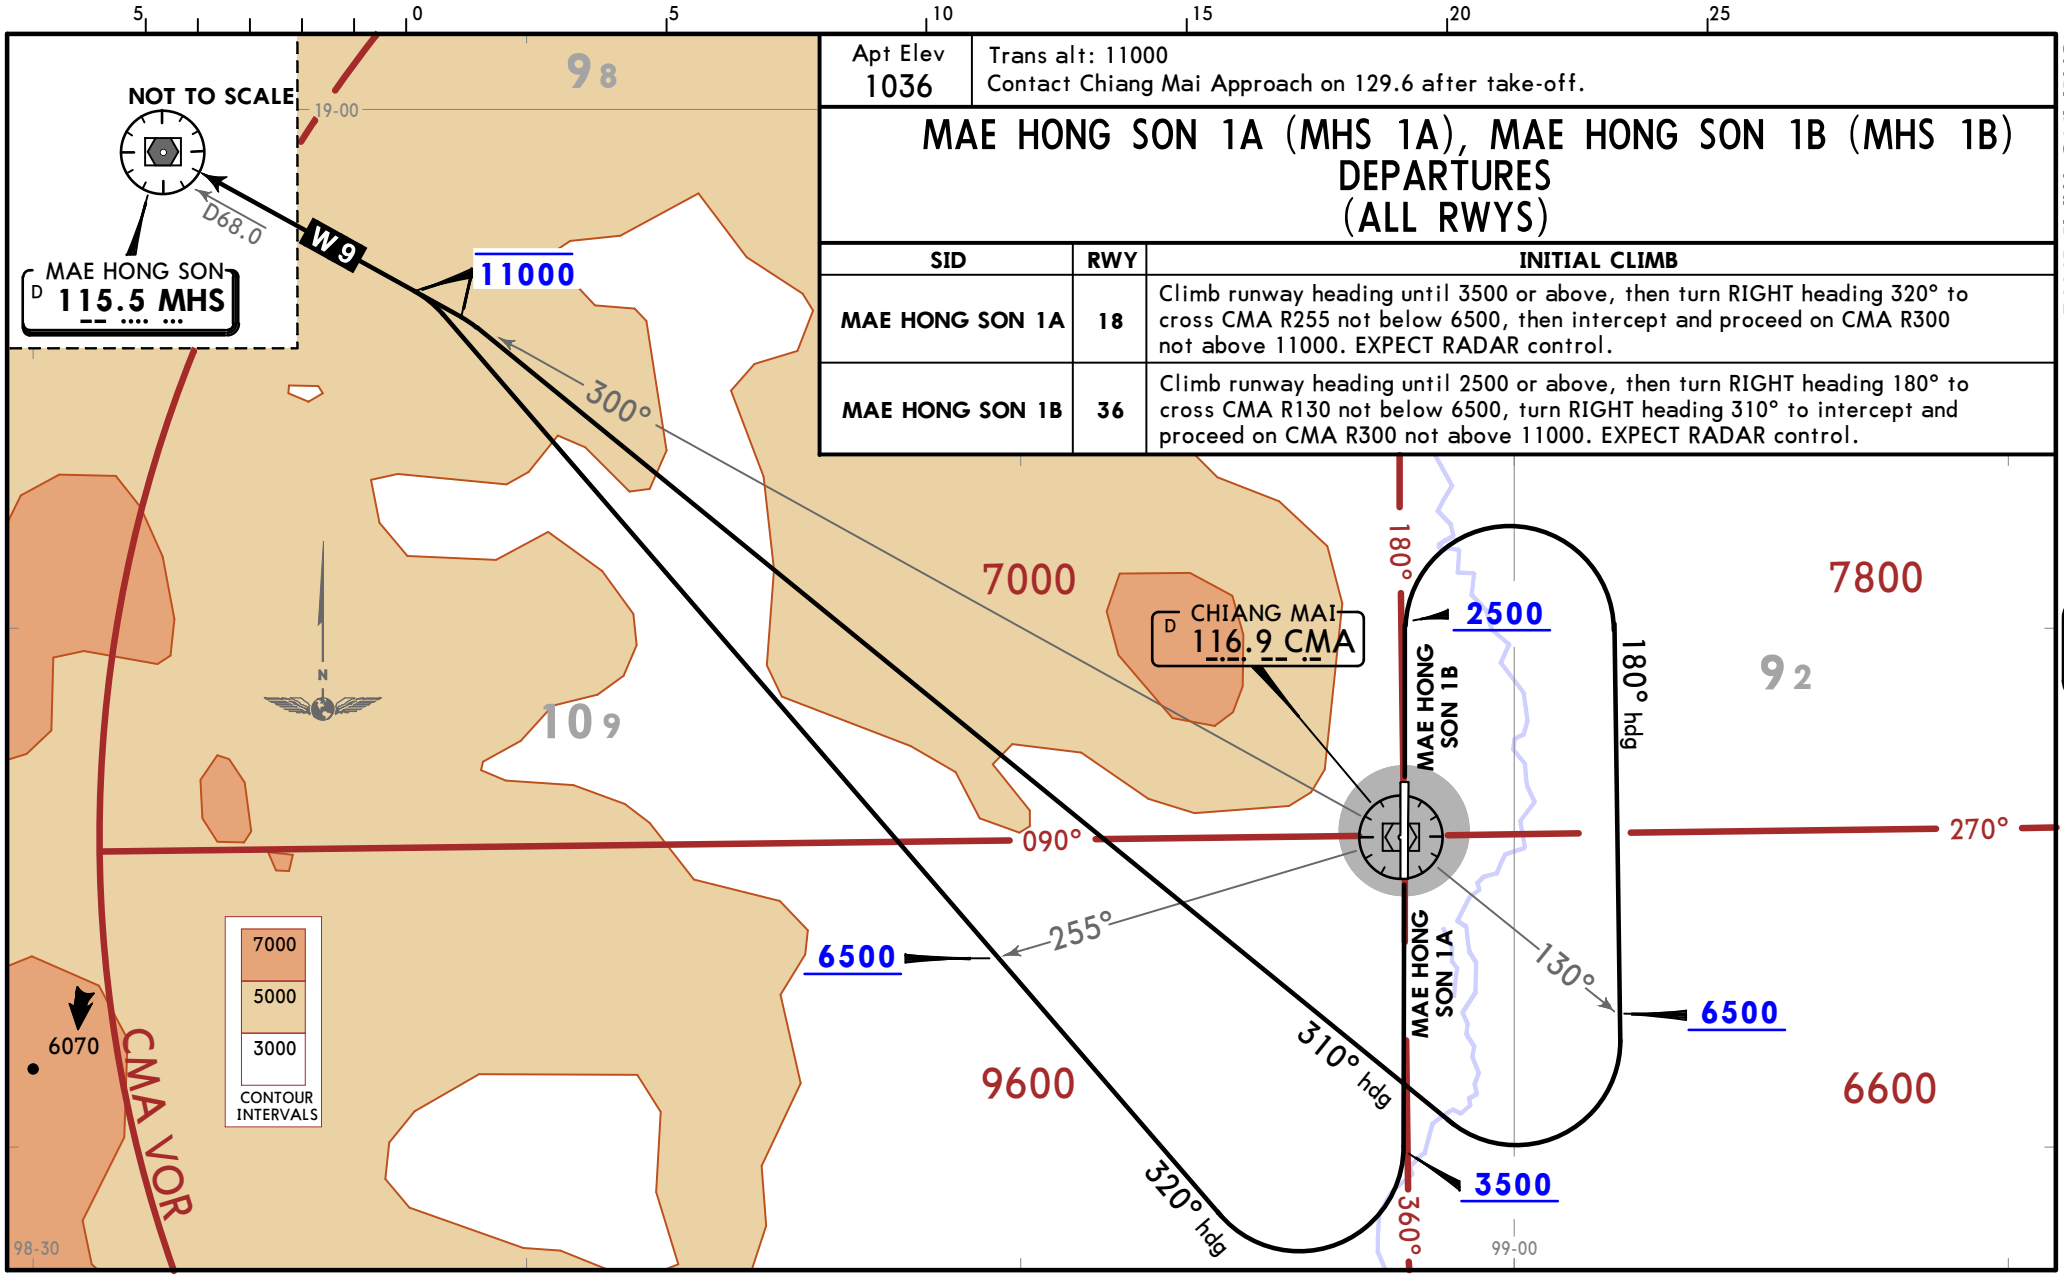


CHANGES: Bearing, general note.

© JEPPESEN, 2018, 2025. ALL RIGHTS RESERVED.

Apt Elev	Trans alt: 11000
1036	Contact Chiang Mai Approach on 129.6 after take-off.


PHITSANULOK 1A (PSL 1A)
PHITSANULOK 1B (PSL 1B)
DEPARTURES
(ALL RWYS)

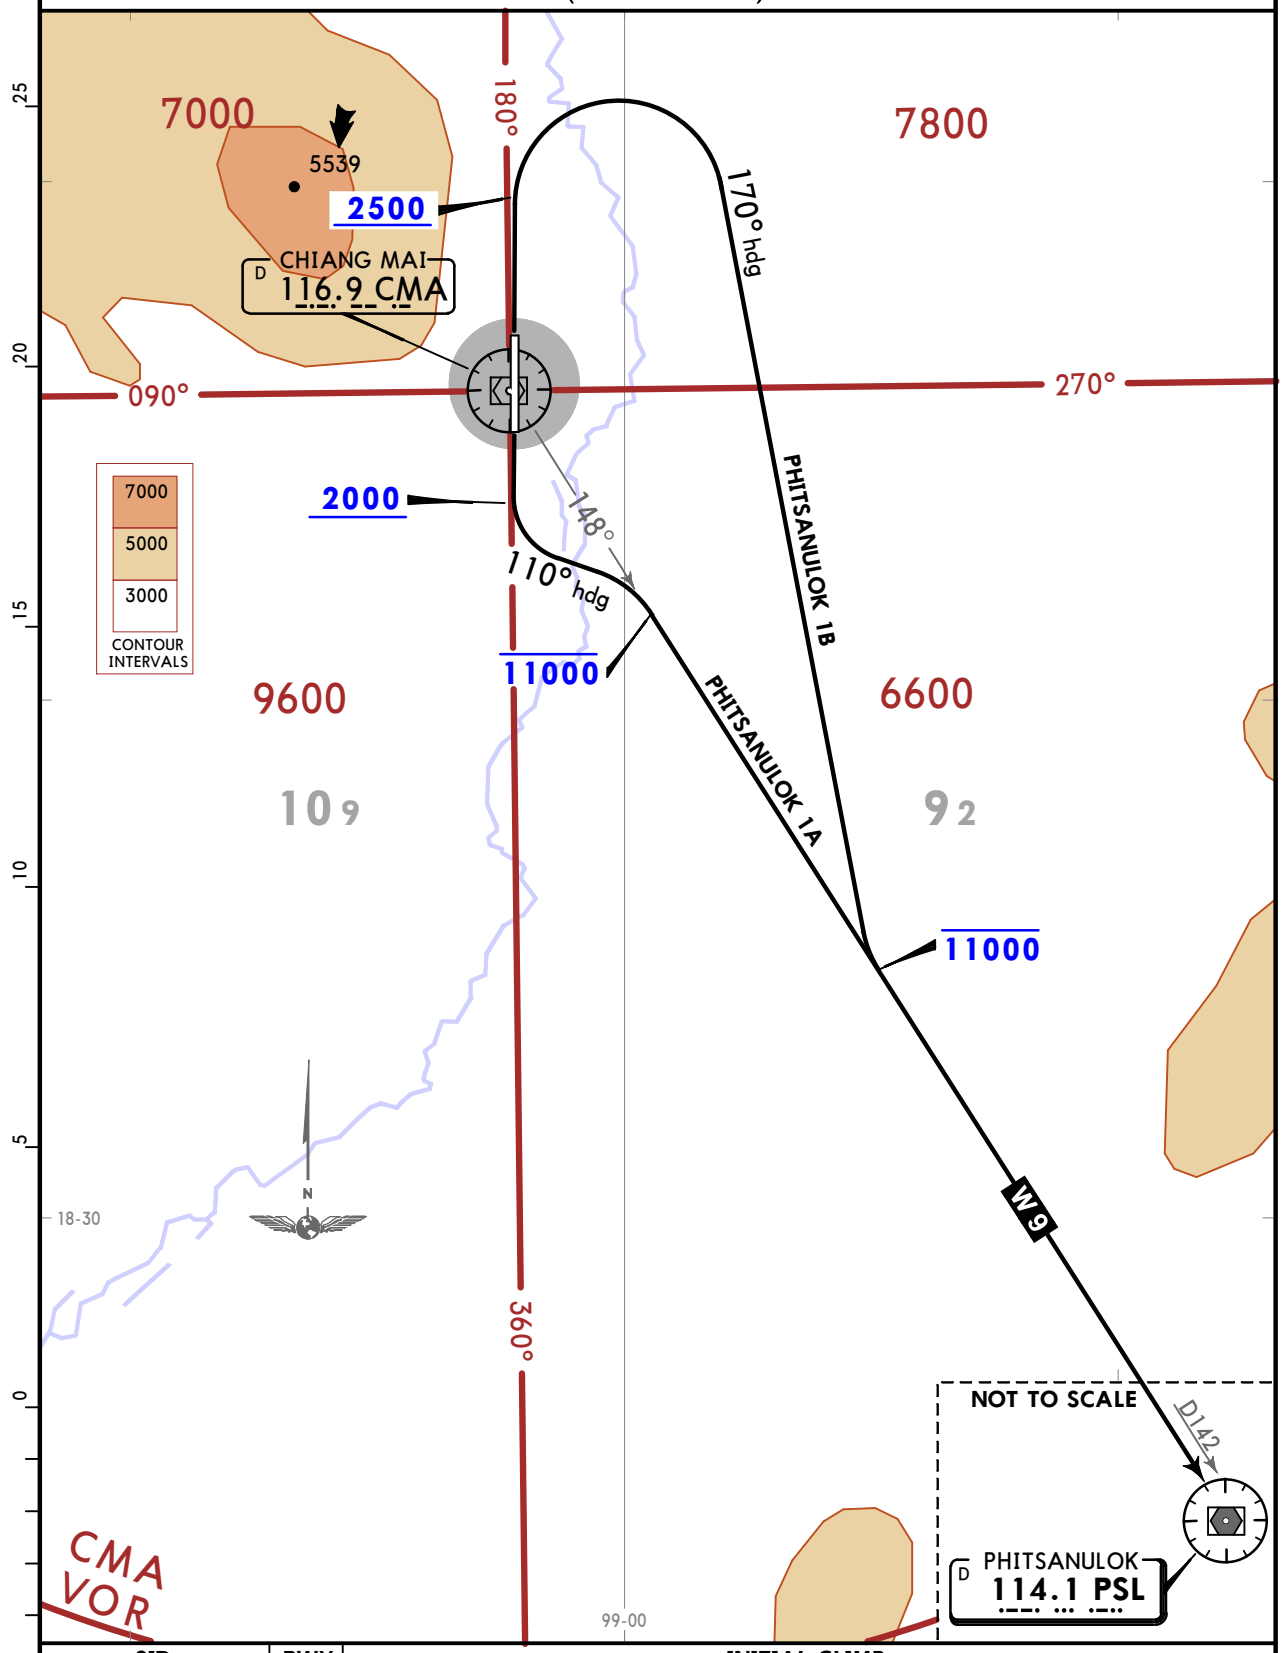

SID	RWY	INITIAL CLIMB
PHITSANULOK 1A	18	Climb runway heading until 2000 or above, then turn LEFT heading 110° to intercept and proceed on CMA R148 not above 11000. EXPECT RADAR control.
PHITSANULOK 1B	36	Climb runway heading until 2500 or above, then turn RIGHT heading 170° to intercept and proceed on CMA R148 not above 11000. EXPECT RADAR control.

CHANGES: Bearing, general note.

© JEPPESEN, 2018, 2025. ALL RIGHTS RESERVED.

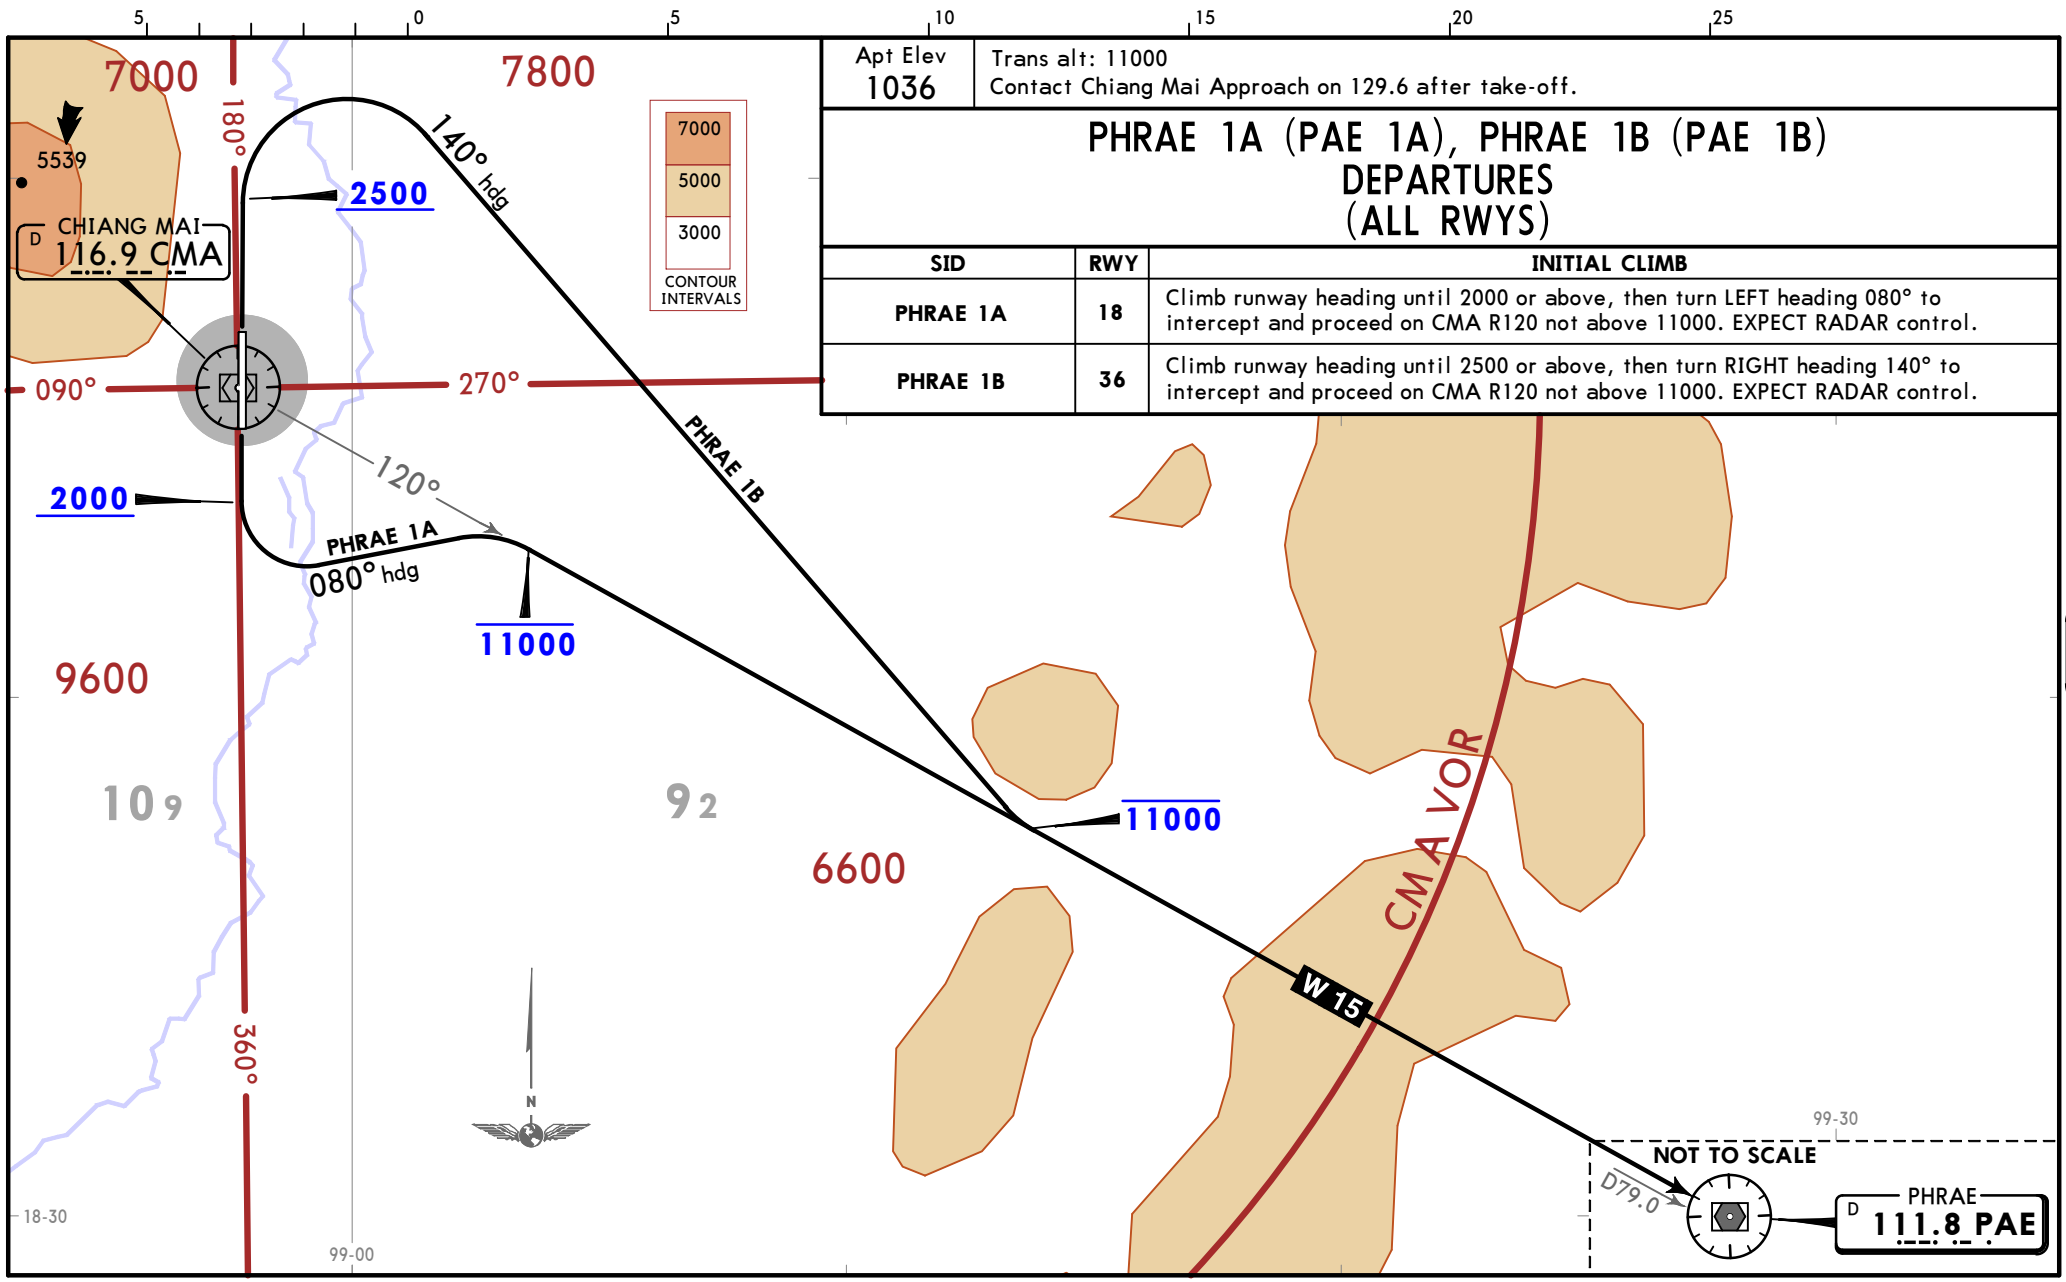

Apt Elev	Trans alt: 11000
1036	Contact Chiang Mai Approach on 129.6 after take-off.

PHRAE 1A (PAE 1A), PHRAE 1B (PAE 1B) DEPARTURES (ALL RWYS)

SID	RWY	INITIAL CLIMB
PHRAE 1A	18	Climb runway heading until 2000 or above, then turn LEFT heading 080° to intercept and proceed on CMA R120 not above 11000. EXPECT RADAR control.
PHRAE 1B	36	Climb runway heading until 2500 or above, then turn RIGHT heading 140° to intercept and proceed on CMA R120 not above 11000. EXPECT RADAR control.


VTCC/CNX
CHIANG MAI INTL
JEPPESEN CHIANG MAI, THAILAND
1 AUG 25 (10-3M) Eff 7 Aug
SID

CHANGES: Computer codes, bearing, general note, PR NDB replaced by PHRAE VOR. © JEPPESEN, 2018, 2025. ALL RIGHTS RESERVED.

VTCC/CNX
CHIANG MAI INTL

JEPPESEN
13 MAR 26 (10-2B) Eff 19 Mar

CHIANG MAI, THAILAND
RNAV STAR

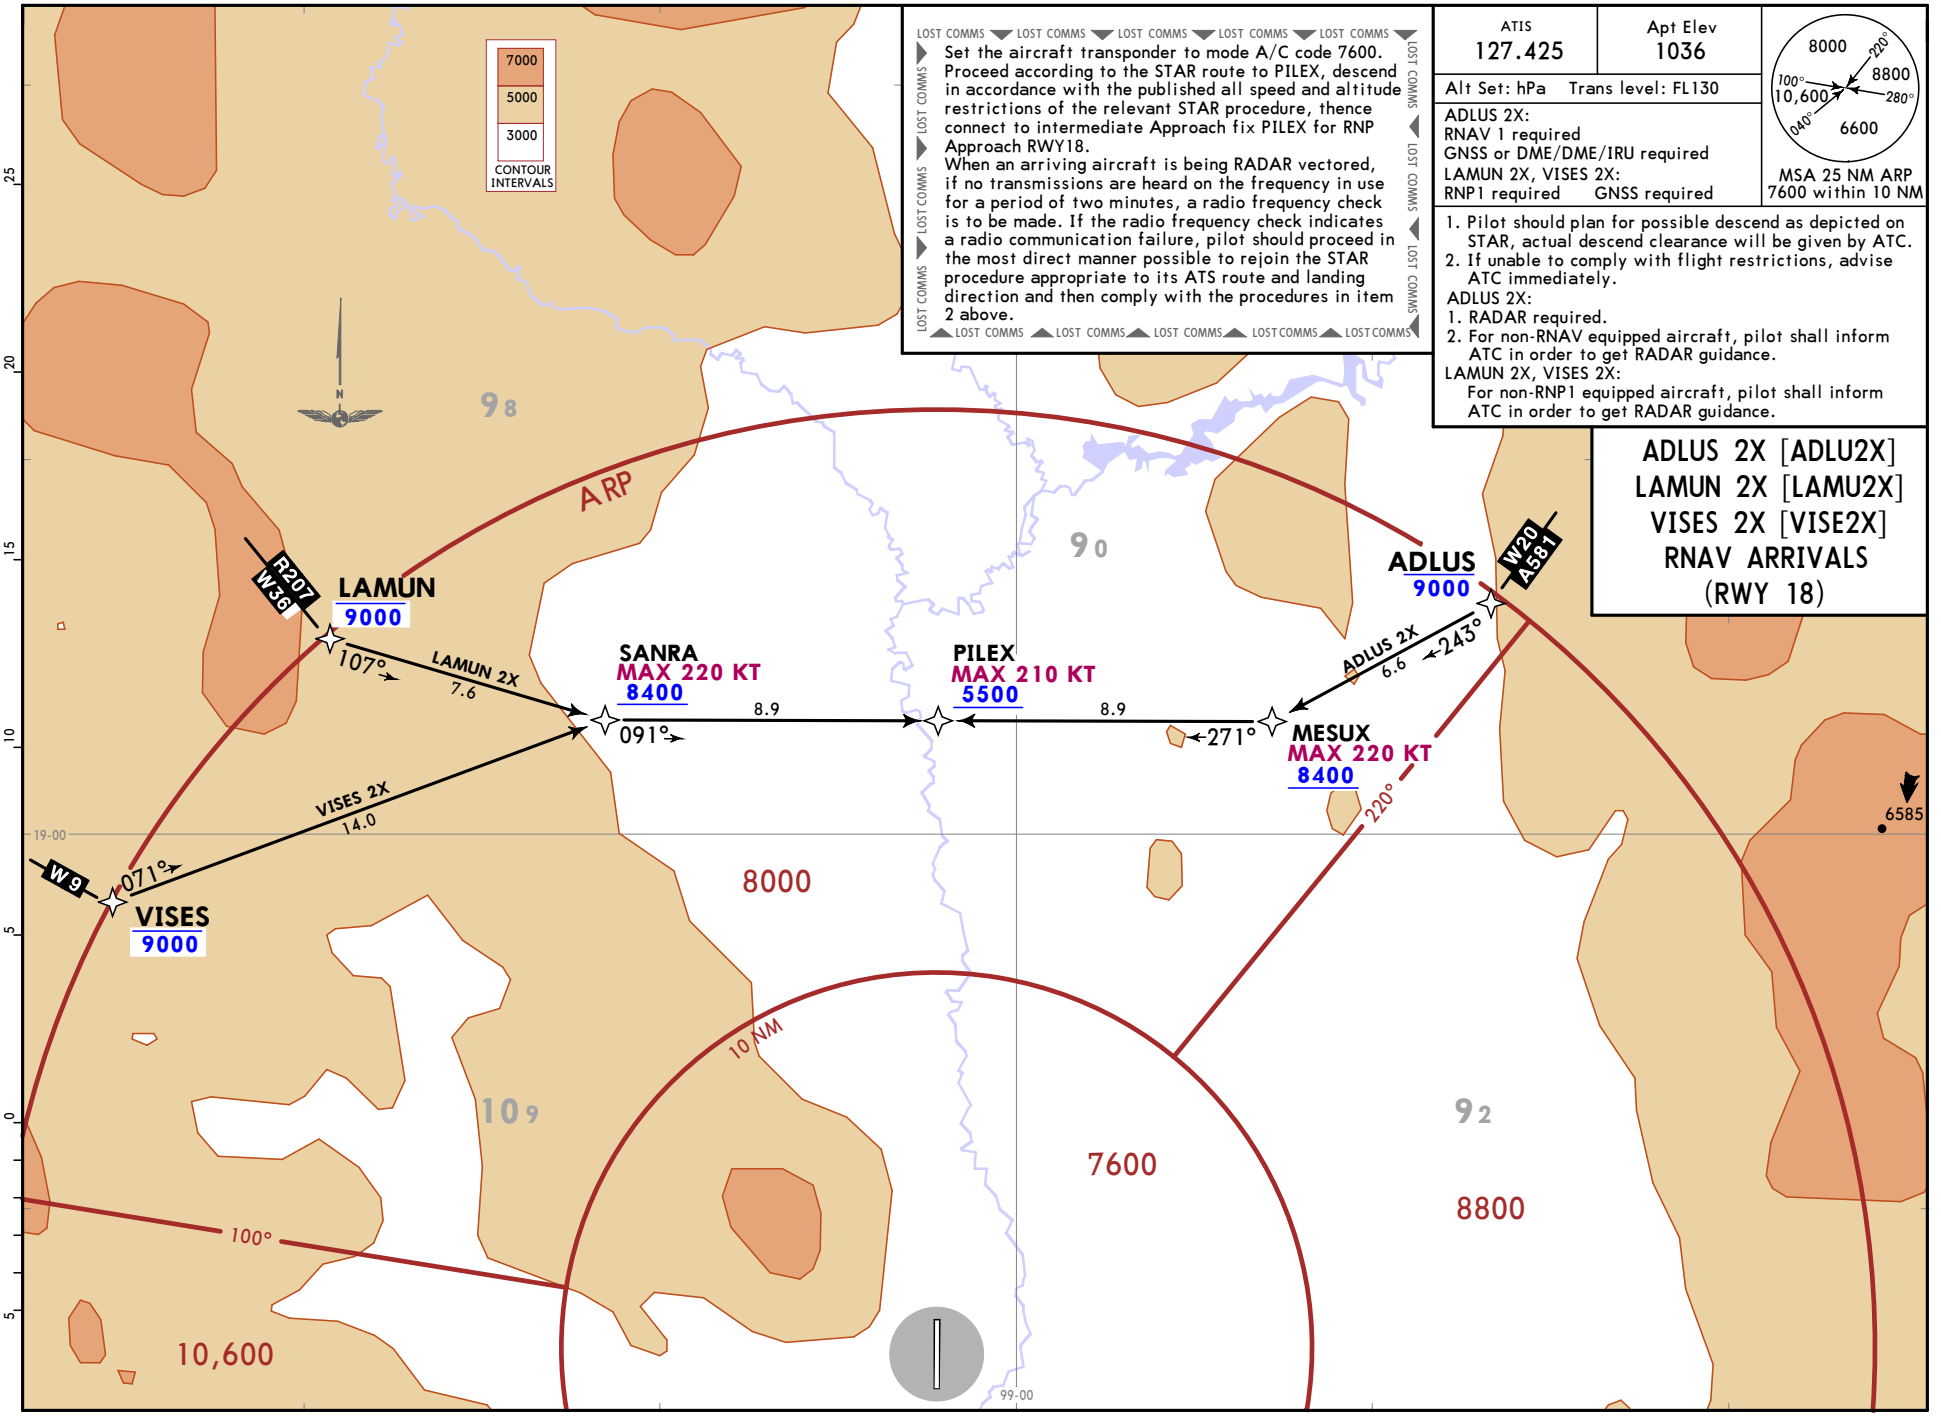

LOST COMMS Set the aircraft transponder to mode A/C code 7600. Proceed according to the STAR route to PILEX, descend in accordance with the published all speed and altitude restrictions of the relevant STAR procedure, thence connect to intermediate Approach fix PILEX for RNP Approach RWY18.
When an arriving aircraft is being RADAR vectored, if no transmissions are heard on the frequency in use for a period of two minutes, a radio frequency check is to be made. If the radio frequency check indicates a radio communication failure, pilot should proceed in the most direct manner possible to rejoin the STAR procedure appropriate to its ATS route and landing direction and then comply with the procedures in item 2 above.

ATIS	Apt Elev
127.425	1036

Alt Set: hPa Trans level: FL130

ADLUS 2X:
RNAV 1 required
GNSS or DME/DME/IRU required
LAMUN 2X, VISES 2X:
RNP1 required GNSS required

8000 220° 8800 100° 10,600 280° 040° 6600
MSA 25 NM ARP
7600 within 10 NM

1. Pilot should plan for possible descend as depicted on STAR, actual descend clearance will be given by ATC.
2. If unable to comply with flight restrictions, advise ATC immediately.

ADLUS 2X:
1. RADAR required.
2. For non-RNAV equipped aircraft, pilot shall inform ATC in order to get RADAR guidance.

LAMUN 2X, VISES 2X:
For non-RNP1 equipped aircraft, pilot shall inform ATC in order to get RADAR guidance.

ADLUS 2X [ADLU2X]
LAMUN 2X [LAMU2X]
VISES 2X [VISE2X]
RNAV ARRIVALS
(RWY 18)


CHANGES: Bearings from ADLUS to MESUX and from VISES to SANRA revised.

© JEPPESEN, 2022, 2026. ALL RIGHTS RESERVED.

VTCC/CNX
CHIANG MAI INTL

JEPPESEN
13 MAR 26 (10-2) Eff 19 Mar RNAV STAR

CHIANG MAI, THAILAND

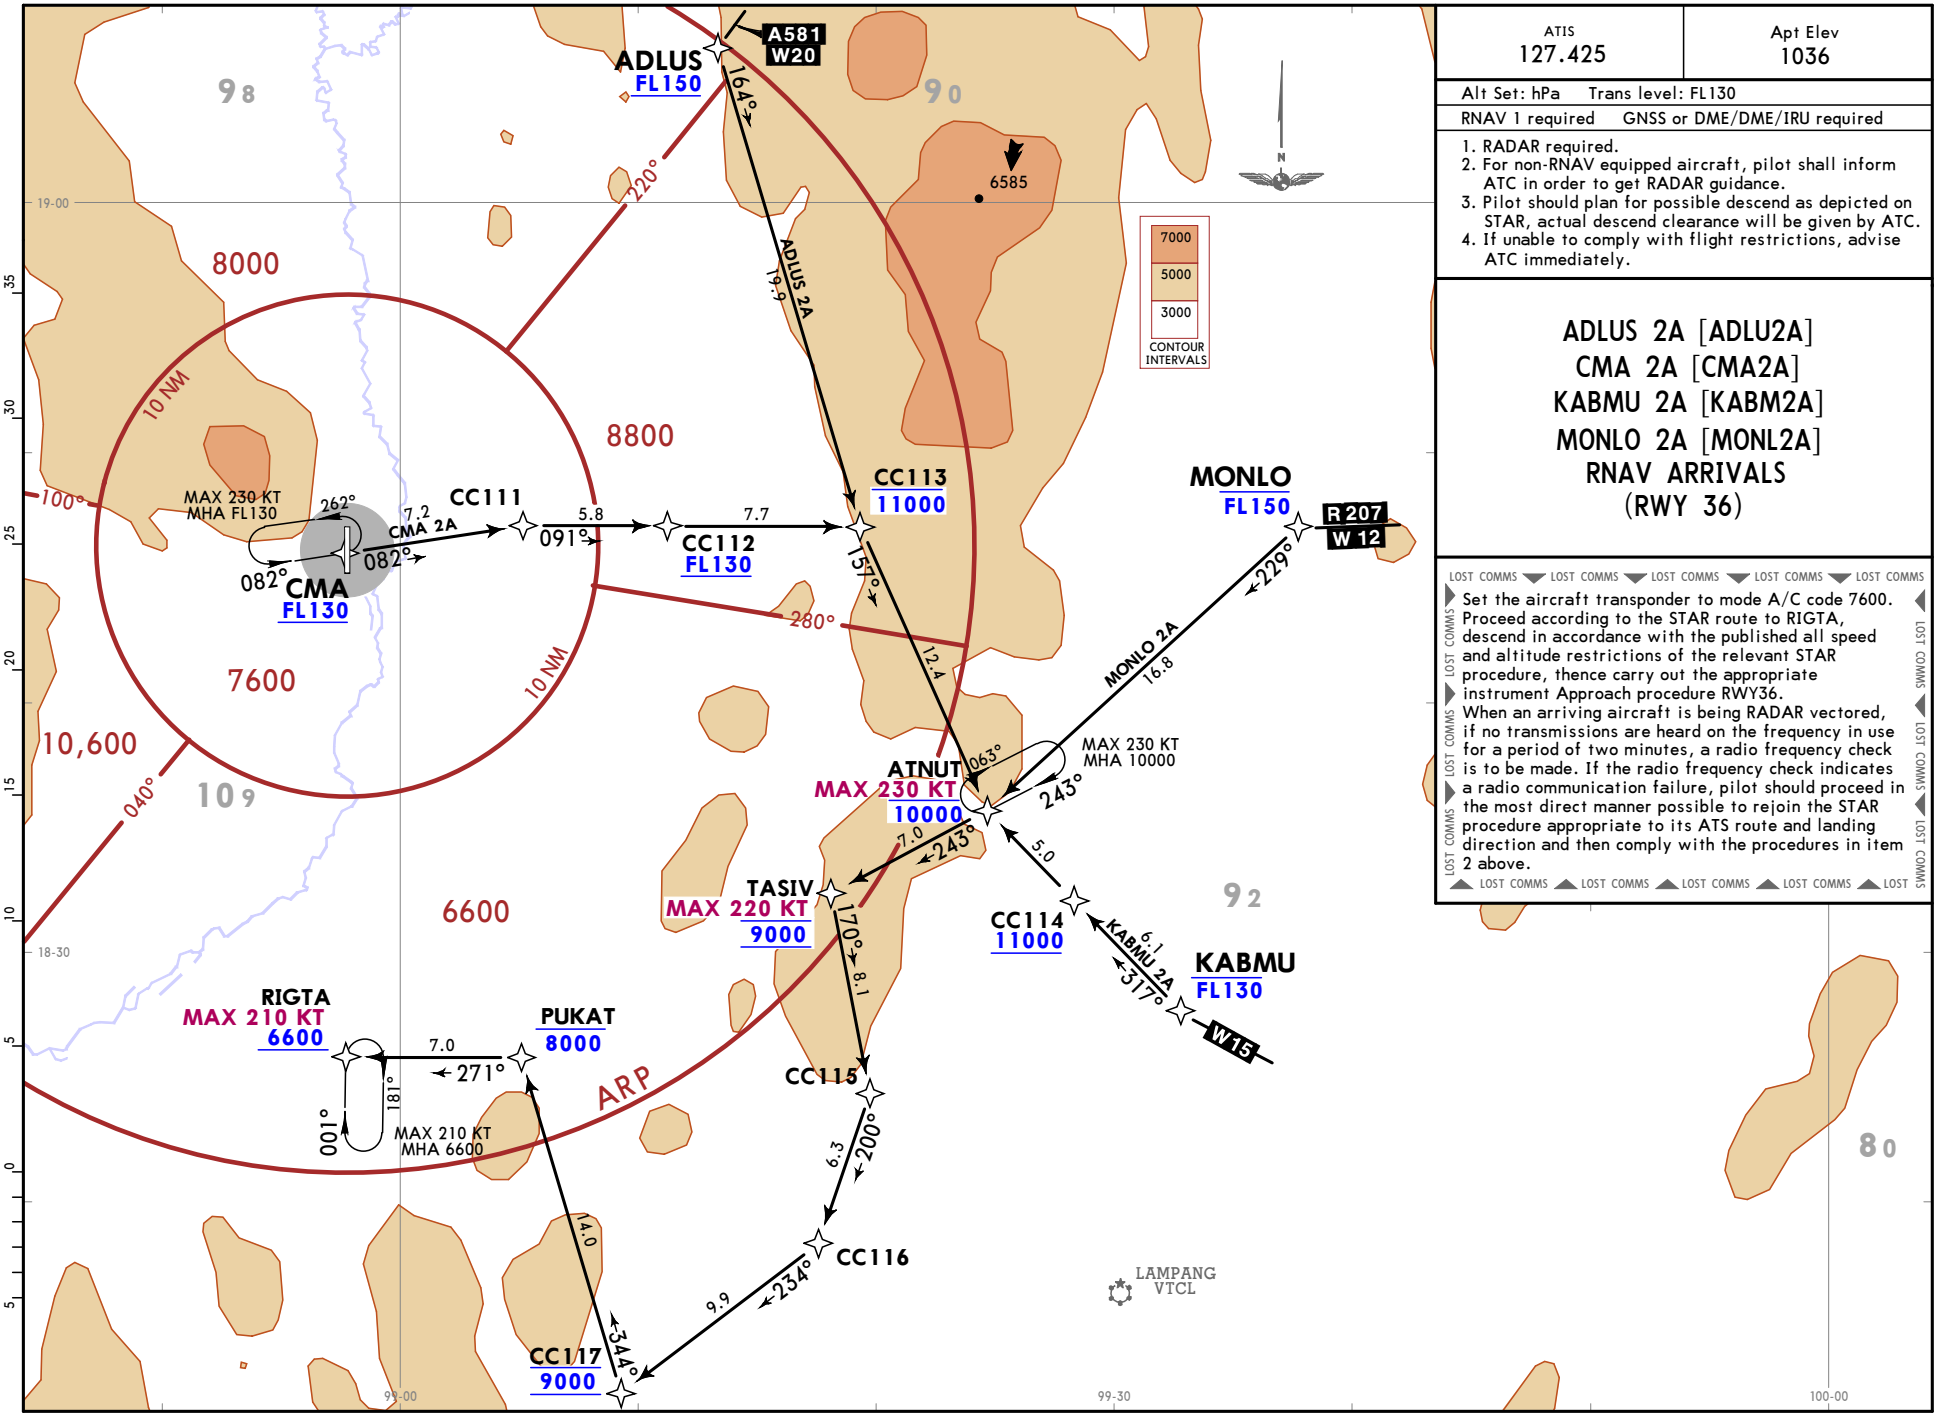

ATIS	Apt Elev
127.425	1036

Alt Set: hPa Trans level: FL130

RNAV 1 required GNSS or DME/DME/IRU required

1. RADAR required.
2. For non-RNAV equipped aircraft, pilot shall inform ATC in order to get RADAR guidance.
3. Pilot should plan for possible descend as depicted on STAR, actual descend clearance will be given by ATC.
4. If unable to comply with flight restrictions, advise ATC immediately.

ADLUS 2A [ADLU2A]
CMA 2A [CMA2A]
KABMU 2A [KABM2A]
MONLO 2A [MONL2A]
RNAV ARRIVALS
(RWY 36)

LOST COMMS


Set the aircraft transponder to mode A/C code 7600. Proceed according to the STAR route to RIGTA, descend in accordance with the published all speed and altitude restrictions of the relevant STAR procedure, thence carry out the appropriate instrument Approach procedure RWY36.

When an arriving aircraft is being RADAR vectored, if no transmissions are heard on the frequency in use for a period of two minutes, a radio frequency check is to be made. If the radio frequency check indicates a radio communication failure, pilot should proceed in the most direct manner possible to rejoin the STAR procedure appropriate to its ATS route and landing direction and then comply with the procedures in item 2 above.

LOST COMMS

CHANGES: Bearings from MONLO to ATNUT and from CC116 to CC117 revised.

© JEPPESEN, 2022, 2026. ALL RIGHTS RESERVED.

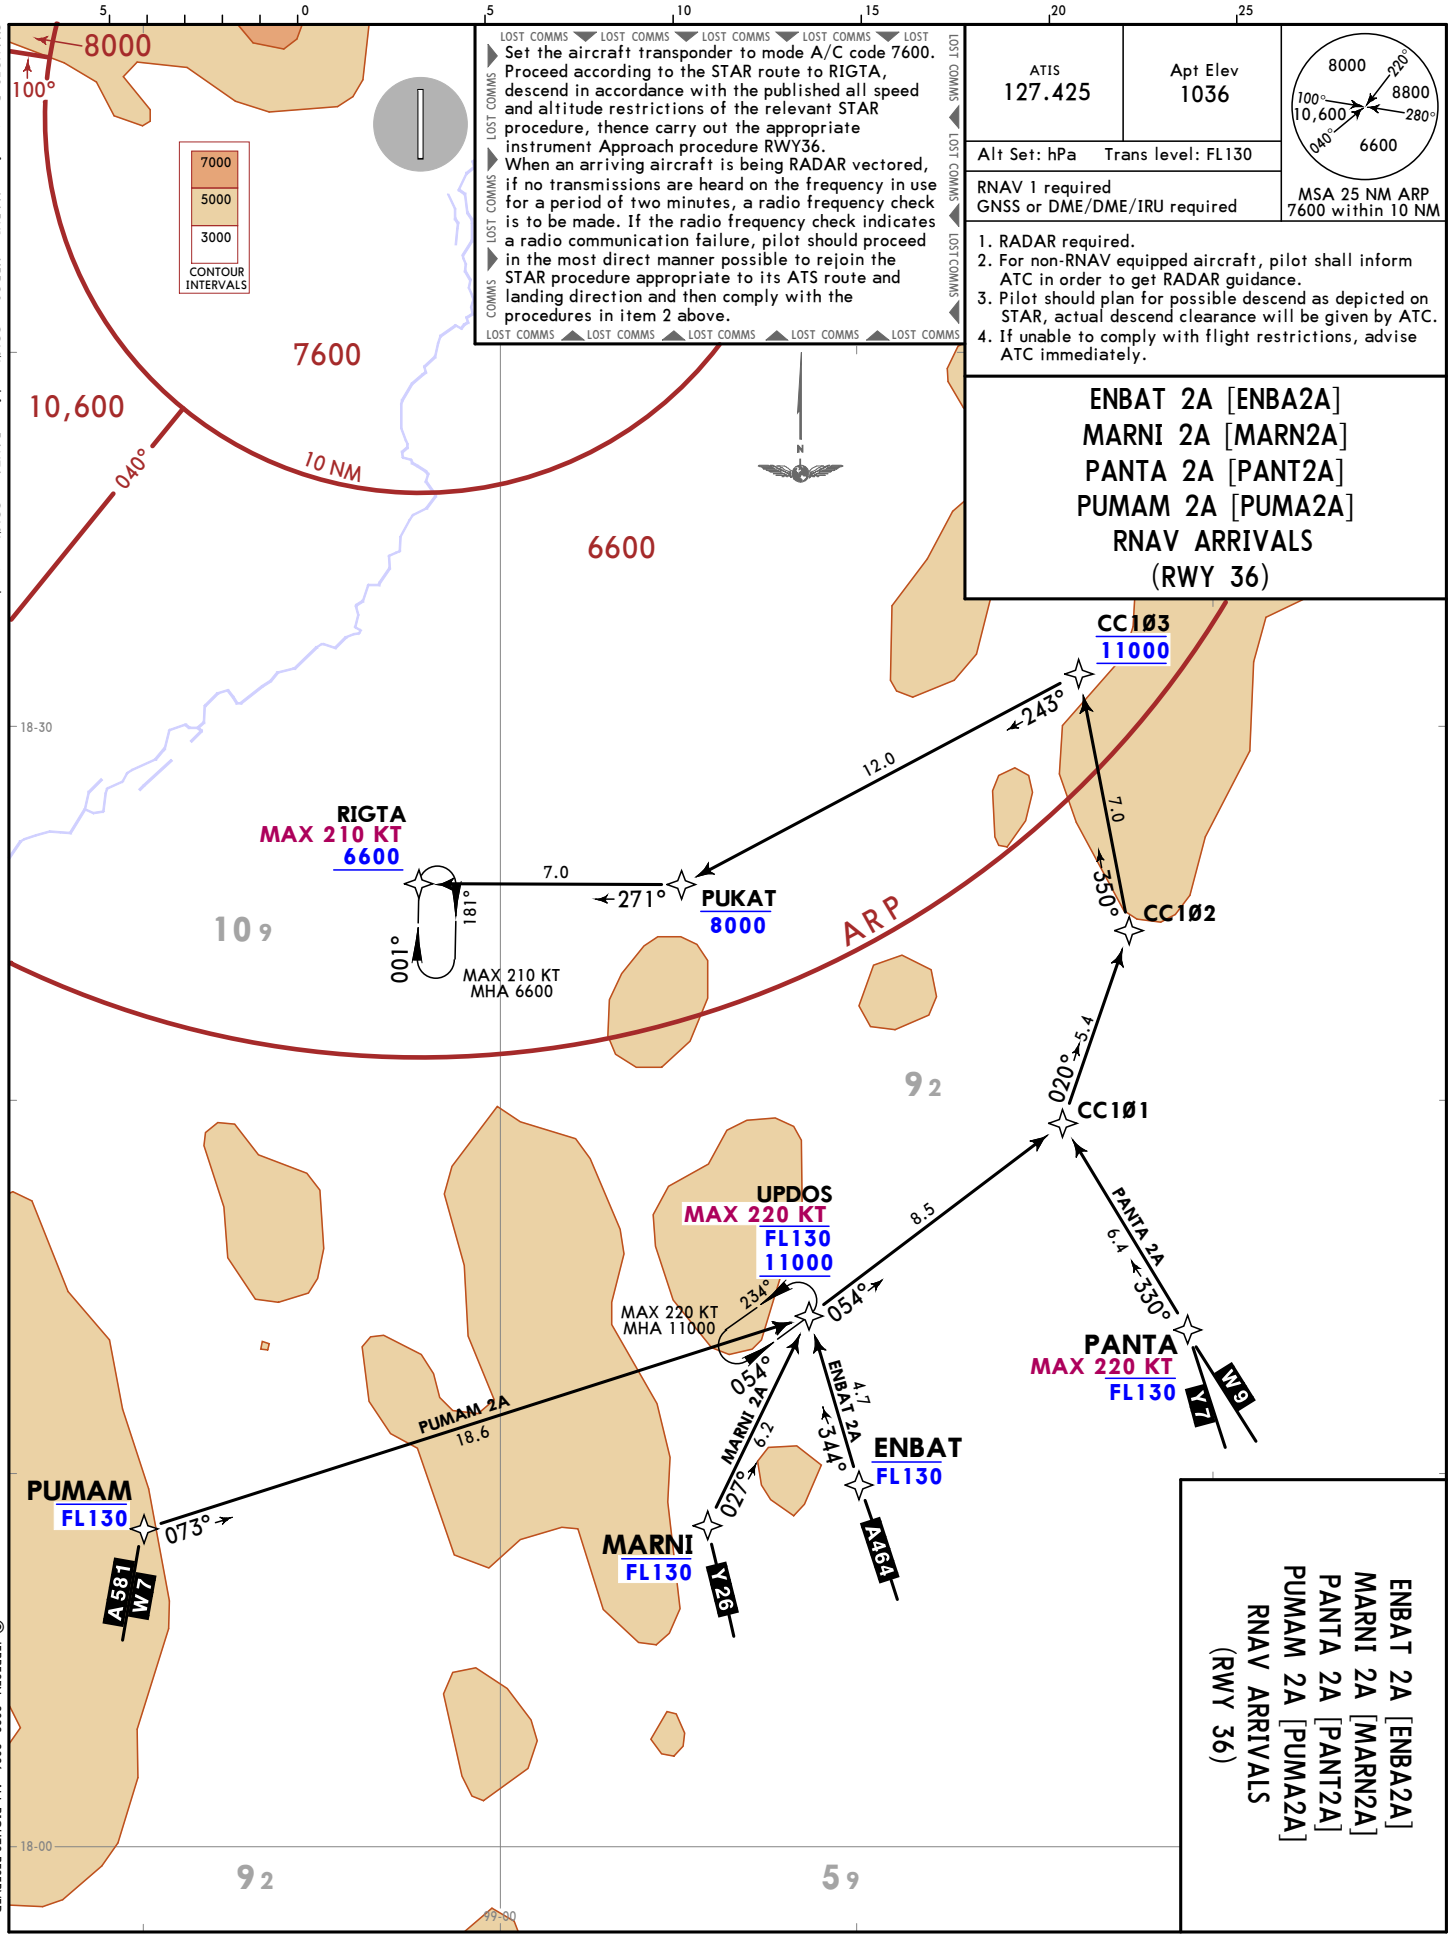

CHANGES: Bearings from MARNI to UPDOS to CC101 and from PANTA to CC101 revised.

© JEPPESEN, 2022, 2026. ALL RIGHTS RESERVED.

VTCC/CNX
CHIANG MAI INTL


JEPPESEN CHIANG MAI, THAILAND
RNAV STAR

13 MAR 26 (10-2C) Eff 19 Mar


ENBAT 2A [ENBA2A]
MARNI 2A [MARN2A]
PANTA 2A [PANT2A]
PUMAM 2A [PUMA2A]
RNAV ARRIVALS
(RWY 36)

ATIS	Apt Elev	Alt Set: hPa
127.425	1036	Trans level: FL130

HOLDING POINT FOR RADAR SERVICE



MSA 25 NM CMA VOR
7600 within 10 NM

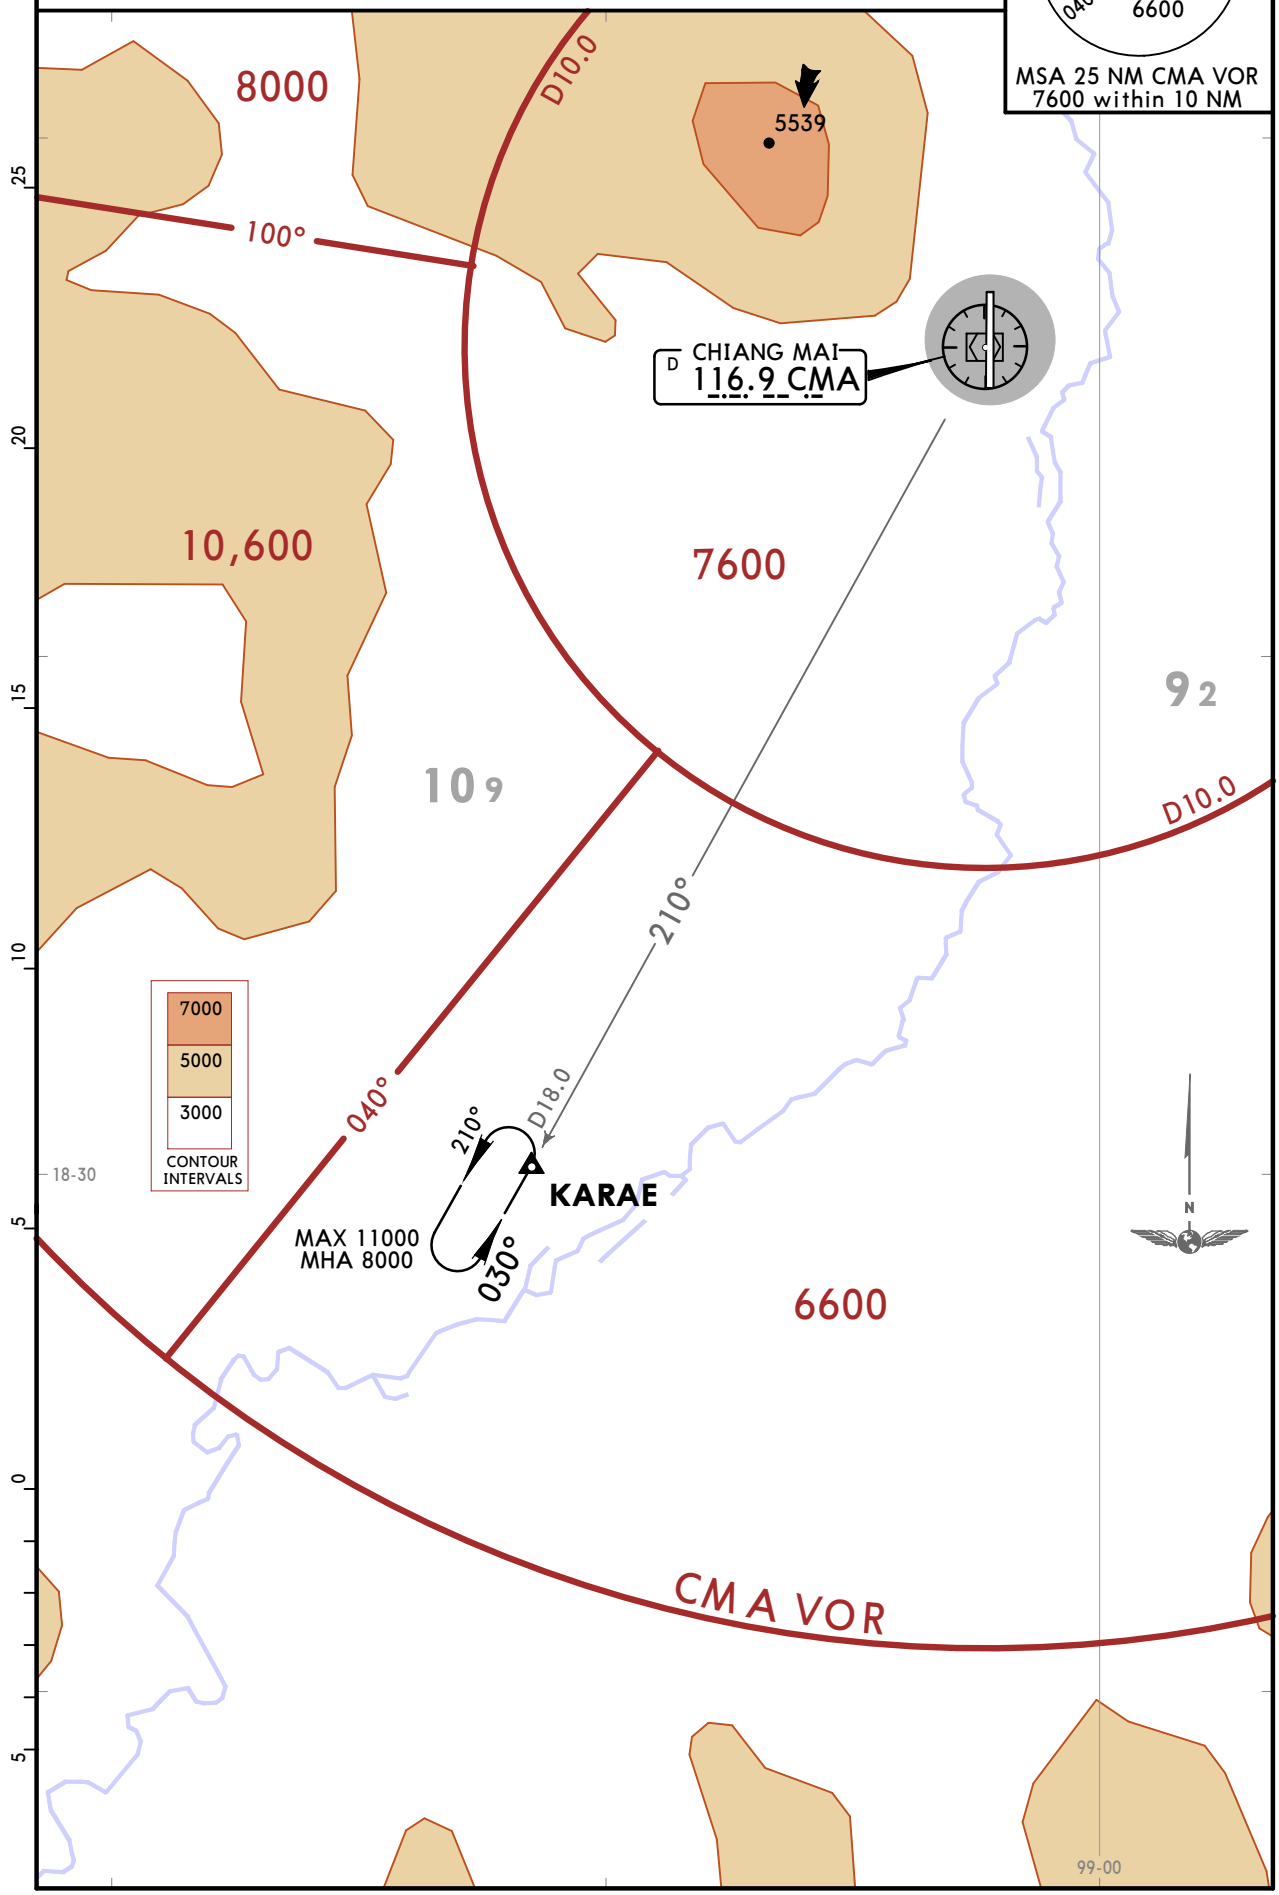


CHANGES: ATIS frequency.

© JEPPESEN, 2022, 2025. ALL RIGHTS RESERVED.


ATIS	Apt Elev	
127.425	1036	Alt Set: hPa Trans level: FL130 RNP 1 required GNSS required 1. For non-RNP1 equipped aircraft, pilot shall inform ATC in order to get arrival instruction. 2. Pilot should plan for possible descend as depicted on STAR, actual descend clearance will be given by ATC. 3. If unable to comply with flight restrictions, advise ATC immediately.

LAMUN 2A [LAMU2A], VISES 2A [VISE2A]
RNAV ARRIVALS
(RWY 36)

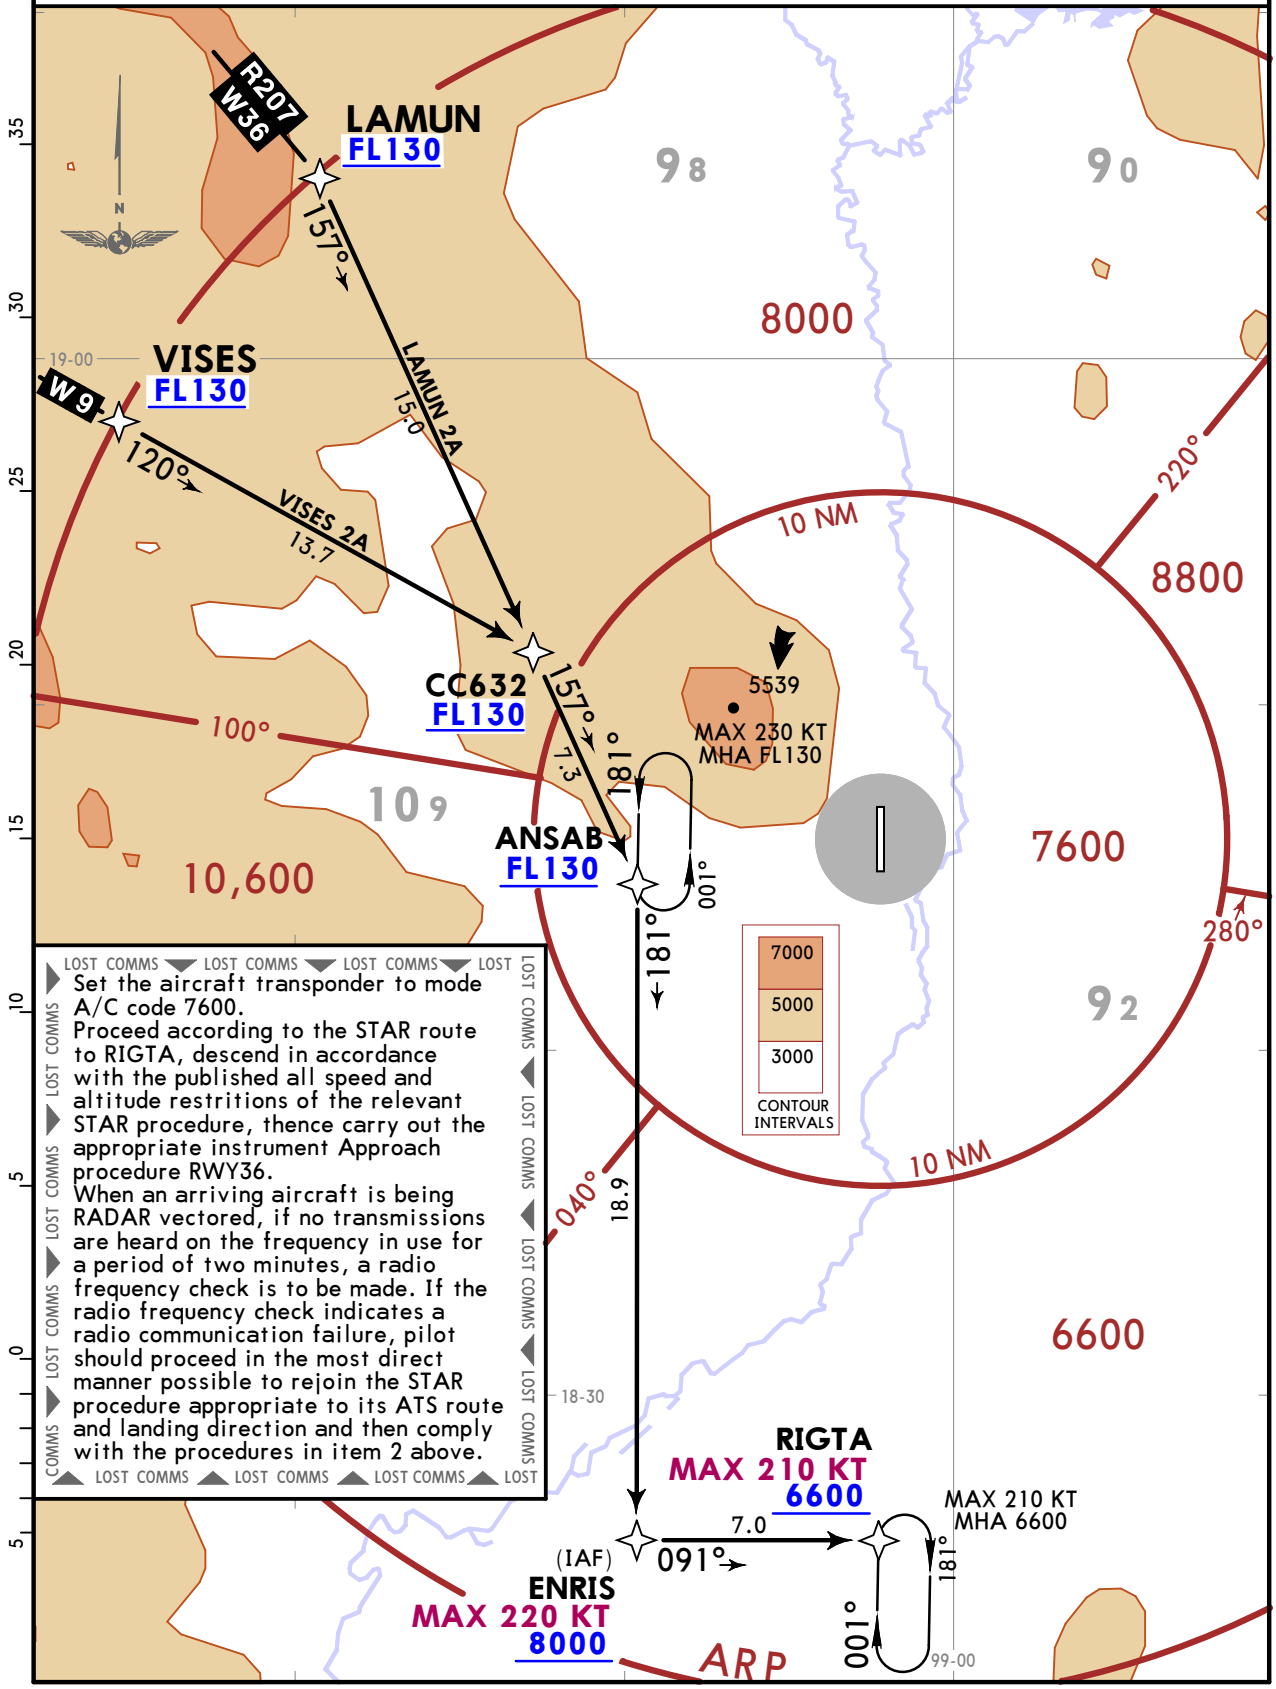

CHANGES: Bearings from LAMUN to CC632 to ANSAB revised.

© JEPPESEN, 2022, 2026. ALL RIGHTS RESERVED.

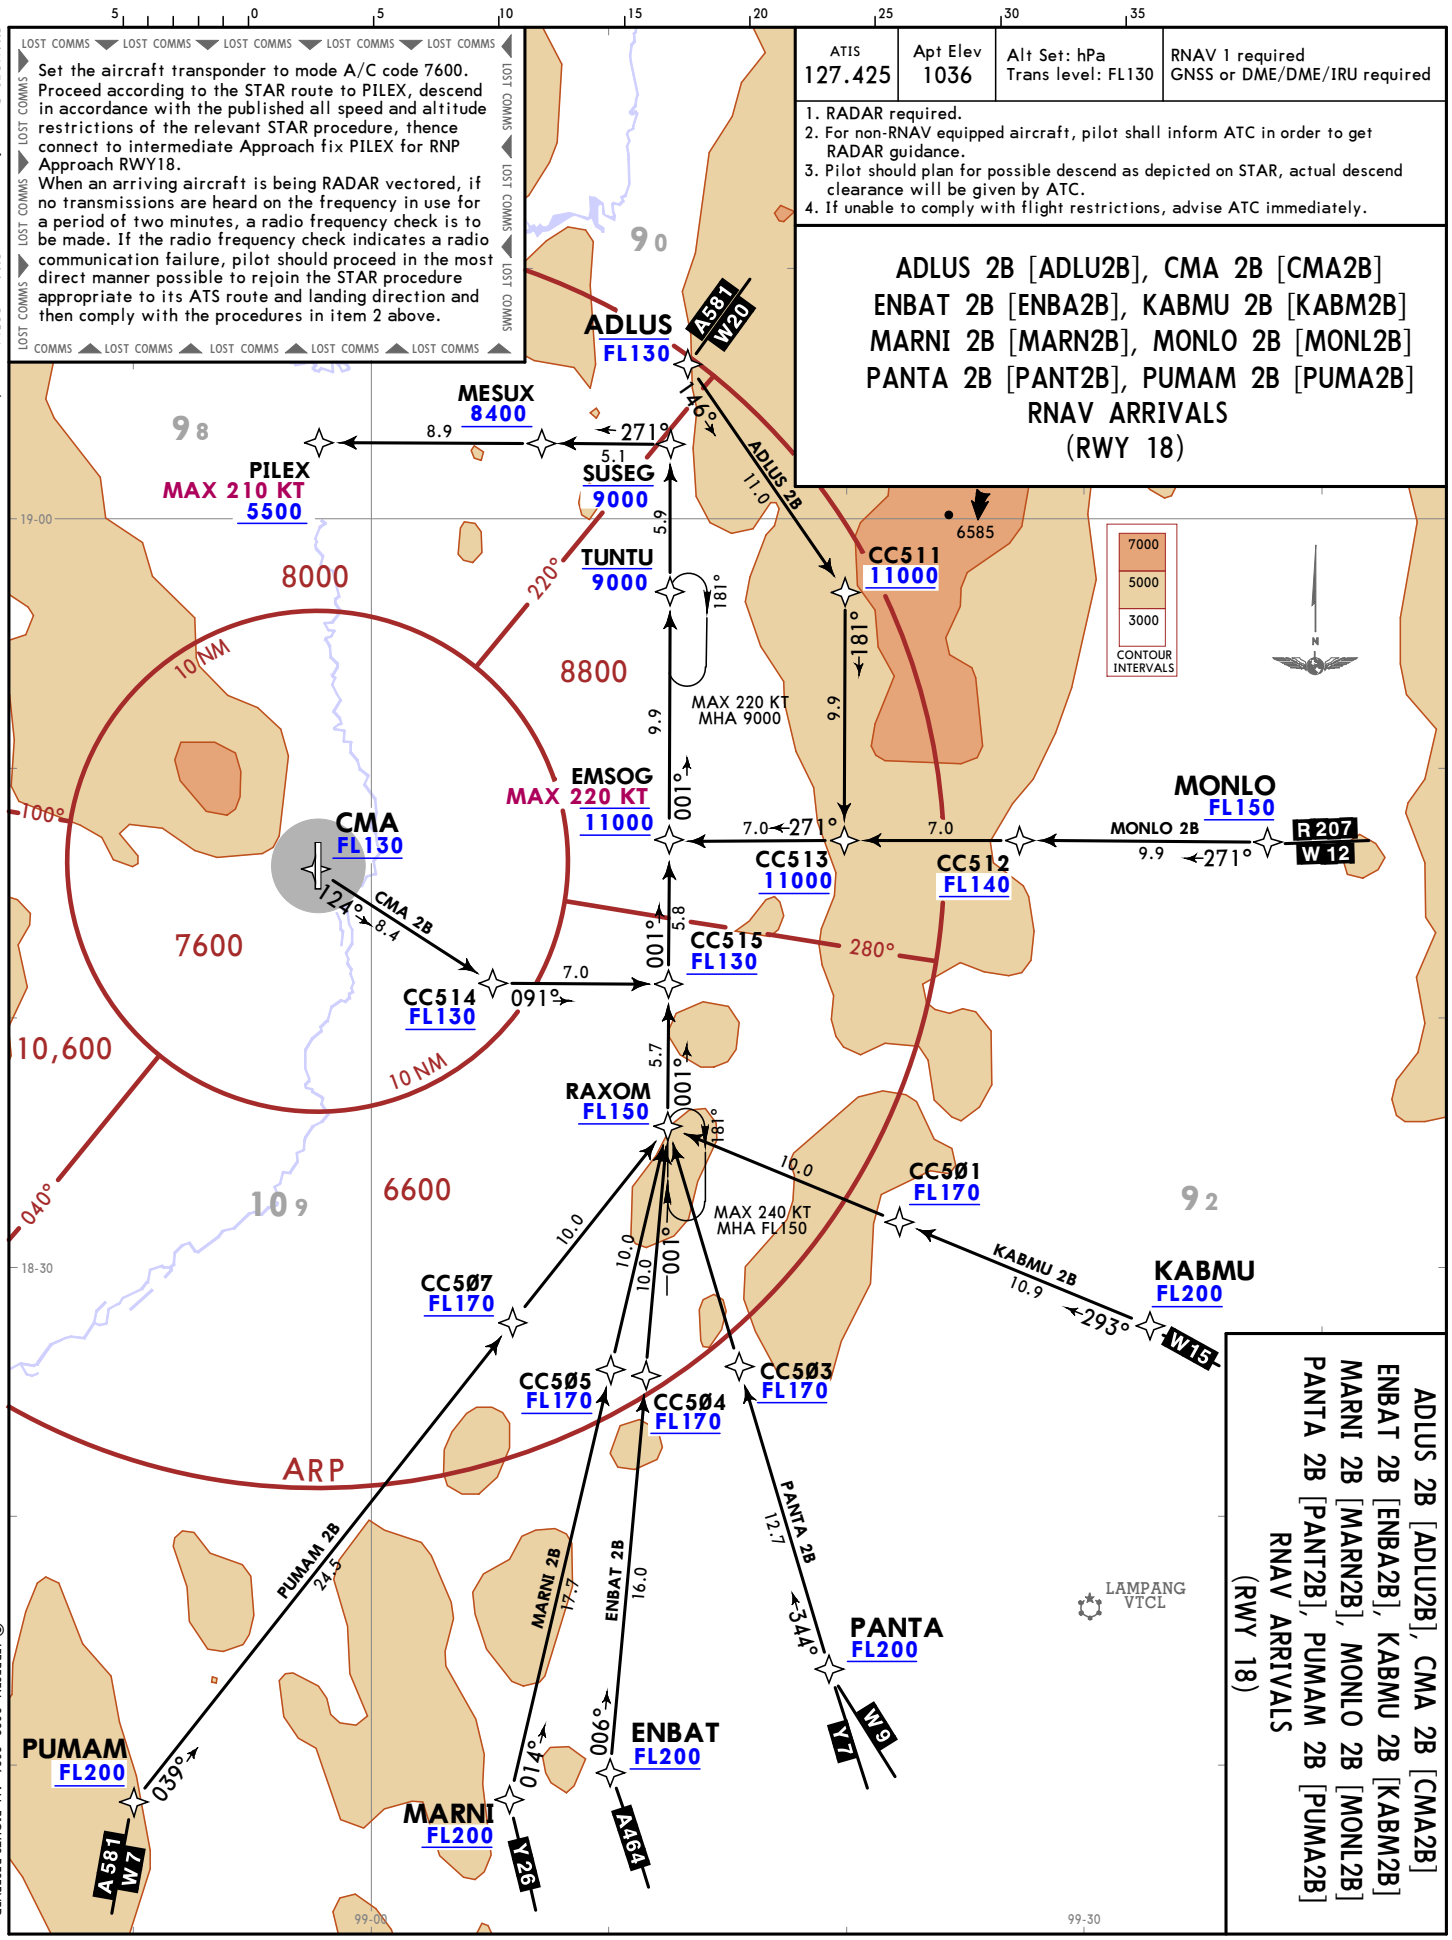
LOST COMMS
Set the aircraft transponder to mode A/C code 7600.
Proceed according to the STAR route to PILEX, descend in accordance with the published all speed and altitude restrictions of the relevant STAR procedure, thence connect to intermediate Approach fix PILEX for RNP Approach RWY18.
When an arriving aircraft is being RADAR vectored, if no transmissions are heard on the frequency in use for a period of two minutes, a radio frequency check is to be made. If the radio frequency check indicates a radio communication failure, pilot should proceed in the most direct manner possible to rejoin the STAR procedure appropriate to its ATS route and landing direction and then comply with the procedures in item 2 above.
ATIS 127.425
Apt Elev 1036
Alt Set: hPa
Trans level: FL130
RNAV 1 required
GNSS or DME/DME/IRU required
1. RADAR required.
2. For non-RNAV equipped aircraft, pilot shall inform ATC in order to get RADAR guidance.
3. Pilot should plan for possible descend as depicted on STAR, actual descend clearance will be given by ATC.
4. If unable to comply with flight restrictions, advise ATC immediately.
ADLUS 2B [ADLU2B], CMA 2B [CMA2B]
ENBAT 2B [ENBA2B], KABMU 2B [KABM2B]
MARNI 2B [MARN2B], MONLO 2B [MONL2B]
PANTA 2B [PANT2B], PUMAM 2B [PUMA2B]
RNAV ARRIVALS
(RWY 18)
ADLUS FL130
MESUX 8400
PILEX MAX 210 KT 5500
SUSEG 9000
TUNTU 9000
CC511 11000
MONLO FL150
CMA FL130
EMSOG MAX 220 KT 11000
CC513 11000
CC512 FL140
CC515 FL130
CC514 FL130
RAXOM FL150
CC501 FL170
CC507 FL170
CC505 FL170
CC504 FL170
CC503 FL170
KABMU FL200
PANTA FL200
ENBAT FL200
MARNI FL200
PUMAM FL200
MAX 220 KT MHA 9000
MAX 240 KT MHA FL150
7000
5000
3000
CONTOUR INTERVALS
LAMPANG VTCL
ARP
10 NM
A581 W20
A581 W7
A464
Y26
W15
W9
V7
R207 W12
CHANGES: Bearing from waypoint CMA to CC514 revised.
© JEPPESEN, 2022, 2026. ALL RIGHTS RESERVED.
VTCC/CNX
CHIANG MAI INTL
JEPPESEN CHIANG MAI, THAILAND
13 MAR 26 (10-2A) Eff 19 Mar
RNAV STAR
ADLUS 2B [ADLU2B], CMA 2B [CMA2B]
ENBAT 2B [ENBA2B], KABMU 2B [KABM2B]
MARNI 2B [MARN2B], MONLO 2B [MONL2B]
PANTA 2B [PANT2B], PUMAM 2B [PUMA2B]
RNAV ARRIVALS
(RWY 18)

VTCC/CNX
CHIANG MAI INTL

JEPPESEN 13 MAR 26 (11-2) Eff 19 Mar

CHIANG MAI, THAILAND
ILS or LOC Y Rwy 36

ATIS	CHIANG MAI Approach (R)	CHIANG MAI Tower	Ground
127.425	129.6	118.1	121.9


BRIEFING STRIP™

LOC ICMA	Final Apch Crs	CC362 MANDATORY	ILS DA(H)	Apt Elev 1036'
109.9	001°	3300' (2293')	1420'(413')	Rwy 1007'


MISSED APCH: Climb STRAIGHT AHEAD to CC18Ø, then turn RIGHT to intercept outbound CMA VOR R-010 to DUMUX, then follow 12 DME Arc CMA VOR until intercept outbound CMA VOR R-121 and proceed to PUPIK, then follow 22 DME Arc CMA VOR to RIGTA at minimum 6600' and hold or as directed by ATC. No turn before MAP. MAX 200 KT until after turn.

Alt Set: hPa | Rwy Elev: 36 hPa | Trans level: FL130 | Trans alt: 11000'

VOR, DME required.




MSA CMA VOR
❶ 10,600

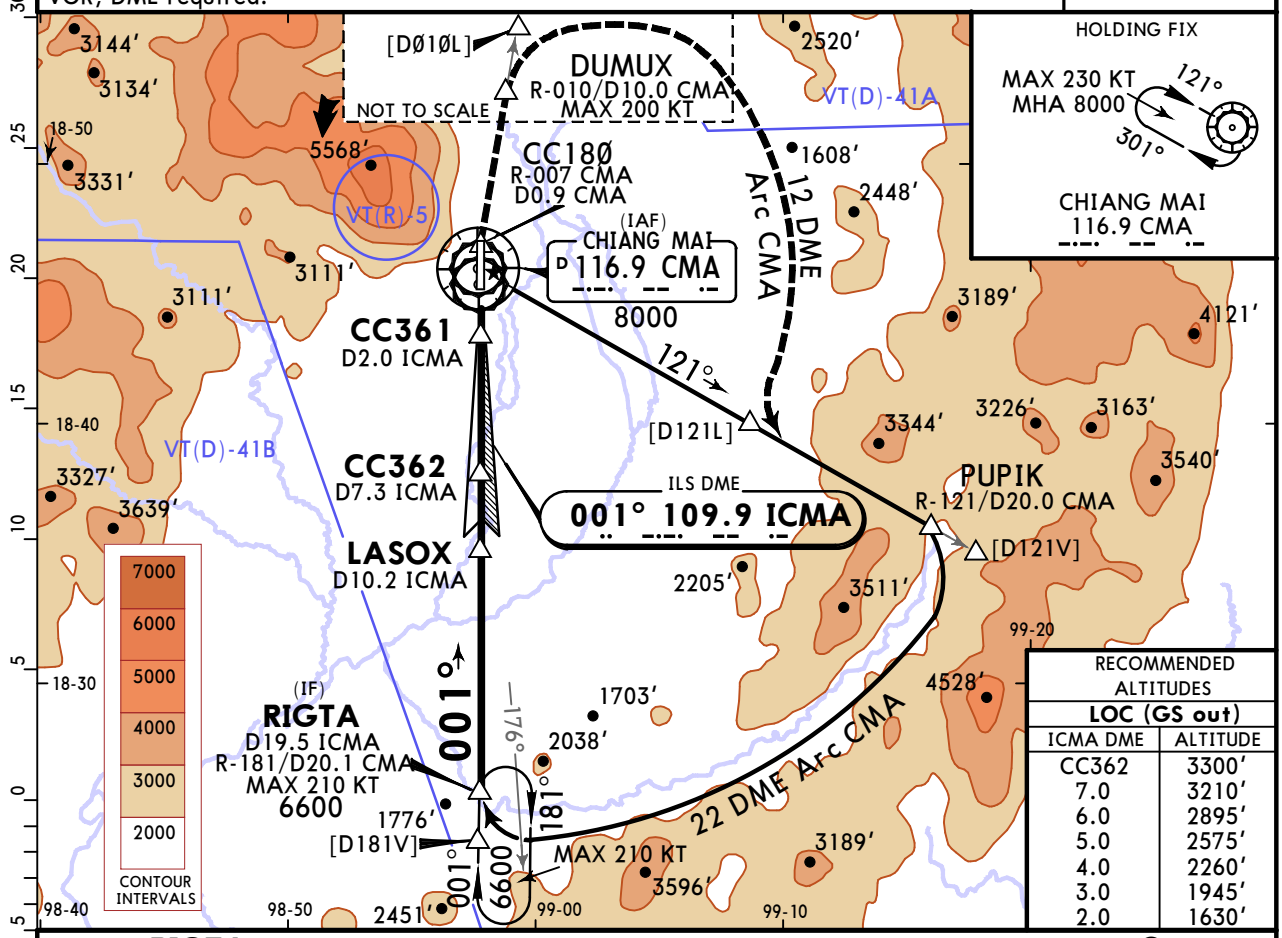

HOLDING FIX
MAX 230 KT
MHA 8000
121°
301°
CHIANG MAI
116.9 CMA

RECOMMENDED ALTITUDES	
LOC (GS out)	
ICMA DME	ALTITUDE
CC362	3300'
7.0	3210'
6.0	2895'
5.0	2575'
4.0	2260'
3.0	1945'
2.0	1630'

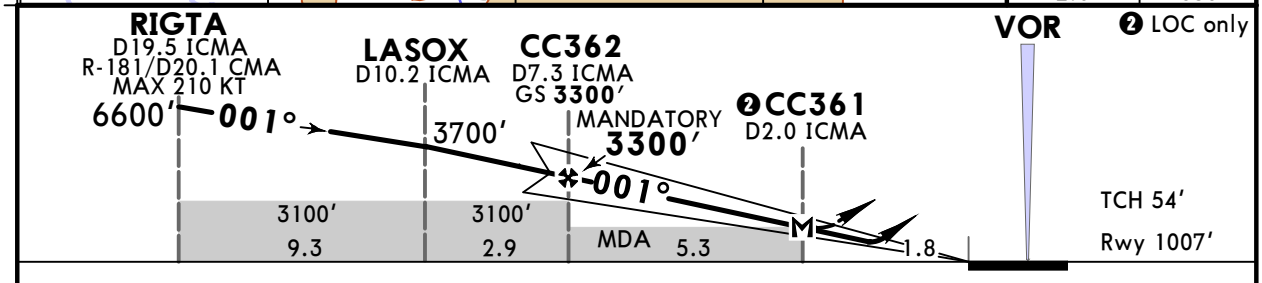


Gnd speed-Kts		70	90	100	120	140	160
GS	3.00°	372	478	531	637	743	849
MAP at CC361							

SALS
PAPI PAPI
to CC18Ø

Std STRAIGHT-IN LANDING

	ILS		LOC (GS out) CDFA	
	DA(H) 1420'(413')		❶ DA/MDA(H) 1630'(623')	
		ALS out		ALS out
A	R1500m	R1500m	R1500m	
B				
C		R1900m	R2400m	
D				

CIRCLE-TO-LAND



Max Kts	MDA(H)	
100	2030' (994')	V1500m
135	2030' (994')	V1600m
180	2220' (1184')	V2400m
205	2420' (1384')	V3600m

❶ VNAV DA(H) in lieu of MDA(H) depends on operator policy.

CHANGES: Airspaces, bearings.

© JEPPESEN, 2022, 2026. ALL RIGHTS RESERVED.

VTCC/CNX
CHIANG MAI INTL

JEPPESEN 13 MAR 26 (11-1) Eff 19 Mar

CHIANG MAI, THAILAND
ILS or LOC Z Rwy 36


ATIS	CHIANG MAI Approach (R)	CHIANG MAI Tower	Ground
127.425	129.6	118.1	121.9

BRIEFING STRIP™


LOC ICMA	Final Apch Crs	CC362 MANDATORY	ILS DA(H)	Apt Elev 1036′
109.9	001°	3300′ (2293′)	1420′(413′)	Rwy 1007′


MISSED APCH: At MAP turn RIGHT direct to CCØØ4, then turn RIGHT to CC2Ø4, continue to PUKAT, then proceed to RIGTA at minimum 6600′ and hold or as directed by ATC.
No turn before MAP. MAX 200 KT until after turn.

RNAV1 required. | Alt Set: hPa Rwy Elev: 36 hPa Trans level: FL130 Trans alt: 11000′
1. GNSS or DME/DME/IRU required. 2. RADAR required. 3. DME required.



MSA ARP
❶10,600

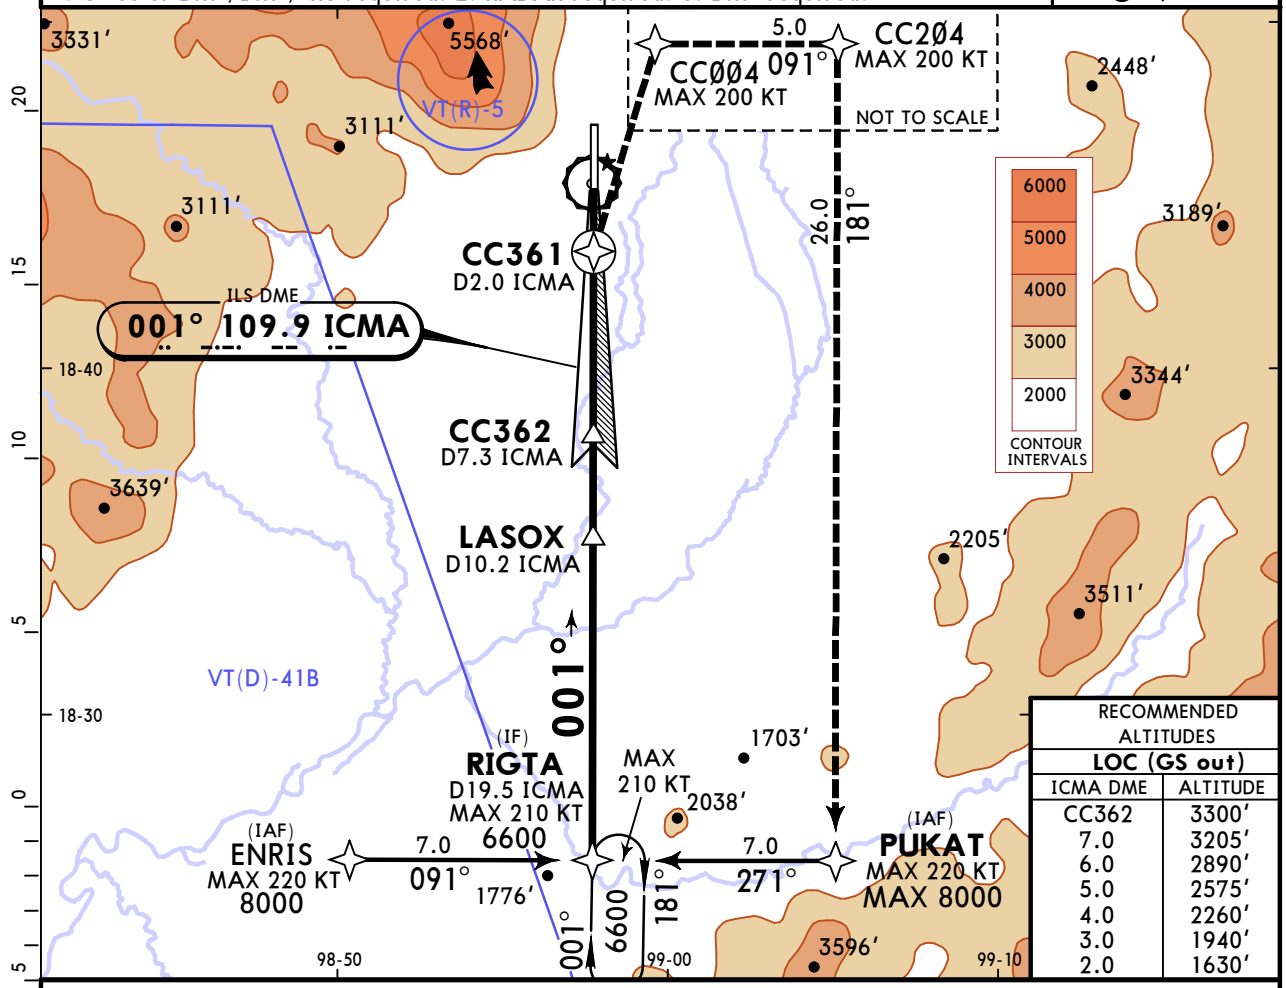

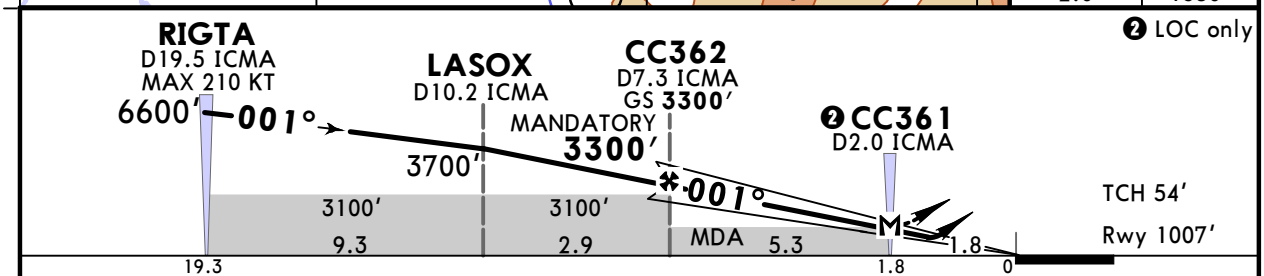


Gnd speed-Kts		70	90	100	120	140	160
GS	3.00°	372	478	531	637	743	849
MAP at CC361							

SALS PAPI PAPI | RT | CCØØ4

Std STRAIGHT-IN LANDING

	ILS		LOC (GS out) CDFA	
	DA(H) 1420′(413′)		❶DA/MDA(H) 1630′(623′)	
		ALS out		ALS out
A	R1500m	R1500m	R1500m	
B				
C		R1900m	R2400m	
D				

CIRCLE-TO-LAND



Max Kts	MDA(H)	
100	2030′ (994′)	V1500m
135	2030′ (994′)	V1600m
180	2220′ (1184′)	V2400m
205	2420′ (1384′)	V3600m

❶ VNAV DA(H) in lieu of MDA(H) depends on operator policy.

CHANGES: Airspaces.

© JEPPESEN, 2022, 2026. ALL RIGHTS RESERVED.

VTCC/CNX
CHIANG MAI INTL

JEPPESEN 13 MAR 26 (12-1) Eff 19 Mar


CHIANG MAI, THAILAND
RNP Rwy 18

ATIS	CHIANG MAI Approach (R)	CHIANG MAI Tower	Ground
127.425	129.6	118.1	121.9


RNAV	Final Apch Crs	CC181 MANDATORY	LNAV/VNAV DA(H)	Apt Elev 1036′
	181°	3400′ (2364′)	1560′ (524′)	Rwy 1036′

MISSED APCH: Climb on track 181° to 5000′, then turn LEFT direct to RAXOM at minimum 8400′ and hold as directed by ATC.
No turn before MAP. MAX 200 KT until after turn.


Alt Set: hPa	Rwy Elev: 37 hPa	Trans level: FL130	Trans alt: 11000′
RNP Apch	Baro-VNAV not authorized below 10°C.		



MSA CMA VOR
❶ 10,600 ❷ 8800

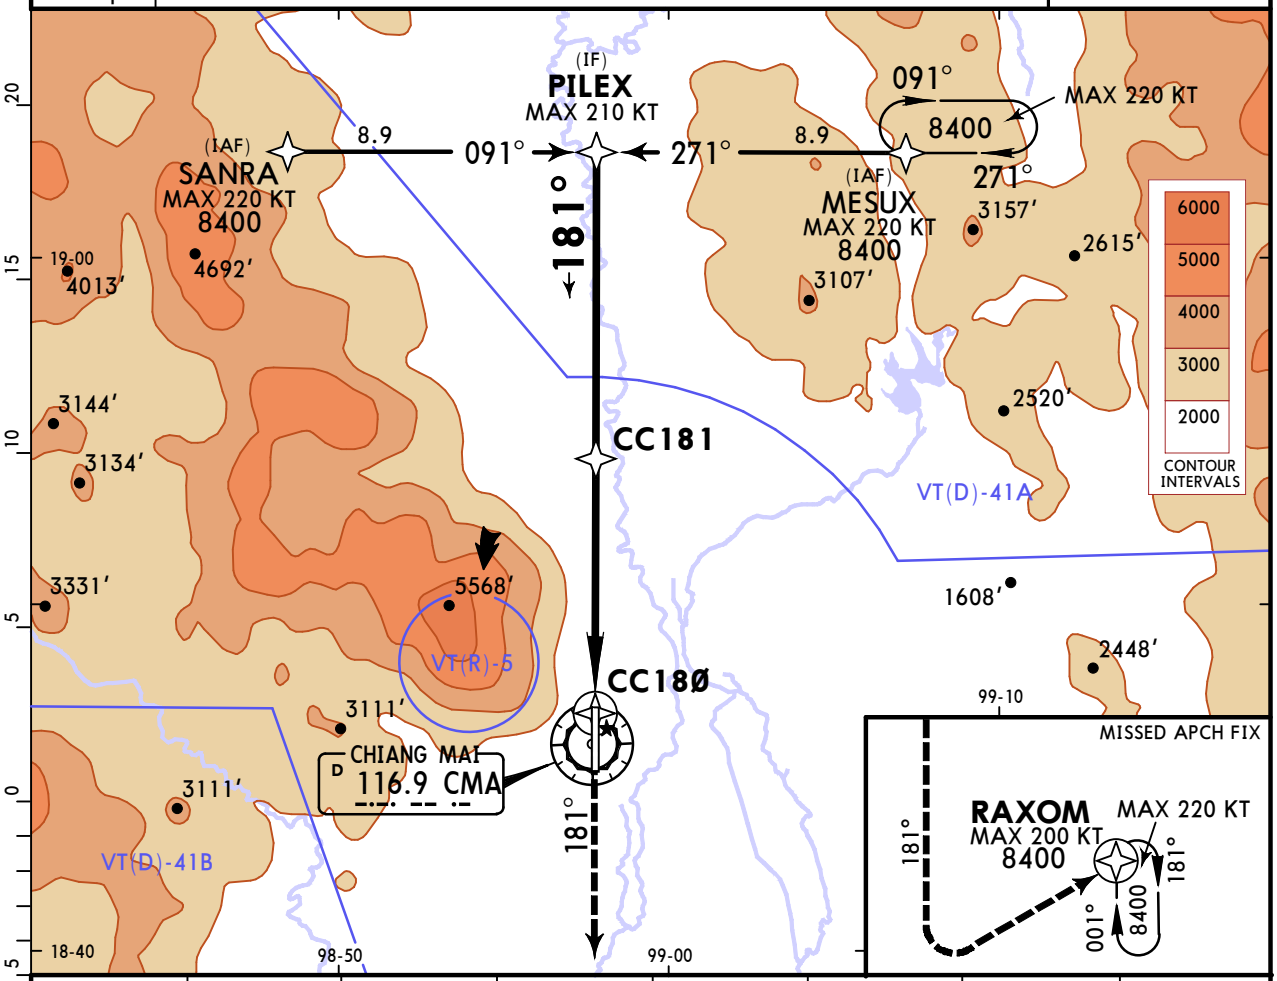

NM to THR	FAF	7.0	6.0	5.0	4.0	3.0	2.2
ALTITUDE	3400′	3300′	2980′	2665′	2350′	2035′	1780′

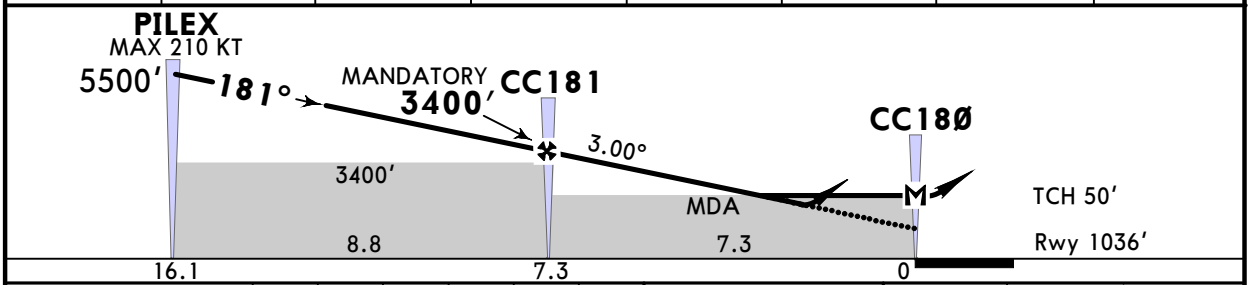

Gnd speed-Kts		70	90	100	120	140	160
Glide Path Angle	3.00°	372	478	531	637	743	849
MAP at CC18Ø							

PAPI
SSALF

5000′ on 181°


Std STRAIGHT-IN LANDING

	LNAV/VNAV DA(H) 1560′ (524′) ALS out	LNAV CDFA ❶ DA/MDA(H) 1780′ (744′) ALS out
A	R1500m	R1500m
B		
C	R2000m R2400m	R2400m
D		

CIRCLE-TO-LAND

Max Kts	MDA(H)	
100	2030′ (994′)	V1500m
135	2030′ (994′)	V1600m
180	2220′ (1184′)	V2400m
205	2420′ (1384′)	V3600m

No Circling



❶ VNAV DA(H) in lieu of MDA(H) depends on operator policy.

CHANGES: Airspaces.

© JEPPESEN, 2011, 2026. ALL RIGHTS RESERVED.

BRIEFING STRIP™ PANS OPS

VTCC/CNX
CHIANG MAI INTL

JEPPESEN 13 MAR 26 (12-2) Eff 19 Mar

CHIANG MAI, THAILAND
RNP Rwy 36


ATIS	CHIANG MAI Approach (R)	CHIANG MAI Tower	Ground
127.425	129.6	118.1	121.9

BRIEFING STRIP™


RNAV	Final Apch Crs	CC362 MANDATORY	LNAV/VNAV DA(H)	Apt Elev 1036′ Rwy 1007′
	001°	3300′ (2293′)	1500′ (493′)	

MISSED APCH: At MAP, turn RIGHT climb on track 014° to CCØØ4, then turn RIGHT to CC2Ø4, continue to PUKAT, then proceed to RIGTA at minimum 6600′ and hold or as directed by ATC.
No turn before MAP. MAX 200 KT until after turn.


Alt Set: hPa	Rwy Elev: 36 hPa	Trans level: FL130	Trans alt: 11000′
RNP Apch	Baro-VNAV not authorized below 10°C.		



MSA ARP
❶ 10,600 ❷ 8800

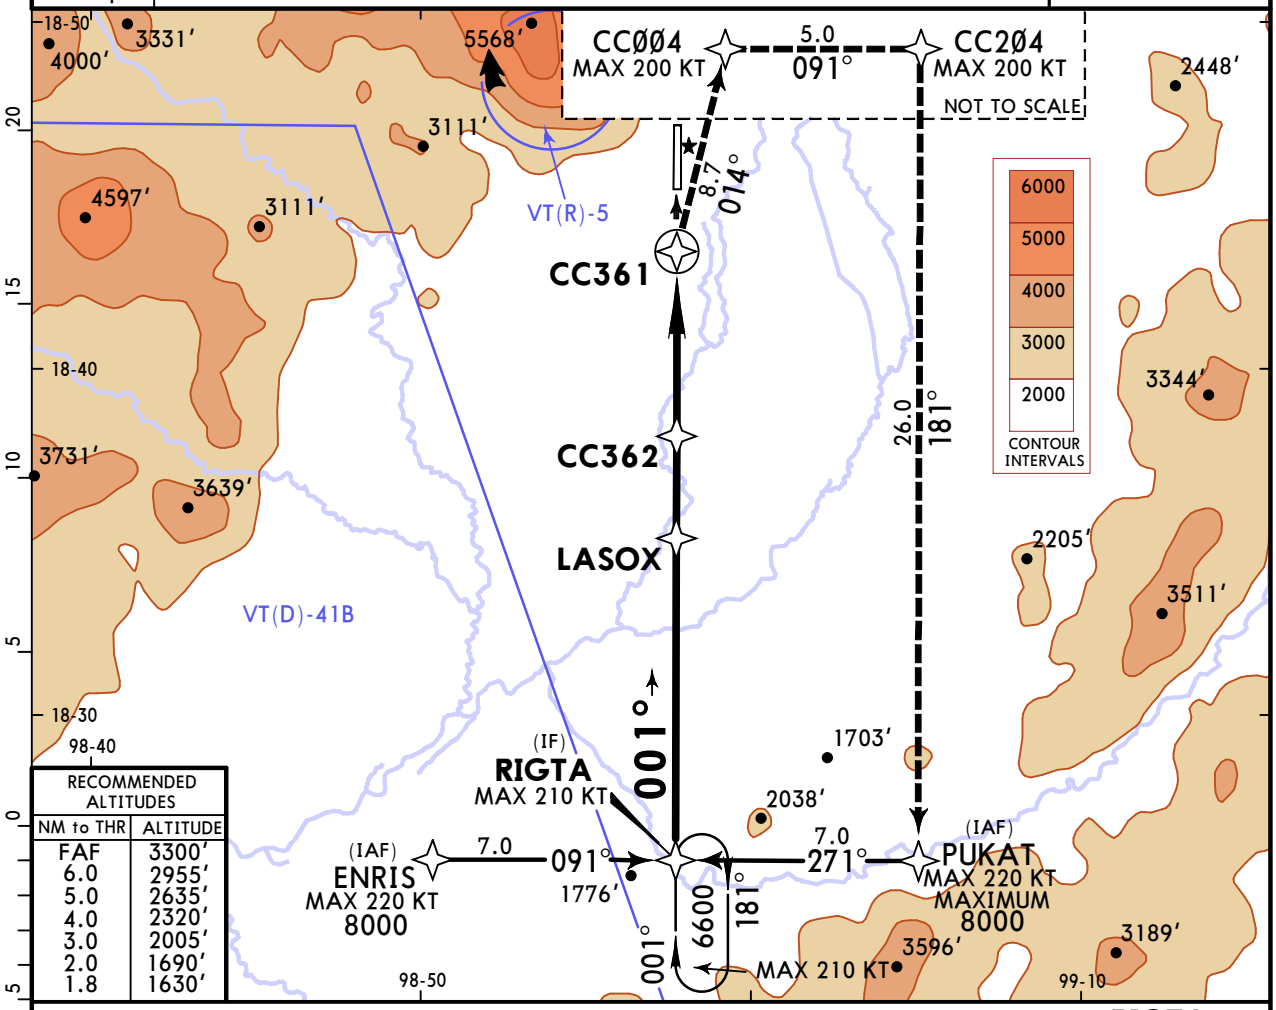

RECOMMENDED ALTITUDES	
NM to THR	ALTITUDE
FAF	3300′
6.0	2955′
5.0	2635′
4.0	2320′
3.0	2005′
2.0	1690′
1.8	1630′

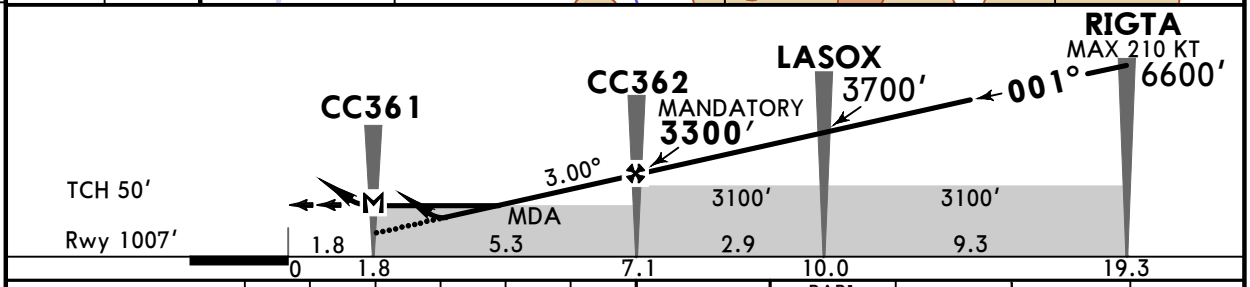

Gnd speed-Kts	70	90	100	120	140	160
Glide Path Angle 3.00°	372	478	531	637	743	849
MAP at CC361						

PAPI
SSALF

RT on 014° track

CCØØ4

PANS OPS


Std STRAIGHT-IN LANDING

	LNAV/VNAV DA(H) 1500′ (493′) ALS out	LNAV CDFA ❶ DA/MDA(H) 1630′ (623′) ALS out
A	R1500m	R1500m
B		
C	R1800m	R2300m
D		R2400m

CIRCLE-TO-LAND

Max Kts	MDA(H)	
100	2030′ (994′)	V1500m
135	2030′ (994′)	V1600m
180	2220′ (1184′)	V2400m
205	2420′ (1384′)	V3600m

No Circling



❶ VNAV DA(H) in lieu of MDA(H) depends on operator policy.

CHANGES: Airspaces.

© JEPPESEN, 2011, 2026. ALL RIGHTS RESERVED.

VTCC/CNX
CHIANG MAI INTL

JEPPESEN 13 MAR 26 (13-1) Eff 19 Mar


CHIANG MAI, THAILAND
VOR A Rwy 18

ATIS	CHIANG MAI Approach (R)	CHIANG MAI Tower	Ground
127.425	129.6	118.1	121.9


VOR CMA	Final Apch Crs	CCØ82 MANDATORY	MDA(H) Refer to Minimums	Apt Elev 1036′
116.9	196°	3400′(2364′)		

MISSED APCH: At MAP, turn LEFT to intercept outbound CMA VOR R-170, then proceed to 4000′ and turn RIGHT to CMA VOR at minimum 8000′ and hold or as directed by ATC.
No turn before MAP. MAX 200 KT until after turn.


Alt Set: hPa | Apt Elev: 37 hPa | Trans level: FL130 | Trans alt: 11000′
DME required.



MSA CMA VOR
❶ 10,600 ❷ 8800

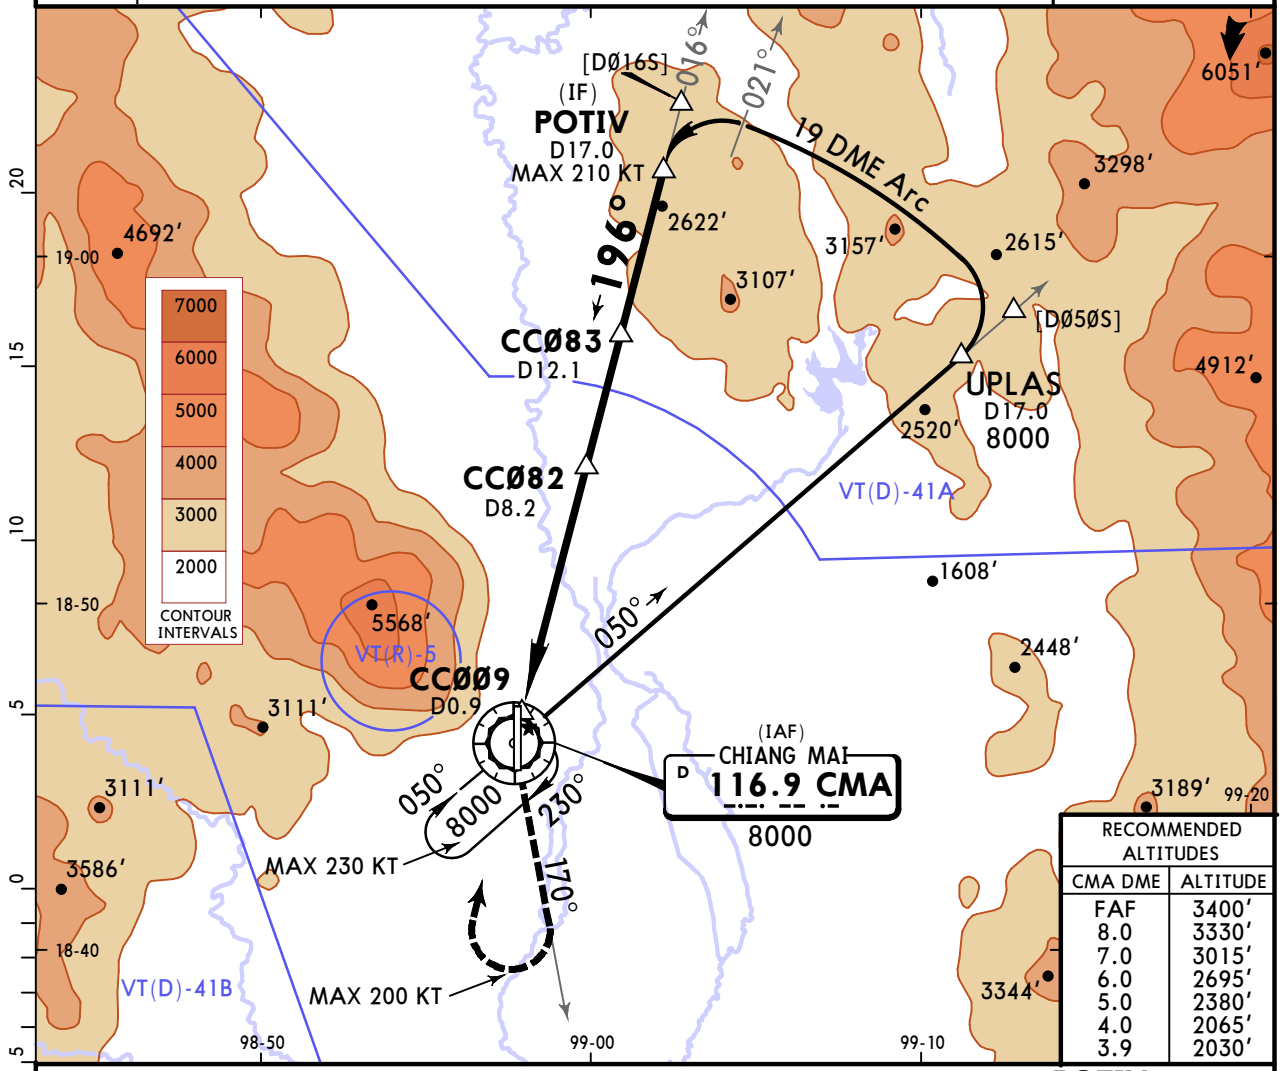

RECOMMENDED ALTITUDES	
CMA DME	ALTITUDE
FAF	3400′
8.0	3330′
7.0	3015′
6.0	2695′
5.0	2380′
4.0	2065′
3.9	2030′

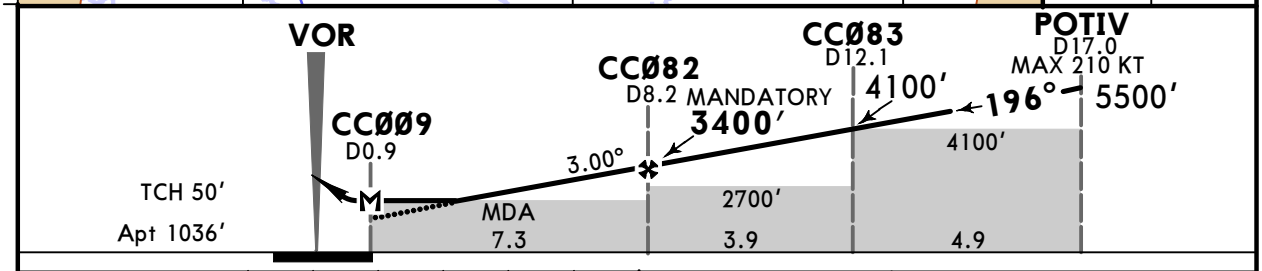

Gnd speed-Kts	70	90	100	120	140	160
Descent Angle 3.00°	372	478	531	637	743	849
MAP at CCØØ9						


PAPI SALS

LT

CMA 116.9 R-170

Std CIRCLE-TO-LAND

	Max Kts	MDA(H)	
A	100	2030′ (994′)	V1500m
B	135	2030′ (994′)	V1600m
C	180	2220′ (1184′)	V2400m
D	205	2420′ (1384′)	V3600m



PANS OPS

CHANGES: Airspaces, bearings.

© JEPPESEN, 2022, 2026. ALL RIGHTS RESERVED.

VTCC/CNX
CHIANG MAI INTL

JEPPESEN 13 MAR 26 (13-2) Eff 19 Mar

CHIANG MAI, THAILAND
VOR Rwy 36


ATIS	CHIANG MAI Approach (R)	CHIANG MAI Tower	Ground
127.425	129.6	118.1	121.9

VOR CMA	Final Apch Crs	CC364 MANDATORY	DA/MDA(H)	Apt Elev 1036′
116.9	001°	3300′(2293′)	1630′(623′)	Rwy 1007′


MISSED APCH: Climb STRAIGHT AHEAD to CMA VOR, then turn RIGHT to intercept outbound CMA VOR R-010 to DUMUX, then follow 12 DME Arc until intercept outbound CMA VOR R-121 and proceed to PUPIK, then follow 22 DME Arc to RIGTA at minimum 6600′ and hold or as directed by ATC. No turn before MAP. MAX 200 KT until after turn.

Alt Set: hPa | Rwy Elev: 36 hPa | Trans level: FL130 | Trans alt: 11000′


DME required.

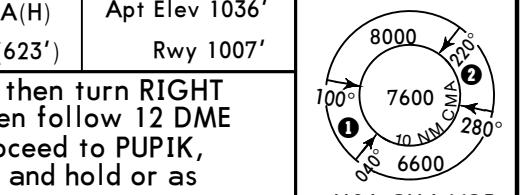

MSA CMA VOR
1 10,600 2 8800

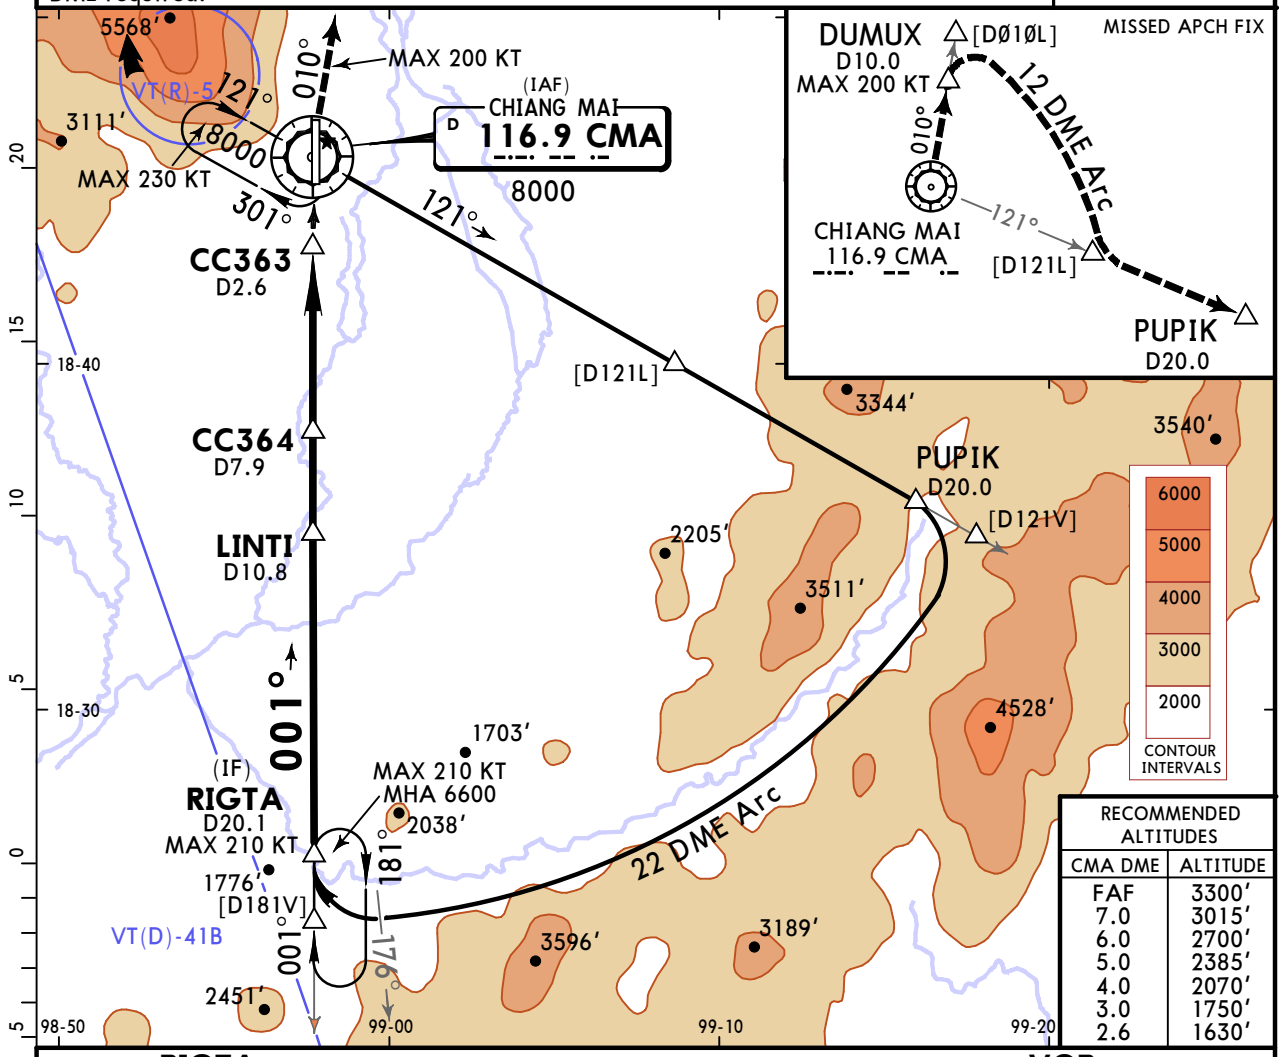

RECOMMENDED ALTITUDES	
CMA DME	ALTITUDE
FAF	3300′
7.0	3015′
6.0	2700′
5.0	2385′
4.0	2070′
3.0	1750′
2.6	1630′

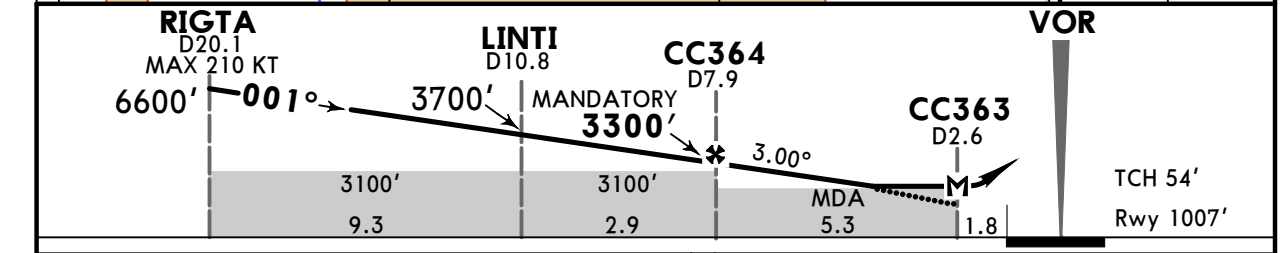

Gnd speed-Kts		70	90	100	120	140	160
Descent Angle	3.00°	372	478	531	637	743	849
MAP at CC363							

PAPI SALS | CMA 116.9 | RT | CMA 116.9 R-010


Std STRAIGHT-IN LANDING
CDFA
1 DA/MDA(H) 1630′(623′)
ALS out

A	V1500m
B	
C	V2400m
D	

CIRCLE-TO-LAND

Max Kts	MDA(H)	
100	2030′(994′)	V1500m
135	2030′(994′)	V1600m
180	2220′(1184′)	V2400m
205	2420′(1384′)	V3600m

No Circling



1 VNAV DA(H) in lieu of MDA(H) depends on operator policy.

PANS OPS

CHANGES: Airspaces, bearings.

© JEPPESEN, 2007, 2026. ALL RIGHTS RESERVED.