1. GENERAL

1.1 ATIS

*ATIS 126.8

1.2 OPERATING LIMITATION

Commercial flight with Code C aircraft shall require an authorization from the Airport Director in accordance with established procedures. Please contact Aerodrome administration Unit for more detail of the authorization procedure.

1.3 OPERATION AT THE AIRPORT DURING AIRCRAFT CODE C OPERATING AT VTPH

When conducting operations with Code C aircraft on the runway (RWY) or taxiway, all other aircraft operations shall be held in abeyance behind runway holding position or intermediate holding position, or aircraft shall comply with instructions issued by ATC.

1.4 ADDITIONAL INFORMATION

Bird concentration in the vicinity of an aerodrome.

2. ARRIVAL

2.1 SPEED CONTROL PROCEDURE IN HUA HIN TMA

2.1.1 All arriving turbo-propeller and turbo-jet aircraft when flying below 10 000′ AMSL are subject to fly not faster than indicated air speed 250 KT unless authorized by ATC.
2.1.2 Speed will be reduced to 220 KT during 20-25 track miles from touchdown.
2.1.3 180 KT at Intermediate fix (Including aircraft from RNAV STAR), or shortly before closing heading to intercept or to establish the final course.
2.1.4 150 to 160 KT at FAP or FAF; all speed to be flown as accurately as possible. At the other times, speed control may be applied on a tactical basis to extend determined by ATC.
2.1.5 Pilots who unable to comply with the speed limits specifics above for reasons of flight safety and/or weather conditions should inform ATC and state the speed acceptable.
2.1.6 ATC will notify that the aircraft may keep its preferred speed without restriction and will use the phrase ″NO SPEED RESTRICTIONS″. An instruction to notify that the aircraft need no longer comply with the previous issued speed restriction, the phrase ″RESUME NORMAL SPEED″ will be used.
2.1.7 All aircraft navigating under conditions of RNAV STARs shall conform to speed limitation as published then at IF pilot shall comply with speed control procedures unless otherwise instructed by ATC.
2.1.8 If the pilots do not comply, the flight shall follow ATC instruction for re-sequencing.

NOTE - an instruction to ″RESUME NORMAL SPEED″ does not cancel speed restrictions that applicable to published procedure of upcoming segments of flight, aircraft shall comply speed restrictions specified in 2.1.1, 2.1.2, 2.1.3 and 2.1.4.

© JEPPESEN, 2023, 2025. ALL RIGHTS RESERVED.


VTPH/HHQ PRACHUAP KHIRI KHAN, THAILAND

Apt Elev 62′
N12 37.8 E099 57.2

19 DEC 25 (10-9)

HUA HIN

*ATIS	*HUA HIN Ground	*Tower
126.8	121.9	122.7

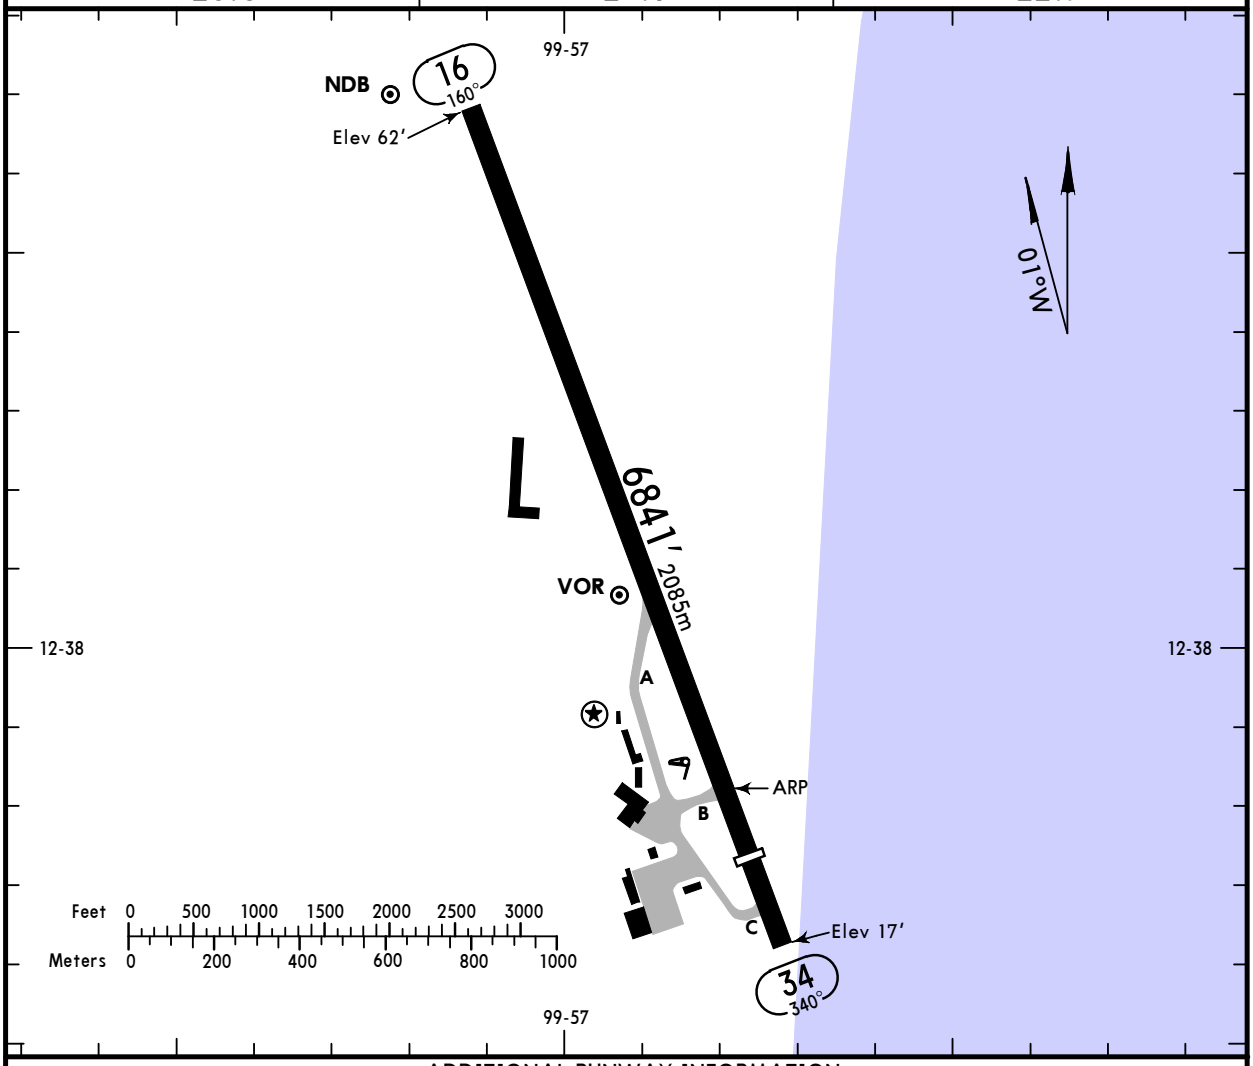

ADDITIONAL RUNWAY INFORMATION

RWY		USABLE LENGTHS LANDING BEYOND Threshold	Glide Slope	TAKE-OFF	WIDTH
16	HIRL (60m) ❶PAPI-L (angle 3.00°)				148′ 45m
34	HIRL (60m)	6119′ 1865m			

❶ PAPI restriction: Due to mountain on right side of approach path, distance approximately 6 NM from rwy, 1300′ height, aircraft approach to Rwy 16 should be careful.

TAKE-OFF

AIR CARRIER

	LVP must be in Force All Rwys RCLM (Day only) or RL	**All Rwys** RCLM (Day only) or RL
A	250m	400m
B		
C		
D	300m	

CHANGES: Swy Rwy 34 withdrawn, Rwy dimension, LDA.

© JEPPESEN, 1999, 2025. ALL RIGHTS RESERVED.

VTPH/HHQ
HUA HIN

JEPPESEN PRACHUAP KHIRI KHAN, THAILAND

4 JUL 25 (16-1) Eff 10 Jul

CAT A, B & C

NDB Rwy 16

*ATIS	*HUA HIN Approach	*HUA HIN Tower	*Ground
126.8	126.2	122.7	121.9


BRIEFING STRIP™

NDB HN	Final Apch Crs	SOPON	MDA(H)	Apt Elev 62′
213	167°	2700′ (2638′)	940′ (878′)	Rwy 62′


MISSED APCH: Climbing LEFT turn to intercept bearing 047° from HN NDB, then continue climbing to 3200′ back to CHANG D15.0 and hold or as directed by ATC. Speed restricted to MAX 180 KT until after turn.

Alt Set: hPa | Rwy Elev: 2 hPa | Trans level: By ATC | Trans alt: 11000′


DME required.



MSA HN NDB

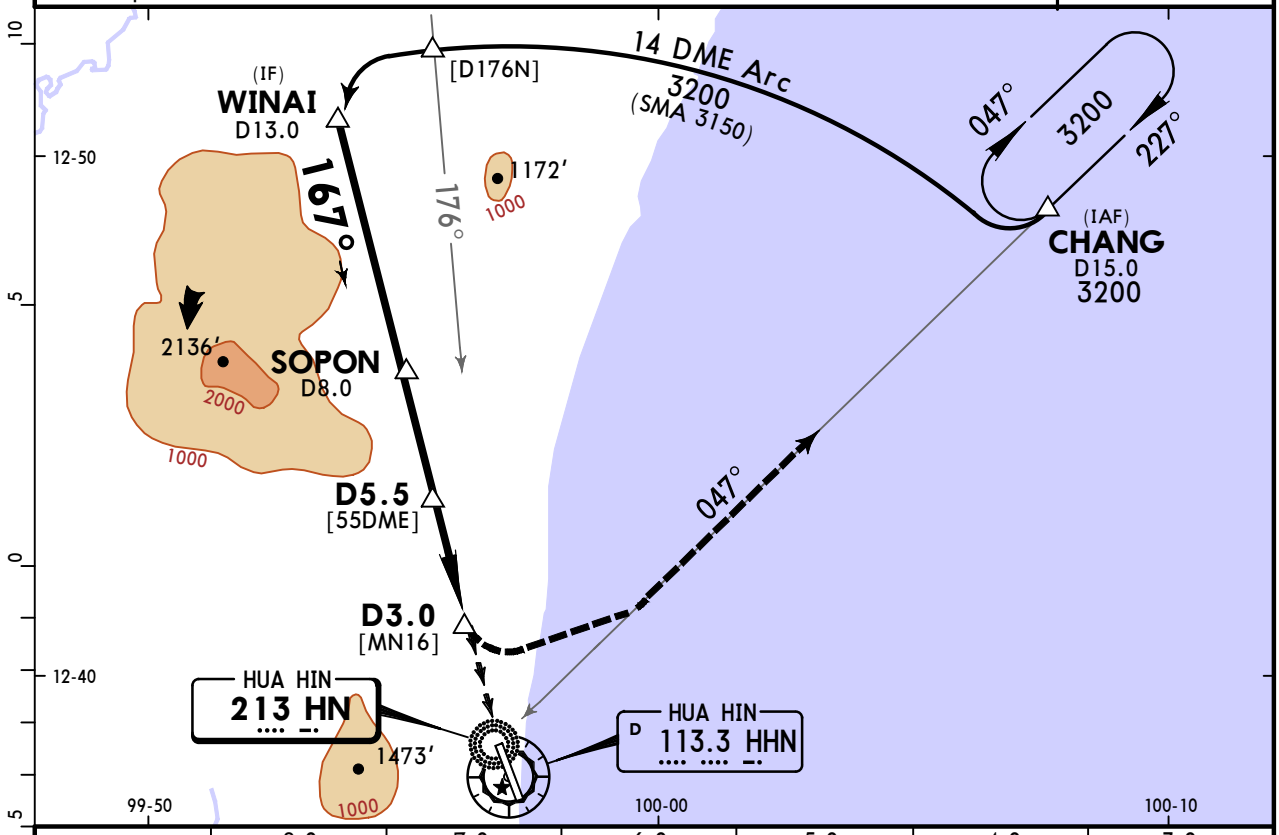

HHN DME	8.0	7.0	6.0	5.0	4.0	3.0
ALTITUDE	2700′	2350′	2000′	1650′	1300′	940′

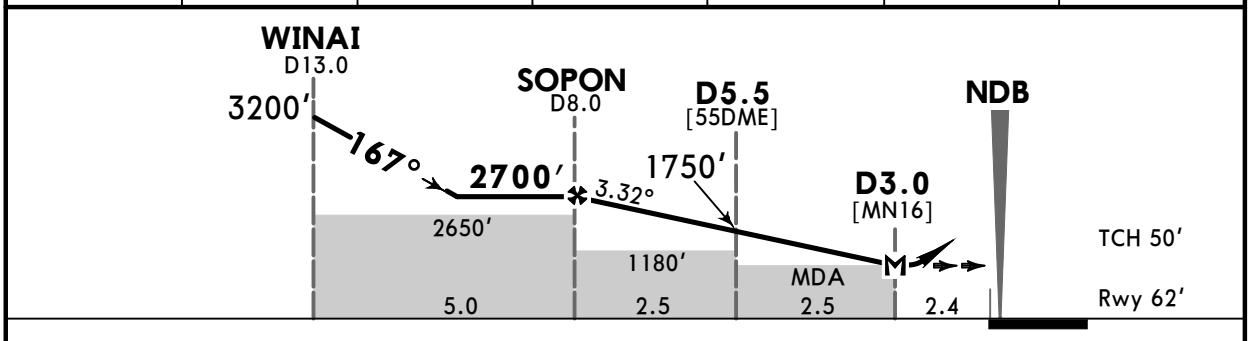

Gnd speed-Kts	70	90	100	120	140	160
Descent Angle 3.32°	411	529	587	705	822	940
MAP at D3.0						

PAPI-L | 3200′ LT | HN 213 047° | CHANG

STRAIGHT-IN LANDING RWY 16	CIRCLE-TO-LAND
MDA(H) 940′ (878′)	

PANS OPS

	STRAIGHT-IN		CIRCLE-TO-LAND
A	3200m	A	NOT AUTHORIZED
B		B	
C	4400m	C	
D	NOT APPLICABLE	D	NOT APPLICABLE

CHANGES: Descent angle.

© JEPPESEN, 2006, 2025. ALL RIGHTS RESERVED.

VTPH/HHQ HUA HIN

JEPPESEN

PRACHUAP KHIRI KHAN, THAILAND RNP Rwy 16

6 AUG 21 (12-1) Eff 12 Aug CAT A, B & C

*ATIS	*HUA HIN Approach	*HUA HIN Tower	*Ground
126.8	126.2	122.7	121.9


BRIEFING STRIP™

RNAV	Final Apch Crs	HHQNF	LNAV MDA(H)	Apt Elev 62′
	160°	3000′ (2938′)	1080′ (1018′)	Rwy 62′


MISSED APCH: Turn LEFT climbing direct to JUTHA at 3200′ and hold or as directed by ATC. No turn before MAP. Speed restricted to MAX 200 KT until after turn.

Alt Set: hPa	Rwy Elev: 2 hPa	Trans level: By ATC	Trans alt: 11000′


RNP Apch



MSA ARP

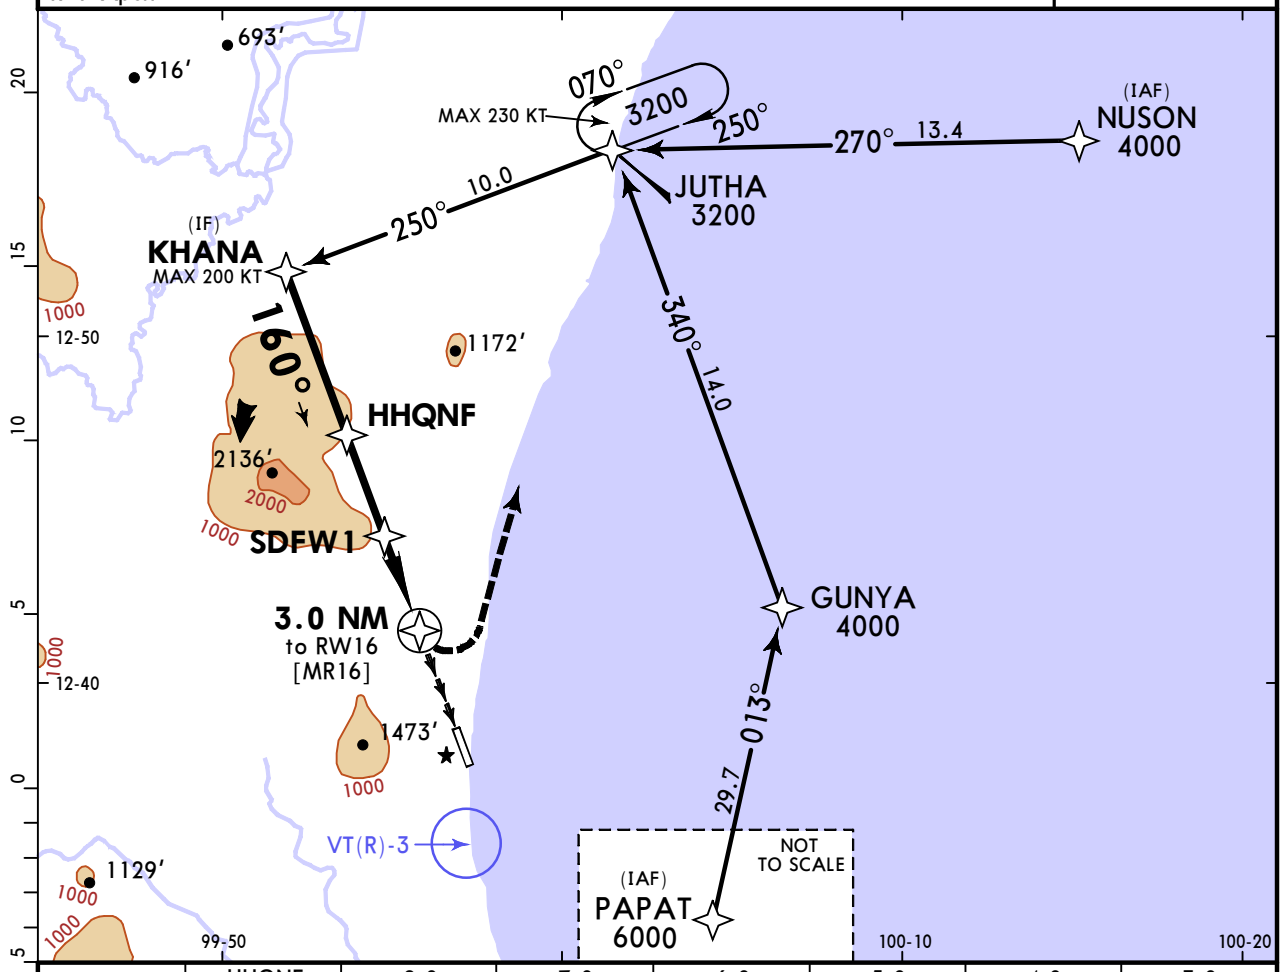

NM to THR	HHQNF	8.0	7.0	6.0	5.0	4.0	3.0
ALTITUDE	3000′	2690′	2365′	2045′	1720′	1400′	1080′

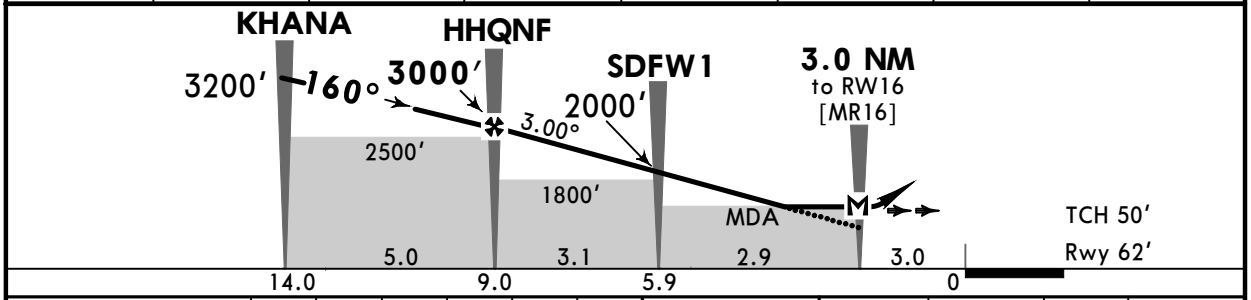

Gnd speed-Kts		70	90	100	120	140	160
Descent Angle	3.00°	372	478	531	637	743	849
MAP at 3.0 NM to RW16							

PAPI-L 3200′ LT JUTHA

STRAIGHT-IN LANDING RWY 16

LNAV
MDA(H) 1080′ (1018′)

CIRCLE-TO-LAND

PANS OPS

		Max Kts	
A	3200m	A	NOT AUTHORIZED
B		B	
C	4800m	C	
D	NOT APPLICABLE	D	NOT APPLICABLE

CHANGES: Procedure renamed.

© JEPPESEN, 2016, 2021. ALL RIGHTS RESERVED.

VTPH/HHQ HUA HIN

JEPPESEN PRACHUAP KHIRI KHAN, THAILAND VOR Rwy 16

4 JUL 25 (13-1) Eff 10 Jul | CAT A, B & C

*ATIS	*HUA HIN Approach	*HUA HIN Tower	*Ground
126.8	126.2	122.7	121.9


BRIEFING STRIP™

VOR HHN	Final Apch Crs	D6.8	MDA(H)	Apt Elev 62′
113.3	162°	2400′ (2338′)	1000′ (938′)	Rwy 62′


MISSED APCH: Turn LEFT to intercept outbound HHN VOR R-071 and climb to join HHN VOR 15.0 DME Arc then proceed to WATSA at 3200′ and hold or as directed by ATC. No turn before MAP. Speed restricted to MAX 200 KT.

Alt Set: hPa | Rwy Elev: 2 hPa | Trans level: By ATC | Trans alt: 11000′


DME Required.



MSA HHN VOR

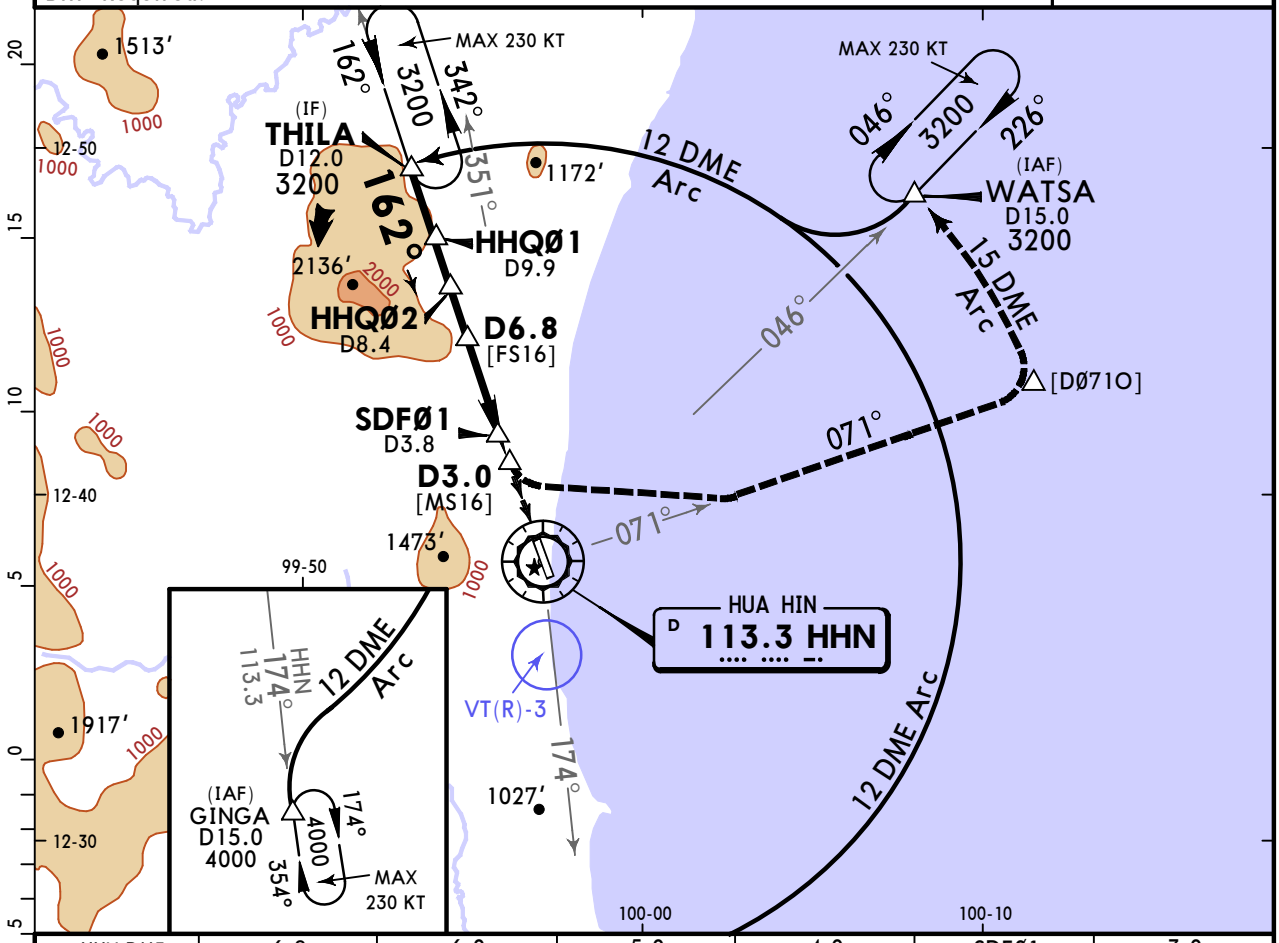

HHN DME	6.8	6.0	5.0	4.0	SDFØ1	3.0
ALTITUDE	2400′	2115′	1740′	1370′	1300′	1000′

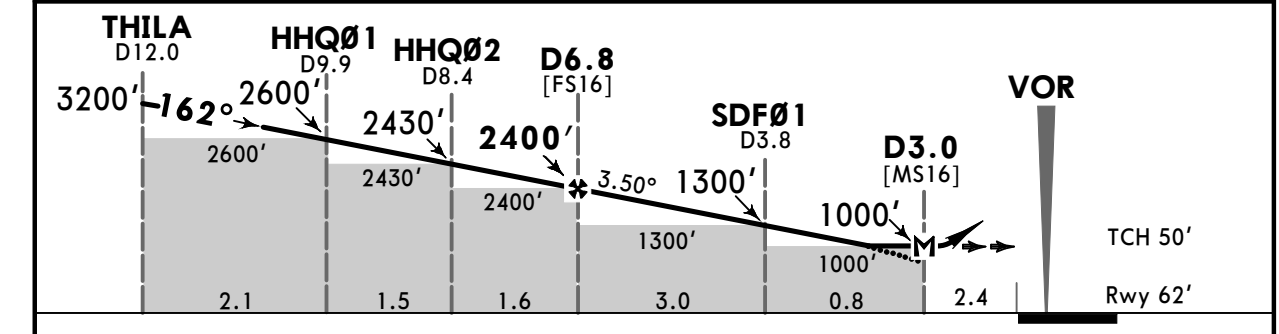

Gnd speed-Kts		70	90	100	120	140	160
Descent Angle	3.50°	434	557	619	743	867	991
FAF to MAP	3.8	3:15	2:32	2:17	1:54	1:38	1:26

PAPI-L

LT via HHN 113.3 R-071

PANS OPS

STRAIGHT-IN LANDING RWY 16		CIRCLE-TO-LAND	
MDA(H) 1000′ (938′)		Max Kts	
A	3200m	A	NOT AUTHORIZED
B		B	
C	4400m	C	
D	NOT APPLICABLE	D	NOT APPLICABLE

CHANGES: Descent angle, CNF [DØ71O] added.

© JEPPESEN, 2000, 2025. ALL RIGHTS RESERVED.