VTPI/TKH

Apt Elev **103′**


N15 16.6 E100 17.8

JEPPESEN **NAKHON SAWAN, THAILAND**

23 FEB 18 (10-9) **Eff 1 Mar**

TAKHLI

*ATIS	TAKHLI Ground	TAKHLI Tower	*TAKHLI Departure
253	121.75	133.25	134.1

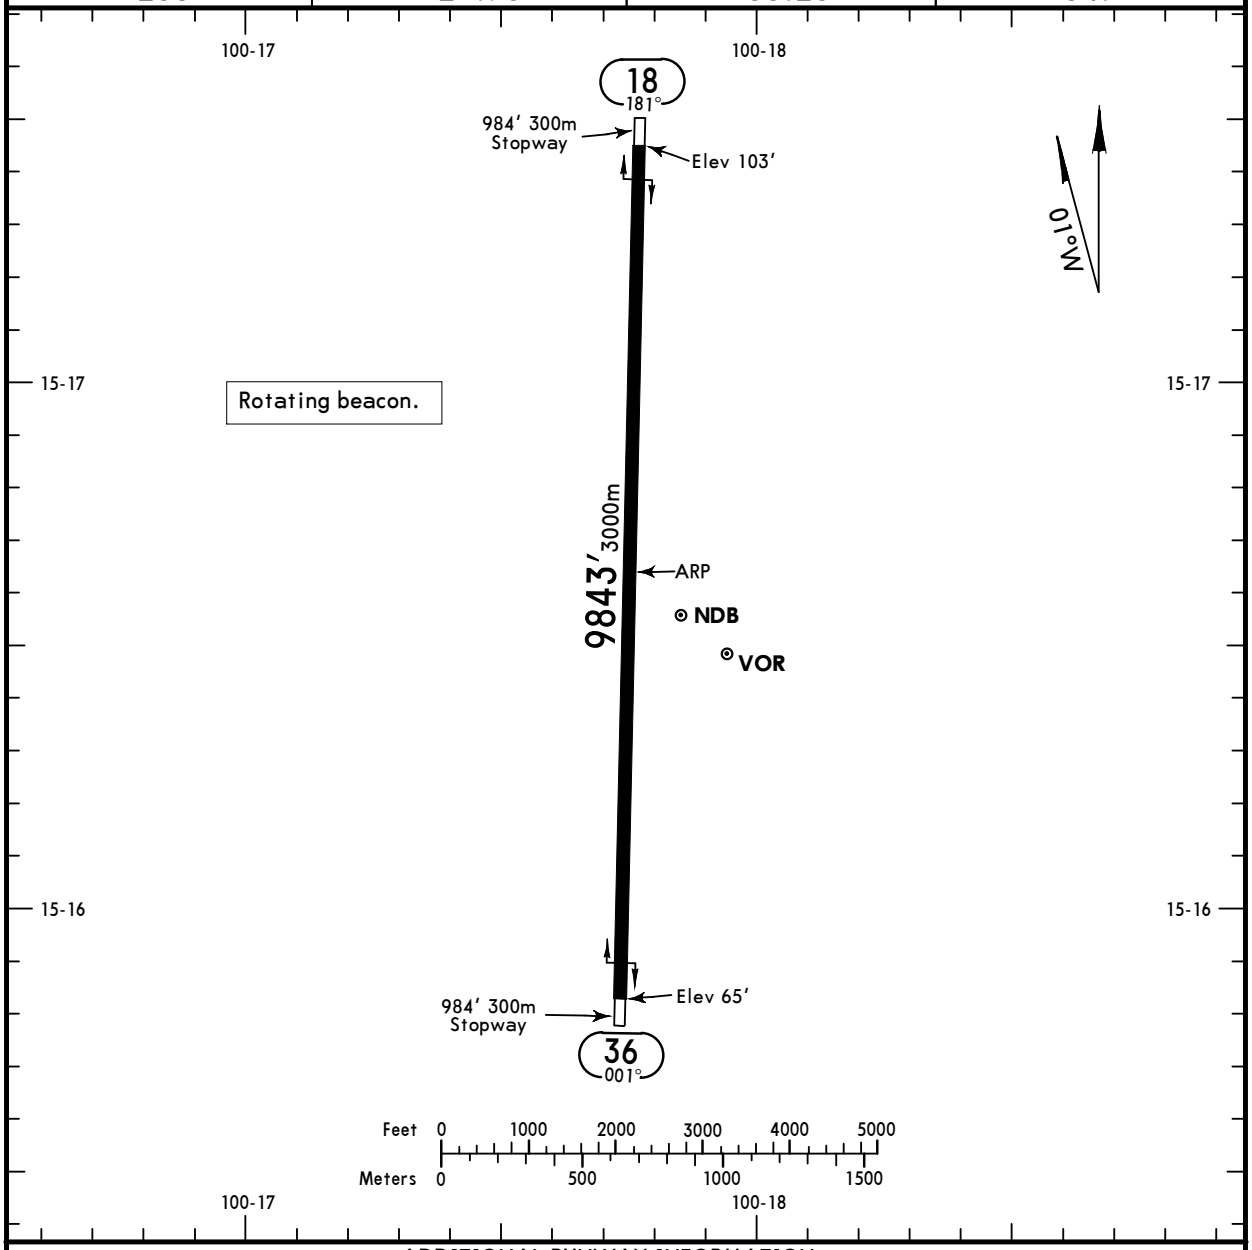

ADDITIONAL RUNWAY INFORMATION

RWY		USABLE LENGTHS — LANDING BEYOND Threshold	Glide Slope	TAKE-OFF	WIDTH
18	HIRL REIL PAPI-B (angle 3.0°)		8690′2649m		148′
36	HIRL REIL PAPI-B (angle 3.0°)				45m

TAKE-OFF

	AIR CARRIER **All Rwys** With HIRL
A	RVR 250m
B	RVR 300m
C	
D	RVR 400m

CHANGES: New chart.

© JEPPESEN, 2018. ALL RIGHTS RESERVED.

VTPI/TKH
TAKHLI

JEPPESEN 1 NOV 19 Eff 7 Nov (11-2)

NAKHON SAWAN, THAILAND
ILS or LOC Y Rwy 18

*ATIS	TAKHLI Approach	TAKHLI Tower	Ground
253	124.0	133.25	121.75


BRIEFING STRIP™


LOC ITKL	Final Apch Crs	Procedure Alt	ILS DA(H)	Apt Elev 103′
108.7	182°	PIØØ2 2000′(1897′)	310′(207′)	Rwy 103′

MISSED APCH: Climb on track 182° to 3000′, then turn RIGHT direct to ATRIL at 3200′ and hold or as directed by ATC.
(For LOC Only, No Turn Before MAP)


Alt Set: hPa | Rwy Elev: 4 hPa | Trans level: FL130 | Trans alt: 11000′

1. RNP1 required. 2. DME required. 3. Military use only.



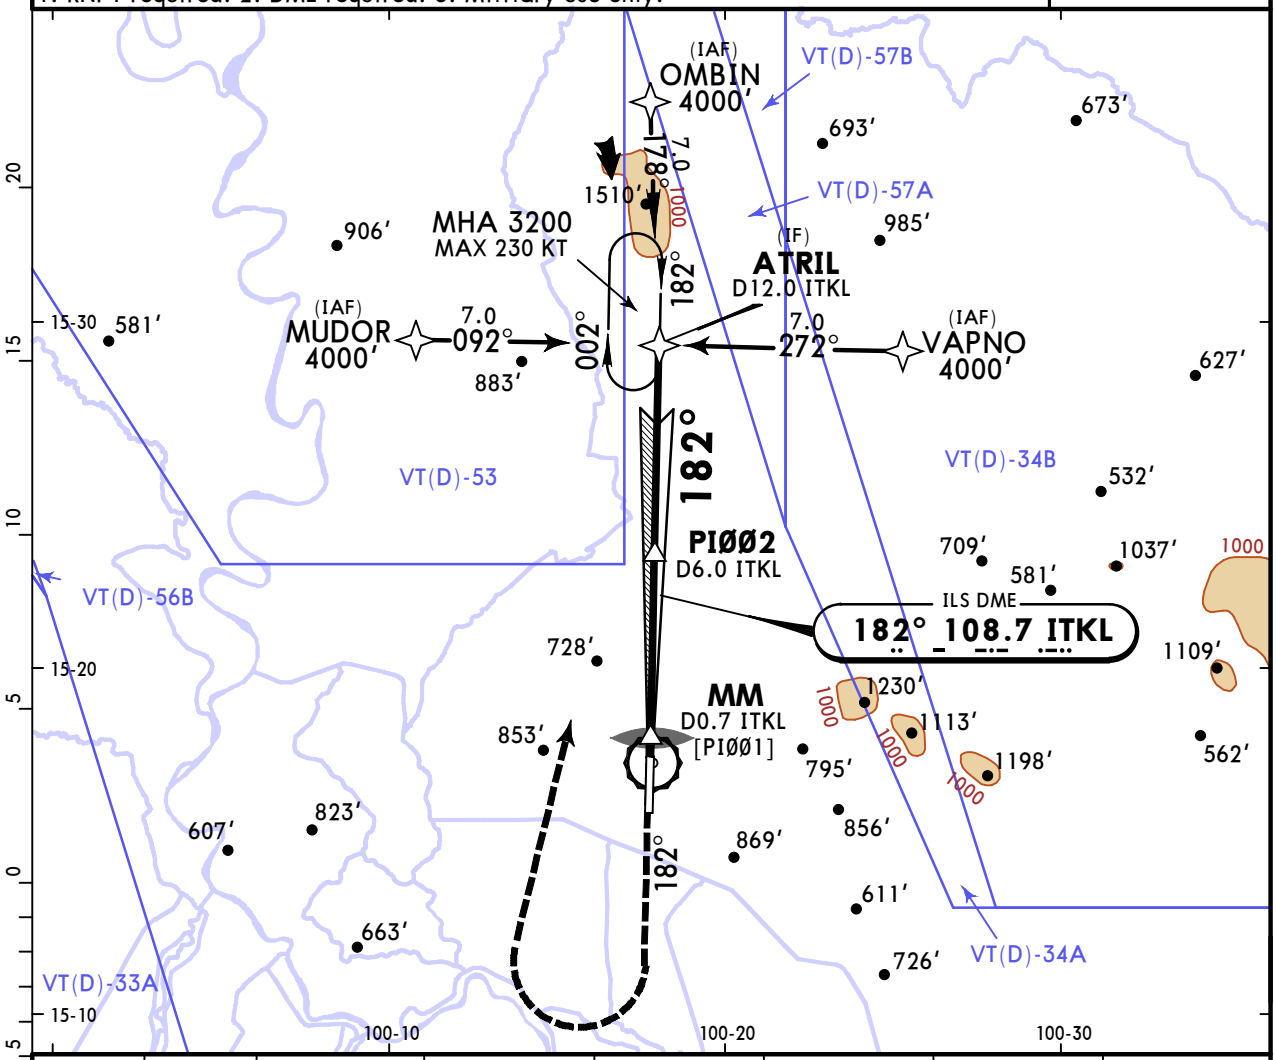

LOC (GS out)	ITKL DME	1.4	2.0	3.0	4.0	5.0	FAF
	ALTITUDE	540′	720′	1040′	1355′	1670′	2000′

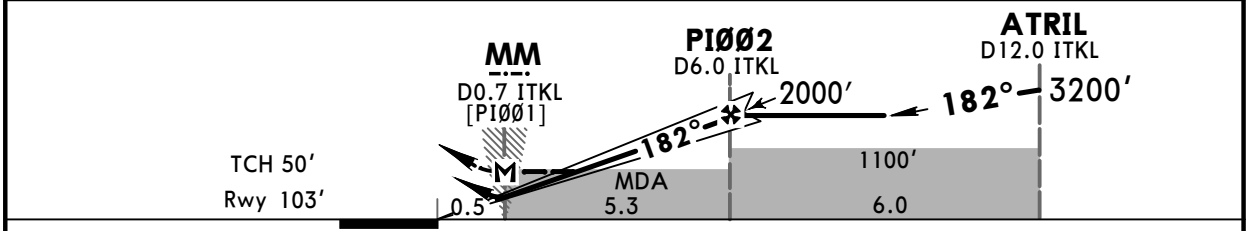

Gnd Speed-Kts	70	90	100	120	140	160
GS 3.00°	372	478	531	637	743	849
MAP at MM/D0.7 ITKL						

PAPI-B | 3000′ on 182° track | RT | D | ATRIL

STRAIGHT-IN LANDING RWY 18

PANS OPS	ILS DA(H) 310′(207′)	LOC (GS out) MDA(H) 540′(437′)
A	1200m	1600m
B		
C		2000m
D		2400m

CIRCLE-TO-LAND

Max Kts	MDA(H)
100	1380′(1277′)-2000m
135	1380′(1277′)-2400m
180	1380′(1277′)-4800m
205	

CHANGES: IAF and IF waypoint identifiers, notes.

© JEPPESEN, 2018, 2019. ALL RIGHTS RESERVED.

VTPI/TKH
TAKHLI

JEPPESEN NAKHON SAWAN, THAILAND

1 NOV 19 | Eff 7 Nov | 11-1 | CAT C & D

ILS or LOC Z Rwy 18

*ATIS	TAKHLI Approach	TAKHLI Tower	Ground
253	124.0	133.25	121.75


BRIEFING STRIP™

LOC ITKL	Final Apch Crs	Procedure Alt	ILS DA(H)	Apt Elev 103′
108.7	182°	D6.0 ITKL 2000′ (1897′)	310′ (207′)	Rwy 103′


MISSED APCH: Climb straight ahead to 3000′, then turn RIGHT to intercept inbound bearing 001° TL NDB, then proceed to D12.0 ITKL at 3200′ and hold or as directed by ATC.
(For LOC Only,No Turn Before MAP)

Alt Set: hPa | Rwy Elev: 4 hPa | Trans level: FL130 | Trans alt: 11000′


1. NDB required. 2. DME required. 3. Military use only.



MSA TL NDB

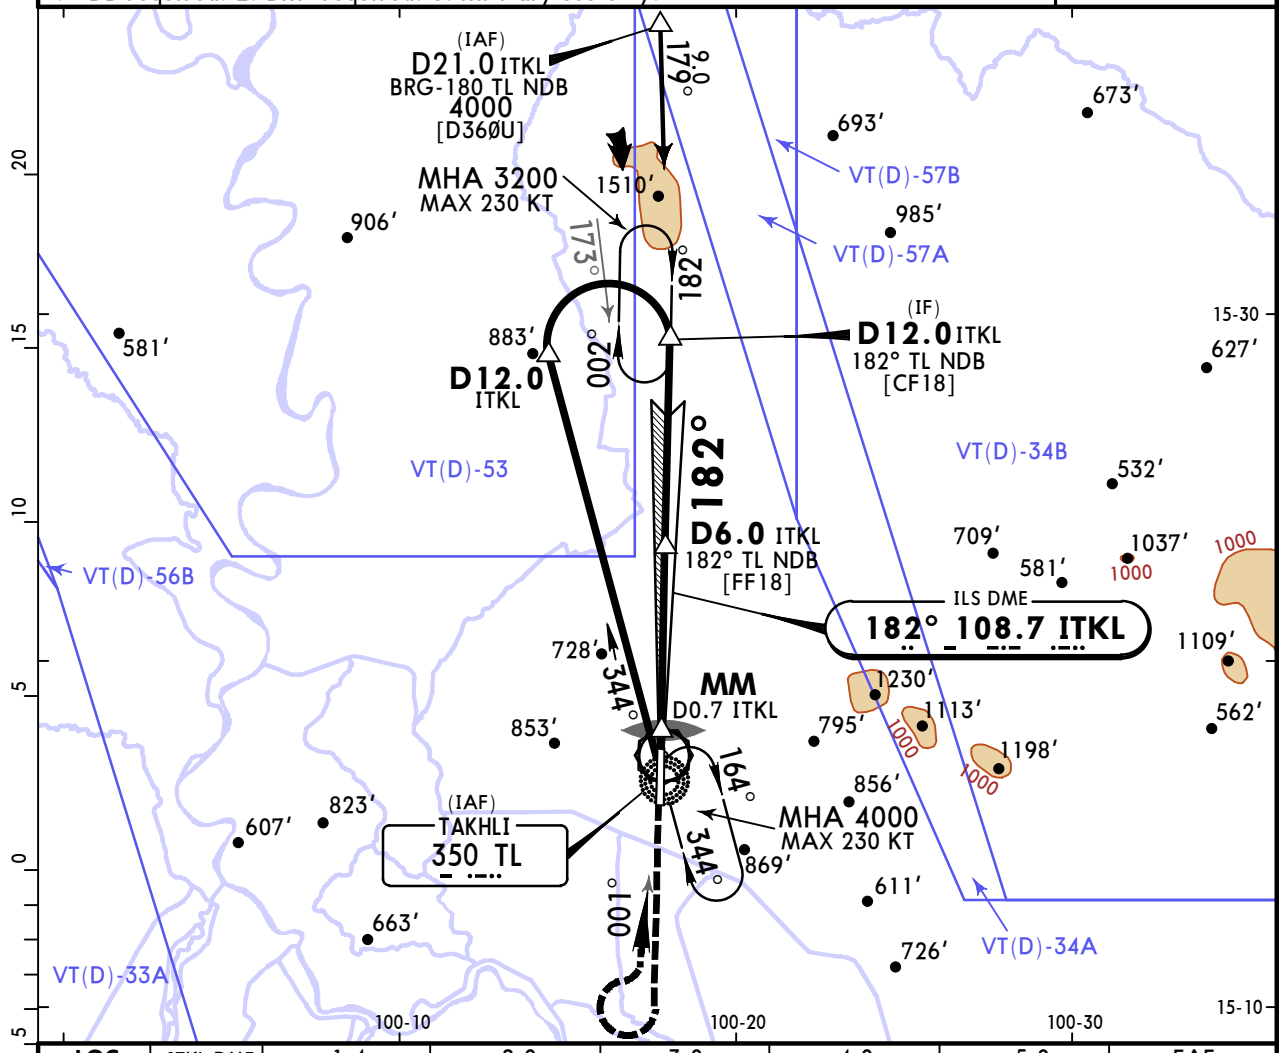

LOC (GS out)	ITKL DME	1.4	2.0	3.0	4.0	5.0	FAF
	ALTITUDE	540′	720′	1040′	1355′	1670′	2000′

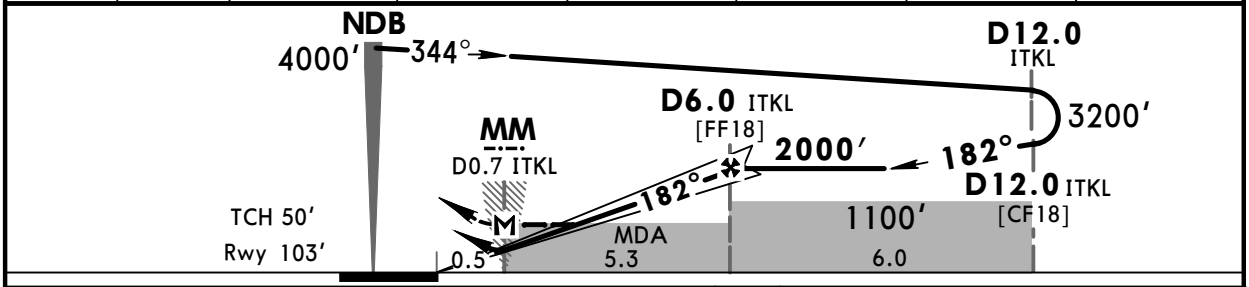

Gnd Speed-Kts		70	90	100	120	140	160
GS	3.00°	372	478	531	637	743	849
MAP at MM/D0.7 ITKL							

PAPI-B | 3000′ | RT on 001° brg | TL 350

PANS OPS

STRAIGHT-IN LANDING RWY 18

	ILS DA(H) 310′ (207′)	LOC (GS out) MDA(H) 540′ (437′)
A	NOT APPLICABLE	NOT APPLICABLE
B		
C	1200m	2000m
D		2400m

CIRCLE-TO-LAND

Max Kts	MDA(H)
A	NOT APPLICABLE
B	
180	1380′ (1277′) -4800m
205	

CHANGES: Notes, CNFs.

© JEPPESEN, 2018, 2019. ALL RIGHTS RESERVED.

VTPI/TKH
TAKHLI

JEPPESEN NAKHON SAWAN, THAILAND
1 NOV 19 (12-1) Eff 7 Nov
RNAV (GNSS) Rwy 18


*ATIS	TAKHLI Approach	TAKHLI Tower	Ground
253	124.0	133.25	121.75

BRIEFING STRIP™


RNAV	Final Apch Crs	PIØØ2	LNAV/VNAV DA(H)	Apt Elev 103′
	182°	2000′ (1897′)	430′ (327′)	Rwy 103′

MISSED APCH: Climb on track 182° to 3000′, then turn RIGHT direct to ATRIL at 3200′ and hold or as directed by ATC.
No turn before MAP.


Alt Set: hPa	Rwy Elev: 4 hPa	Trans level: FL130	Trans alt: 11000′
RNP Apch	1. Military use only. 2. Baro-VNAV not authorized below 10°C.		



MSA ARP

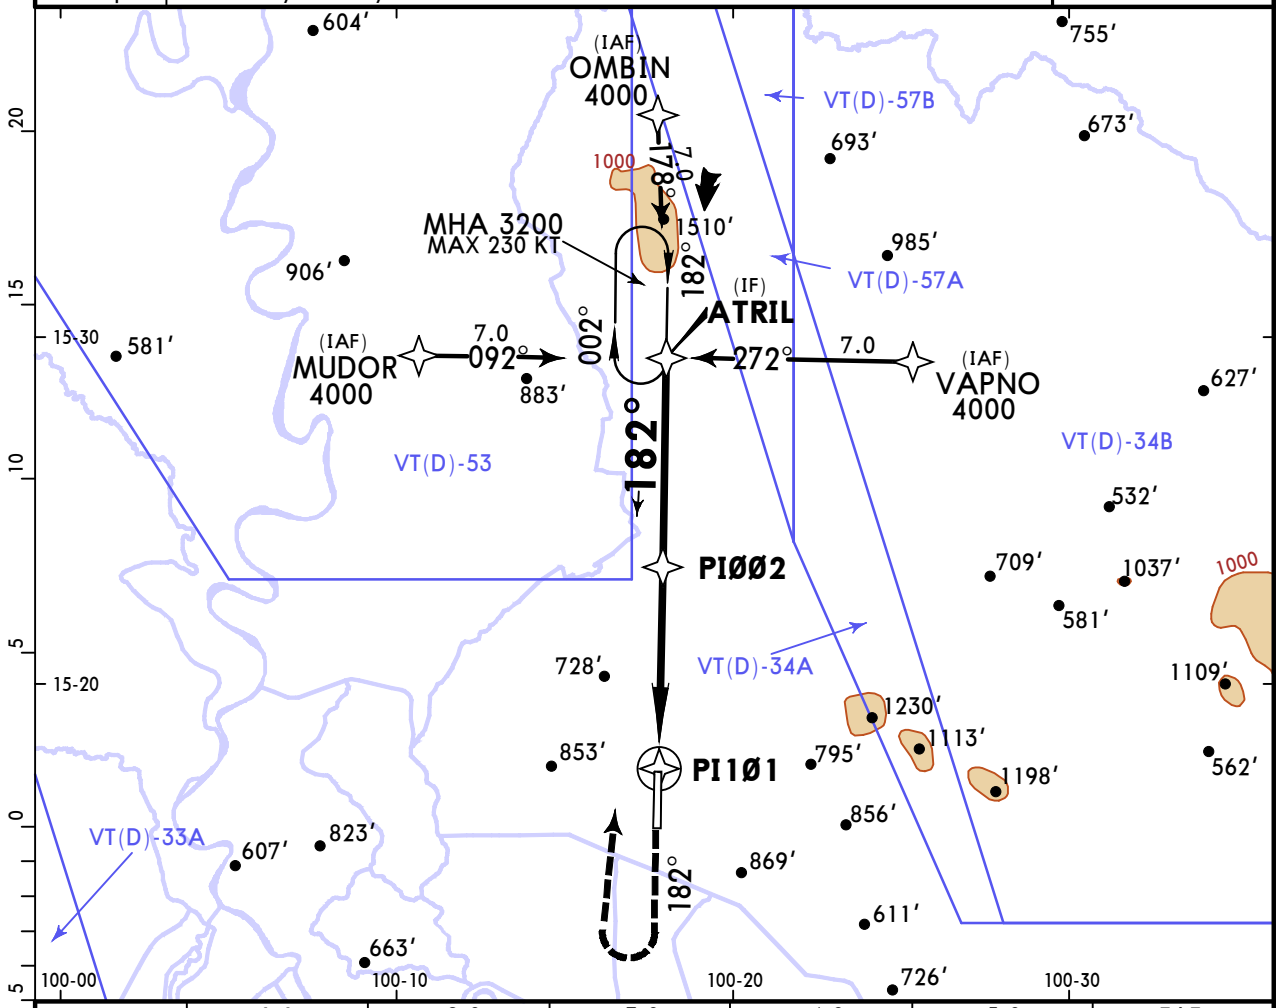

NM to THR	1.1	2.0	3.0	4.0	5.0	FAF
ALTITUDE	490′	785′	1100′	1415′	1735′	2000′

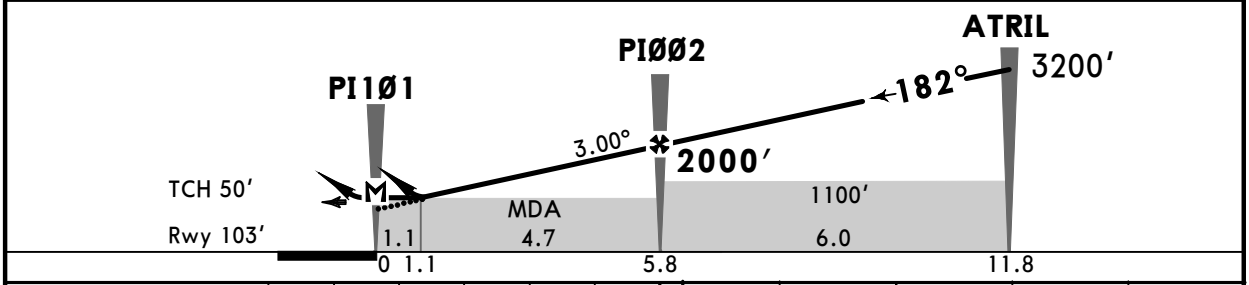

Gnd speed-Kts	70	90	100	120	140	160
Descent Angle 3.00°	372	478	531	637	743	849
LNAV/VNAV: MAP at DA						
LNAV: MAP at PI1Ø1						

REIL
PAPI-B
3000′ on 182° track
RT
ATRIL

PANS OPS

STRAIGHT-IN LANDING RWY 18

	LNAV/VNAV DA(H) 430′ (327′)	LNAV MDA(H) 490′ (387′)
A	1600m	1600m
B		
C		
D		2000m

CIRCLE-TO-LAND

Max Kts	MDA(H)
100	1380′ (1277′)-2000m
135	1380′ (1277′)-2400m
180	1380′ (1277′)-4800m
205	

CHANGES: New procedure.

© JEPPESEN, 2019. ALL RIGHTS RESERVED.

VTPI/TKH
TAKHLI

JEPPESEN NAKHON SAWAN, THAILAND
1 NOV 19 (12-2) Eff 7 Nov
RNAV (GNSS) Rwy 36


*ATIS	TAKHLI Approach	TAKHLI Tower	Ground
253	124.0	133.25	121.75

BRIEFING STRIP™


RNAV	Final Apch Crs	PI361	LNAV/VNAV DA(H)	Apt Elev 103′
	002°	2000′ (1935′)	390′ (325′)	Rwy 65′

MISSED APCH: Climb on track 002° to 2000′, then turn RIGHT direct to DALBA at 3200′ and hold or as directed by ATC.
No turn before MAP.


Alt Set: hPa	Rwy Elev: 2 hPa	Trans level: FL130	Trans alt: 11000′
RNP Apch	1. Military use only. 2. Baro-VNAV not authorized below 10°C.		



MSA ARP

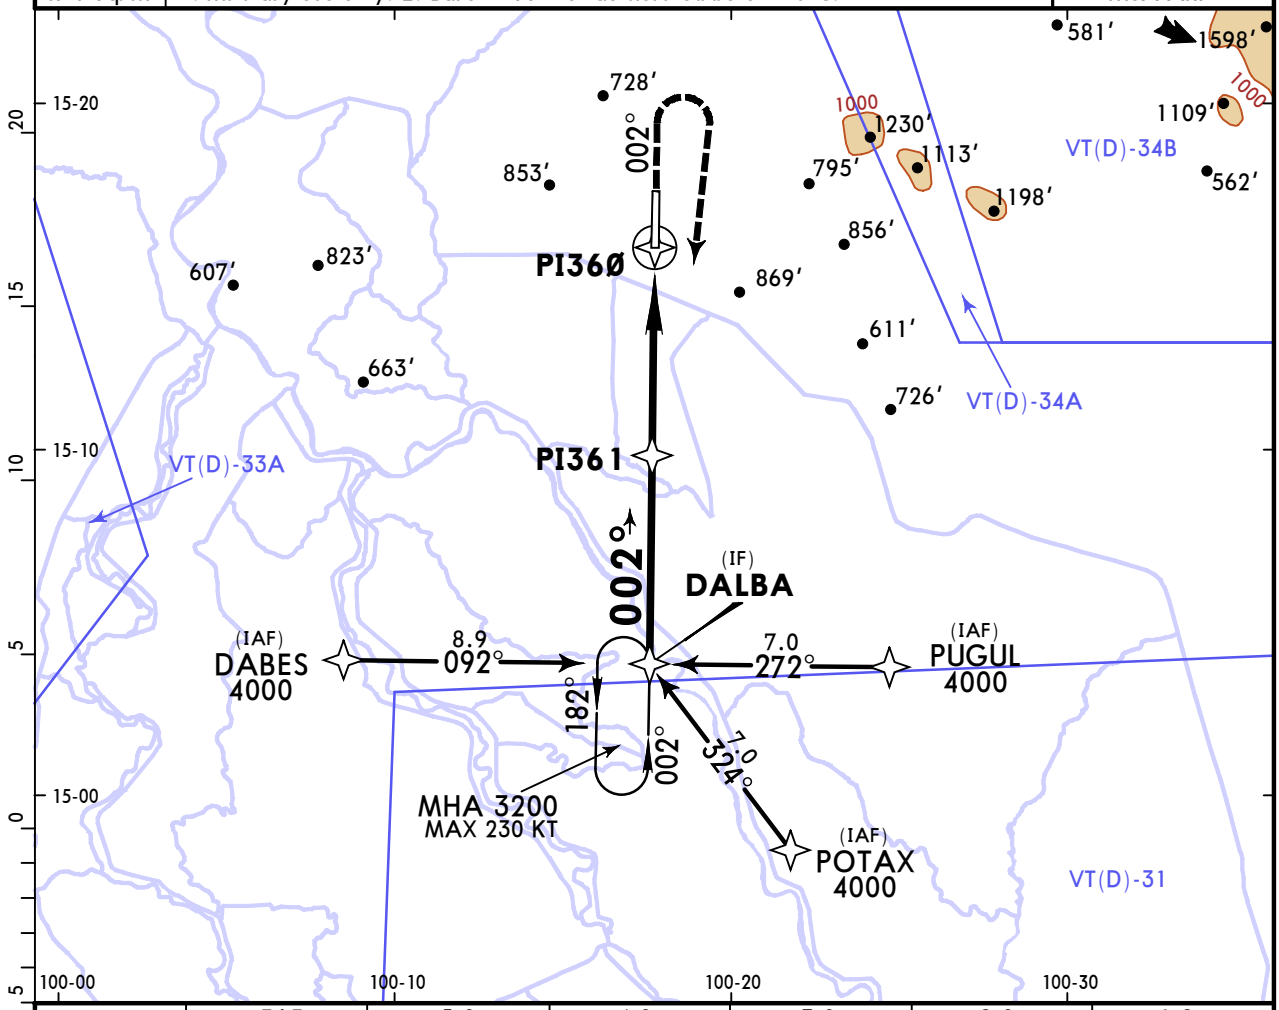

NM to THR	FAF	5.0	4.0	3.0	2.0	1.2
ALTITUDE	2000′	1695′	1380′	1065′	745′	480′

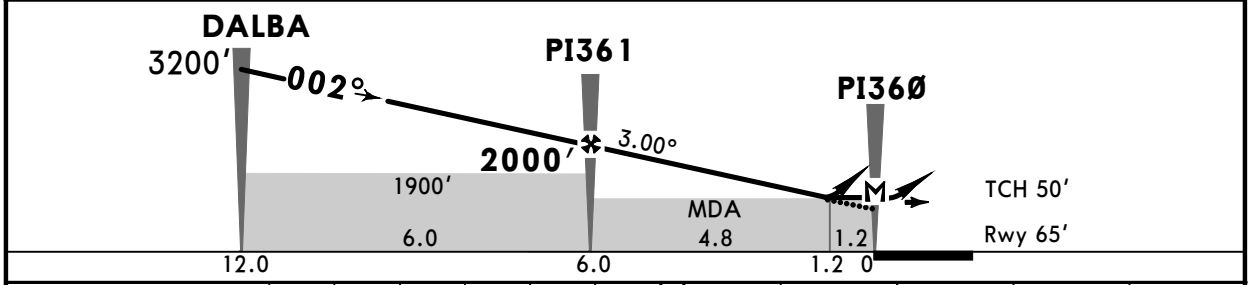

Gnd speed-Kts		70	90	100	120	140	160
Descent Angle	3.00°	372	478	531	637	743	849
LNAV/VNAV: MAP at DA							
LNAV: MAP at PI360							

REIL PAPI-B | 2000′ on 002° track | RT | DALBA

PANS OPS

STRAIGHT-IN LANDING RWY 36

	LNAV/VNAV DA(H) 390′ (325′)	LNAV MDA(H) 480′ (415′)
A	1600m	1600m
B		
C		2000m
D		

CIRCLE-TO-LAND

Max Kts	MDA(H)
100	1380′ (1277′)-2000m
135	1380′ (1277′)-2400m
180	1380′ (1277′)-4800m
205	

CHANGES: New procedure.

© JEPPESEN, 2019. ALL RIGHTS RESERVED.