
*ATIS	*PHITSANULOK Ground	*Tower
127.4	121.9	118.9

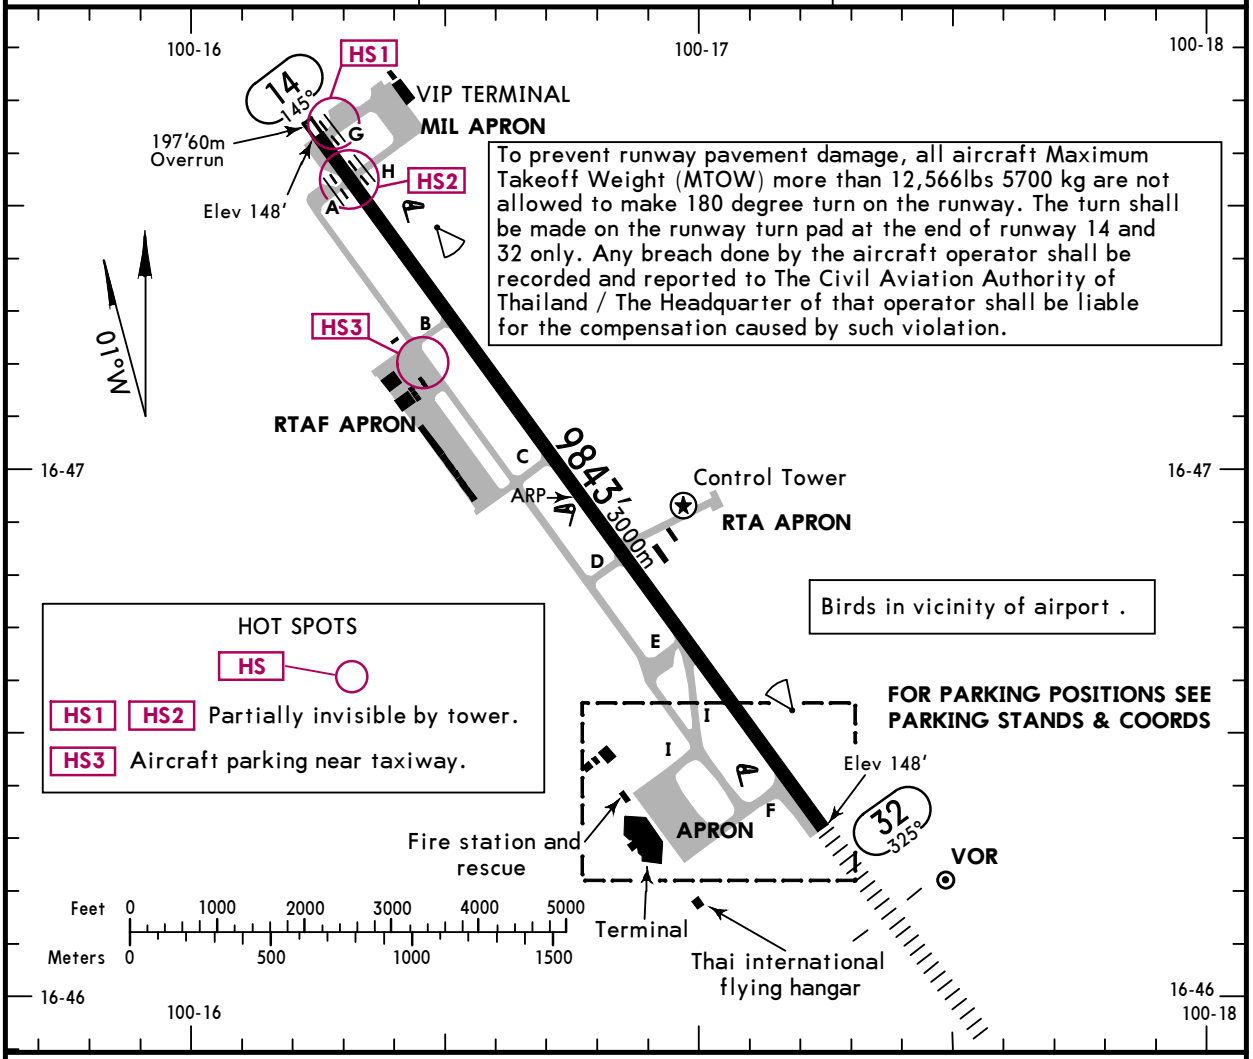

ADDITIONAL RUNWAY INFORMATION

RWY		USABLE LENGTHS LANDING BEYOND Threshold	Glide Slope	TAKE-OFF	WIDTH
14	MIRL (60m) PAPI-L (angle 3.0°) ❶ Flares RVR				148′ 45m
32	MIRL (60m) ❷ PALS (CAT I) ❸ PAPI-L ❶ Flares RVR		8789′(2679m)	❹	

❶ 2 hour prior notice.
❷ Length 900m.
❸ (angle 3.0°, MEHT 52′)
❹ TAKE-OFF RUNWAY AVAILABLE
RWY 32:
From Rwy head: 9843′ (3000m)
Twy F int: 9236′ (2815m)


Std TAKE-OFF

1 RL & RCLM	1 RL or RCLM	Adequate Vis Ref DAY	Adequate Vis Ref NIGHT
R/V300m	R/V400m	R/V500m	NA

1 For NIGHT operations, at least RL and RENL are required.

CHANGES: Usable lenghts.

© JEPPESEN, 2001, 2026. ALL RIGHTS RESERVED.

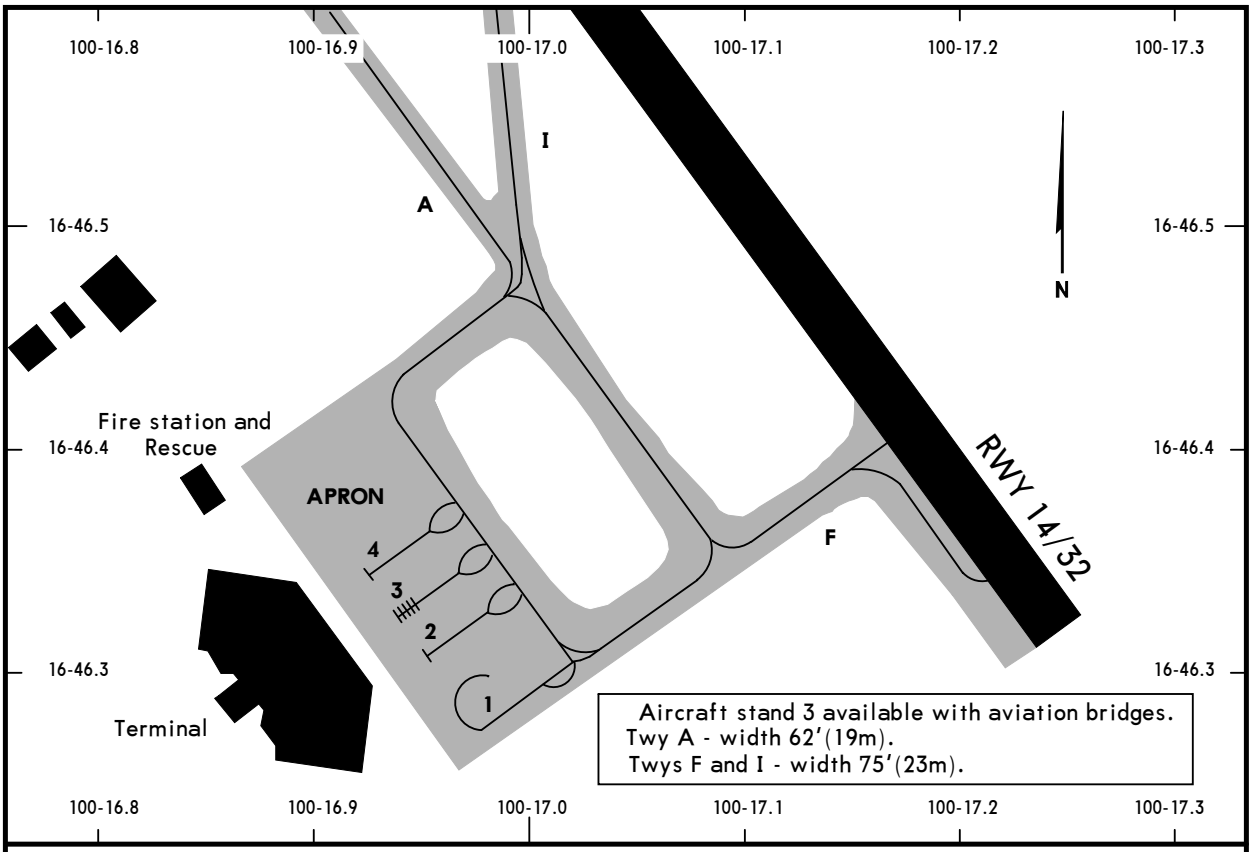

PARKING STAND COORDINATES


STAND No.	COORDINATES
1, 2	N16 46.3 E100 17.0
3, 4	N16 46.3 E100 16.9

CHANGES: None.

© JEPPESEN, 2025. ALL RIGHTS RESERVED.

Apt Elev 148	Trans alt: 11000 1. OMNIDIRECTIONAL departures during take-off and initial climb-out are permitted during the day and night. ATC clearance to execute an OMNIDIRECTIONAL depature may be issued upon request of the pilot or upon initiative of the ATC and accepted by the pilot. 2. The pilot shall be maintaining a minimum climb gradient up to specific altitude as published shown as below. 3. The pilot shall be responsible for adherence to such obtained ATC clearance. 4. The pilot prior to take-off shall agree to execute this procedure. 5. The ATC clearance shall be readback.

OMNI DEPARTURE
[OMNI]
(ALL RWYS)

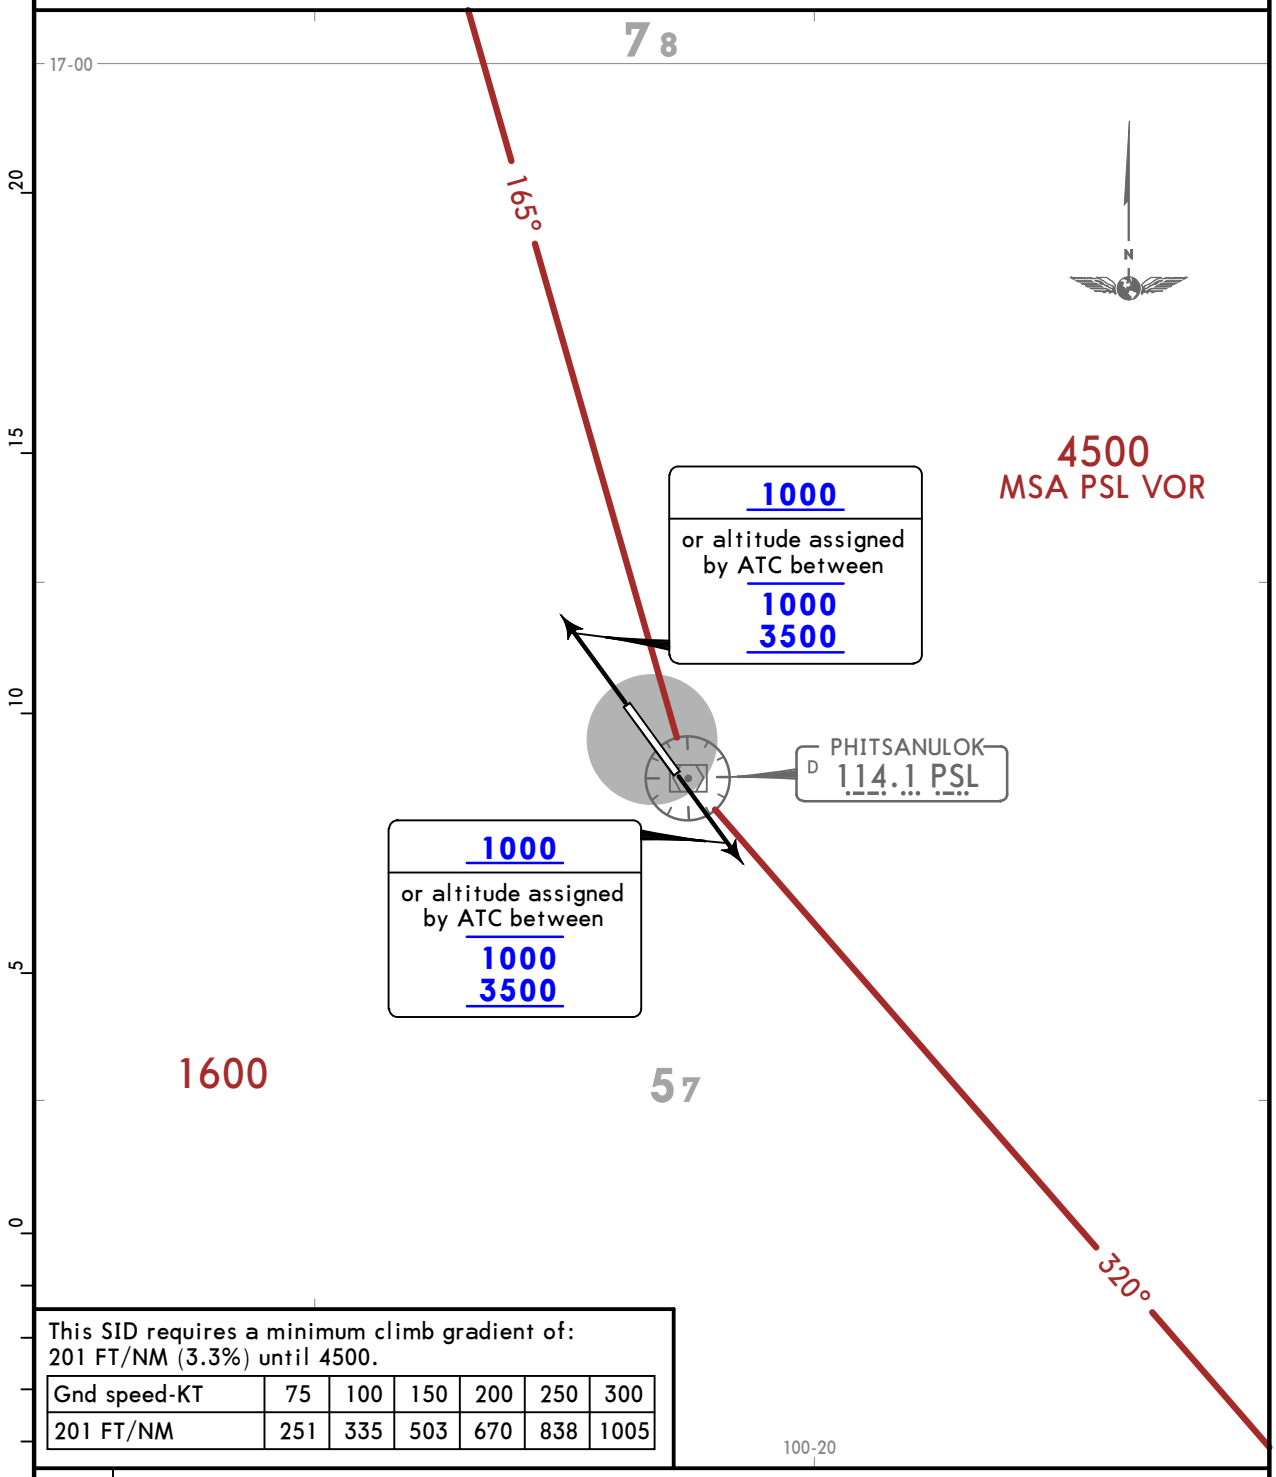

This SID requires a minimum climb gradient of:
201 FT/NM (3.3%) until 4500.

Gnd speed-KT	75	100	150	200	250	300
201 FT/NM	251	335	503	670	838	1005

RWY	INITIAL CLIMB
14	No turn before DER. After departure climb stright ahead until 1000 (or altitude assigned by ATC between 1000 - 3500), then comply with ATC clearance issued (or as directed by ATC).
32	No turn before DER. After departure climb stright ahead until 1000 (or altitude assigned by ATC between 1000 - 3500), then comply with ATC clearance issued (or as directed by ATC).

CHANGES: New procedure at this airport.


© JEPPESEN, 2024. ALL RIGHTS RESERVED.

VTPP/PHS
PHITSANULOK

JEPPESEN
8 MAY 26 (10-3) Eff 14 May

PHITSANULOK, THAILAND

RNAV SID

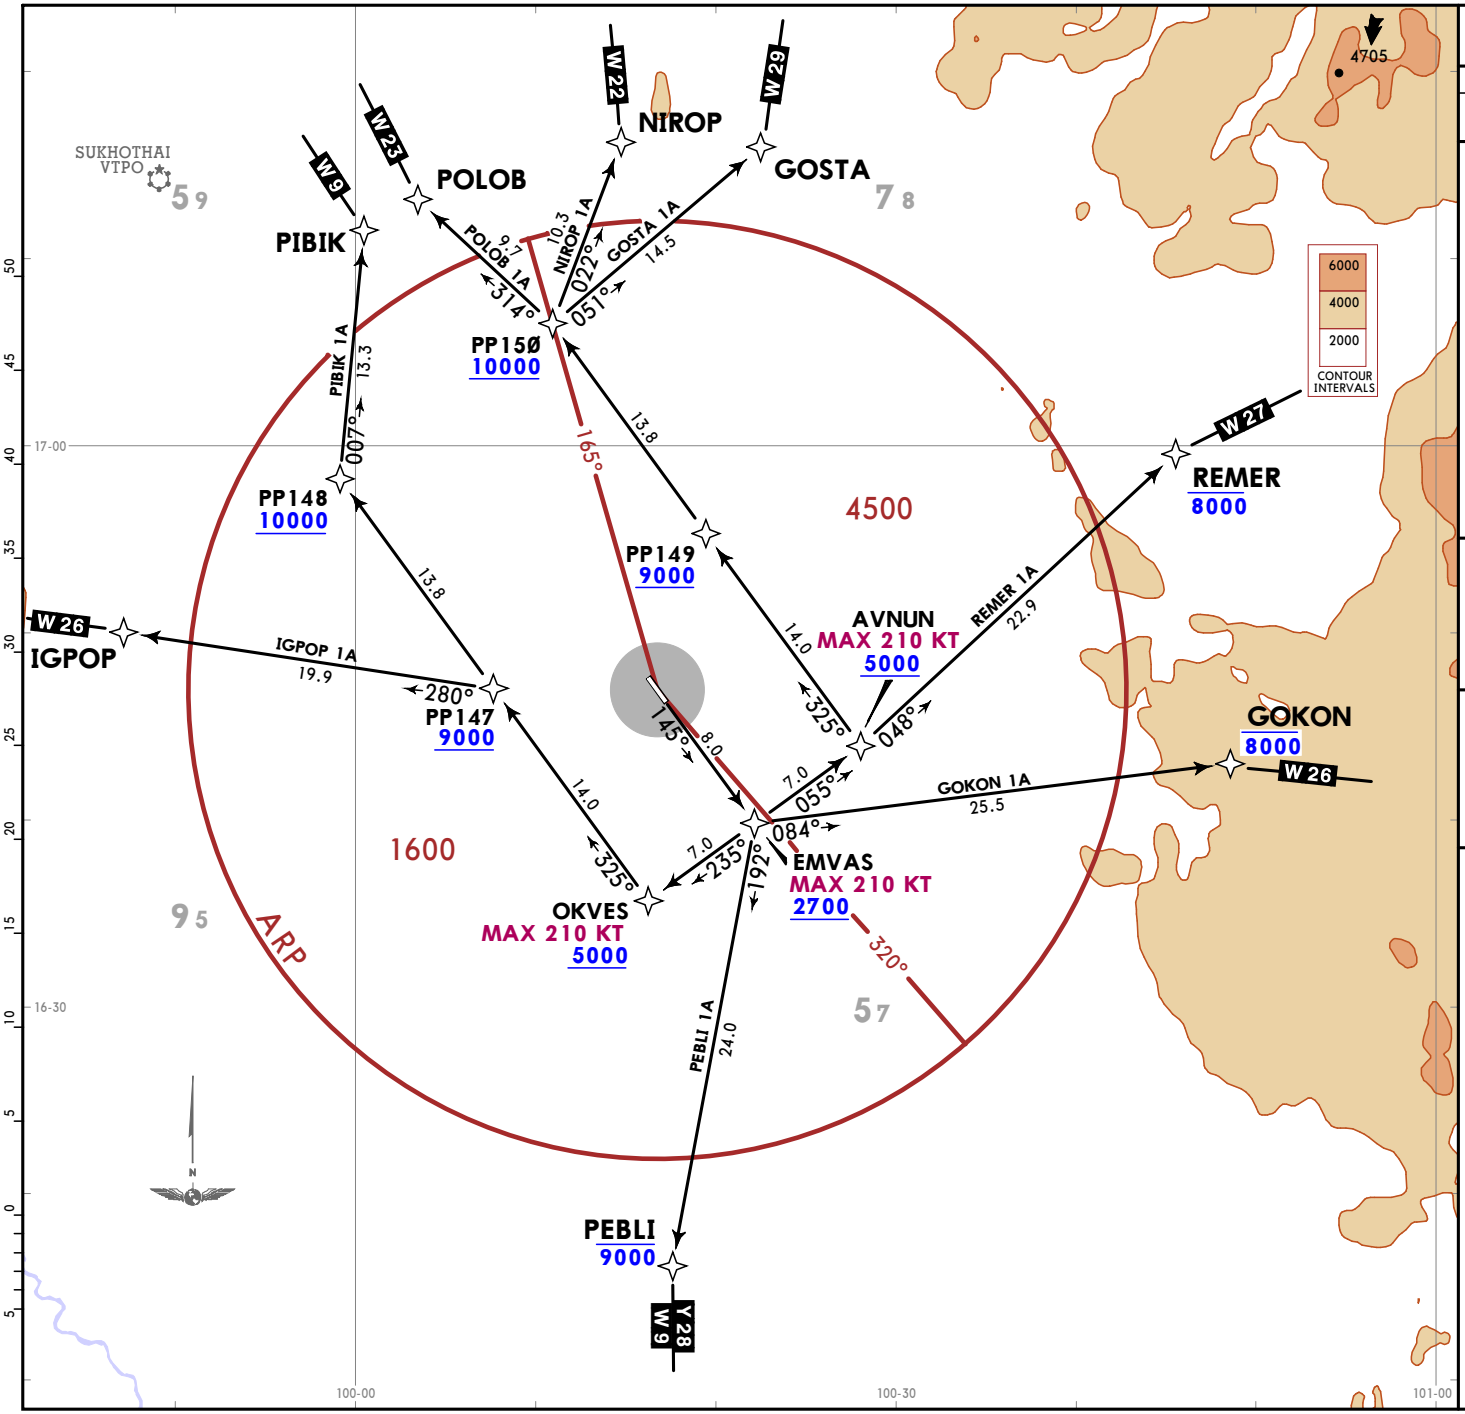

Apt Elev	Trans alt: 11000
148	

RNP1 required GNSS required

If unable to comply with SID or climb gradient, advise Phitsanulok Ground Control on 121.9.

GOKON 1A [GOKO1A]
GOSTA 1A [GOST1A]
IGPOP 1A [IGPO1A]
NIROP 1A [NIRO1A]
PEBLI 1A [PEBL1A]
PIBIK 1A [PIBI1A]
POLOB 1A [POLO1A]
REMER 1A [REME1A]
RNAV DEPARTURES
(RWY 14)

LOST COMMS


Set transponder code 7600.
Proceed on SID, comply with last assigned level or MFA whichever is higher until next compulsory reporting point, then climb to flight plan cruising level.

These SIDs require a minimum climb gradient of: 347 FT/NM (5.7%) until passing 9000 for airspace restrictions only.

Gnd speed-KT	75	100	150	200	250	300
347 FT/NM	434	578	868	1157	1446	1735

CHANGES: General note revised.

© JEPPESEN, 2019, 2026. ALL RIGHTS RESERVED.

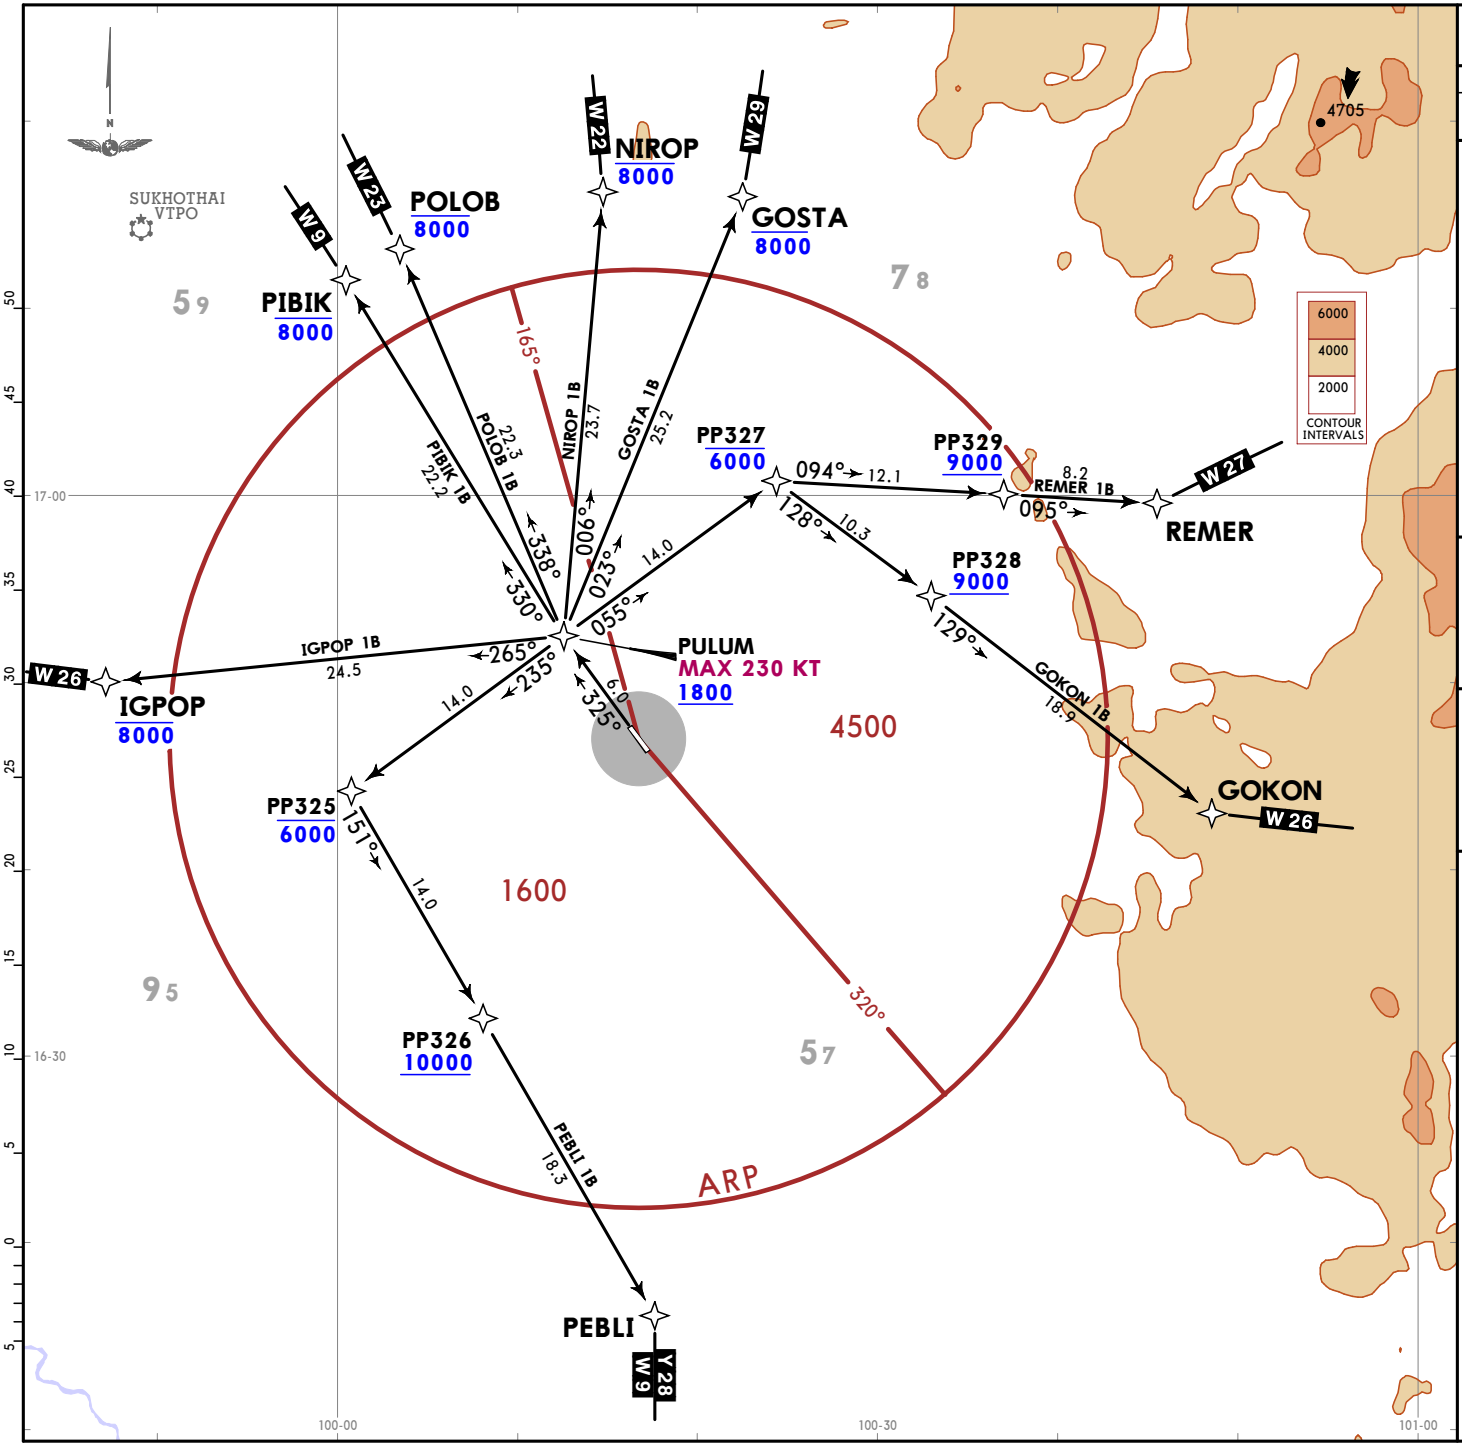

Apt Elev	Trans alt: 11000
148	

RNP1 required GNSS required

If unable to comply with SID or climb gradient, advise Phitsanulok Ground Control on 121.9.

GOKON 1B [GOKO1B]
GOSTA 1B [GOST1B]
IGPOP 1B [IGPO1B]
NIROP 1B [NIRO1B]
PEBLI 1B [PEBL1B]
PIBIK 1B [PIBI1B]
POLOB 1B [POLO1B]
REMER 1B [REME1B]
RNAV DEPARTURES
(RWY 32)

LOST COMMS
Set transponder code 7600.
Proceed on SID, comply with last assigned level or MFA whichever is higher until next compulsory reporting point, then climb to flight plan cruising level.

These SIDs require a minimum climb gradient of: 323 FT/NM (5.3%) until passing 10000 for airspace restrictions only.

Gnd speed-KT	75	100	150	200	250	300
323 FT/NM	404	538	808	1077	1346	1615

CHANGES: General note revised.

© JEPPESEN, 2019, 2026. ALL RIGHTS RESERVED.

JEPPESEN PHITSANULOK, THAILAND

8 MAY 26 (11-2) Eff 14 May ILS or LOC Y Rwy 32

BRIEFING STRIP™


*ATIS	*PHITSANULOK Approach (R)	*PHITSANULOK Tower	*Ground
127.4	120.7	118.9	121.9

LOC IPSL	Final Apch Crs	POSIL MANDATORY	ILS DA(H)	Apt Elev 148′
110.1	325°	2100′ (1952′)	370′ (222′)	Rwy 148′


MISSED APCH: Climb STRAIGHT AHEAD to 3000′, then turn LEFT to intercept outbound PSL VOR R-145 and continue climb to PUGAN at minimum 3200′ and hold or as directed by ATC. No turn before MAP (for LOC only).

Alt Set: hPa | Rwy Elev: 5 hPa | Trans level: FL130 | Trans alt: 11000′


VOR, DME required.



MSA PSL VOR

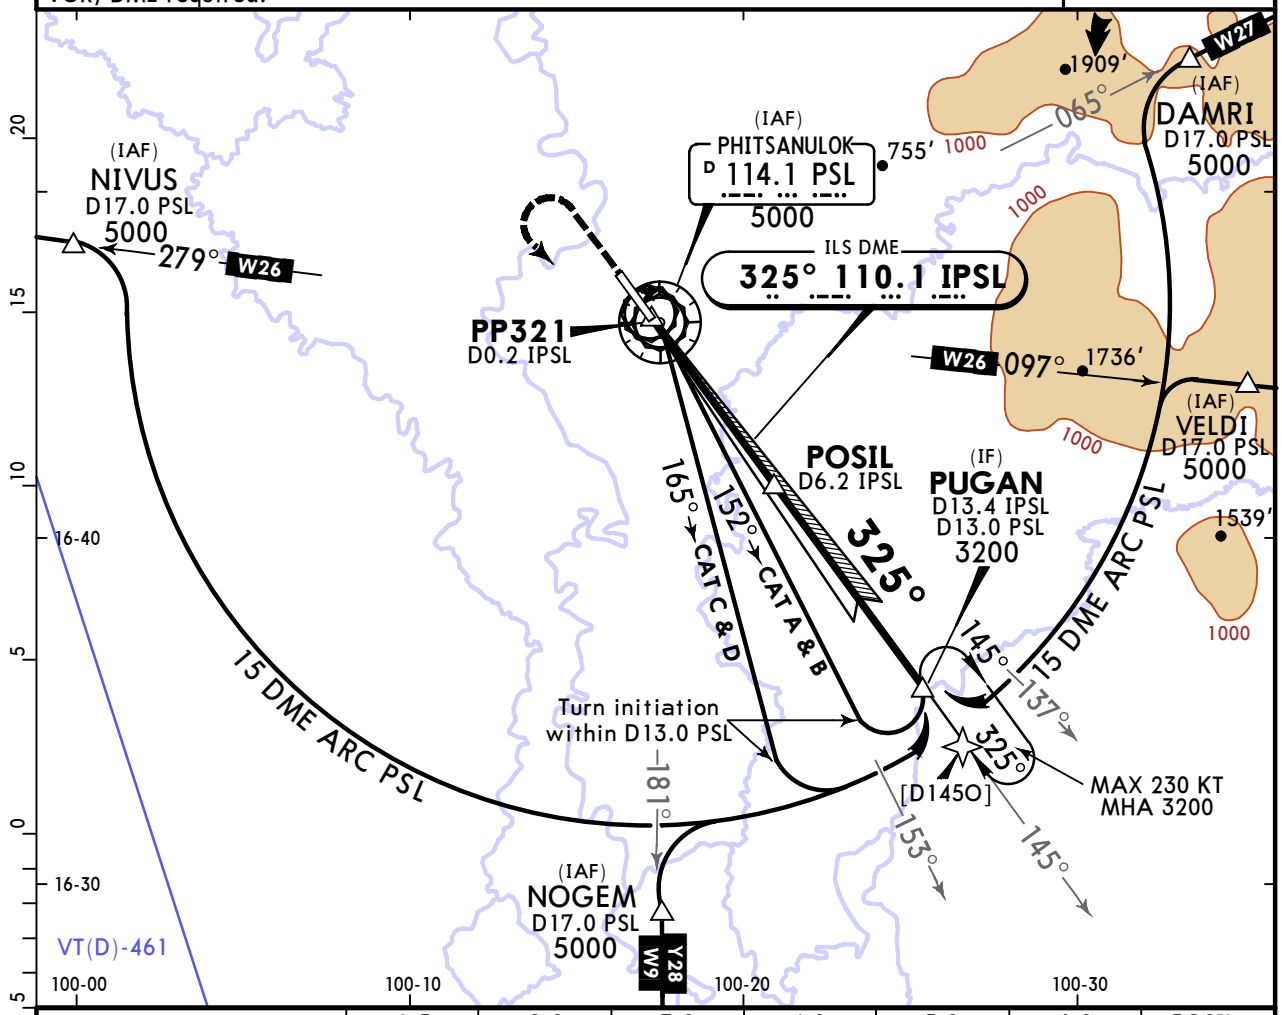

IPSL DME	1.5	2.0	3.0	4.0	5.0	6.0	POSIL
ALTITUDE	610′	765′	1080′	1400′	1715′	2030′	2100′

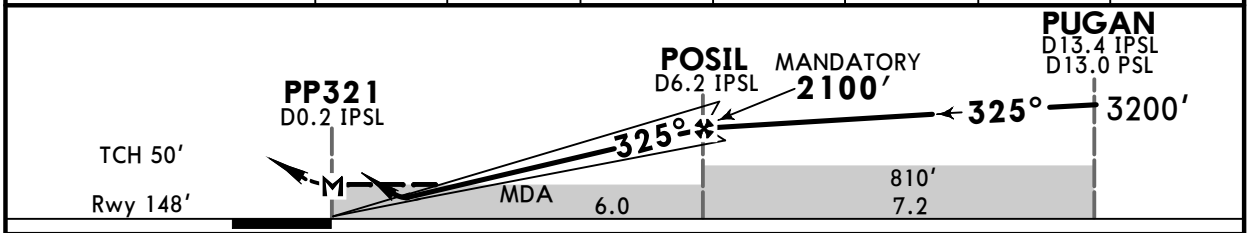

Gnd speed-Kts		70	90	100	120	140	160
GS	3.00°	372	478	531	637	743	849
MAP at PP321							

PALS CAT I
PAPI

3000′

LT

PSL
114.1
R-145

PUGAN

Std

	STRAIGHT-IN LANDING ILS DA(H) 370′ (222′)		LOC (GS out) CDFA 2 DA/MDA(H) 610′ (462′)		CIRCLE-TO-LAND Max Kts	MDA(H)
		ALS out		ALS out		
A	1 R550m	R1200m	R1500m	R1500m	100	1000′ (852′) V1500m
B					135	1000′ (852′) V1600m
C				R2200m	180	1000′ (852′) V2400m
D					205	1000′ (852′) V3600m

PANS OPS

1 R750m when a Flight Director or Autopilot or HUD to DA is not used.
2 VNAV DA(H) in lieu of MDA(H) depends on operator policy.

CHANGES: Airspaces.

© JEPPESEN, 2009, 2026. ALL RIGHTS RESERVED.

VTPP/PHS
PHITSANULOK

JEPPESEN PHITSANULOK, THAILAND
8 MAY 26 (11-1) Eff 14 May ILS or LOC Z Rwy 32

*ATIS	*PHITSANULOK Approach (R)	*PHITSANULOK Tower	*Ground
127.4	120.7	118.9	121.9


BRIEFING STRIP

LOC IPSL	Final Apch Crs	POSIL MANDATORY	ILS DA(H)	Apt Elev 148′ Rwy 148′
110.1	325°	2100′ (1952′)	370′ (222′)	


MISSED APCH: Climb STRAIGHT AHEAD to 3000′, then turn LEFT direct to PUGAN at minimum 3200′ and hold or as directed by ATC.
No turn before MAP (for LOC only).

RNP1 required. | Alt Set: hPa | Rwy Elev: 5 hPa | Trans level: FL130 | Trans alt: 11000′
1. GNSS required. 2. DME required.

MSA ARP
165° 4500
1600 320°

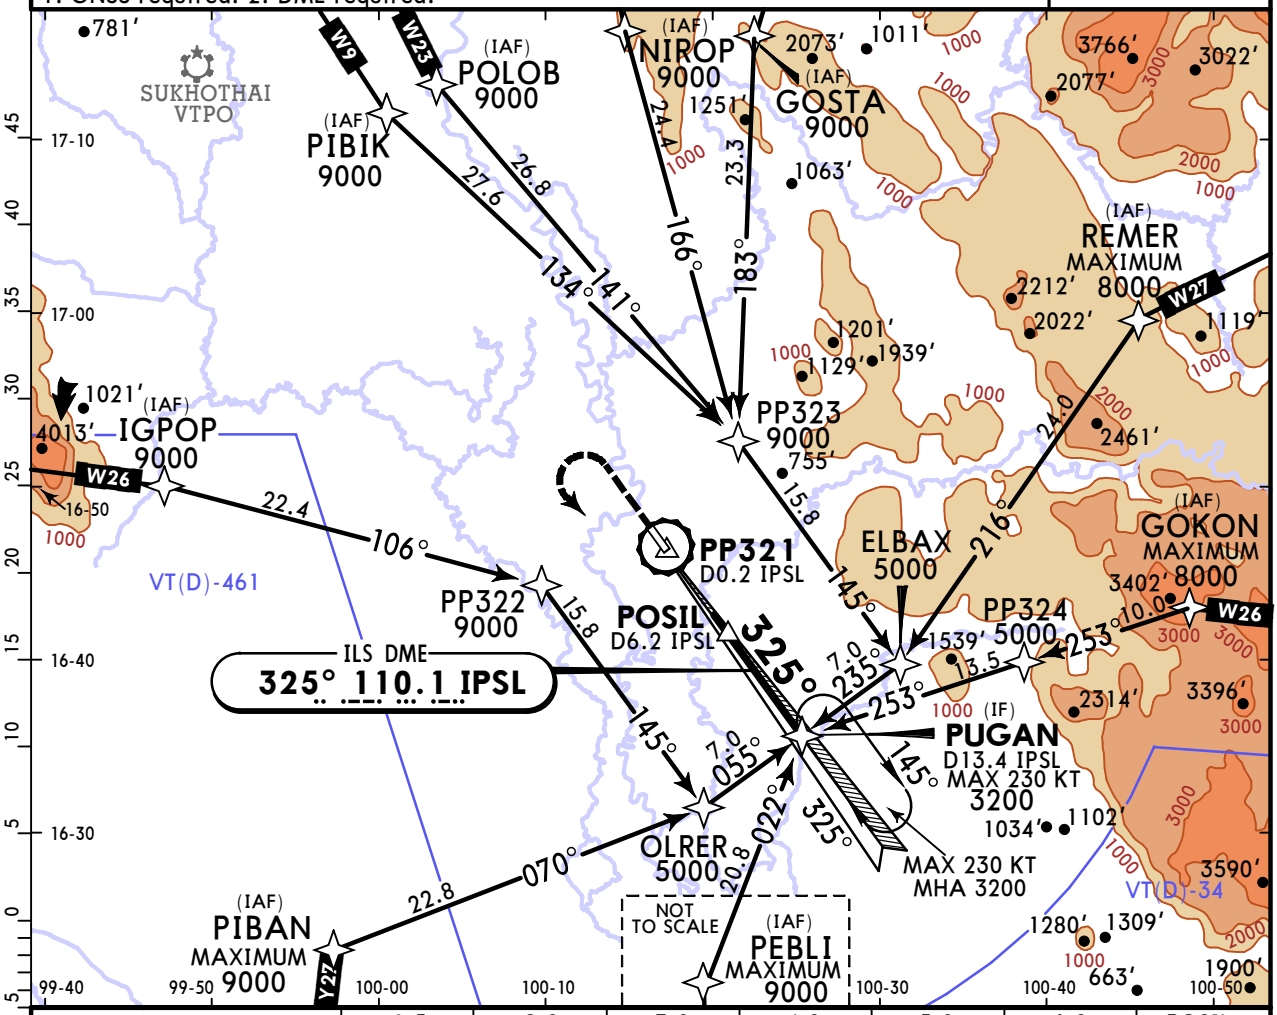

IPSL DME	1.5	2.0	3.0	4.0	5.0	6.0	POSIL
ALTITUDE	610′	765′	1080′	1400′	1715′	2030′	2100′

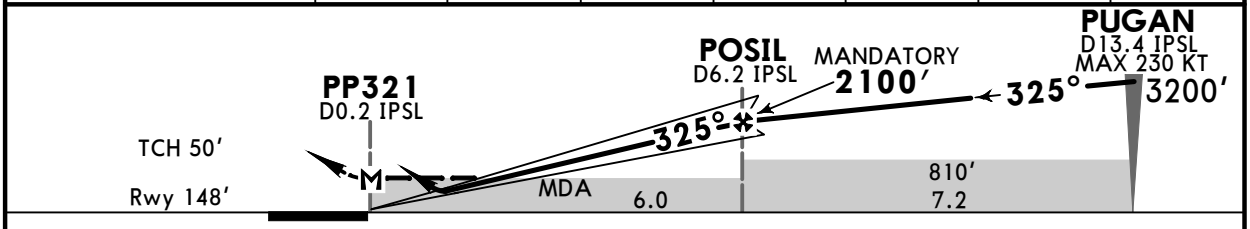

Gnd speed-Kts		70	90	100	120	140	160
GS	3.00°	372	478	531	637	743	849
MAP at PP321							

PAPI | PALS CAT I | 3000′ | LT | D | PUGAN

Std

	STRAIGHT-IN LANDING ILS DA(H) 370′ (222′)		LOC (GS out) CDFA 2 DA/MDA(H) 610′ (462′)		CIRCLE-TO-LAND Max Kts	MDA(H)
		ALS out		ALS out		
A	1 R550m	R1200m	R1500m	R1500m	100	1000′ (852′) V1500m
B					135	1000′ (852′) V1600m
C				R2200m	180	1000′ (852′) V2400m
D					205	1000′ (852′) V3600m

PANS OPS

1 R750m when a Flight Director or Autopilot or HUD to DA is not used.
2 VNAV DA(H) in lieu of MDA(H) depends on operator policy.

CHANGES: Airspaces.

© JEPPESEN, 2024, 2026. ALL RIGHTS RESERVED.

*ATIS	*PHITSANULOK Approach (R)	*PHITSANULOK Tower	*Ground
127.4	120.7	118.9	121.9

BRIEFING STRIP


RNAV	Final Apch Crs	PULUM MANDATORY	LNAV/VNAV DA(H)	Apt Elev 148′
	145°	2100′ (1952′)	640′ (492′)	Rwy 148′

MISSED APCH: Climb on track 145° to 3000′, then turn RIGHT direct to OMBAR at minimum 3200′ and hold or as directed by ATC. No turn before MAP.


RNP Apch | Alt Set: hPa | Rwy Elev: 5 hPa | Trans level: FL130 | Trans alt: 11000′

Baro-VNAV not authorized below 10°C.

MSA ARP: 165° 4500 | 1600 | 320°

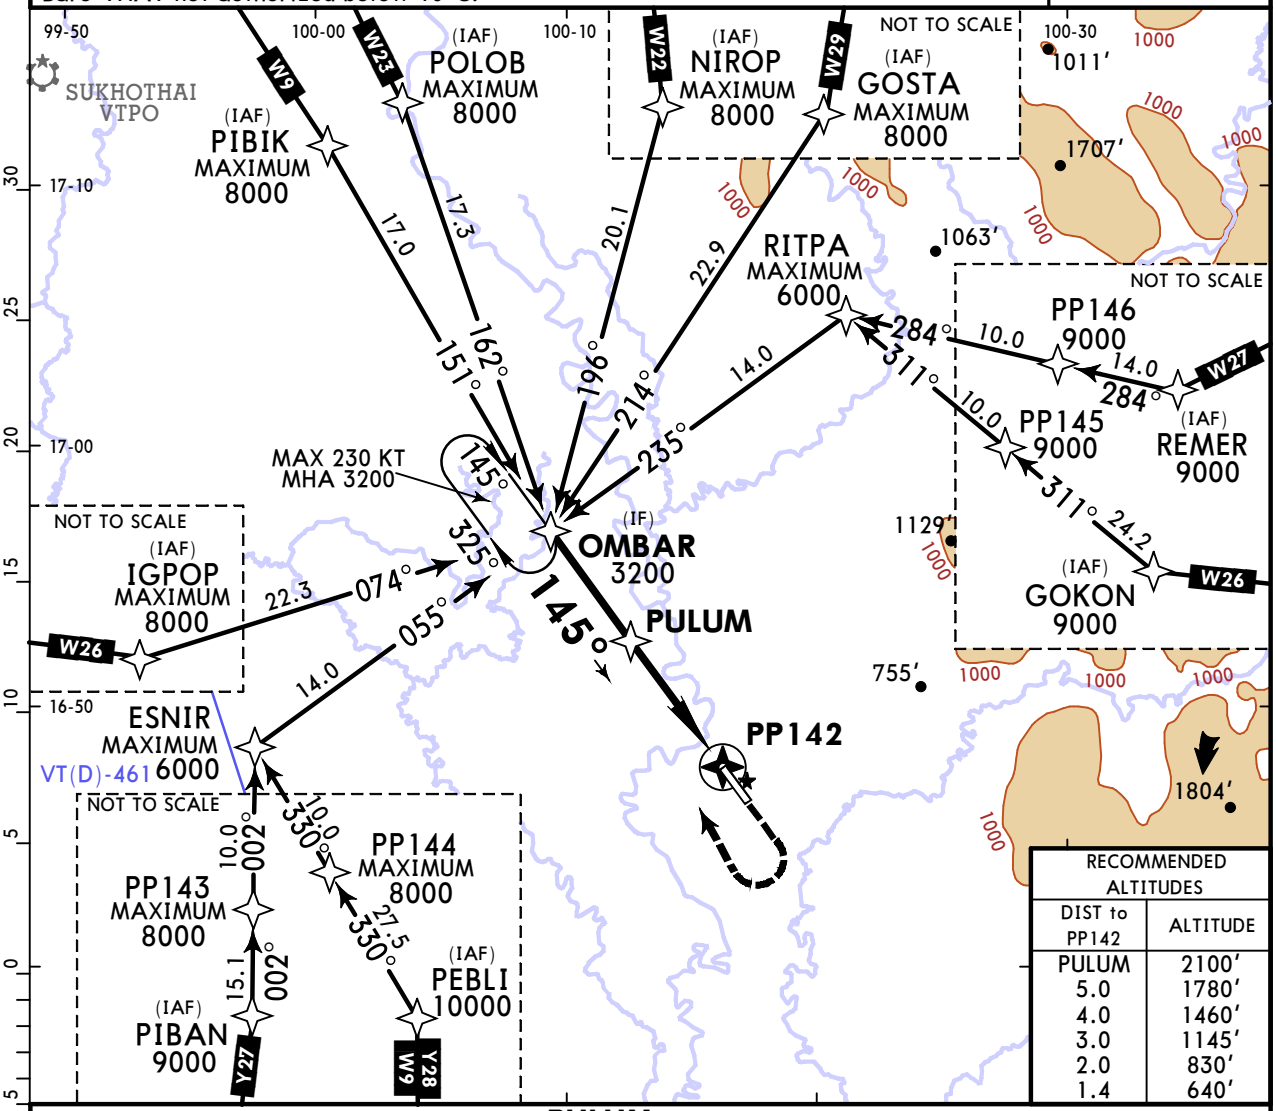

RECOMMENDED ALTITUDES	
DIST to PP142	ALTITUDE
PULUM	2100′
5.0	1780′
4.0	1460′
3.0	1145′
2.0	830′
1.4	640′

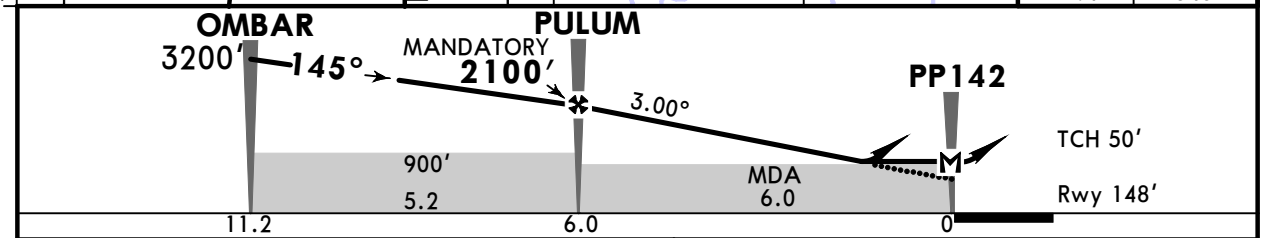

Gnd speed-Kts		70	90	100	120	140	160
Descent Angle	3.00°	372	478	531	637	743	849
MAP at PP142							

PAPI-L 3000′ on 145°

Std

STRAIGHT-IN LANDING		CIRCLE-TO-LAND		
LNAV/VNAV DA(H) 640′(492′)	LNAV CDFA 1 DA/MDA(H) 640′(492′)	Max Kts	MDA(H)	
A	R1500m	R1500m	100	1000′(852′) V1500m
B			135	1000′(852′) V1600m
C	R2300m	R2300m	180	1000′(852′) V2400m
D			205	1000′(852′) V3600m

PANS OPS

1 VNAV DA(H) in lieu of MDA(H) depends on operator policy.

CHANGES: Airspaces.

© JEPPESEN, 2016, 2026. ALL RIGHTS RESERVED.

VTPP/PHS
PHITSANULOK

JEPPESEN 8 MAY 26 (12-2) Eff 14 May

PHITSANULOK, THAILAND
RNP Rwy 32

*ATIS	*PHITSANULOK Approach (R)	*PHITSANULOK Tower	*Ground
127.4	120.7	118.9	121.9

BRIEFING STRIP™

RNAV	Final Apch Crs	POSIL MANDATORY	LNAV/VNAV DA(H)	Apt Elev 148′
	325°	2100′ (1952′)	470′ (322′)	Rwy 148′

MISSED APCH: Climb on track 325° to 3000′, then turn LEFT direct to PUGAN at minimum 3200′ and hold or as directed by ATC.
No turn before MAP.

RNP Apch	Alt Set: hPa	Rwy Elev: 5 hPa	Trans level: FL130	Trans alt: 11000′


Baro-VNAV not authorized below 10°C.

MSA ARP
195° 4500 320° 1600

NOT TO SCALE

(IAF) PIBIK 9000
(IAF) POLOB 9000
(IAF) NIROP 9000
(IAF) GOSTA 9000
(IAF) REMER MAXIMUM 8000
(IAF) IGPOP 9000 NOT TO SCALE
(IAF) GOKON MAXIMUM 8000 NOT TO SCALE
(IAF) PIBAN MAXIMUM 9000 NOT TO SCALE
(IAF) PEBLI MAXIMUM 9000 NOT TO SCALE
PP321
PP322 9000
PP323 9000
PP324 5000
POSIL
(IF) PUGAN MAX 230 KT 3200
ELBAX 5000
OLRER 5000
MAX 230 KT MHA 3200
VT(D)-461
VT(D)-34

RECOMMENDED ALTITUDES	
DIST to PP321	ALTITUDE
POSIL	2100′
5.0	1780′
4.0	1460′
3.0	1145′
2.0	830′
1.3	610′

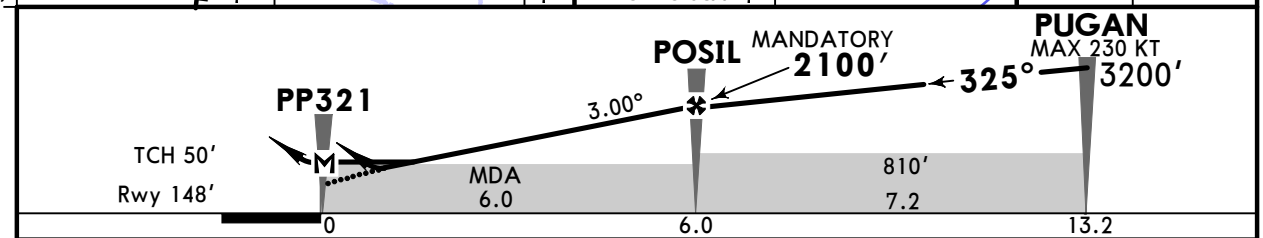

Gnd speed-Kts		70	90	100	120	140	160
Descent Angle	3.00°	372	478	531	637	743	849
MAP at PP321							

PALS CAT I PAPI 3000′ on 325°

Std STRAIGHT-IN LANDING

	LNAV/VNAV DA(H) 470′(322′)		LNAV CDFA 1 DA/MDA(H) 610′(462′)	
		ALS out		ALS out
A	R800m	R1500m	R1500m	R1500m
B				
C				R2200m
D				

CIRCLE-TO-LAND

Max Kts	MDA(H)	
100	1000′ (852′)	V1500m
135	1000′ (852′)	V1600m
180	1000′ (852′)	V2400m
205	1000′ (852′)	V3600m

PANS OPS

1 VNAV DA(H) in lieu of MDA(H) depends on operator policy.

CHANGES: Airspaces.

© JEPPESEN, 2016, 2026. ALL RIGHTS RESERVED.

VTPP/PHS
PHITSANULOK

JEPPESEN 8 MAY 26 (13-1) Eff 14 May

PHITSANULOK, THAILAND
VOR Rwy 14

*ATIS	*PHITSANULOK Approach (R)	*PHITSANULOK Tower	*Ground
127.4	120.7	118.9	121.9


BRIEFING STRIP ™

VOR PSL	Final Apch Crs	PP141 MANDATORY	DA/MDA(H)	Apt Elev 148′
114.1	142°	2100′ (1952′)	670′ (522′)	


MISSED APCH: Climb STRAIGHT AHEAD to 3000′, then turn RIGHT to intercept outbound PSL VOR R-322 and continue climb to SALOK at minimum 3200′ and hold or as directed by ATC. No turn before MAP.

Alt Set: hPa | Apt Elev: 5 hPa | Trans level: FL130 | Trans alt: 11000′


DME required.



MSA PSL VOR

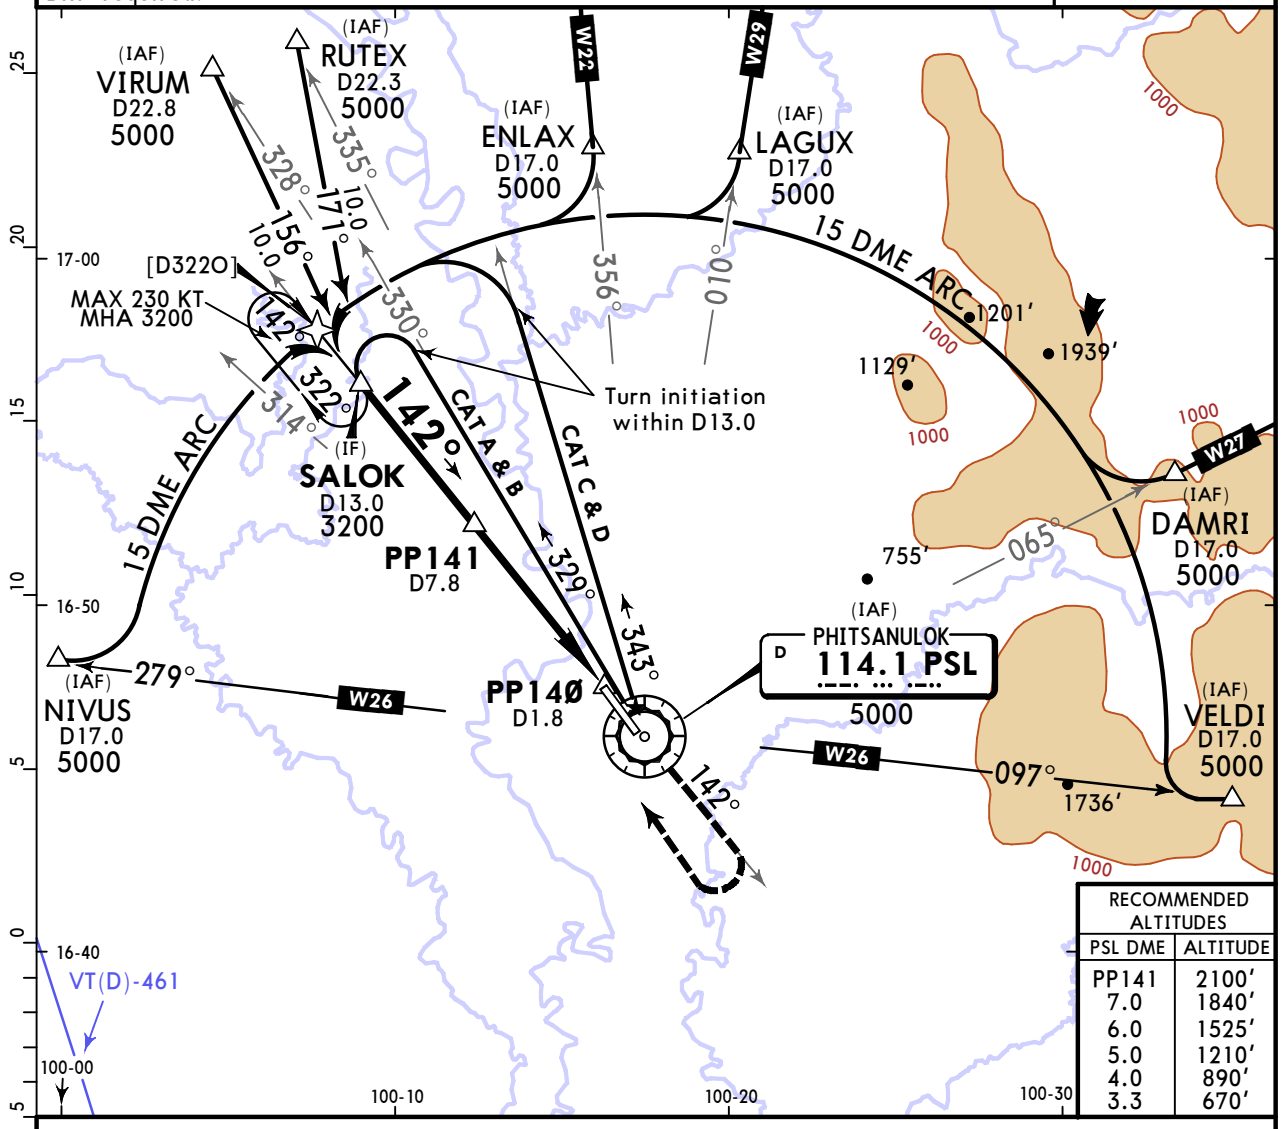

RECOMMENDED ALTITUDES	
PSL DME	ALTITUDE
PP141	2100′
7.0	1840′
6.0	1525′
5.0	1210′
4.0	890′
3.3	670′

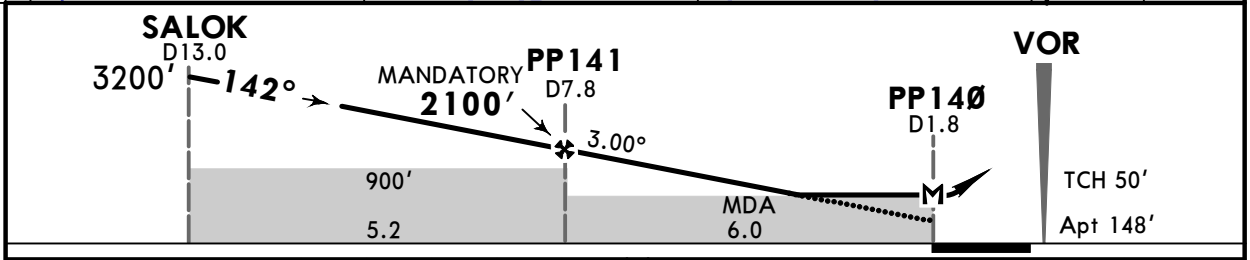

Gnd speed-Kts	70	90	100	120	140	160
Descent Angle 3.00°	372	478	531	637	743	849
MAP at PP14Ø						

PAPI-L | 3000′ | RT | PSL 114.1 R-322 | SALOK

PANS OPS

Std STRAIGHT-IN LANDING
CDFA
1 DA/MDA(H) **670′** (522′)

A	R1500m
B	
C	R2400m
D	

CIRCLE-TO-LAND

Max Kts	MDA(H)	
100	1000′ (852′)	V1500m
135	1000′ (852′)	V1600m
180	1000′ (852′)	V2400m
205	1000′ (852′)	V3600m

1 VNAV DA(H) in lieu of MDA(H) depends on operator policy.

CHANGES: Airspaces.

© JEPPESEN, 2017, 2026. ALL RIGHTS RESERVED.

VTPP/PHS
PHITSANULOK

JEPPESEN 8 MAY 26 (13-2) Eff 14 May

PHITSANULOK, THAILAND
VOR Rwy 32

*ATIS	*PHITSANULOK Approach (R)	*PHITSANULOK Tower	*Ground
127.4	120.7	118.9	121.9


BRIEFING STRIP ™

VOR PSL	Final Apch Crs	PP32Ø MANDATORY	DA/MDA(H)	Apt Elev 148′
114.1	330°	2100′ (1952′)	610′ (462′)	


MISSED APCH: Climb STRAIGHT AHEAD to 3000′, then turn LEFT to intercept outbound PSL VOR R-150 and continue climb to LUKPA at minimum 3200′ and hold or as directed by ATC. No turn before MAP.

Alt Set: hPa | Apt Elev: 5 hPa | Trans level: FL130 | Trans alt: 11000′


DME required.



MSA PSL VOR

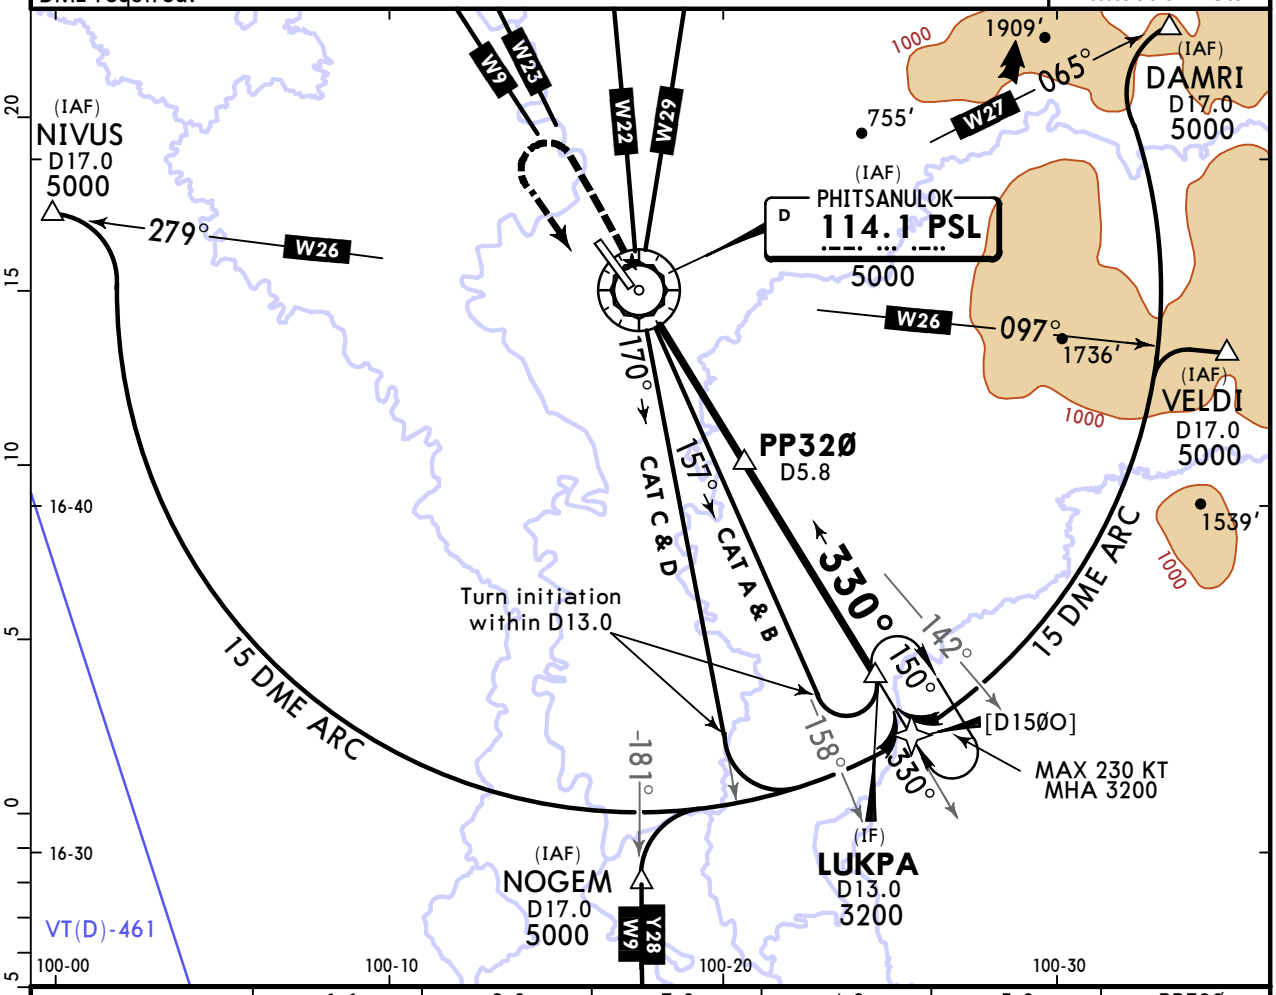

PSL DME	1.1	2.0	3.0	4.0	5.0	PP32Ø
ALTITUDE	610′	895′	1210′	1525′	1840′	2100′

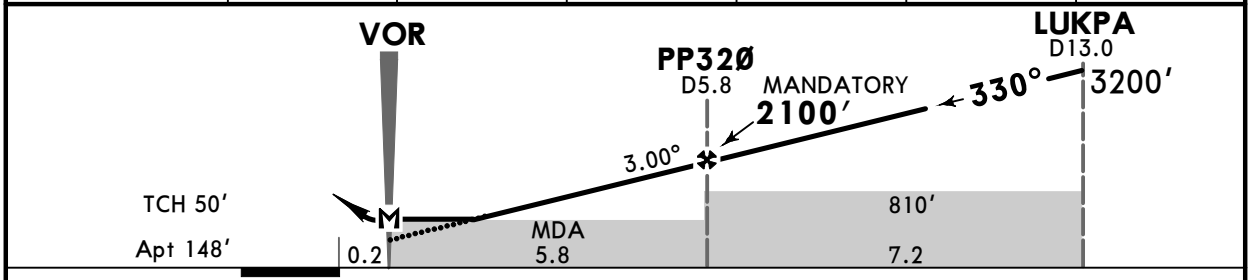

Gnd speed-Kts		70	90	100	120	140	160
Descent Angle	3.00°	372	478	531	637	743	849
MAP at VOR							

PALS CAT I
PAPI

3000′

LT

PSL 114.1 R-150

LUKPA

Std

STRAIGHT-IN LANDING
CDFA
1 DA/MDA(H) 610′ (462′)

		ALS out
A	R1500m	R1500m
B		
C		R2200m
D		

CIRCLE-TO-LAND

Max Kts	MDA(H)	
100	1000′ (852′)	V1500m
135	1000′ (852′)	V1600m
180	1000′ (852′)	V2400m
205	1000′ (852′)	V3600m

PANS OPS

1 VNAV DA(H) in lieu of MDA(H) depends on operator policy.

CHANGES: Airspaces.

© JEPPESEN, 2017, 2026. ALL RIGHTS RESERVED.